RNAV (GPS) RWY 22

WASILLA (IYS) (PAWS)


WAAS	APP CRS	Rwy Ldg	3700
CH 69536	218°	TDZE	354
W22A		Apt Elev	354

RNP APCH.


Circling NA to Rwys 4S and 22S. Baro-VNAV and VDP NA when using Palmer altimeter setting. Rwy 22 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Palmer altimeter setting and increase all DA 46 feet, MDA 60 feet and all visibilities ⅛ mile.

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct BGQ VORTAC and hold.


AWOS-3P	ANCHORAGE APP CON	CTAF
135.25	119.1 363.2	122.8 (L)

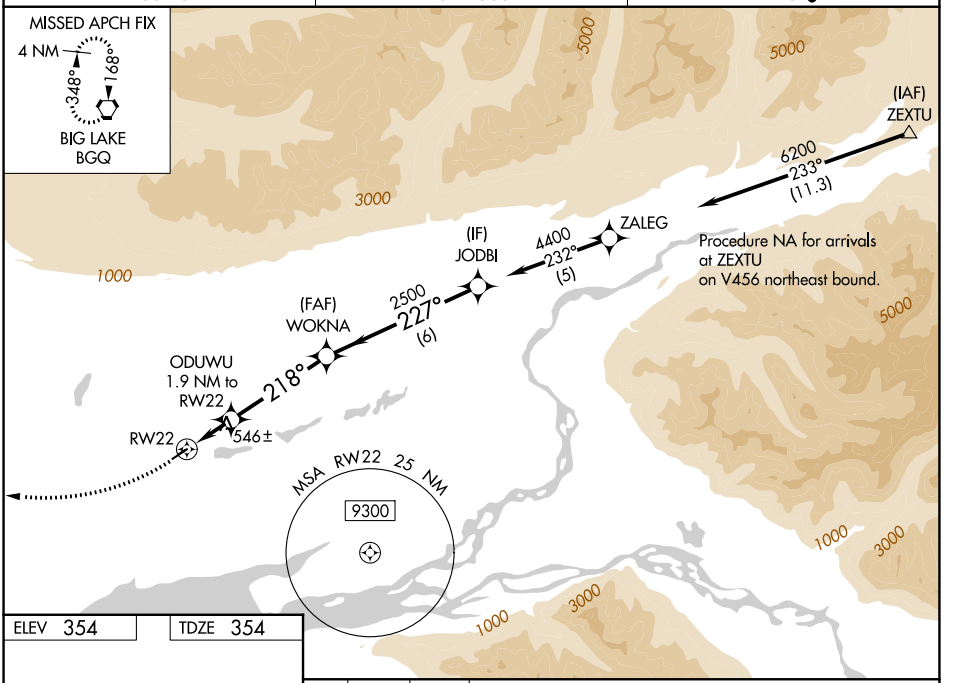

ELEV 354 TDZE 354



MIRL Rwy 4-22 (L)

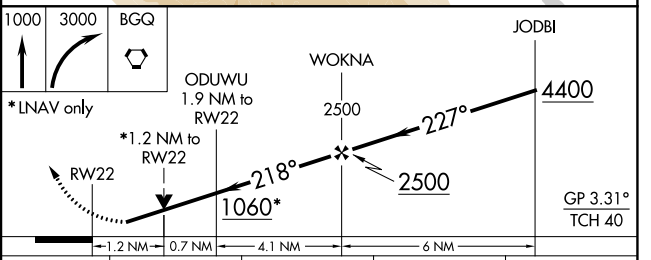

CATEGORY	A	B	C	D
LPV DA	604-¾	250 (300-¾)	NA	
LNAV/VNAV DA	821-1½	467 (500-1½)	NA	
LNAV MDA	800-1	446 (500-1)	NA	
CIRCLING	1000-1	646 (700-1)	NA	

AK, 29 OCT 2026 to 24 DEC 2026
AK, 29 OCT 2026 to 24 DEC 2026