WAAS CH 53636 W04A	APP CRS 038°	Rwy Ldg 3700 TDZE 352 Apt Elev 354

RNAV (GPS) RWY 4


WASILLA (IYS) (PAWS)


RNP APCH.


Circling NA to Rwys 4S and 22S. Baro-VNAV and VDP NA when using Palmer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Palmer altimeter setting and increase all DA 46 feet, all MDA 60 feet and all visibilities ¼ mile.

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct BGQ VORTAC and hold.

AWOS-3P	ANCHORAGE APP CON	CTAF
135.25	119.1 363.2	122.8 L

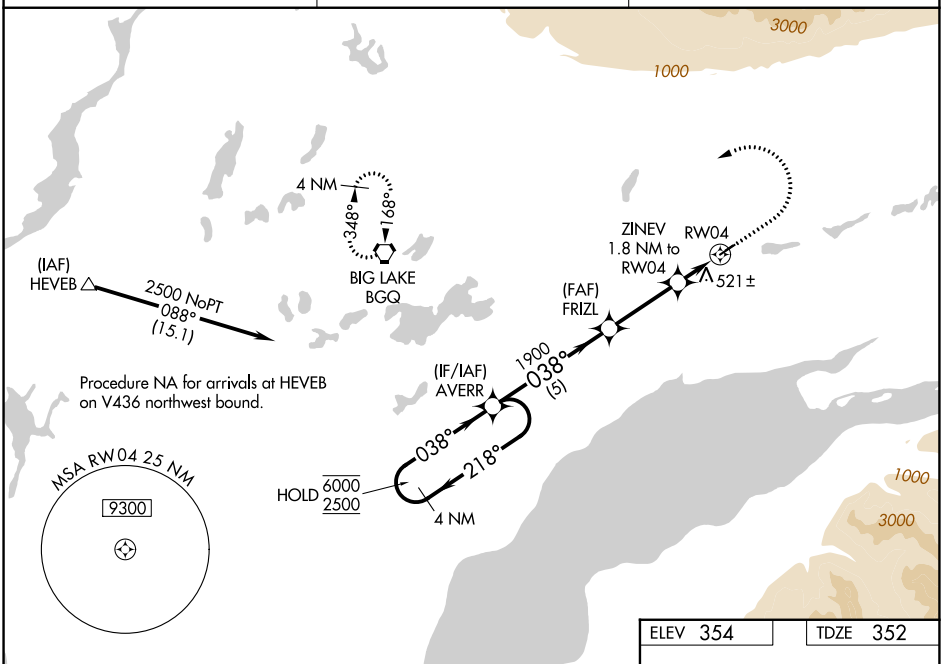

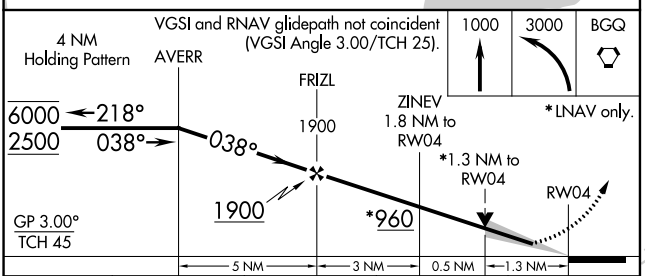

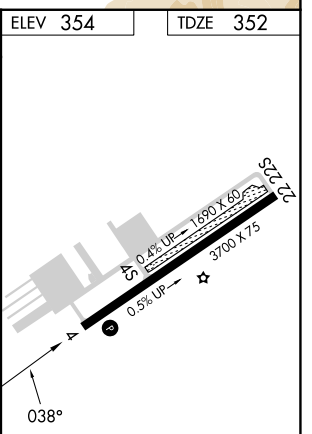

CATEGORY	A	B	C	D
LPV DA	602-¾	250 (300-¾)	NA	
LNAV/VNAV DA	828-1⅝	476 (500-1⅝)	NA	
LNAV MDA	780-1	428 (500-1)	NA	
CIRCLING	1000-1	646 (700-1)	NA	

AK, 29 OCT 2026 to 24 DEC 2026
AK, 29 OCT 2026 to 24 DEC 2026