RNAV (GPS) Y RWY 18

PICAYUNE MUNI (MJD)


WAAS CH 42938 W18A	APP CRS 179°	Rwy Ldg 5000 TDZE 55 Apt Elev 55


RNP APCH.

Baro-VNAV and VDP NA when using Stennis Intl altimeter setting. Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 5°C. When local altimeter setting not received, use Stennis Intl altimeter setting: increase LPV DA to 377 and visibility all Cats ⅛ mile; increase LNAV/VNAV DA to 621 and visibility all Cats ⅛ mile; increase all MDA 40 feet. Procedure NA when R-4403 B/C/E is active.


MISSED APPROACH: (Do not exceed 185K) Climb to 560 then climbing right turn to 1800 direct CIQYI and hold.

AWOS-3PT	GULFPORT APP CON ★	UNICOM
119.075	124.6 354.1	122.8 (CTAF) L

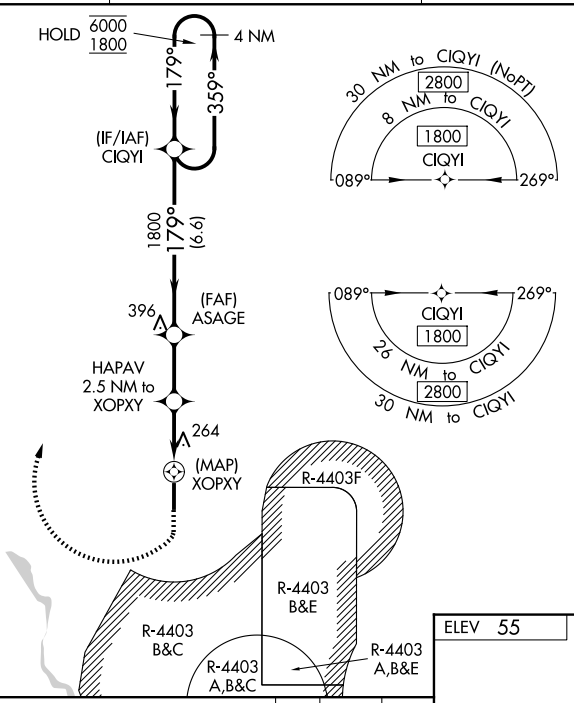

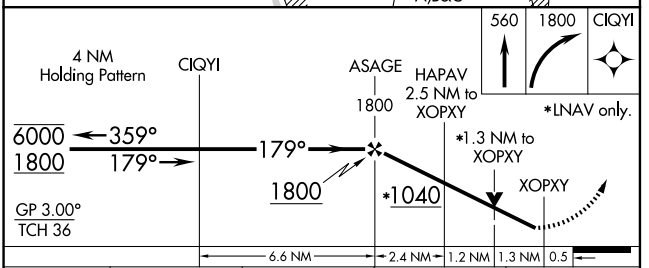

CATEGORY	A	B	C	D
LPV DA		343-1	288 (300-1)	
LNAV/VNAV DA		587-1⅞	532 (600-1⅞)	
LNAV MDA	520-1 465 (500-1)		520-1⅜ 465 (500-1⅜)	
CIRCLING	520-1 465 (500-1)	580-1 525 (600-1)	NA	

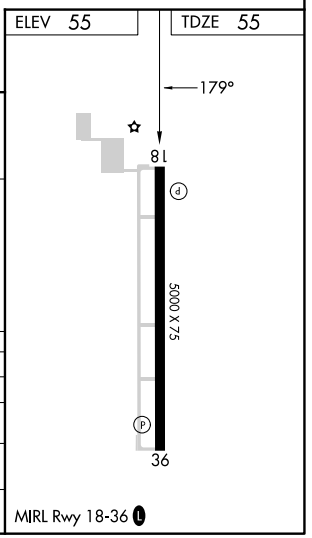

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026