RNAV (GPS) Z RWY 18


PICAYUNE MUNI (MJD)


WAAS	APP CRS		
CH **99310**	**179°**	Rwy Ldg	**5000**
W18B		TDZE	**55**
		Apt Elev	**55**


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Stennis Intl altimeter setting. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Procedure NA when R-4403 B, C, or E is active. When local altimeter setting not received, used Stennis Intl altimeter setting: increase LPV DA to 377 and visibility all Cats ⅛ mile; increase LNAV/VNAV DA to 621 and visibility all Cats ⅛ mile; increase all MDA 40 feet and Circling Cat C visibility ¼ mile.


MISSED APPROACH: Climb to 1200, then climbing right turn to 1800 direct CIQYI and hold.

AWOS-3PT	GULFPORT APP CON★	UNICOM
119.075	**124.6 354.1**	**122.8** (CTAF) L



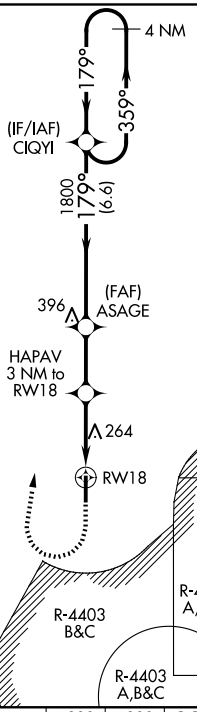

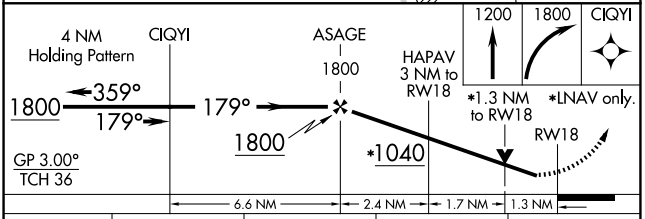

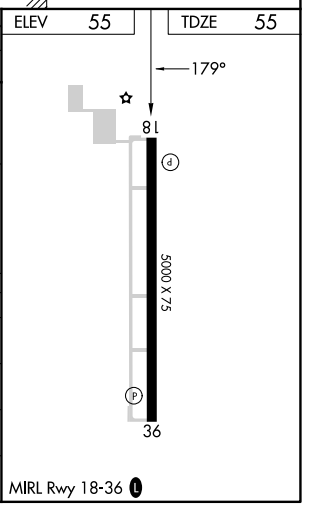

CATEGORY	A	B	C	D
LPV DA	343-1 288 (300-1)			
LNAV/VNAV DA	587-1⅞ 532 (600-1⅞)			
LNAV MDA	520-1 465 (500-1)		520-1⅜ 465 (500-1⅜)	
CIRCLING	520-1 465 (500-1)	580-1 525 (600-1)	700-1¾ 645 (700-1¾)	960-3 905 (1000-3)

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026