RNAV (GPS) RWY 33

GRIFFISS INTL (RME)

WAAS CH 42906 W33A	APP CRS 327°	Rwy Ldg 11820 TDZE 498 Apt Elev 504


RNP APCH - GPS.


T A Baro-VNAV and VDP NA when using SYR altimeter setting. Circling NA southwest of Rwy 15-33. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Inop table does not apply. When local altimeter setting not received, use SYR altimeter setting; increase LPV DA to 784 feet and all visibilities ⅛ SM, increase LNAV/VNAV DA to 975 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cats C and D ¼ SM, and Circling visibility Cats B and C ½ SM.


MALSR

MISSED APPROACH: Climb to 3500 direct TURYN and hold.

ATIS	SYRACUSE APP CON	GRIFFISS TOWER ★	GND CON	UNICOM
118.7	127.425 290.45	118.1 (CTAF) L 291.7	121.9	122.95

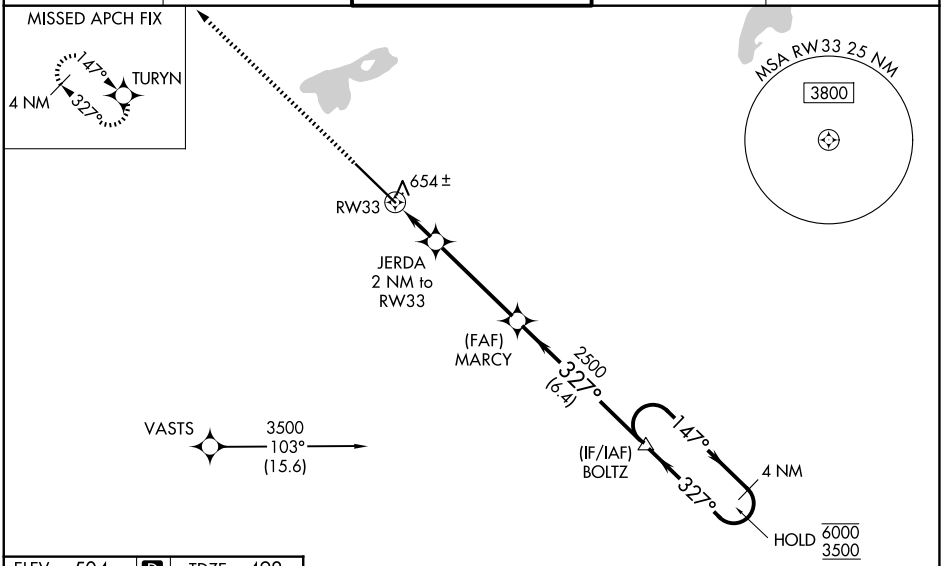

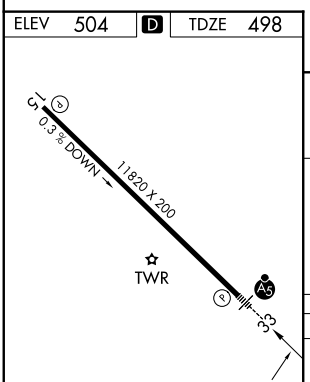

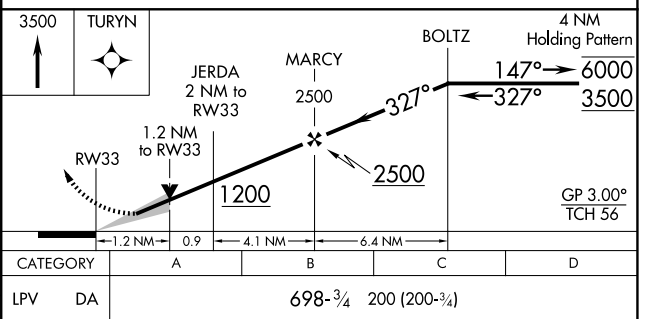

CATEGORY	A	B	C	D
LPV DA	698-¾	200 (200-¾)		
LNAV/VNAV DA	889-1⅛	391 (400-1⅛)		
LNAV MDA	920-1	422 (500-1)	920-1¼	422 (500-1¼)
CIRCLING	1120-1 616 (700-1)	1220-1 716 (800-1)	1380-2½ 876 (900-2½)	1660-3 1156 (1200-3)

NE-2, 26 NOV 2026 to 24 DEC 2026
NE-2, 26 NOV 2026 to 24 DEC 2026