RNAV (GPS) RWY 17

TUNICA MUNI (UTA)


WAAS CH 56212 W17A	APP CRS 167°	Rwy Ldg 8500 / TDZE 194 / Apt Elev 194


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility all Cats to ⅞ SM, and LNAV Cats C, D visibility to 1⅜ SM. Baro VNAV and VDP NA when using MEM altimeter setting. When local altimeter setting not received, use MEM altimeter setting; increase LPV DA to 468 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 545 feet and all visibilities ⅛ SM; increase all MDAs 80 feet and LNAV visibility Cats C/D ⅛ SM and Circling visibility Cat C ¼ SM.


MISSED APPROACH: Climb to 2800 direct ULIKE and hold.

AWOS-3	MEMPHIS APP CON	CLNC DEL	UNICOM
118.075	119.1 291.6	118.9	123.0 (CTAF) L

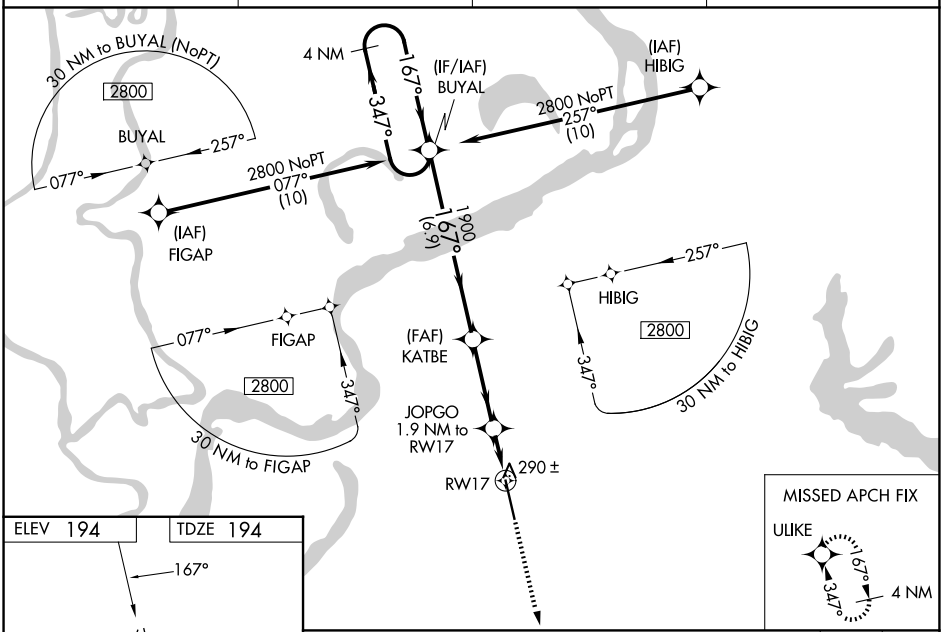

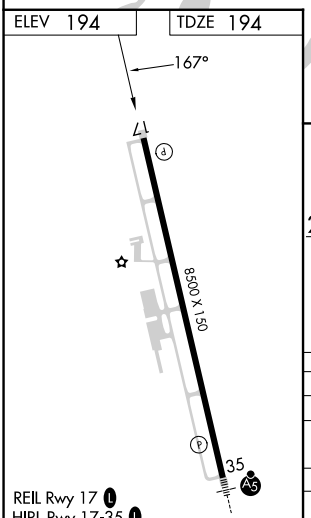

REIL Rwy 17 L
HIRL Rwy 17-35 L

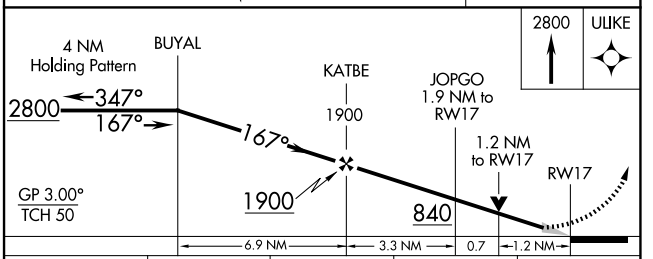

CATEGORY		A	B	C	D
LPV	DA	394-¾ 200 (200-¾)			
LNAV/VNAV	DA	471-⅞ 277 (300-⅞)			
LNAV	MDA	640-1 446 (500-1)		640-1⅜ 446 (500-1⅜)	
CIRCLING		680-1 486 (500-1)	740-1 546 (600-1)	760-1½ 566 (600-1½)	760-2 566 (600-2)

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026