RNAV (GPS) RWY 34


HILLSBORO MUNI (INJ)


WAAS	APP CRS	Rwy Ldg	3998
CH 65908	336°	TDZE	684
W34A		Apt Elev	686


Baro-VNAV NA when using Cleburne Rgnl altimeter setting. DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Visibility reduction by helicopters NA. When local altimeter setting not received use Cleburne Rgnl altimeter setting and increase all DA/MDA 80 feet, increase LPV and LNAV/VNAV visibility ¼ mile all Cats.

MISSED APPROACH: Climb to 3000 direct COMUB and via 265° track to CELTC and hold.

AWOS-3PT	WACO APP CON ★	CTAF
118.725	127.65 352.0	122.9 (L)

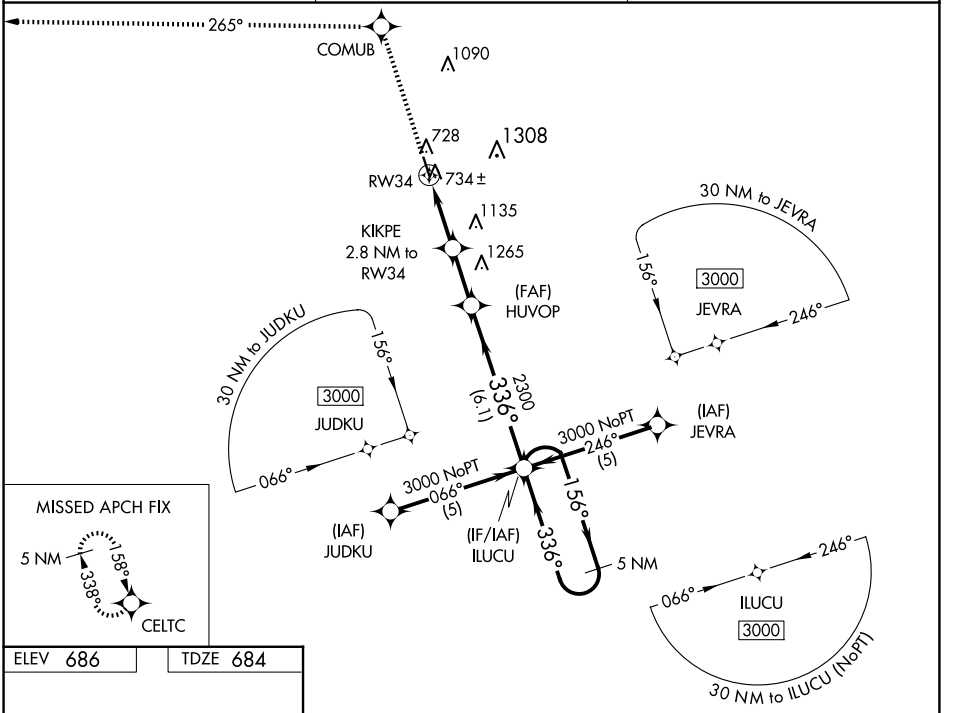

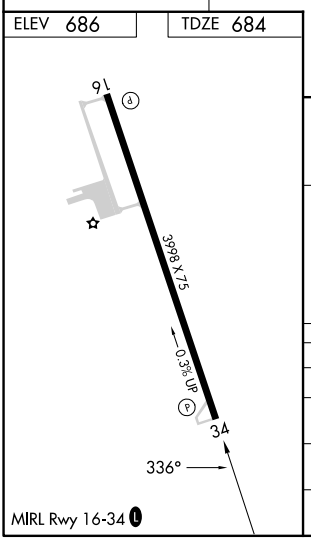

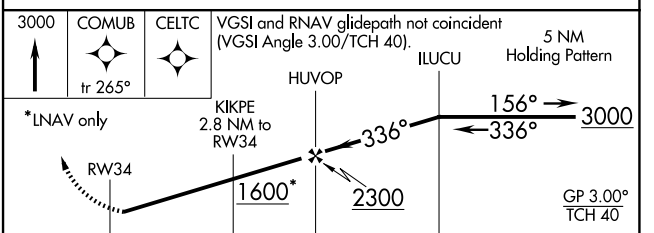

CATEGORY	A	B	C	D
LPV DA	934-1 250 (300-1)		NA	
LNAV/ VNAV DA	1004-1¼ 320 (400-1¼)		NA	
LNAV MDA	1320-1 636 (700-1)		NA	
CIRCLING	1320-1 634 (700-1)		NA	

SC-2, 26 NOV 2026 to 24 DEC 2026
SC-2, 26 NOV 2026 to 24 DEC 2026