RNAV (GPS) RWY 36

HOUSTON EXEC (TME)


WAAS	APP CRS	Rwy Ldg	6610
CH 97504	355°	TDZE	164
W36A		Apt Elev	166

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C and above 54°C. Baro-VNAV and VDP NA when using DWH altimeter setting. When local altimeter setting not received, use DWH altimeter setting: increase LPV DA to 471 feet; increase LNAV/VNAV DA to 719 feet; increase all MDAs 60 feet and Circling visibility Cats C/D ¼ SM.


MISSED APPROACH: Climb to 2000 direct AGAXE and via 328° track to BIMTE and hold.

ATIS	HOUSTON APP CON	EXECUTIVE TOWER ★	GND CON	UNICOM
119.525	123.8 257.7	126.975 (CTAF) L	132.075	122.975

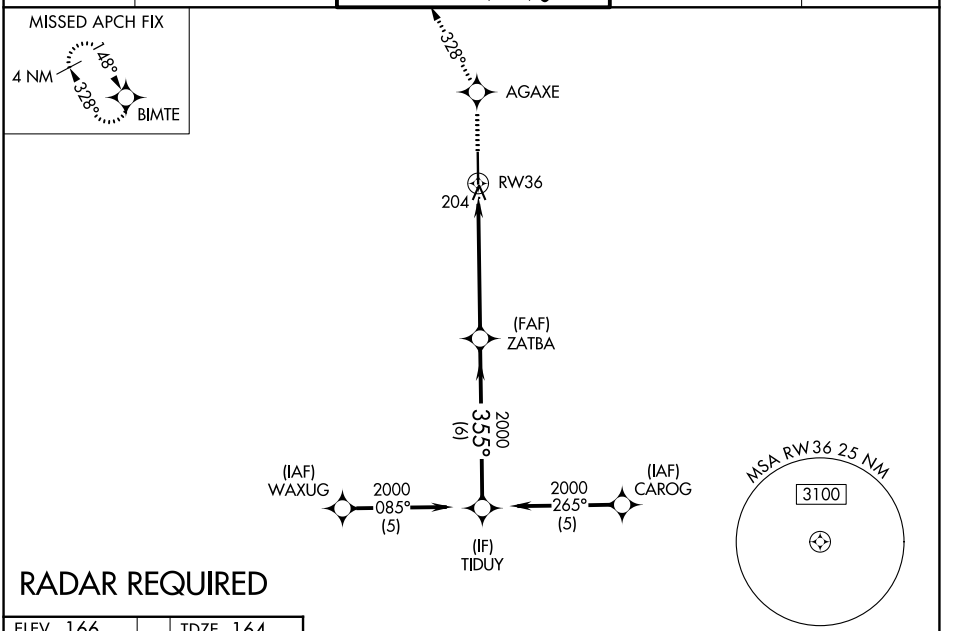


RADAR REQUIRED

ELEV 166	TDZE 164

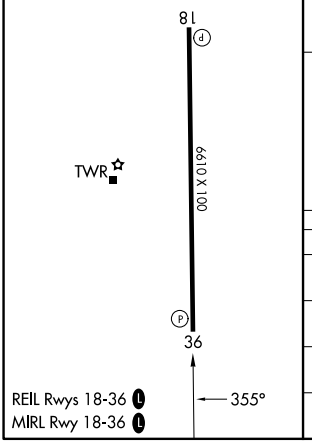

REIL Rwys 18-36 L
MIRL Rwy 18-36 L

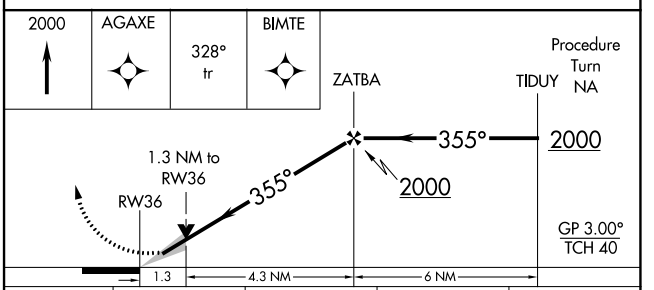

CATEGORY	A	B	C	D
LPV DA	414-1	250 (300-1)		
LNAV/VNAV DA	662-1¾	498 (500-1¾)		
LNAV MDA	620-1	456 (500-1)	620-1⅜ 456 (500-1⅜)	620-1½ 456 (500-1½)
CIRCLING	820-1	654 (700-1)	860-2 694 (700-2)	1000-2¾ 834 (900-2¾)

SC-5, 26 NOV 2026 to 24 DEC 2026
SC-5, 26 NOV 2026 to 24 DEC 2026