RNAV (GPS) RWY 2


MOREHEAD-ROWAN COUNTY CLYDE A THOMAS RGNL (SYM)

WAAS	APP CRS	Rwy Ldg	5500
CH 86909	026°	TDZE	1028
W02A		Apt Elev	1028

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Sterling altimeter setting. When local altimeter setting not received, use Mount Sterling altimeter setting: increase all DA 50 feet and all MDA 60 feet; increase LPV all Cats and LNAV Cats C/D visibility ⅛ mile, LNAV/VNAV all Cats visibility ¼ mile, and Circling Cats C/D visibility ¼ mile.

MISSED APPROACH: Climb to 3600 direct IDABE and hold.

AWOS-3	INDIANAPOLIS CENTER	UNICOM
119.95	124.225 360.725	122.7 (CTAF) L

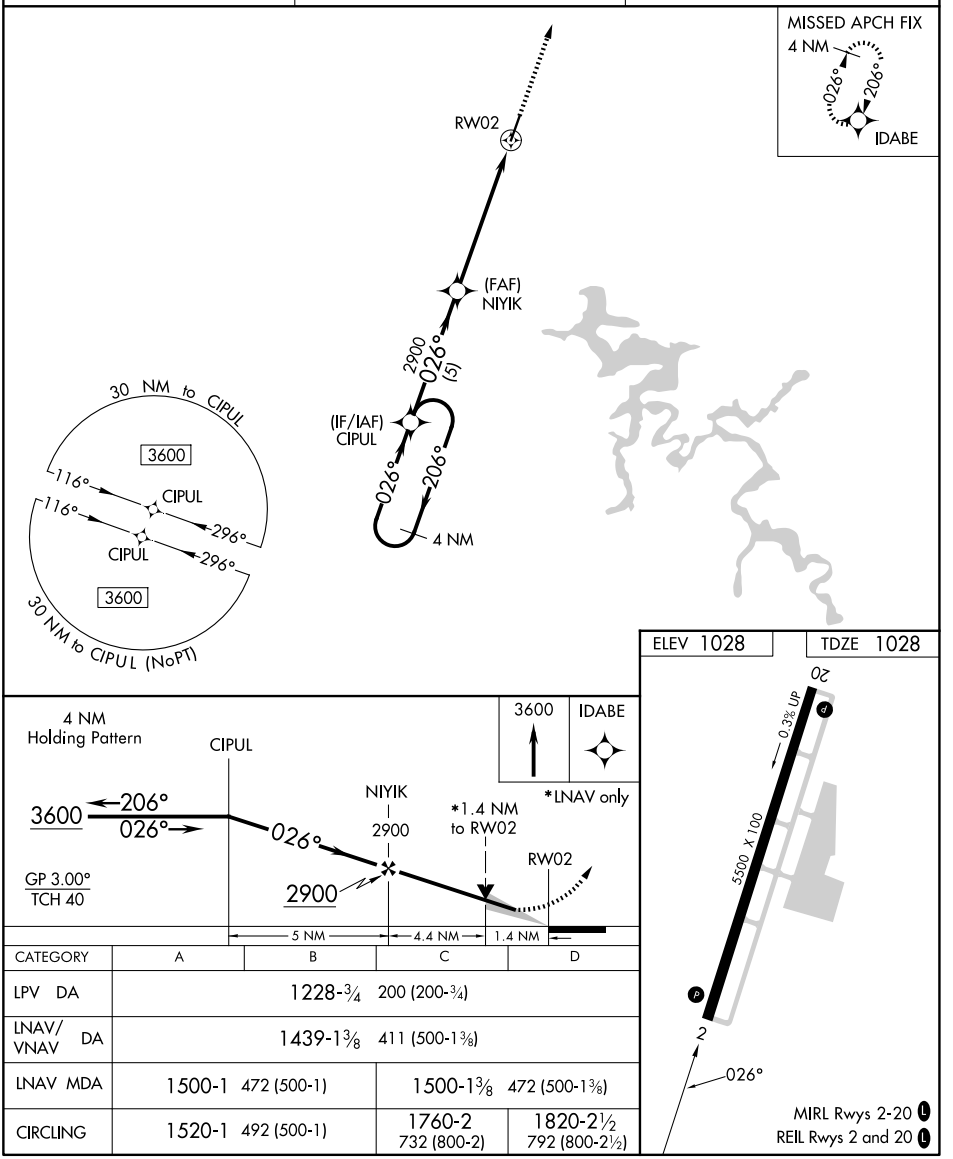

CATEGORY	A	B	C	D
LPV DA	1228-¾ 200 (200-¾)			
LNAV/VNAV DA	1439-1⅜ 411 (500-1⅜)			
LNAV MDA	1500-1 472 (500-1)		1500-1⅜ 472 (500-1⅜)	
CIRCLING	1520-1 492 (500-1)		1760-2 732 (800-2)	1820-2½ 792 (800-2½)

SE-1, 26 NOV 2026 to 24 DEC 2026
SE-1, 26 NOV 2026 to 24 DEC 2026