RNAV (GPS) RWY 3

BLAKE FLD (AJZ)


WAAS	APP CRS	Rwy Ldg	5598
CH 90537	032°	TDZE	5157
W03A		Apt Elev	5193

RNP APCH.


Baro-VNAV NA when using Montrose altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -25°C or above 54°C. When local altimeter setting not received, use Montrose altimeter setting: increase #LPV DA to 5529 feet and visibility all Cats ⅜ SM, increase LPV DA to 5670 feet and visibility all Cats ½ SM, increase LNAV/VNAV DA to 5979 feet and visibility all Cats ½ SM. Increase all MDA 140 feet and visibility Cat B ¼ SM, Cat C ½ SM and Circling Cat A ¼ SM. VDP NA when using Montrose altimeter setting.
Circling NA to Rwys 14 and 32.
Missed approach requires minimum climb of 250 feet per NM to 6900.

MISSED APPROACH: Climb to 7000 then climbing right turn to 11600 direct CAKBI and on track 187° to NADIN and hold, continue climb-in-hold to 11600.


AWOS-3	DENVER CENTER	UNICOM
134.0	127.1 343.65	122.8 (CTAF) L

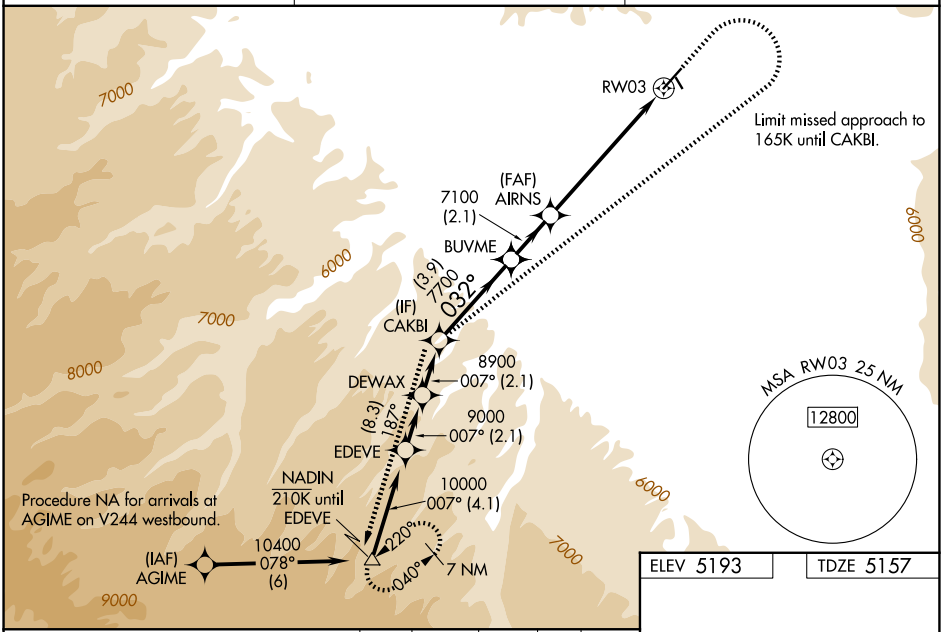

ELEV 5193 TDZE 5157

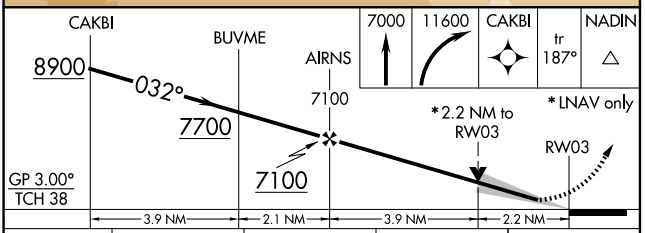

CATEGORY	A	B	C	D
#LPV DA	5407-1 250 (300-1)			NA
LPV DA	5548-1½ 391 (400-1½)			NA
LNAV/VNAV DA	5857-2 700 (700-2)			NA
LNAV MDA	5840-1 683 (700-1)		5840-2 683 (700-2)	NA
CIRCLING	5900-1 707 (800-1)	6340-1½ 1147 (1200-1½)	6680-3 1487 (1500-3)	NA



MIRL Rwy 3-21 L
REIL Rwys 3 and 21 L

SW-1, 26 NOV 2026 to 24 DEC 2026
SW-1, 26 NOV 2026 to 24 DEC 2026