WAAS CH 58347 W06A	APP CRS 062°	Rwy Ldg 5000 / TDZE 830 / Apt Elev 830

RNAV (GPS) RWY 6


GALLATIN COUNTY (8GK)


RNP APCH - GPS.

T NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using IMS altimeter setting. Procedure NA at night. Rwy 6 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use IMS altimeter setting and increase LPV DA to 1091 feet; increase LNAV/VNAV DA to 1141 feet; increase all MDAs 80 feet and LNAV visibility Cat C 3/8 SM, and Circling visibility Cat C 1/2 SM.


MISSED APPROACH: Climb to 1400 then climbing right turn to 2700 direct PABRE and hold.

AWOS-3P	CINCINNATI APP CON	CTAF
119.15	128.7 254.25	122.9

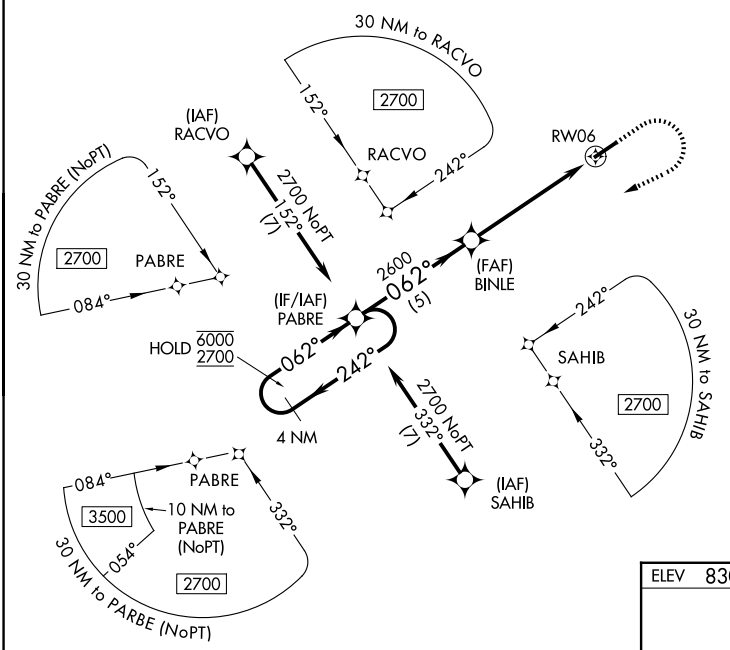

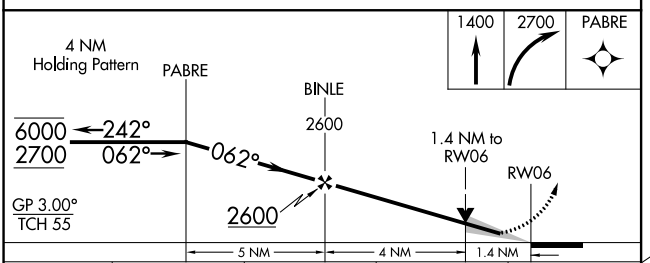

CATEGORY	A	B	C	D
LPV DA	1030-1 200 (200-1)			NA
LNAV/VNAV DA	1080-1 250 (300-1)			NA
LNAV MDA	1340-1 510 (600-1)		1340-1 3/8 510 (600-1 3/8)	NA
CIRCLING	1340-1 510 (600-1)	1500-1 670 (700-1)	1500-1 3/4 670 (700-1 3/4)	NA

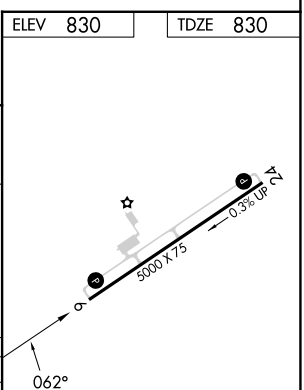

SE-1, 26 NOV 2026 to 24 DEC 2026
SE-1, 26 NOV 2026 to 24 DEC 2026