WAAS	APP CRS	Rwy Ldg	4364
CH 62947	331°	TDZE	2034
W33A		Apt Elev	2034

RNAV (GPS) RWY 33


ASHLEY MUNI (ASY)

RNP APCH - GPS.


Baro-VNAV NA. Use 7L2 altimeter setting; when not received, use MBG altimeter setting and increase LPV DA to 2400 feet; increase LNAV/VNAV DA to 2450 feet and all visibilities ⅛ SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.


MISSED APPROACH: Climb to 4000 direct COLDE and hold.

7L2 AWOS-3	MINNEAPOLIS CENTER	CTAF
118.175	135.25 256.7	122.9 (L)

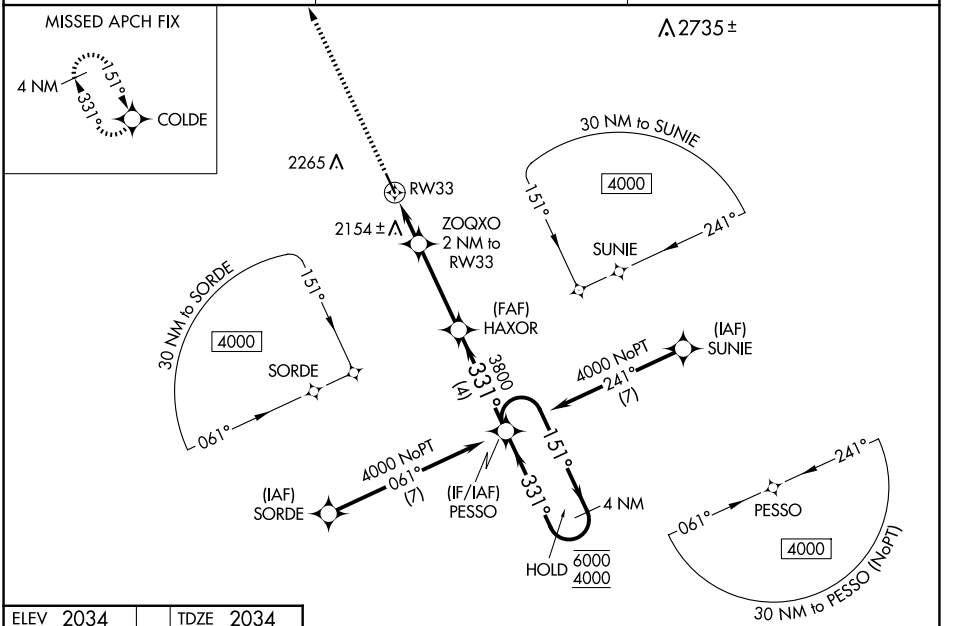

ELEV 2034 TDZE 2034

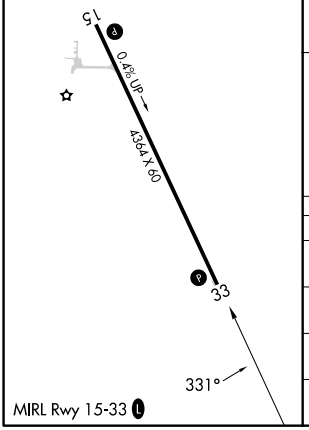

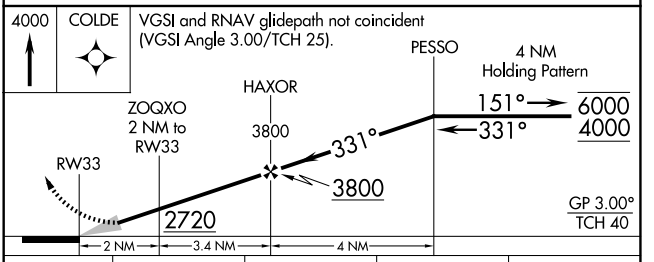

CATEGORY	A	B	C	D
LPV DA	2360-1 326 (400-1)			
LNAV/VNAV DA	2410-1 376 (400-1)			
LNAV MDA	2540-1 506 (600-1)		2540-1⅜ 506 (600-1⅜)	
CIRCLING	2600-1 566 (600-1)	2700-1 666 (700-1)	2700-1¾ 666 (700-1¾)	2800-2½ 766 (800-2½)

NC-1, 26 NOV 2026 to 24 DEC 2026
NC-1, 26 NOV 2026 to 24 DEC 2026