# RNAV (GPS) RWY 35

MARION (C17)


| WAAS | APP CRS | Rwy ldg | 3776 |
|---|---|---|---|
| CH 98719 | 352° | TDZE | 861 |
| W35A | | Apt Elev | 861 |

RNP APCH - GPS.

Baro-VNAV NA. Circling Rwy 17, NA at night. Circling NA for Cat B west of Rwy 17/35. Use The Eastern Iowa altimeter setting; when not received, use Monticello Rgnl altimeter setting: increase LPV DA to 1133; increase LNAV/VNAV DA to 1162; increase all MDAs 40 feet. For uncompensated Baro-VNAV system, LNAV/VNAV NA below -6°C or above 54°C.


MISSED APPROACH: Climb to 2600 direct HENCH and hold.


| CID ASOS | CEDAR RAPIDS APP CON ★ | UNICOM |
|---|---|---|
| 124.15 | 134.05 266.8 | 122.7 (CTAF) L |

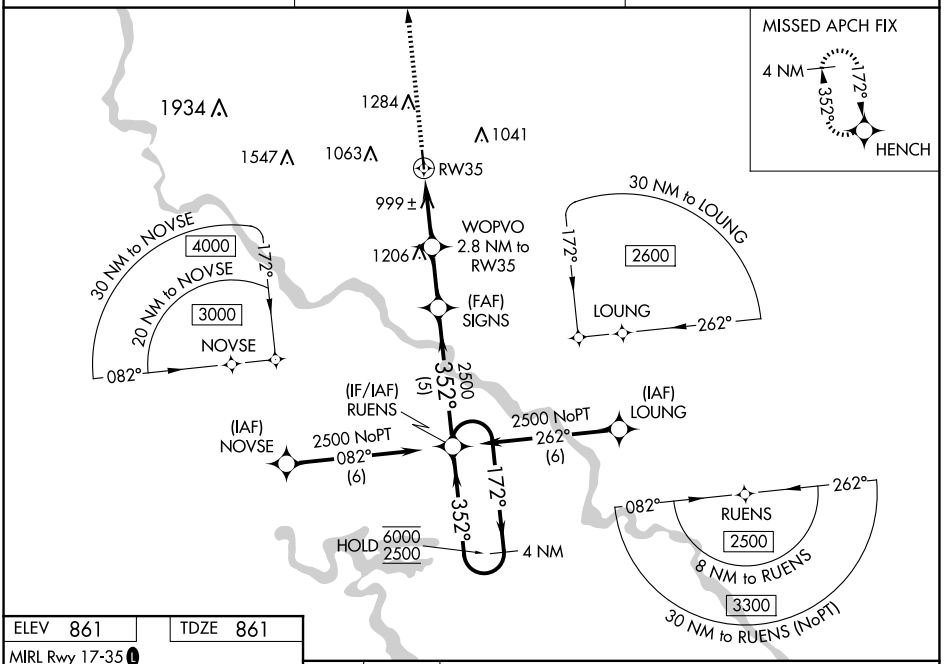


ELEV 861 | TDZE 861

MIRL Rwy 17-35 L



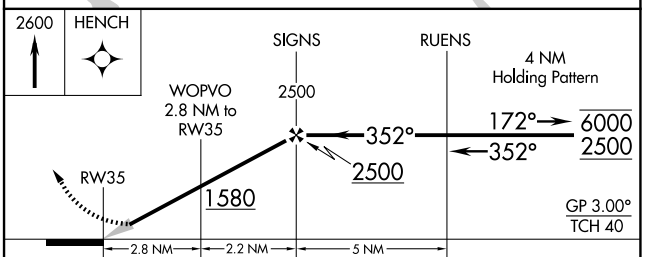
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1111-1 250 (300-1) | | NA | |
| LNAV/VNAV DA | 1140-1 279 (300-1) | | NA | |
| LNAV MDA | 1280-1 419 (500-1) | | NA | |
| CIRCLING | 1280-1 419 (500-1) | 1340-1 479 (500-1) | NA | |



NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026