



**Federal Aviation
Administration**

UNITED STATES GOVERNMENT SPECIFICATIONS

**IFR ENROUTE LOW ALTITUDE CHARTS -
U.S. AND ALASKA**

**IACC 1
27 October 2014**

Prepared by the Interagency Air Cartographic Committee (IACC)

**UNITED STATES GOVERNMENT SPECIFICATIONS
FOR THE
IFR ENROUTE LOW ALTITUDE CHARTS - U.S. AND ALASKA**

27 October 2014

These specifications have been developed by the Interagency Air Cartographic Committee (IACC), composed of representatives of the Department of Defense and the Federal Aviation Administration, for use in the preparation of the United States Government IFR Enroute Low Altitude Charts - U.S. and Alaska. These specifications shall be complied with, without deviation, until such time as they are amended by formal IACC action.

Changes to these specifications will be provided when necessitated by new requirements or through development action of the IACC.

Questions of interpretation that arise in the use of these specifications shall be referred to the Chair, Interagency Air Cartographic Committee.

FAA/National Aeronautical Navigation Products

DoD/NGA/MSRF

FAA/Aeronautical Information Management

DoD/NGA/SF

Page Intentionally Left Blank

CHANGES APPLIED TO MOST RECENT EDITION

REQUIREMENT DOCUMENTS

- a. None applied in this edition.

EDITORIAL CHANGES

- a. EC 14-04 - Charting RCO Frequencies
- b. EC 14-16 - Final Product Print Color Variation

CHANGES APPLIED TO 28 APRIL 2014 EDITION**REQUIREMENT DOCUMENTS**

- a. RD 432 - NDB/DME
- b. RD 440 - Superseded by RD 490
- c. RD 442 - Off-Route Obstruction Clearance Altitude (OROCA) Overprint to Low Altitude Enroute Charts
- d. RD 445 - Grand Canyon National Park (SFRA)
- e. RD 446 - Superseded by RD 536
- f. RD 467 - Superseded by RD 536
- g. RD 472 - Airway Direction of Flight Indicators in Canadian Airspace
- h. RD 474 - 210 KIAS Holding Patterns
- i. RD 479 - Superseded by RD 502
- j. RD 484 - Unnamed Airway Intersections on Enroute Charts
- k. RD 490 - Revised NAVAID Weather Broadcast Symbol on IFR and VFR Charts
- l. RD 491 - RNAV Waypoints on IFR Charts
- m. RD 499 - Remove Mode C Cross-hatching from IFR Enroute Charts
- n. RD 502 - Elimination of Air/Ground Communication Tabulation on Enroute Low Altitude Charts
- o. RD 504 - Airport Identifiers to the Airport Data Block on IFR Enroute Charts
- p. RD 505 - Airport Associated City Names to the Airport Data Block on IFR Enroute Charts
- q. RD 509 - Superseded by RD 549
- r. RD 514 - Superseded by RD 533
- s. RD 516 - Time Zones on Chart Indexes
- t. RD 520 - Charting of Compulsory Reporting Waypoints
- u. RD 526 - Terrain Contours on Area Charts
- v. RD 527 - Application of Barcodes on FAA/NACO Aeronautical Products
- w. RD 528 - Waypoints
- x. RD 532 - RNAV and Joint RNAV Routes
- y. RD 533 - Dual Symbol Usage
- z. RD 534 - Military Landing Rights
- aa. RD 536 - U.S. and AK High and Low Enroute Charts Reschema
- ab. RD 543 - Deleting Seaplane Base Symbology
- ac. RD 549 - Charting of OROCA Definition on IFR Enroute Low Altitude Charts
- ad. RD 551 - NOTAM Definition on Chart Legends
- ae. RD 564 - Paired VHF Frequencies with TACAN Channels
- af. RD 566 - Q-Route MEAs
- ag. RD 575 - NOTAM Definition on Chart Legends
- ah. RD 583 - Phoenix Area Chart
- ai. RD 587 - RNAV IFR Terminal Transition Route (RITTR)
- aj. RD 592 - Runway Lighting at Private Airports on Enroute Charts
- ak. RD 594 - Off-airport (Stand-alone) AWOS/ASOS on Enroute Charts
- al. RD 618 - Depiction of LF/MF Tapered Routes on Enroute Charts

- am.**RD 620 - Depiction of RCAG Boxes on the Enroute Charts
- an.** RD 621 - Depiction of FSS Boxes on Enroute Charts
- ao.** RD 624 - ICAO Location Indicators
- ap.** RD 638 - Charting of Out of Service and Shutdown NAVAIDs
- aq.** RD 643 - Airport Locations Listing on Enroute Low Charts
- ar.** RD 654 - OROCA Values Outside U.S. ADIZ - Low Enroute Charts
- as.** RD 661 - Standard Flight Service Station (FSS) Frequencies, Remote Control Outlet (RCO) Radio Name, and Airport Advisory Service (AAS)
- at.** RD 664 - Deletion of Airport Name from ILS Facility Boxes
- au.** RD 665 - Revision of Alert Area Color on Visual & Enroute Charts
- av.** RD 677 - Deletion of TACAN Fix Data from Enroute Charts
- aw.**RD 680 - Low Altitude Helicopter RNAV Routes on Enroute & Visual Charts
- ax.** RD 683 - Enroute Title Panel Revisions
- ay.** RD 685 - Automatic Flight Information Service (AFIS) - Alaska FSSs Only
- az.** RD 689 - MTA Charting on Enroutes
- ba.** RD 690 - On-Request and Compulsory Reporting Functionality of NAVAIDs
- bb.** RD 697 - Deletion of UHF NDBs from Enroute Charts
- bc.** RD 703 - Charting Criteria for Public-use and Private-use NAVAIDs - See also EC 12-15.
- bd.** RD 716 - Depiction of Canadian Class G Airways
- be.** RD 724 - Addition of QR Codes to AeroNav Products
- bf.** RD 733 - Removal of SUA Hashing on Airways/Terminal Routes

EDITORIAL CHANGES

- a. EC 00-08 - Superseded by EC 01-10
- b. EC 01-10 - Outside U.S. Airspace Notes
- c. EC 02-02 - Enroute Charts NAS & AK
- d. EC 02-03 - NAS After Airport Name
- e. EC 03-02 - SFAR Note on AK Low Enroute
- f. EC 03-03 - Boxed Terrain Note on Area Charts
- g. EC 03-05 - RNAV Route Legends
- h. EC 05-02 - Enroute Low Chart Reschema
- i. EC 05-03 - Superseded by EC 06-05. See also RD 683.
- j. EC 05-10 - Compulsory Waypoints
- k. EC 06-03 - Dash Information on Enroute Legend
- l. EC 06-05 - Revise Contact Information. See also RD 683.
- m. EC 06-10 - RNAV Holding Patterns
- n. EC 06-15 - Enroute Low Chart Parameters
- o. EC 07-06 - Airport Locations in Enroute Tabs
- p. EC 07-07 - Redefined definition of “Collocated” NAVAIDs and FSS Outlets
- q. EC 07-08 - Blue/Green Airports Criteria Change
- r. EC 08-03 - Enroute Area Chart Outline Color Change
- s. EC 08-06 - Add References to Russian Airspace
- t. EC 08-08 - Boxed Note L-21
- u. EC 09-09 - L-21 Chart Index Reference to Offshore Nav Only
- v. EC 09-10 - MTR Clarification - Visual/Enroute
- w. EC 10-06 - Delete FAR Part 93 Params from Low Enroute Charts
- x. EC 11-01 - Product Notes AeroNav Products
- y. EC 12-09 - Depiction of Canadian DRCOs
- z. EC 12-10 - Objectionable Airport Charting
- aa. EC 12-14 - T-Route Legend Verbiage
- ab. EC 12-15 - Private NAVAIDs Outside the U.S. Airspace
- ac. EC 13-19 - Addition of RNAV 2 Terminology to Legends

CHANGES APPLIED TO 16 SEPTEMBER 1993 EDITION**REQUIREMENT DOCUMENTS**

- a. RD 410 - Canadian and Mexican Airport/Seaplane Bases on Enroute Charts
- b. RD 432 - NDB/DME
- c. RD 440 - Hazardous In-flight Weather Advisory Service (HIWAS) on Visual and Enroute Charts

EDITORIAL CHANGES

- a. No Editorial Changes applied

AMENDMENT OF SPECIFICATIONS

1. PROCEDURE

- a. Recommendations for amendments to specifications from the Department of Defense shall be directed to:

National Geospatial-Intelligence Agency
7500 GEOINT Drive
Springfield, VA 22150-7500

- b. Recommendations for amendments to specifications from the Federal Aviation Administration shall be directed to:

Federal Aviation Administration /AeroNav Products
SSMC-4 Sta # 4445
1305 East-West Highway
Silver Spring, MD 20910

2. AMENDMENT SYSTEM

- a. Change to the specifications will be issued at the effective date of the latest Requirement Document (RD) and / or Editorial Change (EC).
- b. The Specification will be dated, indicated along the upper margin of each page, to reflect the most current change.

Page Intentionally Left Blank

CHAPTER 1 – GENERAL

1.1	PURPOSE AND SCOPE.....	1-1
1.1.1	Purpose	1-1
1.1.2	Scope	1-1
1.2	REQUIREMENTS	1-1
1.2.1	General	1-1
1.2.2	Safety, Accuracy and Currency	1-1
1.2.3	Titles	1-2
1.2.3.1	Enroute Low Altitude Chart Series	1-2
	Figure 1.1 Enroute Low Title Labels.....	1-2
1.2.3.2	Area Chart.....	1-2
	Figure 1.2 Area Chart Title Label.....	1-2
1.2.4	Areas of Coverage	1-2
1.2.4.1	Enroute Charts - U.S.	1-2
	Table 1.1 U.S. - Corner Coordinates - IFR Low Enroute.....	1-2
1.2.4.2	(AK) Enroute Charts - Alaska.....	1-5
	Table 1.2 (AK) - Corner Coordinates - IFR Low Enroute	1-5
1.2.4.3	Inset Charts - U.S.	1-6
	Table 1.3 U.S. - Inset Charts - IFR Low Enroute	1-6
1.2.4.4	U.S. Area Chart (A-1 & A-2).....	1-7
1.2.4.5	U.S. & Alaska Area Charts	1-7
	Table 1.4 U.S. - Area Charts - IFR Low Enroute	1-7
	Table 1.5 U.S. - Area Chart A-1 Corner Coordinates - IFR Low Enroute.....	1-7
	Table 1.7 (AK) Area Charts - IFR Low Enroute	1-8
	Table 1.6 U.S. - Area Chart A-2 Corner Coordinates - IFR Low Enroute.....	1-8
1.2.4.6	(AK) Route Selection Chart (on Chart L-2).....	1-9
	Table 1.8 (AK) - Route Selection Chart	1-9
1.2.5	Scales	1-9
1.2.5.1	U.S. Enroute Charts	1-9
	Table 1.9 U.S. - Enroute Chart Scales	1-9
	Table 1.10 (AK) - Enroute Chart Scales.....	1-9
1.2.5.2	Inset Charts	1-10
	Table 1.11 U.S. - Inset Chart Scales	1-10
1.2.5.3	Area Charts	1-10
	Table 1.12 U.S. - Area Chart Scales.....	1-10
	Table 1.13 (AK) - Area Chart Scales.....	1-10
1.2.5.4	(AK) Route Selection Chart.....	1-10
1.2.6	Central Meridians	1-10
1.2.6.1	Enroute Charts.....	1-10

1.2.6.2	Area Charts - U.S.....	1-11
	Table 1.14 U.S. - Area Chart Central Meridians.....	1-11
1.2.6.3	(AK) Area Charts - Alaska.....	1-11
	Table 1.15 (AK) Area Chart Central Meridians.....	1-11
1.2.6.4	(AK) Alaska and Route Selection Chart.....	1-11
1.2.7	Projections	1-11
1.2.8	Colors	1-11
1.2.9	Symbolization.....	1-12
1.2.10	Type Styles	1-12

CHAPTER 2 – LAYOUT AND FORMAT

2.1	U.S. & Alaska Enroute and U.S. Area (A-1 & A-2) CHARTS.....	2-1
2.1.1	Format.....	2-1
2.1.2	Layout.....	2-1
2.1.2.1	U.S. & Alaska Enroute Charts	2-1
2.1.2.1.1	U.S. Enroute Chart Layouts	2-1
2.1.2.1.2	(AK) Alaska Enroute Chart Layouts	2-1
2.1.2.1.3	Size and Dimension	2-2
2.1.2.1.4	Dimensions	2-2
2.1.2.1.5	Panel Folds.....	2-2
2.1.2.2	INSET CHARTS.....	2-2
	Table 2.1 Inset Chart Location.....	2-2
2.1.2.3	AREA CHARTS	2-2
2.1.2.3.1	Arrangement and Location	2-2
	Table 2.2 Area Chart Arrangement and Location - U.S.....	2-3
	Table 2.3 (AK) - Area Chart Arrangement and Location	2-3
2.1.2.4	(AK) Route Selection Chart.....	2-4

CHAPTER 3 – CONTENT

3.1	General.....	3-1
3.1.1	Mileages	3-1
3.1.2	Bearings and Radials	3-1
3.1.3	Boxes	3-1
3.1.4	Time Zones	3-2
	Figure 3.1 Application of Double Dagger -Examples	3-2
3.1.5	Chart Notes	3-2
3.1.6	Geographical Coordinates	3-2
3.1.7	Elevations/Altitudes	3-2

- 3.2 Placement of Data..... 3-2
 - 3.2.1 Text..... 3-2
 - 3.2.2 Symbols 3-2
- 3.3 Title Panel Information..... 3-3
 - 3.3.1 Foreign Airspace Warning Note..... 3-3
 - Figure 3.2 Foreign Airspace Warning Note3-3
 - 3.3.2 Chart Identification Area 3-4
 - 3.3.2.1 Chart Idents 3-4
 - Figure 3.3 Chart Idents Examples - U.S. and Alaska Charts.....3-4
 - 3.3.2.2 Arrowheads 3-4
 - 3.3.2.3 Panel Identification 3-4
 - 3.3.2.4 Chart Scales..... 3-4
 - 3.3.3 Title Area..... 3-5
 - 3.3.3.1 Chart Title 3-5
 - Figure 3.4 Chart Title Format.....3-5
 - 3.3.3.2 Altitude Note 3-5
 - Figure 3.5 Altitude Note3-5
 - 3.3.3.3 Effective Dates and Times Note 3-5
 - Figure 3.6 Effective Dates and Times Note.....3-5
 - 3.3.3.4 NOTAM Note 3-5
 - Figure 3.7 NOTAM Note3-5
 - 3.3.3.5 Publishers Credit Note 3-5
 - 3.3.3.6 Corrections, Comments and/or Procurement Note 3-6
 - 3.3.3.7 ORACA Notice..... 3-6
 - 3.3.3.8 (AK) Chart Notice - GPS/WAAS Navigation Operations in Alaska..... 3-6
 - Figure 3.8 (AK) GPS/WAAS Chart Notice.....3-6
 - 3.3.4 Chart Identification Labels 3-6
 - Figure 3.9 Chart Identification Labels - U.S. and Alaska Charts.....3-6
 - 3.3.4.1 Chart Idents 3-7
 - 3.3.4.2 Chart Effective Date..... 3-7
 - 3.3.4.3 Area of Coverage 3-7
 - 3.3.5 FAA Logo/Banner 3-7
 - Figure 3.10 FAA Branding.....3-7
 - 3.3.6 Chart Index 3-7
 - Figure 3.11 Chart Index - U.S.3-8
 - Figure 3.12 Chart Index - Alaska3-8
 - 3.3.6.1 Land and Water Areas..... 3-8
 - 3.3.6.2 International Boundaries 3-8

3.3.6.3	Low Altitude Chart Coverage	3-9
3.3.6.3.1	Offshore Navigation Only L-21	3-9
3.3.6.4	Area Chart Cities	3-9
3.3.6.4.1	U.S. Area Chart Coverage	3-9
	Figure 3.13 Area Chart Listing	3-9
	Figure 3.14 Area Chart Coverage Note	3-9
3.3.6.4.2	(AK) Alaska Area Chart Coverage	3-10
	Figure 3.15 (AK) Alaska Area Chart Depiction on Active Chart	3-10
	Figure 3.16 (AK) Alaska Area Chart Depiction on Inactive Chart	3-10
3.3.6.5	Prominent Cities	3-10
3.3.6.6	Time Zone Boundaries and International Dateline	3-10
3.3.6.7	(AK) Wall Planning Chart Instructions (Airplane Silhouettes)	3-11
	Figure 3.17 Registration Marks (Airplane Silhouettes)/Wall Planning Instructions	3-11
3.3.7	Interagency Air Cartographic Committee (IACC) Credit Note	3-11
	Figure 3.18 IACC Credit Note	3-11
3.3.8	QR Codes	3-11
3.3.9	Bar Codes	3-11
	Figure 3.19 Bar Codes	3-11
3.4	Legend Panel Information	3-12
3.4.1	Chart Identification Area	3-12
3.4.1.1	Chart Idents	3-12
3.4.1.1.1	U.S. Charts	3-12
3.4.1.1.2	(AK) Alaska Charts	3-12
3.4.1.2	Arrowheads	3-13
3.4.1.2.1	U.S. Charts	3-13
3.4.1.2.2	(AK) Alaska Charts	3-13
3.4.1.3	Panel Identification	3-13
3.4.1.3.1	U.S. Charts	3-13
3.4.1.3.2	Alaska Charts	3-13
3.4.1.4	Chart Scales	3-14
3.4.1.4.1	U.S. Charts	3-14
3.4.1.4.2	Alaska Charts	3-14
3.4.2	Title Area	3-14
3.4.2.1	Chart Title	3-14
3.4.2.2	Altitude Note	3-14
3.4.2.3	Horizontal Datum Note	3-14
	Figure 3.20 Horizontal Datum Note	3-14

- 3.4.3 Chart Legend 3-14
 - Table 3.1 Chart Legend Title Headings3-15
- 3.5 Tabulated Data Area 3-15
 - 3.5.1 Military Training Routes (MTR) Tabulation - U.S. & Alaska..... 3-16
 - 3.5.1.1 General 3-16
 - Figure 3.21 Military Training Routes Tabulation.....3-16
 - 3.5.1.2 Title 3-16
 - 3.5.1.3 Columns and Sub-columns 3-16
 - 3.5.1.3.1 Number Column 3-16
 - 3.5.1.3.2 Altitude Range Column 3-16
 - 3.5.2 Special Use Airspace (SUA) and Military Operations Areas (MOA) Tabulation
 - Legend..... 3-17
 - Figure 3.22 SUA and MOA Tabulation Legend - U.S. Charts3-17
 - Figure 3.23 SUA and MOA Tabulation Legend - AK Charts.....3-17
 - 3.5.3 Special Use Airspace (SUA) Tabulation 3-17
 - Figure 3.24 Special Use Airspace (SUA) Tabulation3-17
 - 3.5.3.1 Number Column..... 3-18
 - 3.5.3.2 Effective Altitude Column 3-18
 - 3.5.3.3 Time of Use Column..... 3-18
 - 3.5.3.3.1 Subcolumn One - “DAYS” 3-18
 - 3.5.3.3.2 Subcolumn Two - “HOURS” 3-18
 - 3.5.3.3.3 Subcolumn Three - “WEATHER” 3-18
 - 3.5.3.4 Controlling Agency/Air Ground (A/G) Column..... 3-18
 - 3.5.3.5 Panel Column..... 3-19
 - 3.5.4 Military Operations Areas (MOA) Tabulation..... 3-19
 - Figure 3.25 Military Operations Areas.....3-19
 - 3.5.4.1 Number Column..... 3-19
 - 3.5.4.2 Effective Altitude Column 3-19
 - 3.5.4.3 Time of Use Column..... 3-19
 - 3.5.4.3.1 Subcolumn One - “DAYS” 3-19
 - 3.5.4.3.2 Subcolumn Two - “HOURS” 3-19
 - 3.5.4.3.3 Subcolumn Three - “WEATHER” 3-20
 - 3.5.4.4 Controlling Agency/Air Ground (A/G) Column..... 3-20
 - 3.5.4.5 Panel Column..... 3-20
 - 3.5.5 Airport Locations Tabulation 3-20
 - Figure 3.26 Airport Locations3-20
 - 3.5.5.1 Name Column 3-20
 - 3.5.5.2 ID Column..... 3-20

3.5.5.3	Panel Column	3-21
3.6	Margin Information	3-21
3.6.1	Bar Scales	3-21
3.6.1.1	Placement	3-21
3.6.1.2	Increments and Labels	3-21
3.6.1.2.1	U.S. Charts	3-21
	Figure 3.27 Chart Scale Increments - 10NM Increment Example	3-21
3.6.1.2.2	Offshore Navigation Chart L-21	3-22
	Figure 3.28 Chart Scale Increments - 2NM Increment Example	3-22
3.6.1.2.3	Alaska Charts	3-22
	Figure 3.29 Chart Scale Increments - 5NM Increment Example	3-22
3.6.1.3	Chart Scale	3-22
3.6.1.4	Nautical Mile Text	3-22
3.6.2	Panel/Fold Identification	3-22
	Figure 3.30 Top of Panel Fold Indication	3-23
	Figure 3.31 Bottom of Panel Fold Indication	3-23
3.6.3	Chart Idents	3-23
	Figure 3.32 Chart Number Identification	3-23
3.6.4	Airways/Routes Extending Past the Chart Neatline	3-23
3.6.4.1	External CNFs & Unnamed Mileage Breaks	3-23
	Figure 3.33 Airways/Routes Past Chart Boundary - External - CNF & Unnamed Mileage Break	3-24
	Figure 3.34 Airways/Routes Past Chart Boundary - External - Russia	3-24
3.6.4.2	Internal Chart Boundaries	3-24
	Table 3.2 Internal Boundary Next Point Information	3-24
3.6.4.2.1	VHF/UHF or LF/MF Routes	3-25
	Figure 3.35 Routes Past Chart Boundary - Internal - VHF/UHF and LF/MF Routes	3-25
3.6.4.2.2	RNAV Routes	3-26
	Figure 3.36 Routes Past Chart Boundary - Internal - RNAV Routes	3-26
3.6.4.2.3	Joint Routes	3-27
	Figure 3.37 Routes Past Chart Boundary - Internal - RNAV Joint Routes	3-27
3.6.4.3	External Chart Boundaries	3-27
	Table 3.3 External Boundary Next Point Information	3-27
3.6.4.3.1	VHF/UHF or LF/MF Routes	3-28
	Figure 3.38 Airways/Routes Past Chart Boundary - External - VHF/UHF and LF/MF Routes	3-28
	Figure 3.39 Airways/Routes Past Chart Boundary - External - Uncontrolled Route	3-28
3.6.4.3.2	RNAV Routes	3-29
	Figure 3.40 Airways/Routes Past Chart Boundary - External - RNAV Route	3-29

- 3.6.4.3.3 Joint Routes..... 3-29
 - Figure 3.41 Airways/Routes Past Chart Boundary - External - Joint3-29
- 3.6.4.4 Placement of Next Point Information 3-30
 - 3.6.4.4.1 Internal Boundary Next Point Information..... 3-30
 - Figure 3.42 Next Point Information - Internal - NAVAID & Fix3-30
 - Figure 3.43 Next Point Information - Internal - RNAV3-30
 - Figure 3.44 Next Point Information - Internal - Airways/Routes with Different Next Points.....3-30
 - 3.6.4.4.2 External Boundary Next Point Information..... 3-30
 - Figure 3.45 Next Point Information - External - NAVAID & Fix3-31
 - Figure 3.46 Next Point Information - External - Congested Area.....3-31
- 3.6.5 Margin Notes for Adjoining/Overlapping Charts..... 3-31
 - Figure 3.47 Margin Notes for Adjoining/Overlapping Charts3-32
 - Figure 3.48 Margin Notes for Adjoining Charts - Along the Top.....3-32
 - Figure 3.49 Margin Notes for Adjoining Charts - Along the Sides3-32
 - Figure 3.50 Margin Notes for Adjoining Charts - Along the Bottom3-32
 - Figure 3.51 Margin Notes for Adjoining Charts - Canadian and DoD Charts3-33
- 3.7 Chart Detail..... 3-33
 - 3.7.1 Projection Lines..... 3-33
 - 3.7.1.1 General 3-33
 - Figure 3.52 Projection Lines.....3-34
 - 3.7.1.2 Latitude 3-34
 - Figure 3.53 Latitude.....3-34
 - 3.7.1.3 Longitude 3-34
 - Figure 3.54 Longitude3-34
 - 3.7.1.4 (AK) Alaska Charts..... 3-34
 - 3.7.1.4.1 General..... 3-34
 - 3.7.1.4.2 (AK) Latitude..... 3-35
 - Figure 3.55 (AK) Latitude3-35
 - 3.7.1.4.3 (AK) Longitude..... 3-35
 - Figure 3.56 Longitude (AK)3-35
 - 3.7.2 Base Detail..... 3-35
 - 3.7.2.1 Shoreline 3-35
 - Figure 3.57 Shoreline.....3-35
 - 3.7.2.2 International Boundary 3-36
 - Figure 3.58 International Boundary Lines.....3-36
 - Figure 3.59 Omission of International Boundary Lines3-36
 - 3.7.2.3 (AK) United States/Russia Maritime Boundary 3-36
 - Figure 3.60 United States/Russian Maritime Boundary3-36

3.7.2.4	Time Zones	3-36
	Figure 3.61 Time Zones	3-36
3.7.2.5	International Date Line	3-37
	Figure 3.62 International Date Line	3-37
3.7.2.6	Lines of Equal Magnetic Variation (Isogonic Lines).....	3-37
	Figure 3.63 Lines of Equal Magnetic Variation (Isogonic Lines)	3-37
3.7.2.7	Off-route Obstruction Clearance Altitude (OROCA).....	3-37
	Figure 3.64 OROCA Value Example - 12,500 Feet	3-37
	Figure 3.65 OROCA Figure Placement	3-38
3.7.2.7.1	OROCA Notice.....	3-38
	Figure 3.66 OROCA Notice.....	3-38
3.7.3	Airports.....	3-39
3.7.3.1	Charting Criteria	3-39
3.7.3.2	Airport Symbolology	3-39
	Figure 3.67 Airport Classification/Symbology	3-39
3.7.3.2.1	Heliports.....	3-40
	Figure 3.68 Heliports Symbology and Data.....	3-40
3.7.3.2.2	Seaplane Bases.....	3-40
	Figure 3.69 Seaplane Bases Symbology and Data	3-40
3.7.3.3	Airport Abbreviations	3-40
	Table 3.4 Airport Abbreviations	3-40
3.7.3.4	Airport Data Block.....	3-41
	Figure 3.70 Airport Data Block	3-41
3.7.3.4.1	Associated City Names	3-41
	Figure 3.71 Associated City Names.....	3-41
3.7.3.4.2	Airport Names.....	3-41
	Figure 3.72 Airports Identified Under Part 93	3-42
3.7.3.4.3	Airport Identifiers	3-42
	Figure 3.73 Airport Identifiers	3-42
	Figure 3.74 Examples of Airport Identifiers	3-42
3.7.3.4.4	Airport Airspace	3-42
3.7.3.4.5	Airport Elevation	3-42
3.7.3.4.6	Runway Lighting	3-42
	Figure 3.75 Example of Lighting Symbology at an Airport	3-43
	Figure 3.76 Example of Availability of Runway Lights at Private Airport	3-43
3.7.3.4.7	Runway Length.....	3-43
3.7.3.4.8	Runway Surface	3-43
3.7.3.4.9	Automatic Terminal Information Service (ATIS)	3-43
	Figure 3.77 ATIS Arrival and Departure Frequencies	3-44
3.7.3.4.10	(AK) Automatic Flight Information Service (AFIS)	3-44

3.7.3.5	FAR Part 91 - Fixed Wing/Special Visual Flight Rules/SFAR 50-2.....	3-44
	Figure 3.78 NO SVFR Example	3-44
3.7.3.6	(AK) Alaska - Part Time Controlled Airspace.....	3-44
3.7.4	Radio Aids to Navigation (NAVAIDs)	3-44
3.7.4.1	Charting Criteria	3-44
3.7.4.2	NAVAID Symbology	3-45
	Figure 3.79 NAVAID Symbols	3-45
3.7.4.3	Compulsory/Non-Compulsory Reporting Points.....	3-45
	Figure 3.80 NAVAID Symbols with Compulsory and Non-Compulsory Reporting	3-45
3.7.4.4	NAVAID North Arrow	3-45
	Figure 3.81 NAVAID North Arrow Orientation	3-45
3.7.4.5	Compass Roses	3-46
	Figure 3.82 Compass Roses.....	3-46
3.7.4.6	NAVAID Identification Boxes	3-46
3.7.4.6.1	General.....	3-46
	Figure 3.83 NAVAID Identification Boxes.....	3-47
	Figure 3.84 Extremely Long NAVAID Name.....	3-47
3.7.4.6.2	Y Mode Channel	3-48
	Figure 3.85 Examples of Y Mode Channel	3-48
3.7.4.6.3	No Voice, Part Time and On Request Frequencies	3-48
	Figure 3.86 NAVAID Operating Less than Continuous & No Voice	3-48
3.7.4.6.4	Geographic Coordinates	3-48
	Figure 3.87 NAVAIDs - Coordinates	3-48
3.7.4.6.5	Standard Service Volume (SSV) Classifications (Frequency Protection).....	3-48
	Figure 3.88 NAVAID Standard Service Volume (SSV)	3-48
3.7.4.6.6	Abnormal Status	3-49
	Figure 3.89 NAVAIDs - Abnormal Status	3-49
3.7.4.6.7	Private NAVAIDS	3-49
	Figure 3.90 Private NAVAID	3-49
3.7.4.7	NAVAID Types	3-49
3.7.4.7.1	VHF Omnidirectional Range Station (VOR).....	3-49
	Figure 3.91 VOR.....	3-49
3.7.4.7.2	VHF Omnidirectional Range Station and Distance Measuring Equipment (VOR/DME).....	3-50
	Figure 3.92 VOR/DME.....	3-50
3.7.4.7.3	Tactical Air Navigation (TACAN).....	3-50
	Figure 3.93 TACAN	3-50
3.7.4.7.4	VHF Omnidirectional Range – Tactical Air Navigation (VORTAC).....	3-50
	Figure 3.94 VORTAC.....	3-50

3.7.4.7.5	Non-Directional Radio Beacons (NDB).....	3-50
	Figure 3.95 LF/MF NDBs.....	3-50
3.7.4.7.6	Non-Directional Radio Beacons and Distance Measuring Equipment (NDB/DME).....	3-51
	Figure 3.96 NDB/DME.....	3-51
3.7.4.7.7	Marine Radio Beacons.....	3-51
3.7.4.7.8	ILS Components.....	3-51
	Figure 3.97 Compass Locator Beacon.....	3-51
	Figure 3.98 ILS Localizer Course with Frequency & Identifier.....	3-52
	Figure 3.99 ILS Back Course.....	3-52
3.7.4.7.9	Non-collocated VOR and TACAN Facilities.....	3-53
3.7.5	Flight Service Stations (FSS) & Remote Communications Outlets (RCOs).....	3-53
3.7.5.1	General.....	3-53
	Figure 3.100 FSSs with the Same Name as NAVAID and Not Designated RCO.....	3-53
3.7.5.2	FSS Frequencies.....	3-54
	Figure 3.101 FSS Frequencies.....	3-54
3.7.5.3	FSS Associated with a NAVAID.....	3-54
	Figure 3.102 FSS Associated with a NAVAID.....	3-54
3.7.5.4	FSS Not Associated with a NAVAID.....	3-54
	Figure 3.103 FSS Not Associated with a NAVAID.....	3-54
3.7.5.5	Part-time FSS.....	3-55
	Figure 3.104 Part-time FSS.....	3-55
3.7.5.6	RCO and DRCOs Associated with NAVAIDs.....	3-55
	Figure 3.105 RCOs Associated with a NAVAID.....	3-55
3.7.5.7	RCOs and DRCOs Not Associated with a NAVAID.....	3-55
	Figure 3.106 RCOs Not Associated with a NAVAID.....	3-55
3.7.5.8	International FSS.....	3-56
	Figure 3.107 International FSS.....	3-56
3.7.6	Automated Weather Broadcast System (AWBS).....	3-56
3.7.6.1	Automated Weather Broadcast Service Associated with a NAVAID.....	3-56
	Figure 3.108 Automated Weather Broadcast Systems.....	3-56
	Figure 3.109 Automated Weather Broadcast System Associated with a NAVAID.....	3-56
3.7.6.2	Stand Alone AWOS & ASOS.....	3-56
	Figure 3.110 Stand Alone AWOS and ASOS.....	3-56
3.7.7	Airspace Information.....	3-57
3.7.7.1	General Air Traffic Service (ATS) Area Information.....	3-57
	Figure 3.111 General Air Traffic Service (ATS) Area Information.....	3-57
3.7.7.1.1	Type of Service.....	3-57
3.7.7.1.2	Identification Name and ICAO Ident.....	3-57
3.7.7.1.3	Vertical Limits.....	3-57

3.7.7.1.4	Call Sign and Frequencies	3-58
3.7.7.1.5	Explanatory Notes.....	3-58
3.7.7.2	Airspace Notes	3-58
3.7.7.2.1	United States Airspace Note	3-58
	Figure 3.112 U.S. Airspace Notes	3-58
3.7.7.2.2	Foreign Airspace Notes - Canada	3-58
	Figure 3.113 Canadian Airspace Note	3-58
	Figure 3.114 Canadian VFR Airspace Restriction	3-59
	Figure 3.115 Canadian Airspace Note	3-59
	Figure 3.116 Cruising Altitude Diagram - Canada	3-59
3.7.7.2.3	Foreign Airspace Notes - Mexico	3-59
	Figure 3.117 Mexican Airspace Notes.....	3-59
	Figure 3.118 Cruising Altitude Note - Mexico	3-60
3.7.7.2.4	Foreign Airspace Notes - All Excluding Canada.....	3-60
	Figure 3.119 Foreign Airspace Notes - DoD Users.....	3-60
3.7.7.2.5	Foreign Airspace Notes - HAVANA FIR.....	3-60
	Figure 3.120 Havana FIR Note	3-60
3.7.7.2.6	Other Miscellaneous Airspace Notes.....	3-60
3.7.7.3	Airspace Types and Boundaries.....	3-60
3.7.7.3.1	General.....	3-60
3.7.7.3.2	Class B Airspace	3-61
	Figure 3.121 Class B Airspace.....	3-61
3.7.7.3.3	Class C Airspace	3-61
	Figure 3.122 Class C Airspace.....	3-62
3.7.7.3.4	Class D Airspace.....	3-62
	Figure 3.123 Part Time Airspace - Class D	3-62
3.7.7.3.5	Class E Airspace	3-62
	Figure 3.124 Offshore Airspace Area	3-63
3.7.7.3.6	Class G Airspace (Uncontrolled) Airspace.....	3-63
	Figure 3.125 Class G (Uncontrolled) Airspace.....	3-64
3.7.7.3.7	Mode C Required Areas	3-64
	Figure 3.126 Mode C Required Area.....	3-64
3.7.7.3.8	Canadian Airspace	3-64
	Figure 3.127 Canadian Class B Airspace with a Floor of 12,500' MSL	3-64
	Figure 3.128 Canadian Class C Airspace	3-64
	Figure 3.129 Canadian Class D Airspace	3-65
	Figure 3.130 Canadian Class G Airspace	3-65
3.7.7.3.9	Oceanic Control Areas	3-65
3.7.7.3.10	Other Foreign Airspace.....	3-66
	Figure 3.131 Class G (Uncontrolled) Airspace.....	3-66

3.7.7.3.11	Special Use Airspace (SUA) and Military Operation Areas (MOA)	3-66
	Figure 3.132 SUA & MOA Boundaries	3-67
	Figure 3.133 SUA Boundaries - Small Areas	3-68
	Figure 3.134 SUA & MOA Exclusion Area with Notes	3-68
3.7.7.3.12	Special Flight Rules Area (SFRA).....	3-68
	Figure 3.135 Special Flight Rules Area Boundary (SFRA).....	3-68
	Figure 3.136 Grand Canyon National Park SFRA Note	3-69
3.7.7.3.13	Air Defense Identification Zones (ADIZ, CADIZ) and Defense Areas	3-69
	Figure 3.137 ADIZ and Defense Area Boundaries	3-69
	Figure 3.138 Adjoining ADIZ Boundaries.....	3-69
	Figure 3.139 FIR Boundary Coincides with the Boundary of an ADIZ.....	3-69
3.7.7.3.14	Flight Information Regions (FIR).....	3-70
	Figure 3.140 FIR Boundary.....	3-70
	Figure 3.141 Adjoining FIRs.....	3-70
	Figure 3.142 Adjoining CTA/FIRs	3-70
	Figure 3.143 CTA/FIR collocated with a FIR & with Class G/Unclassified Airspace.....	3-70
3.7.7.3.15	Air Route Traffic Control Center (ARTCC), Area Control Center (ACC), Remote Center Air/Ground (RCAG) and Peripheral Station (PAL)	3-71
	Figure 3.144 ARTCC or ACC Boundary	3-71
	Figure 3.145 ARTCC Remote Communications A/G (RCAG).....	3-71
	Figure 3.146 ARTCC Boundaries Collocated with Other Linear Symbols	3-71
3.7.7.3.16	Continental Control Boundary (U.S.).....	3-72
	Figure 3.147 Example of Continental Control Boundary (U.S.).....	3-72
3.7.7.3.17	Altimeter Setting	3-72
	Figure 3.148 Example of Altimeter Settings.....	3-72
3.7.7.3.18	Additional Control Areas.....	3-73
	Figure 3.149 Additional Control Areas	3-73
	Figure 3.150 Offshore Airspace Areas - Vertical Limits	3-73
3.7.8	Airways/Routes	3-73
3.7.8.1	General	3-74
	Figure 3.151 Bypass Symbol	3-74
	Figure 3.152 Supplementary Explanatory Notes	3-74
3.7.8.2	Airway/Route Types	3-74
3.7.8.2.1	Victor Airways.....	3-74
	Figure 3.153 Victor Airways.....	3-74
3.7.8.2.2	LF/MF Airway	3-75
	Figure 3.154 LF/MF Airway	3-75
3.7.8.2.3	Oceanic, Atlantic, Gulf, Puerto Rico and Bahamas Routes.....	3-75
	Figure 3.155 Oceanic, Atlantic and Bahamas Routes	3-75
3.7.8.2.4	Air Traffic Service (ATS) Routes.....	3-75
	Figure 3.156 Air Traffic Service Routes	3-75

3.7.8.2.5	Area Navigation (RNAV) T-Routes and TK-Routes	3-76
	Figure 3.157 RNAV T and TK Routes	3-76
	Figure 3.158 RNAV T and TK Routes - Coincident	3-76
	Figure 3.159 (AK) GPS/WAAS Chart Note	3-76
3.7.8.2.6	Gulf of Mexico “Q” (RNAV) Routes	3-77
	Figure 3.160 Q Routes	3-77
3.7.8.2.7	Direct Routes	3-77
	Figure 3.161 Direct Routes	3-77
3.7.8.2.8	Unusable Airway/Route Segments	3-77
	Figure 3.162 Unusable Airway/Route Segment	3-77
3.7.8.2.9	Substitute Airway/Route	3-78
	Figure 3.163 Substitute Airway/Route Symbol	3-78
	Figure 3.164 Substitute Airway/Route Non Coincident	3-78
	Figure 3.165 Substitute Airway/Route Coincident	3-79
	Figure 3.166 Substitute Routes - NOTAM and Special Notice Notes	3-79
3.7.8.2.10	Military Training Routes (MTR)	3-79
	Figure 3.167 Military Training Routes (MTRs)	3-79
	Figure 3.168 IR and VR MTRs on Same Route Segment	3-80
	Figure 3.169 MTRs Directional Arrowheads	3-80
3.7.8.2.11	Uncontrolled Airways	3-81
	Figure 3.170 Canadian Uncontrolled LF/MF Airway	3-81
	Figure 3.171 Uncontrolled LF/MF & VHF Airways	3-81
3.7.8.3	Airway/Route Data	3-82
3.7.8.3.1	General	3-82
	Figure 3.172 Airway/Route Data Grouping	3-82
3.7.8.3.2	Identification	3-82
	Figure 3.173 Route Identifications	3-83
	Figure 3.174 Coincidental Routes of the Same Classification	3-83
	Figure 3.175 Airway/Route Identifications in Congested Areas	3-83
3.7.8.3.3	Single Direction Airways/Routes	3-84
	Figure 3.176 Single Directional Routes	3-84
3.7.8.3.4	Radials and Bearings	3-84
	Figure 3.177 Radials and Bearings	3-84
	Figure 3.178 RNAV T Route Magnetic Reference Bearings	3-84
	Figure 3.179 Gulf of Mexico Q Routes	3-84
	Figure 3.180 Unusable Radial	3-85

3.7.8.3.5	Minimum Enroute Altitudes (MEA), Minimum Obstruction Clearance Altitude (MOCA) and Maximum Authorized Altitudes (MAA).....	3-86
	Figure 3.181 MEAs	3-86
	Figure 3.182 Different MEAs	3-86
	Figure 3.183 MOCAs	3-87
	Figure 3.184 MAAs.....	3-87
	Figure 3.185 MEAs and MAAs	3-87
	Figure 3.186 MEA and MAA Along Uncontrolled Airways.....	3-87
	Figure 3.187 “T” Symbol	3-88
	Figure 3.188 Altitude Changes Along a Route	3-88
	Figure 3.189 Direction of Flight Indicator (Canadian)	3-88
3.7.8.3.6	MEA Gap	3-89
	Figure 3.190 MEA Gap	3-89
3.7.8.3.7	Minimum Crossing Altitudes (MCA) and Minimum Turning Altitudes (MTA)	3-89
	Figure 3.191 MCA/MTA Flag Symbol.....	3-89
	Figure 3.192 MCA and MTA Data at a Fix	3-89
	Figure 3.193 MCA & MTA Data Complex Example	3-90
	Figure 3.194 Minimum Crossing Altitudes (MCA) at a NAVAID	3-90
	Figure 3.195 MCA in a Congested Area with Leader Line	3-90
	Figure 3.196 Multiple Minimum Crossing Altitude (MCAs)	3-91
3.7.8.3.8	Minimum Reception Altitudes (MRA).....	3-91
	Figure 3.197 Minimum Reception Altitudes (MRA).....	3-91
3.7.8.3.9	Mileage Distances.....	3-91
	Figure 3.198 Segment Mileages.....	3-91
	Figure 3.199 Box Mileages	3-92
	Figure 3.200 Box Mileages Offset by Segment Mileage	3-92
	Figure 3.201 Box Mileages - Coincidental Routes	3-92
	Figure 3.202 Box Mileages - “TO” Notes.....	3-92
	Figure 3.203 Mileage Breaks	3-93
3.7.8.3.10	VOR Changeover Points (COP)	3-93
	Figure 3.204 Changeover Points (COP).....	3-93
	Figure 3.205 Changeover Points (COP) - LF/MF Establishing COP	3-93
	Figure 3.206 Changeover Points (COP) - LF/MF with DME.....	3-93
	Figure 3.207 Canadian Class G Airway Changeover Points (COP)	3-94
3.7.9	Navigational and Procedural Information	3-94
3.7.9.1	Fixes	3-94
3.7.9.1.1	Operational Notes	3-94
	Figure 3.208 Operational Notes	3-94
3.7.9.1.2	Flyover Symbology.....	3-94
	Figure 3.209 Flyover Symbology.....	3-94

3.7.9.1.3	Radio Intersections & DME Fixes.....	3-94
	Figure 3.210 Radio Fixes	3-94
	Figure 3.211 Offshore Fixes without Makeups	3-94
	Figure 3.212 Radio Fix Geographic Coordinates	3-95
	Figure 3.213 NAVAIDS without DME Capability	3-95
	Figure 3.214 NAVAIDS with DME Capability	3-95
	Figure 3.215 DME Boats	3-96
	Figure 3.216 NAVAIDS Used for Fix Makeups.....	3-96
	Figure 3.217 Radio Fix Makeup for Offshore Fixes.....	3-96
	Figure 3.218 Magnetic Radial/Bearing Values.....	3-97
3.7.9.1.4	Facility Locator Boats.....	3-97
	Figure 3.219 VOR and VOR/DME Capability Facility Locator Boats	3-97
	Figure 3.220 NDB and NDB/DME Facility Locator Boats.....	3-97
	Figure 3.221 Facility Locator Boats	3-98
	Figure 3.222 Facility Locator Boats	3-98
	Figure 3.223 Facility Locator Boats in Congested Areas	3-98
	Figure 3.224 Facility Locator Boats - Unusable NAVAID	3-99
3.7.9.1.5	RNAV Waypoints.....	3-99
	Figure 3.225 RNAV Waypoints Reporting & Flyover Function.....	3-99
	Figure 3.226 Waypoints - Not Part of a Route Description.....	3-99
3.7.9.2	Computer Navigation Fixes (CNF).....	3-99
	Figure 3.227 Computer Navigation Fixes	3-99
	Figure 3.228 Computer Navigation Fixes - Victor Airway Examples	3-100
3.7.9.3	Holding Patterns.....	3-100
3.7.9.3.1	NAVAID-based Holding Patterns	3-100
	Figure 3.229 Conventional Holding Patterns.....	3-100
	Figure 3.230 Holding Patterns with Speed Restriction.....	3-100
	Figure 3.231 Off Route NDB Holding Pattern	3-101
	Figure 3.232 Off Route Holding Pattern within Compass Rose.....	3-101
	Figure 3.233 Off Route Holding Pattern Off a TACAN	3-101
	Figure 3.234 Offroute VHF Defined Fix Holding Pattern with Extended Radial Line.....	3-101
	Figure 3.235 Off Route VHF Defined Fix Holding Pattern	3-102
3.7.9.3.2	RNAV-based Holding Patterns.....	3-102
	Figure 3.236 RNAV Holding Patterns.....	3-102
	Figure 3.237 RNAV Holding Pattern Beyond U.S. Continental Control.....	3-102
3.7.10	Area Chart Coverage Areas on Enroute Charts.....	3-102
3.7.10.1	General	3-102
	Figure 3.238 Area Chart Coverage Area Boundary within Enroute Charts	3-102
3.7.10.2	Data Depicted Within the Outlined Areas	3-103
3.7.10.2.1	Data Depicted within the Outlined Area for Washington.....	3-103
3.7.10.2.2	(AK) Data Depicted within the Outlined Area for Vancouver	3-103
	Figure 3.239 (AK) NAVAIDS Depicted within Vancouver Area Chart Boundary Area	3-103

3.7.10.2.3	Chart Detail within the Outline Areas	3-103
3.7.11	(AK) Registration Guide Marks for Wall Chart Assembly	3-105
Figure 3.240	(AK) Registration Marks	3-105
3.8	Inset Charts	3-106
3.8.1	General.....	3-106
3.8.2	Border Information	3-106
3.8.2.1	Inset Chart Title	3-106
Figure 3.241	Inset Chart Title	3-106
3.8.2.2	Bar Scale	3-106
Figure 3.242	Inset Chart Bar Scale	3-106
3.8.2.3	Overlap Notes	3-106
Figure 3.243	Inset Chart Overlap Note	3-106
3.8.2.4	Airways	3-107
3.8.3	Chart Detail	3-107
3.8.3.1	Airspace Information	3-107
3.8.3.2	Airway Data	3-107
3.8.3.3	Navigation and Procedural Information.....	3-107
3.9	Area Charts - U.S. (A-1 & A-2) AND Alaska (AK)	3-107
3.9.1	Chart Detail	3-108
3.9.1.1	Projection Lines	3-108
3.9.2	Terrain Contours on Area Charts.....	3-108
Figure 3.244	Example No. 1 - Contour Lines every 2,000 feet.....	3-108
Figure 3.245	Example No. 2 - Contour Lines every 3,000 feet.....	3-109
3.9.2.1	Terrain Contour Note	3-109
Figure 3.246	Terrain Contour Note.....	3-109
3.9.3	Airspace Notes.....	3-109
Figure 3.247	Uncontrolled Airspace Note	3-109
3.10	Area Chart (A-1 & A-2)	3-110
3.10.1	Title Panel.....	3-111
Figure 3.248	Area Chart Title Panel	3-111
3.10.1.1	Area Chart Distinctive Header	3-111
Figure 3.249	Area Chart Distinctive Header.....	3-111
3.10.1.2	Foreign Airspace Warning Note	3-112
3.10.1.3	Chart Identification Area	3-112
3.10.1.3.1	Chart Numbers	3-112
Figure 3.250	Chart Number Style	3-112
3.10.1.3.2	Arrowheads.....	3-112
3.10.1.3.3	Area Chart Names.....	3-112

3.10.1.4	Title Area	3-112
3.10.1.4.1	Chart Title	3-112
	Figure 3.251 IFR Area Chart Title Format	3-112
3.10.1.4.2	Altitude Note.....	3-112
3.10.1.4.3	Effective Dates and Times Note	3-113
3.10.1.4.4	NOTAM Note	3-113
3.10.1.4.5	Legend Reference Note	3-113
	Figure 3.252 Legend Information	3-113
3.10.1.4.6	Publishers Credit Note	3-113
3.10.1.4.7	Corrections, Comments, and/or Procurement.....	3-113
3.10.1.4.8	OROCA Note.....	3-113
3.10.1.5	Chart Identification Labels.....	3-113
	Figure 3.253 Chart Identification Labels.....	3-113
3.10.1.5.1	Chart Numbers	3-113
3.10.1.5.2	Chart Effective Date	3-114
3.10.1.5.3	Area of Coverage	3-114
3.10.1.6	FAA Logo/Banner.....	3-114
3.10.1.7	Chart Index.....	3-114
	Figure 3.254 Area Chart Indexing	3-114
3.10.1.7.1	Land and Water Areas	3-114
3.10.1.7.2	International Boundaries.....	3-114
3.10.1.7.3	Low Altitude Chart Coverage.....	3-115
3.10.1.7.4	Depiction of Area Chart Coverage & Cities.....	3-115
	Figure 3.255 Area Chart Listing	3-115
3.10.1.7.5	Time Zone Boundaries and International Dateline.....	3-115
3.10.1.8	Interagency Air Cartographic Committee (IACC) Credit Note.....	3-115
3.10.1.9	Bar Code	3-115
3.10.2	Tabulated Data Area.....	3-115
3.10.2.1	Military Training Routes (MTR) Tabulation	3-115
	Figure 3.256 Military Training Routes Tabulation.....	3-116
3.10.2.1.1	Number Column	3-116
3.10.2.1.2	Altitude Range Column	3-116
3.10.2.1.3	Area Column.....	3-116
3.10.2.2	Special Use Airspace (SUA) and Military Operations Area (MOA) Tabulation Legend.....	3-116
	Figure 3.257 SUA and MOA Tabulation Legend	3-116
3.10.2.3	Special Use Airspace (SUA) Tabulation	3-117
	Figure 3.258 SUA Table - Area Chart.....	3-117

3.10.2.4	Military Operations Areas (MOA) Tabulation	3-117
	Figure 3.259 MOA Table - Area Chart.....	3-117
3.10.3	Margin Information	3-117
3.10.3.1	Bar Scales.....	3-117
3.10.3.2	Area Chart Title	3-118
	Figure 3.260 Area Chart Title	3-118
3.10.3.3	Panel Fold Information	3-118
3.10.3.4	Reverse Side - Even Numbered Charts.....	3-118
3.10.3.5	Airway/Route Leads	3-118
3.11	Chart L-21 - Offshore Navigational Chart.....	3-118
3.11.1	Title Panel Information.....	3-119
3.11.1.1	L-21 Offshore Navigation Only Note	3-119
	Figure 3.261 Offshore Navigation Note.....	3-119
3.11.2	Margin Information	3-119
3.11.2.1	Bar Scales.....	3-119
3.11.3	Chart Detail	3-119
3.11.3.1	Airports	3-119
3.11.3.1.1	Charting Criteria	3-119
3.11.3.1.2	Airport Names.....	3-119
	Figure 3.262 Airports Naming	3-119
	Figure 3.263 Airports Under SFAR	3-120
3.11.3.2	NAVAIDs	3-120
3.11.3.2.1	Charting Criteria	3-120
3.11.3.2.2	NAVAID Identification Boxes Criteria	3-120
	Figure 3.264 NAVAID Identification Boxes	3-120
3.11.3.3	Airspace Information	3-120
3.11.3.4	Airways/Routes	3-120
3.12	(AK) L-2 - Low Altitude Route Selection Chart	3-121
3.12.1	General.....	3-121
3.12.2	Chart Detail	3-121
3.12.2.1	Base Detail	3-121
3.12.2.1.1	Land and Water Areas	3-121
3.12.2.1.2	International Boundaries.....	3-121
3.12.2.1.3	U.S. - Russia Maritime Boundary.....	3-121
3.12.2.2	Radio Aids to Navigation (NAVAIDs).....	3-121
3.12.2.3	Airways/Routes	3-121
3.12.2.4	Navigational and Procedural Information.....	3-121

3.12.2.4.1	Compulsory and Non-compulsory Reporting Points.....	3-121
3.12.2.5	Operational and/or Information Notes	3-122
Appendix 1	Low Enroute Chart Area of Coverage – U.S.....	A-1
Appendix 2	Alaska Low Enroute Chart Area of Coverage.....	A-2
Appendix 3	Chart Layout - U.S. L-1 and L-7	A-3
Appendix 4	Chart Layout - U.S. L-2 and L-8	A-4
Appendix 5	Chart Layout - U.S. L-3, L-9, L-11, L-13, L-15, L-19, L-27 and L-29	A-5
Appendix 6	Chart Layout - U.S. L-4, L-10, L-12, L-14, L-16 and L-24	A-6
Appendix 7	Chart Layout - U.S. L-5.....	A-7
Appendix 8	Chart Layout - U.S. L-6.....	A-8
Appendix 9	Chart Layout - U.S. L-17 and L-31	A-9
Appendix 10	Chart Layout - U.S. L-18 and L-32	A-10
Appendix 11	Chart Layout - U.S. L-20 and L-28	A-11
Appendix 12	Chart Layout - U.S. L-21, L-33 and L-35	A-12
Appendix 13	Chart Layout - U.S. L-22 and L-36	A-13
Appendix 14	Chart Layout - U.S. L-23.....	A-14
Appendix 15	Chart Layout - U.S. L-25.....	A-15
Appendix 16	Chart Layout - U.S. L-26.....	A-16
Appendix 17	Chart Layout - U.S. L-30.....	A-17
Appendix 18	Chart Layout - U.S. L-34.....	A-18
Appendix 19	Chart Layout - Alaska L-1	A-19
Appendix 20	Chart Layout - Alaska L-2.....	A-20
Appendix 21	Chart Layout - Alaska L-3.....	A-21
Appendix 22	Chart Layout - Alaska L-4.....	A-22
Appendix 23	Title Panel Information - U.S. & Alaska.....	A-23
Appendix 24	Chart Identification & Title Panel Area Layout - U.S. & Alaska	A-24
Appendix 25	Corrections, Comments and/or Procurement Area Layout - U.S. & Alaska.....	A-26
Appendix 26	OROCA Notice	A-27
Appendix 27	SFAR No. 97 Chart Notice - Alaska	A-28
Appendix 28	Chart Identification Labels - U.S., Alaska & Area Charts	A-29
Appendix 29	Chart Indexes - Dimensions - U.S.....	A-31
Appendix 30	Chart Indexes - Dimensions - Alaska.....	A-32
Appendix 31	Chart Indexes - U.S. and Alaska	A-33
Appendix 32	Bar Codes	A-35
Appendix 33	Legend Panel - U.S. and Alaska.....	A-36
Appendix 34	Legend Panel - Dimensions - U.S. and Alaska Charts	A-37
Appendix 35	Legend Panel Information - U.S.....	A-38
Appendix 36	Legend Panel Information - Alaska.....	A-41
Appendix 37	Legend Panel - Chart Identification Labels U.S. & Alaska	A-44

Appendix 38	Military Training Routes Tabulation - U.S. & Alaska	A-45
Appendix 39	SUA & MOA Tabulation - U.S. & Alaska.....	A-46
Appendix 40	Airport Locations Tabulation - U.S. & Alaska.....	A-47
Appendix 41	Margin Information - U.S. & Alaska.....	A-48
Appendix 42	Chart Detail - Projection Lines - U.S. & Alaska	A-52
Appendix 43	Base Detail - U.S. & Alaska.....	A-53
Appendix 44	Airports - U.S. & Alaska	A-54
Appendix 45	NAVAID North Arrows & Compass Roses.....	A-55
Appendix 46	NAVAID Identification Boxes.....	A-56
Appendix 47	Flight Service Stations & Remote Communications Outlets	A-57
Appendix 48	Automated Weather Broadcasting Systems	A-58
Appendix 49	Airspace Information.....	A-59
Appendix 50	Airspace.....	A-60
Appendix 51	Airway/Route Types.....	A-63
Appendix 52	Airway/Route Data.....	A-64
Appendix 53	Navigational & Procedural Information.....	A-66
Appendix 54	Chart Area of Coverage - Area Charts	A-68
Appendix 55	Chart Layout - Area Chart A-1.....	A-69
Appendix 56	Chart Layout - Area Chart A-2.....	A-70
Appendix 57	Title Panel Information - Area Charts	A-71
Appendix 58	Chart Identification & Title Area - Area Charts.....	A-72
Appendix 59	Chart Index - Area Charts.....	A-74
Appendix 60	Margin Information - Bar Scales - Area Charts	A-75
Appendix 61	Military Training Routes Tabulation - Area Charts	A-78
Appendix 62	SUA & MOA Tabulation - Area Charts.....	A-79
Appendix 63	Terrain Contours - Area Charts	A-81
Appendix 64	Title Panel Layout - U.S. L-21	A-82

CHAPTER 1 GENERAL

1.1 PURPOSE AND SCOPE

1.1.1 Purpose

These specifications serve as a guide in the preparation of the IFR Enroute Low Altitude chart series for the conterminous United States, Alaska and portions of Canada, Mexico, Russia and Caribbean, providing users with satisfactory charts for operational use. Foreign areas are included for transitional purposes only.

These specifications provide appropriate guidelines to effect uniformity and standardization of content and portrayal techniques in the preparation and production of IFR Enroute Low Altitude charts.

Although the digital chart files are compiled in accordance with these specifications, the final product may vary slightly in appearance due to differences in printing techniques/processes and/or digital display technique.

1.1.2 Scope

The Low Altitude Airspace System is effective up to, but not including 18,000' MSL.

The charts in this series shall serve as the enroute navigational reference for flights in the Low Altitude Airspace System and are meant for use by both civil and military pilots. Only such information specifically required for low altitude instrument operations will come within the scope of these specifications. The primary objective is to provide optimum presentation and portrayal of the Enroute Low Altitude Flight Rules (IFR) Airspace System based on the users' requirements.

Items applicable only to the Alaska Enroute Low Altitude Charts are so noted within these specifications by the designation **(AK)** positioned immediately to the right of the paragraph, table or figure number or immediately preceding unnumbered paragraphs.

1.2 REQUIREMENTS

1.2.1 General

The Enroute Low Altitude Chart series shall consist of 36 charts for the conterminous U.S. and four charts for Alaska. All charts shall be printed front and back.

In addition, the Enroute Low Altitude Chart series shall be supplemented with:

- Area charts of high density area traffic areas.
- **(AK)** Route Selection Chart.
- **(AK)** Supplement Alaska
- Special Notices, as required

1.2.2 Safety, Accuracy and Currency

Safe navigation is dependent upon the ability of the pilot to rapidly identify and associate data on the chart with aircraft instruments and navigational equipment. The charts in this series should contain built in safety factors that preclude ambiguity and misinterpretation, avoid duplication of data, and provide rapid identification of correct information. Accuracy of the data is critical.

Consistent with the accuracy of the data contained on the charts, such charts shall be maintained current and published on the revision schedule coinciding with the effective date and schedule of air-space changes.

1.2.3 Titles

1.2.3.1 **Enroute Low Altitude Chart Series**

The title for the conterminous U.S. and Alaska enroute low altitude charts shall be:

Figure 1.1 Enroute Low Title Labels
 UNITED STATES GOVERNMENT
 FLIGHT INFORMATION PUBLICATION
IFR ENROUTE LOW ALTITUDE - U.S.
OR

UNITED STATES GOVERNMENT
 FLIGHT INFORMATION PUBLICATION
IFR ENROUTE LOW ALTITUDE - ALASKA

1.2.3.2 **Area Chart**

The title for the Area Enroute Low Altitude charts shall be:

Figure 1.2 Area Chart Title Label
 UNITED STATES GOVERNMENT
 FLIGHT INFORMATION PUBLICATION
IFR AREA CHARTS - U.S.

1.2.4 Areas of Coverage

1.2.4.1 **Enroute Charts - U.S.**

References:

[Appendix 1](#) - Low Enroute Chart Area of Coverage – U.S.

Area of coverage shall be comprised of 36 overlapping areas or charts covering the conterminous United States including portions of Canada, the Caribbean and Mexico. (See Appendices).

The limits of each chart are defined by the following corner coordinates (corner coordinates are organized starting from the NW corner and go in a clockwise manner there after):

Table 1.1 U.S. - Corner Coordinates - IFR Low Enroute

CHART NUMBER	A	B	C	D
L-1	49°18'27.6"N	49°19'10.0"N	42°48'25.7"N	42°47'46.9"N
	124°59'08.9"W	121°13'06.1"W	121°21'37.5"W	124°45'31.4"W
L-2	42°47'32.9"N	43°07'53.6"N	37°16'09.9"N	36°57'24.0"N
	124°54'20.9"W	121°31'51.1"W	120°39'55.7"W	123°46'25.8"W
L-3	38°38'40.7"N	39°44'36.8"N	33°44'29.3"N	32°43'55.4"N
	123°34'58.1"W	120°41'00.9"W	117°21'38.5"W	120°04'52.3"W

Table 1.1 U.S. - Corner Coordinates - IFR Low Enroute (Continued)

L-4	34°58'48.2"N	34°24'27.8"N	32°14'35.5"N	32°47'51.6"N
	120°41'44.2"W	114°29'28.9"W	114°51'47.9"W	120°53'41.1"W
L-5	34°34'44.3"N	34°14'00.8"N	31°07'37.6"N	31°27'07.7"N
	115°24'12.8"W	107°32'25.8"W	107°52'53.5"W	115°26'11.4"W
L-6N	34°22'41.8"N	34°59'35.9"N	31°52'34.6"N	31°17'19.0"N
	108°15'31.9"W	101°24'29.3"W	101°09'03.0"W	107°43'54.8"W
L-6S	31°24'01.7"N	31°44'44.8"N	28°39'10.1"N	28°19'23.6"N
	106°46'15.3"W	103°05'47.0"W	102°47'04.0"W	106°19'11.7"W
L-7	35°40'05.1"N	36°36'24.1"N	34°25'36.3"N	33°31'01.1"N
	121°10'54.5"W	114°10'58.3"W	113°51'07.0"W	120°39'21.9"W
L-8	36°33'34.4"N	37°45'40.2"N	34°38'47.8"N	33°29'49.5"N
	114°23'47.3"W	105°17'45.6"W	104°52'04.8"W	113°36'22.8"W
L-9	40°12'47.9"N	41°32'04.7"N	37°08'47.9"N	35°54'11.9"N
	120°45'33.0"W	105°41'40.3"W	105°31'10.4"W	119°42'00.4"W
L-10	40°52'06.4"N	41°22'21.2"N	37°36'34.7"N	37°07'52.3"N
	106°00'52.8"W	94°19'31.5"W	94°21'37.7"W	105°26'46.7"W
L-11	43°54'59.5"N	44°12'54.5"N	39°50'26.9"N	39°33'34.2"N
	121°52'37.6"W	105°58'43.9"W	106°19'44.2"W	121°14'06.0"W
L-12	45°11'24.4"N	45°07'08.6"N	40°45'25.9"N	40°49'27.9"N
	106°45'06.9"W	92°13'58.8"W	92°43'59.0"W	106°19'50.1"W
L-13	48°53'42.9"N	49°00'16.1"N	44°03'38.5"N	43°57'29.6"N
	122°09'46.7"W	102°30'07.0"W	103°11'30.9"W	121°21'30.2"W
L-14	48°35'44.7"N	49°04'14.1"N	44°43'53.7"N	44°17'00.4"N
	87°56'49.2"W	103°20'13.1"W	103°06'14.4"W	88°44'35.8"W
L-15	37°51'03.3"N	38°18'50.2"N	35°10'44.1"N	34°44'09.8"N
	105°18'32.7"W	94°55'17.1"W	94°55'28.4"W	104°52'47.5"W
L-16	38°18'50.2"N	37°55'41.2"N	34°48'35.5"N	35°10'44.1"N
	94°55'17.1"W	85°35'14.8"W	85°58'47.5"W	94°55'28.4"W
L-17	34°59'35.9"N	35°08'58.8"N	32°01'32.3"N	31°52'34.6"N
	101°24'30.2"W	92°26'43.1"W	92°32'53.2"W	101°09'02.9"W
L-18	35°08'58.8"N	34°28'15.9"N	31°22'38.2"N	32°01'32.3"N
	92°26'43.1"W	82°31'44.5"W	83°01'31.6"W	92°32'53.2"W

Table 1.1 U.S. - Corner Coordinates - IFR Low Enroute (Continued)

L-19	31°44'44.8"N	32°02'36.5"N	28°56'12.9"N	28°39'10.1"N
	103°05'47.0"W	93°31'33.9"W	93°34'59.2"W	102°47'03.1"W
L-20	28°43'08.9"N	28°56'12.9"N	25°51'24.1"N	25°38'57.3"N
	101°50'58.4"W	93°34'59.2"W	93°38'09.8"W	101°35'43.0"W
L-21 Gulf of Mexico	31°30'18.6"N	30°34'46.5"N	23°35'04.8"N	24°24'52.8"N
	98°02'55.3"W	80°43'23.4"W	81°54'33.4"W	97°47'31.0"W
L-22	32°02'36.5"N	31°22'38.2"N	28°18'03.7"N	28°56'12.9"N
	93°31'33.9"W	83°01'31.6"W	83°29'01.9"W	93°34'59.2"W
L-23	27°49'57.2"N	26°41'15.4"N	23°41'42.5"N	24°47'12.5"N
	83°30'49.5"W	75°57'40.1"W	76°38'50.8"W	83°56'06.8"W
L-24	35°05'42.8"N	34°35'58.0"N	27°23'30.1"N	27°50'12.1"N
	82°25'26.5"W	78°40'27.5"W	80°07'32.0"W	83°33'02.1"W
L-25	36°59'31.8"N	36°17'08.1"N	34°07'29.8"N	34°48'35.5"N
	85°42'30.9"W	79°21'36.0"W	79°48'39.0"W	85°58'47.5"W
L-26	39°11'03.2"N	38°21'21.5"N	36°11'48.9"N	37°00'00.7"N
	85°31'16.4"W	78°14'46.4"W	78°44'32.7"W	85°45'22.0"W
L-27	41°26'52.0"N	40°53'45.2"N	37°47'01.8"N	38°18'44.2"N
	94°19'28.7"W	83°28'35.2"W	83°58'34.4"W	94°21'15.1"W
L-28	44°33'21.7"N	43°57'33.4"N	40°51'29.8"N	41°25'48.5"N
	92°42'57.3"W	82°31'36.1"W	83°05'30.1"W	92°49'13.9"W
L-29	41°12'24.3"N	40°21'43.2"N	38°12'33.6"N	39°01'45.3"N
	83°25'25.9"W	76°43'18.8"W	77°16'40.5"W	83°46'54.1"W
L-30	43°20'23.7"N	42°19'19.7"N	40°10'49.8"N	41°10'07.2"N
	82°38'38.8"W	74°58'13.3"W	75°35'45.5"W	83°02'15.2"W
L-31	48°03'26.3"N	45°39'49.1"N	42°07'27.7"N	44°24'18.0"N
	88°03'32.6"W	75°45'42.4"W	77°27'46.3"W	89°08'24.2"W
L-32	46°02'46.4"N	47°56'09.6"N	43°35'36.2"N	41°48'34.9"N
	79°29'47.0"W	63°04'30.3"W	62°37'08.3"W	78°00'33.5"W
L-33	42°26'24.7"N	43°21'37.0"N	41°11'59.7"N	40°18'22.7"N
	76°11'04.2"W	70°06'00.7"W	69°36'38.1"W	75°30'48.2"W

Table 1.1 U.S. - Corner Coordinates - IFR Low Enroute (Continued)

L-34	A	B	C	D
	43°12'27.0"N 73°28'55.6"W	42°40'50.6"N 72°35'33.3"W	42°35'22.8"N 72°05'58.9"W	42°49'37.0"N 71°35'48.1"W
	E	F	G	
42°12'31.9"N 70°41'54.5"W	37°27'35.7"N 76°08'48.8"W	38°50'41.3"N 78°18'18.4"W		
L-35	A	B	C	D
	37°39'03.8"N 75°49'07.0"W	35°53'34.5"N 74°11'07.8"W	33°06'10.3"N 78°33'20.7"W	34°47'27.7"N 80°13'40.1"W
L-36	A	B	C	D
	39°53'18.3"N 76°38'23.8"W	38°27'52.7"N 74°29'32.2"W	33°34'42.5"N 79°27'23.1"W	34°54'20.9"N 81°33'13.4"W

1.2.4.2 (AK) Enroute Charts - Alaska

The area of coverage shall be comprised of four overlapping areas or charts covering Alaska and portions of Canada and Russia.

The basic chart coverage shall be supplemented with Area Charts, covering Vancouver, Anchorage, Fairbanks, Juneau, Nome, and a Route Selection Chart appearing on the appropriate Enroute Chart.

The limits of each chart are defined by the following coordinates, beginning in the upper left corner (NW Corner) of the chart and reading clockwise:

References:

[Appendix 2](#) - Alaska Low Enroute Chart Area of Coverage

Table 1.2 (AK) - Corner Coordinates - IFR Low Enroute

CHART NUMBER	CORNER			
	A	B	C	D
L-1	65°13'04.4"N	47°39'51.5"N	45°42'45.3"N	51°43'35.9"N
	142°26'40.2"W	121°28'22.0"W	126°56'06.1"W	132°33'58.9"W
	E	F	G	H
	49°30'46.9"N	51°57'59.6"N	54°25'45.9"N	58°12'26.6"N
	137°22'30.6"W	140°30'20.5"W	135°17'33.7"W	140°38'56.7"W
	I	J		
	55°31'50.6"N	59°31'02.5"N		
	145°59'31.4"W	154°08'31.0"W		
L-2 West Portion	A	B	C	D
	52°58'20.3"N	54°47'03.3"N	53°31'21.0"N	55°07'53.1"N
	172°43'08.8"E	178°25'35.8"E	179°27'21.6"E	173°55'53.7"W
	E	F		
	51°55'12.7"N	48°46'14.4"N		
172°02'57.8"W	176°24'14.4"E			

Table 1.2 (AK) - Corner Coordinates - IFR Low Enroute (Continued)

CHART NUMBER	CORNER			
	A	B	C	D
L-2 Central Portion	56°17'24.6"N	58°58'32.6"N	54°20'38.2"N	51°55'12.7"N
	175°19'57.3"W	161°18'43.2"W	159°19'17.5"W	172°02'57.8"W
L-2 East Portion	58°58'32.6"N	60°05'14.2"N	55°20'24.9"N	54°20'38.2"N
	161°18'43.2"W	145°48'58.9"W	145°32'08.0"W	159°19'17.5"W
L-3	64°21'27.0"N	64°19'03.5"N	56°35'49.8"N	56°19'21.1"N
	171°10'23.5"W	136°26'51.7"W	139°53'53.8"W	170°26'12.3"W
	60°06'27.8"N	60°26'39.6"N		
	172°10'16.1"W	169°15'56.5"W		
L-4	71°24'49.7"N	71°01'42.6"N	63°36'25.6"N	63°05'38.2"N
	169°55'04.2"W	133°24'15.1"W	138°18'01.6"W	174°14'32.7"W
	63°36'01.4"N	67°40'29.4"N	67°55'13.8"N	
	174°33'58.5"W	170°52'40.1"W	167°50'19.4"W	

1.2.4.3 Inset Charts - U.S.

The area of coverage of each Inset Chart is such as to coordinate and chart overwater routes between coverage of the basic Enroute chart series, providing concurrently, transition points to and from the Inset Chart.

The limits of each Inset Chart are defined by the following corner coordinates:

Table 1.3 U.S. - Inset Charts - IFR Low Enroute

CHART NUMBER	CORNER			
	A	B	C	D
Boston-Yarmouth 1:30	42°49'42.4"N	44°03'29.1"N	42°45'41.8"N	41°59'36.7"N
	71°13'11.1"W	65°59'36.0"W	65°57'08.5"W	67°00'00.5"W
	41°01'43.9"N			
70°22'31.6"W				
Wilmington-Bimini 1:31	35°17'27.6"N	34°46'24.2"N	25°16'51.7"N	25°43'45.5"N
	81°16'09.0"W	76°56'04.7"W	78°40'42.1"W	82°31'36.9"W

1.2.4.4 U.S. Area Chart (A-1 & A-2)

The U.S. Area Chart consists of A-1 and A-2 which is made up of individual area charts. The term Area Charts refers to U.S. Area Charts (A-1 & A-2).

References:

[Appendix 54](#) - Chart Area of Coverage - Area Charts

1.2.4.5 U.S. & Alaska Area Charts

The term Area Charts refers to the chart contained within the U.S. Area Charts (A-1 & A-2) and (AK) Alaska Enroute Charts.

The basic enroute chart coverage will be supplemented by area charts for any area on the IFR Enroute Low Altitude Charts where the depiction of information is such as to preclude safe operation of aircraft within that area. This situation may exist when either of the following occurs:

- The amount of detail required or portrayal techniques used result in congestion of information.
- The depiction of an important terminal area at the edge of an Enroute Chart makes entry into this area difficult.

The following Area Charts are an integral part of the basic Enroute Chart series for the conterminous United States:

Table 1.4 U.S. - Area Charts - IFR Low Enroute

CHART IDENTIFICATION	
FRONT SIDE (A-1)	REVERSE SIDE (A-2)
Atlanta	Chicago / Milwaukee
Detroit	Dallas / Ft. Worth
Jacksonville	Denver
Miami	Kansas City
Minneapolis / St.Paul	Los Angeles
St. Louis	Phoenix
Washington	San Francisco

Table 1.5 U.S. - Area Chart A-1 Corner Coordinates - IFR Low Enroute

CITY	A	B	C	D
Atlanta	34°05'55.2"N	34°05'51.4"N	33°10'29.8"N	33°10'33.5"N
	84°57'58.0"W	83°49'55.9"W	83°50'24.9"W	84°57'37.8"W
Detroit	42°44'15.3"N	42°44'16.4"N	41°58'04.8"N	41°59'03.7"N
	83°49'09.4"W	82°45'09.6"W	82°45'29.9"W	83°48'46.1"W
Jacksonville	30°54'11.943"N	30°54'15.904"N	29°59'14.160"N	29°59'10.254"N
	82°09'01.830"W	81°03'45.572"W	81°04'03.805"W	82°08'34.711"W
Miami	26°18'33.061"N	26°18'35.738"N	25°24'18.772"N	25°24'16.132"N
	80°50'11.859"W	79°48'33.735"W	79°48'51.093"W	80°49'48.751"W
Minneapolis/ St. Paul	45°26'00.211"N	45°26'08.872"N	44°12'31.938"N	44°12'23.419"N
	94°03'49.524"W	92°17'07.623"W	92°17'55.965"W	94°02'37.561"W

Table 1.5 U.S. - Area Chart A-1 Corner Coordinates - IFR Low Enroute (Continued)

CITY	A	B	C	D
St. Louis	39°11'10.806"N	39°11'15.927"N	38°15'43.255"N	38°15'38.199"N
	90°59'39.655"W	89°46'44.476"W	89°47'06.382"W	90°59'05.035"W
Washington	38°13'08.3"N	38°10'01.3"N	40°23'45.8"N	40°26'58.6"N
	078°23'11.4"W	074°43'36.4"W	074°36'56.4"W	078°23'34.1"W

Table 1.6 U.S. - Area Chart A-2 Corner Coordinates - IFR Low Enroute

CITY	A	B	C	D
Chicago/ Milwaukee	43°16'36.2"N	43°16'34.7"N	41°22'06.1"N	41°22'07.6"N
	88°36'13.3"W	87°18'48.2"W	87°19'57.2"W	88°35'12.7"W
Dallas/Ft. Worth	33°43'10.0"N	33°42'49.2"N	31°30'01.0"N	31°29'40.8"N
	98°06'43.5"W	96°05'46.2"W	98°05'34.6"W	96°07'59.2"W
Denver	40°22'30.0"N	40°22'30.0"N	39°17'50.0"N	39°17'50.0"N
	105°23'00.0"W	103°56'40.0"W	105°22'20.0"W	103°57'15.0"W
Kansas	40°52'06.4"N	41°22'21.2"N	37°36'34.7"N	37°07'52.3"N
	106°00'52.8"W	94°19'31.5"W	94°21'37.7"W	105°26'46.7"W
Los Angeles	34°34'09.666"N	34°19'30.630"N	33°33'57.045"N	33°48'26.418"N
	118°59'33.666"W	117°03'20.489"W	117°12'12.613"W	119°07'17.595"W
Phoenix	34°05'40.8"N	34°05'43.3"N	32°47'19.2"N	32°47'16.8"N
	112°50'56.2"W	111°14'33.2"W	111°15'19.6"W	112°50'04.2"W
San Francisco	38°16'17.44"N	38°16'19.153"N	37°20'46.0"N	37°20'44.309"N
	122°53'44.663"W	121°41'44.428"W	121°42'09.891"W	122°53'14.972"W

(AK) The following Area Charts are an integral part of the basic Enroute Chart series for Alaska:

Table 1.7 (AK) Area Charts - IFR Low Enroute

CHART NAME	A	B	C	D
Vancouver Area Chart	49°40'40.1"N	47°41'27.4"N	47°11'18.0"N	49°09'12.5"N
	122°56'33.3"W	121°29'15.6"W	123°00'49.3"W	124°30'57.8"W
Juneau Area Chart	60°00'54.0"N	58°09'32.7"N	56°44'57.6"N	58°32'36.2"N
	135°51'58.9"W	132°38'59.1"W	135°35'32.6"W	138°49'44.0"W
Anchorage Area Chart	A	B	C	D
	62°43'06.6"N	61°36'52.5"N	60°08'29.9"N	60°18'32.7"N
	151°17'19.2"W	144°00'24.1"W	145°07'42.9"W	146°04'33.2"W
	E	F	G	
	59°05'39.1"N	58°50'47.3"N	59°21'12.9"N	
	149°16'41.8"W	149°25'18.7"W	153°04'08.4"W	
	A	B	C	D

Table 1.7 (AK) Area Charts - IFR Low Enroute (Continued)

CHART NAME	A	B	C	D
Fairbanks Area Chart	65°15'07.6"N	65°17'07.9"N	63°45'44.0"N	63°43'49.9"N
	150°10'25.4"W	145°06'14.6"W	145°10'14.7"W	149°59'58.6"W
Nome Area Chart	63°23'12.1"N	65°23'24.5"N	63°51'53.0"N	63°52'03.5"N
	166°59'50.6"W	163°17'57.7"W	166°54'10.2"W	163°22'49.1"W

1.2.4.6 (AK) Route Selection Chart (on Chart L-2)

Table 1.8 (AK) - Route Selection Chart

A	B	C	D
69°13'55.5"N	71°55'33.3"N	56°24'31.7"N	54°36'14.4"N
174°47'33.6"W	141°00'10.8"W	141°00'49.3"W	162°24'57.9"W

1.2.5 Scales

Fractional equivalents based on 6,076.11549' = 1NM

1.2.5.1 U.S. Enroute Charts

Charts for the conterminous U.S. shall be compiled and drawn at the following scales:

Table 1.9 U.S. - Enroute Chart Scales

CHART NUMBER	SCALE	CHART NUMBER	SCALE
L-1	1"=8NM (1:583,307)	L-19	1"=10NM (1:729,133)
L-2	1"=8NM (1:583,307)	L-20	1"=10NM (1:729,133)
L-3	1"=8NM (1:583,307)	L-21	1"=23NM (1:1,677,005)
L-4	1"= 7NM (1:510,393)	L-22	1"=10NM (1:729,133)
L-5	1"=10NM (1:729,133)	L-23	1"=10NM (1:729,133)
L-6	1"=10NM (1:729,133)	L-24	1"=10NM (1:729,133)
L-7	1"= 7NM (1:510,393)	L-25	1"= 7NM (1:510,393)
L-8	1"=10NM (1:729,133)	L-26	1"= 7NM (1:510,393)
L-9	1"=14NM (1:1,020,786)	L-27	1"=10NM (1:729,133)
L-10	1"=12NM (1:874,960)	L-28	1"=10NM (1:729,133)
L-11	1"=14NM (1:1,020,786)	L-29	1"= 7NM (1:510,393)
L-12	1"=14NM (1:1,020,786)	L-30	1"= 7NM (1:510,393)
L-13	1"=16NM (1:1,166,614)	L-31	1"=12NM (1:874,960)
L-14	1"=14NM (1:1,020,786)	L-32	1"=14NM (1:1,020,786)
L-15	1"=10NM (1:729,133)	L-33	1"= 7NM (1:510,393)
L-16	1"=10NM (1:729,133)	L-34	1"= 7NM (1:510,393)
L-17	1"=10NM (1:729,133)	L-35	1"= 7NM (1:510,393)
L-18	1"=10NM (1:729,133)	L-36	1"= 7NM (1:510,393)

(AK) The Enroute Charts for Alaska shall be compiled and drawn at the following scales:

Table 1.10 (AK) - Enroute Chart Scales

CHART NUMBER	SCALE
L-1	1"=25NM (1:1,822,834)

Table 1.10 (AK) - Enroute Chart Scales (Continued)

CHART NUMBER	SCALE
L-2 West	1"=25NM (1:1,822,834)
L-2 Central	1"=25NM (1:1,822,834)
L-2 East	1"=25NM (1:1,822,834)
L-3	1"=25NM (1:1,822,834)
L-4	1"=25NM (1:1,822,834)

1.2.5.2 Inset Charts

The insets shall be compiled and drawn at the following scales:

Table 1.11 U.S. - Inset Chart Scales

CHART NAME (Location)	SCALE
Wilmington-Bimini (L-23)	1"=31NM (1:2,260,315)
Boston-Yarmouth (L-34)	1"=23NM (1:1,677,008)

1.2.5.3 Area Charts

Area charts for the conterminous U.S. shall be compiled and drawn at the following scales:

Table 1.12 U.S. - Area Chart Scales

CHART NAME	SCALE	CHART NAME	SCALE
Atlanta	1"= 6NM (1:437,480)	Chicago / Milwaukee	1"= 6NM (1:437,480)
Detroit	1"= 5NM (1:364,566)	Dallas / Ft. Worth	1"= 7NM (1:510,393)
Jacksonville	1"= 6NM (1:437,480)	Denver	1"= 7NM (1:510,393)
Miami	1"= 6NM (1:437,480)	Kansas City	1"= 5NM (1:364,566)
Minneapolis / St.Paul	1"= 8NM (1:583,307)	Los Angeles	1"= 5NM (1:364,566)
St. Louis	1"= 6NM (1:437,480)	Phoenix	1"= 8.5NM (1:619,762)
Washington	1"= 7NM (1:510,393)	San Francisco	1"= 6NM (1:437,480)

(AK) Area charts for Alaska shall be compiled and drawn at the following scales:

Table 1.13 (AK) - Area Chart Scales

CHART NAME (Location)	SCALE
Juneau (AK L-1)	1"= 14NM (1:1,020,787)
Vancouver (AK L-1)	1"= 8NM (1:583,307)
Nome (AK L-3)	1"= 10NM (1:729,133)
Fairbanks (AK L-3)	1" = 10NM (1:729,133)
Anchorage (AK L-4)	1" = 11NM (1:802,046)

1.2.5.4 (AK) Route Selection Chart

Route Selection Chart 1" = 50NM (1:3,645,669)

1.2.6 Central Meridians**1.2.6.1 Enroute Charts**

The Central Meridian of the IFR Enroute Low Altitude - U.S. charts shall be 95°W.

(AK) The Central Meridian of the IFR Enroute Low Altitude - Alaska and Route Selection Chart charts shall be 154°W.

1.2.6.2 Area Charts - U.S.

The Central Meridian of the IFR Enroute Low Altitude - U.S. Area charts shall be as specified in the table below.

Table 1.14 U.S. - Area Chart Central Meridians

CHART NAME	CENTRAL MERIDIANS	CHART NAME	CENTRAL MERIDIANS
Atlanta	84°30'00.0"W	Chicago / Milwaukee	88°00'00.0"W
Detroit	83°15'00.0"W	Dallas / Ft. Worth	97°25'00.0"W
Jacksonville	81°30'00.0"W	Denver	104°45'00.0"W
Miami	80°15'00.0"W	Kansas City	94°30'00.0"W
Minneapolis / St.Paul	90°00'00.0"W	Los Angeles	131°44'45.0"W
St. Louis	90°15'00.0"W	Phoenix	112°00'00.0"W
Washington	95°00'00.0"W	San Francisco	122°15'00.0"W

1.2.6.3 (AK) Area Charts - Alaska

The Central Meridian of the IFR Enroute Low Altitude - Alaska Area charts shall be as specified in the table below.

Table 1.15 (AK) Area Chart Central Meridians

CHART NAME (Location)	CENTRAL MERIDIANS
Juneau (AK L-1)	136°W
Vancouver (AK L-1)	122°W
Nome (AK L-3)	166°W
Fairbanks (AK L-3)	148°W
Anchorage (AK L-4)	150°W

1.2.6.4 (AK) Alaska and Route Selection Chart

The Central Meridian of the IFR Enroute Low Altitude - Alaska and Route Selection Chart charts shall be 154°W.

1.2.7 Projections

The Lambert Conformal Conic Projection with standard parallels of 33°N and 45°N shall be used for the conterminous U.S. Low Enroute Charts and Area Charts.

(AK) The Lambert Conformal Conic Projection with standard parallels of 37°N and 65°N shall be used for the charts in the Alaska series.

1.2.8 Colors

Colors for printing shall be adapted for use under red and white lighting conditions, both day and night. Colors used shall be blue, brown, black, and green.

1.2.9 Symbolization

Symbolization shall be in accordance with the symbols included in the Appendices. These symbols have been developed by the United States Government Interagency Air Cartographic Committee (IACC) for the purpose of standardization.

The configuration of the symbols contained herein shall be adhered to. The size and line weight, specified and/or indicated therein, should also be adhered to, but may be varied when absolutely necessary

1.2.10 Type Styles

All type styles, unless otherwise specified, shall be Futura Medium. Other type styles that may be specified include: Copperplate Gothic 31, Helvetica 45 Light, Helvetica 66 Medium Italic, Trade Gothic Bold, and a Reverse.

Type styles and sizes shall be as stated, or their equivalent. Equivalent shall be such as to equal the height, width and line weight of the specified style of type.

The use of capital letters is intended unless otherwise stated as caps and lowercase (C/L).

CHAPTER 2 LAYOUT AND FORMAT

2.1 U.S. & ALASKA ENROUTE AND U.S. AREA (A-1 & A-2) CHARTS

2.1.1 Format

The charts in this series shall be rectangular in shape (normally West-East) with the layout and format of the charts conforming to the Appendices.

2.1.2 Layout

All odd numbered charts shall be printed on what shall be referred to as the “front side” (with the title panel). All even numbered charts shall be printed on what will be referred to as the “reverse side.”

Charts shall be numbered and printed, backed-up, head-to-head, in accordance with that indicated in the Appendices.

2.1.2.1 **U.S. & Alaska Enroute Charts**

2.1.2.1.1 **U.S. Enroute Chart Layouts**

References:

Appendix 3 - Chart Layout - U.S. L-1 and L-7

Appendix 4 - Chart Layout - U.S. L-2 and L-8

Appendix 5 - Chart Layout - U.S. L-3, L-9, L-11, L-13, L-15, L-19, L-27 and L-29

Appendix 6 - Chart Layout - U.S. L-4, L-10, L-12, L-14, L-16 and L-24

Appendix 7 - Chart Layout - U.S. L-5

Appendix 8 - Chart Layout - U.S. L-6

Appendix 9 - Chart Layout - U.S. L-17 and L-31

Appendix 10 - Chart Layout - U.S. L-18 and L-32

Appendix 11 - Chart Layout - U.S. L-20 and L-28

Appendix 12 - Chart Layout - U.S. L-21, L-33 and L-35

Appendix 13 - Chart Layout - U.S. L-22 and L-36

Appendix 14 - Chart Layout - U.S. L-23

Appendix 15 - Chart Layout - U.S. L-25

Appendix 16 - Chart Layout - U.S. L-26

Appendix 17 - Chart Layout - U.S. L-30

Appendix 18 - Chart Layout - U.S. L-34

2.1.2.1.2 **(AK) Alaska Enroute Chart Layouts**

References:

Appendix 19 - Chart Layout - Alaska L-1

Appendix 20 - Chart Layout - Alaska L-2

Appendix 21 - Chart Layout - Alaska L-3

Appendix 22 - Chart Layout - Alaska L-4

2.1.2.1.3 Size and Dimension

Each chart shall have a neatline .020" in weight, printed in black.

Chart detail shall extend to this neatline.

2.1.2.1.4 Dimensions

Paper dimensions for the quality control prints shall be 20" x 55.5", including plate idents for U.S. L-1, L-2, L-7, L-8, L-25 and L-26. Paper for all other U.S. and Alaska Charts shall be 20"x 60.5".

Tabulated data panels or fly leaf shall be 5" wide.

Refer to Appendices 3 through 18 for chart area dimensions (border-to-border) for U.S. Charts and Appendices 19 through 22 for Alaska Charts.

2.1.2.1.5 Panel Folds

Each chart shall have 10 folds and 11 panels for U.S. L-1, L-2, L-7, L-8, L-25 and L-26. All other charts shall have 11 folds and 12 panels, (5" wide evenly spaced).

A panel is defined as the area between two folds, or between a fold and a trim edge, and shall be 5" x 20". The final folded product size shall be 5" x 10".

2.1.2.2 INSET CHARTS

The Inset Charts shall be contained within a .020" neatline, with the neatline aligned with the borderline of the enroute chart. A double neatline with a .40" space between will be provided to separate the Inset Chart from the detail of the enroute chart upon which the area is positioned. Chart detail shall extend to these borderlines.

Inset Charts shall be provided at the scale specified, and positioned on the enroute chart as indicated, for the following areas:

Table 2.1 Inset Chart Location

CHART NAME	LOCATION
Wilmington-Bimini	L-34
Boston-Yarmouth	L-23

References:

[Appendix 14](#) - Chart Layout - U.S. L-23

[Appendix 18](#) - Chart Layout - U.S. L-34

2.1.2.3 AREA CHARTS**2.1.2.3.1 Arrangement and Location****2.1.2.3.1.1 Conterminous U.S.**

The U.S. Area Charts layout shall conform with the format illustrated in [Appendix 55](#) and [Appendix 56](#).

Arrangement of individual areas shall conform to that illustrated in the Appendices:

Table 2.2 Area Chart Arrangement and Location - U.S.

CHART IDENTIFICATION	
FRONT SIDE (A-1)	REVERSE SIDE (A-2)
Atlanta	Chicago / Milwaukee
Detroit	Dallas / Ft. Worth
Jacksonville	Denver
Miami	Kansas City
Minneapolis / St.Paul	Los Angeles
St. Louis	Phoenix
Washington	San Francisco

References:

[Appendix 55](#) - Chart Layout - Area Chart A-1

[Appendix 56](#) - Chart Layout - Area Chart A-2

Size and dimensions of the U.S. Area Charts shall generally conform to that specified for the Enroute Charts and as illustrated for the individual areas.

2.1.2.3.1.2 (AK) Alaska Area Charts

Area Charts within Alaska shall conform to the format illustrated in the Appendices.

Each chart shall normally be aligned with true north.

Alaska Area Charts shall be provided and positioned on the appropriate enroute chart as indicated and illustrated in the Appendices for the following areas:

Table 2.3 (AK) - Area Chart Arrangement and Location

CHART NAME	LOCATION
Juneau	L-1
Vancouver	L-1
Anchorage	L-4
Fairbanks	L-3
Nome	L-3

References:

[Appendix 19](#) - Chart Layout - Alaska L-1

[Appendix 20](#) - Chart Layout - Alaska L-2

[Appendix 21](#) - Chart Layout - Alaska L-3

[Appendix 22](#) - Chart Layout - Alaska L-4

Each Alaska Area Chart shall be contained within a .018" borderline, with the borderline aligned with the borderline of the enroute chart. A double borderline with a .4" space between will be provided to separate the Area Chart from the detail of the enroute chart upon which the area is positioned. Chart detail shall extend to these borderlines.

A nautical mile bar scale, similar to that contained on the enroute chart, shall be shown, positioned within the chart area, parallel to and adjoining the bottom (lower neatline). Bar scales shall, as near as possible, extend the full length of the charted area.

Exception to the Enroute Chart Bar Scales shall be that the mile division breakdown of the scale shall be shown and labeled on both ends of the scales, and the subdivision shall be for each 10 miles.

The name of each Area Chart, e.g., ANCHORAGE AREA, shall be shown, centered above or below the chart, within the .4" marginal area.

2.1.2.4 (AK) Route Selection Chart

The Route Selection Chart shall conform with the format as illustrated in [Appendix 20](#).

References:

[3.12](#) - (AK) L-2 - Low Altitude Route Selection Chart

CHAPTER 3 CONTENT

3.1 GENERAL

The content and portrayal techniques contained and described herein apply to the Low Enroute Chart Series which includes Enroute, Area and Inset Charts. For more specific information see the following sections:

- **3.8** - Inset Charts
- **3.9** - Area Charts - U.S. (A-1 & A-2) AND Alaska (AK)
- **3.10** - Area Chart (A-1 & A-2)
- **3.11** - Chart L-21 - Offshore Navigational Chart
- **3.12** - (AK) L-2 - Low Altitude Route Selection Chart

3.1.1 Mileages

Mileages shall be shown in nautical miles to the nearest whole mile, using .5 as the division point for the next highest number.

3.1.2 Bearings and Radials

Bearings and radials shall be shown as magnetic, unless otherwise indicated as True, and shall be depicted by a three digit figure, e.g., 001, 012, 123. Bearings and radials shall be shown to the nearest whole degree, using .5 as the division point for the next higher number. True bearings and radials shall be indicated by a "T" after the value.

VHF/UHF radials shall be charted with magnetic outbound values and LF/MF bearings shall be charted with magnetic inbound values, using the magnetic slave variation of the NAVAID. RNAV waypoint radials shall be identified with magnetic outbound values, based on the dynamic variation at the NAVAID or waypoint geographic coordinates.

When RNAV and ATS routes are collocated, the ATS route bearing or radial values shall have charting priority.

Care shall be exercised in the charting of radial and bearing values to eliminate any possibility of misreading these values. This is critical with values which may at a glance be read upside down, e.g., 161 for 191 or 090 for 060, etc. Where the possibility for misinterpretation exists, a degree sign (°) shall be shown with the bearing or radial value.


3.1.3 Boxes

Boxes required to be shown around or encompassing specific data shall be of a size consistent with the amount of data contained therein.

3.1.4 Time Zones

Time shall be shown as Coordinated Universal Time (UTC), also known as Zulu time (Z), e.g., 0600-1800Z. Times affected by Daylight Savings shall be indicated by the double dagger symbol, positioned adjacent to and preceding the hours of operation.

Figure 3.1 Application of Double Dagger -Examples

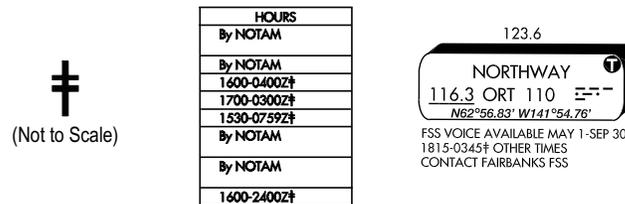

3.1.5 Chart Notes

Chart notes shall make use of location identifiers and approved FAA contractions for abbreviations, e.g., EFF (effective), TWR (tower), CNTR (Center), when possible.

3.1.6 Geographical Coordinates

Geographic coordinates shall be shown to the hundredth of a minute.

3.1.7 Elevations/Altitudes

Elevations/Altitudes shall be shown as Mean Sea Level (MSL), unless otherwise indicated.

3.2 PLACEMENT OF DATA

3.2.1 Text

Text should be positioned to be readable relative to True North.

Text associated with nonlinear symbols (e.g., airports, RCOs, etc.) should be placed within the same two-panel area between external folds. Placement of text on external chart folds should be avoided whenever possible. The preferred location of text associated with nonlinear symbols will be to the Northeast of the symbol, thence progressing counter clockwise around the symbol.

Text associated with linear symbols shall be aligned with and adjacent to the linear symbol, except when such placement would result in the obstruction of other chart detail. Text for Time Zones and SUAs, even though associated with linear symbols, shall be positioned relative to True North

When the location of text associated with a non-linear feature overlies linear symbols (e.g., ARTCCs, ADIZs, FIRs), then these symbols may be partially deleted to accommodate the text, as long as the original graphic intent of the symbols are maintained.

Leader lines with arrows may be used when necessary for clarity of detail, or to effect or maintain the correct relationship between text and symbol.

3.2.2 Symbols

NAVAIDs and fixes that are part of a route shall always be charted at their true geographic position.

Other symbology should also be charted at their true geographic positions; however, some exceptions may apply in areas of congestion.

For nonlinear symbols the following guidance should be considered for offsetting NAVAIDs and airports:

1. If it becomes necessary to offset symbols due to congestion, preference shall be given to the accurate plotting of NAVAIDs.
2. When two or more NAVAIDs cannot be accurately plotted because of close proximity to each other, the NAVAID not having a route function should be displaced.
3. When LF/MF and VHF UHF NAVAIDs have the same geographical location, the LF/MF symbol may be displaced slightly so as not to obliterate the VHF/UHF symbol, however, each symbol shall be clearly evident and visible upon the chart.
4. The relative position of the NAVAIDs, or airports and NAVAIDs, to each other shall be maintained.
5. Airport symbols may be collocated with NAVAIDs. See [3.7.3.2](#) - Airport Symbolology, paragraph 3.

Linear symbols that are collocated should be offset to provide easy recognition and identification. Rules for linear symbol collocation can be found under pertinent linear feature description (e.g., ADIZ).

3.3 TITLE PANEL INFORMATION

All Title Panel type and symbols shall be shown charted in compliance with the criteria established within these specifications and appendices.

All Title Panel information shall be shown in solid black unless otherwise indicated within these specifications. Type and symbols shall be positioned so as to be perpendicular to the chart trim edge.

The extreme left panel of all odd numbered charts shall be the Title Panel and shall be visible when the chart is completely unfolded.

References:

[Appendix 23](#) - Title Panel Information - U.S. & Alaska

[Appendix 24](#) - Chart Identification & Title Panel Area Layout - U.S. & Alaska

[Appendix 25](#) - Corrections, Comments and/or Procurement Area Layout - U.S. & Alaska

[Appendix 26](#) - OROCA Notice

[Appendix 27](#) - SFAR No. 97 Chart Notice - Alaska

[Appendix 28](#) - Chart Identification Labels - U.S., Alaska & Area Charts

[Appendix 29](#) - Chart Indexes - Dimensions - U.S.

[Appendix 32](#) - Bar Codes

3.3.1 Foreign Airspace Warning Note

The following boxed note shall be shown centered at the top of the title panel:

Figure 3.2 Foreign Airspace Warning Note

Warning: Refer to current foreign charts and flight information publications for information within foreign airspace
--

3.3.2 Chart Identification Area


References:

[Appendix 24](#) - Chart Identification & Title Panel Area Layout - U.S. & Alaska

3.3.2.1 **Chart Idents**

Charts shall be identified by the letter “L” and a number, e.g., L-1, L-2, L-3, etc. Together they shall be referred to as the chart ident. Chart idents shall be positioned in the upper left and upper right corners of the panel. Chart idents for the odd-numbered charts (L-1 through L-35 and Alaska L-1 and L-3) shall be positioned in the upper right corner. Chart idents for the even-numbered charts (L-2 through L-36 and Alaska L-2 and L-4) shall be positioned in the upper left corner.

Figure 3.3 Chart Idents Examples - U.S. and Alaska Charts

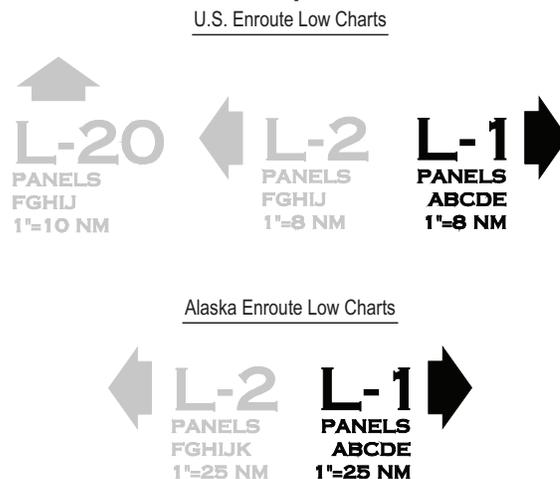

3.3.2.2 **Arrowheads**

Arrowheads shall be shown to indicate in which direction (left, right or up) the particular chart should be opened or turned to be read correctly. Arrowheads for the odd-numbered charts shall be centered and to the right of the chart idents and point to the right. Arrowheads for even numbered charts idents L-20, L-22, L-26, L-28, L-30 and L-36 shall be above and flush left with the chart ident and point up. All other even numbered charts shall be centered and to the left of the chart ident and point to the left.

3.3.2.3 **Panel Identification**

The text “PANELS” shall be positioned below all chart idents. The text shall be flush right with the chart ident in the upper right corner and flush left with the chart ident in the upper left corner.

Panel identifications are an alphabetical listing of all the panel letters found on a particular chart. For odd numbered charts the Panel Identifications shall be positioned below and flush right with the text ‘PANELS’ and for even numbered charts shall be positioned below and flush left with the text ‘PANELS’.

3.3.2.4 **Chart Scales**

The scale of each chart shall be expressed in terms of inches to nautical miles. Scale for odd-numbered charts shall be positioned below and flush right with the panel identification. Scale for even-numbered charts shall be positioned below and flush left with the panel identification.

Refer to Section 1.2.5 for actual scale of individual charts.

3.3.3 Title Area

References:

[Appendix 24](#) - Chart Identification & Title Panel Area Layout - U.S. & Alaska

3.3.3.1 Chart Title

The chart title, as shown below, shall be centered within the panel.

Figure 3.4 Chart Title Format
 UNITED STATES GOVERNMENT
 FLIGHT INFORMATION PUBLICATION
IFR ENROUTE LOW ALTITUDE - U.S.
 - OR -
 UNITED STATES GOVERNMENT
 FLIGHT INFORMATION PUBLICATION
IFR ENROUTE LOW ALTITUDE - ALASKA

3.3.3.2 Altitude Note

An altitude note, as shown below, shall be centered below the chart title.

Figure 3.5 Altitude Note
 For use up to but not including 18,000' MSL

3.3.3.3 Effective Dates and Times Note

The effective dates and times note, as shown below, shall be centered below the altitude note. The note shall reflect the effective date and Zulu (Z) time and the expiration date and Zulu (Z) time of the aeronautical information. Dates shall consist of the day, month and year with the names of the month abbreviated to the first three letters.

Figure 3.6 Effective Dates and Times Note
 EFFECTIVE 0901Z 23 SEP 2010
 TO 0901Z 18 NOV 2010

3.3.3.4 NOTAM Note

A NOTAM note, as shown below, shall be centered below the effective dates and times note.

Figure 3.7 NOTAM Note
 Consult NOTAMs for latest Information

3.3.3.5 Publishers Credit Note

A publishers credit note shall be shown positioned centered on the top half of the title panel positioned below the Consult NOTAM note.

References:

[Appendix 24](#) - Chart Identification & Title Panel Area Layout - U.S. & Alaska

3.3.3.6 Corrections, Comments and/or Procurement Note

A Corrections, Comments and/or Procurement note shall be shown centered below the Publishers Credit Note.

References:

[Appendix 25](#) - Corrections, Comments and/or Procurement Area Layout - U.S. & Alaska


3.3.3.7 ORACA Notice

An explanatory boxed note shall be shown, centered above the center fold line and shall be depicted as shown in Section [3.3.3.7](#) - ORACA Notice.

3.3.3.8 (AK) Chart Notice - GPS/WAAS Navigation Operations in Alaska

A Chart Notice titled ‘Implementation of Instrument Flight Rules (IFR) Area Navigation (RNAV) Operations Using Global Positioning System (GPS) in Alaska’ shall be shown centered below the ‘Corrections, Comments and/or Procurement Note’ and above the OROCA Notice.

Figure 3.8 (AK) GPS/WAAS Chart Notice

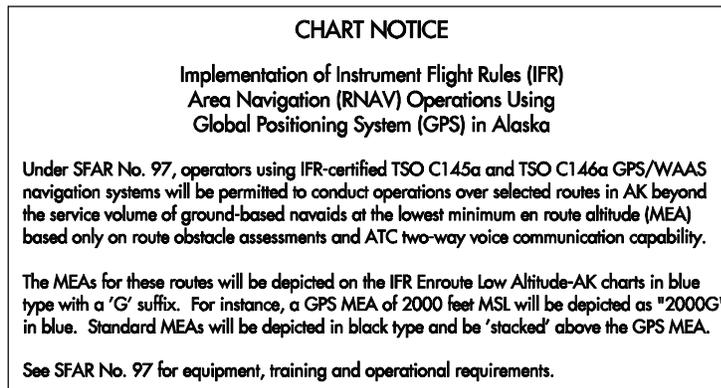

3.3.4 Chart Identification Labels

Chart Identification Labels shall be shown to identify a complete set of conterminous U.S. Enroute Low Charts or Alaska Enroute Low Charts, and identify individual charts within a set.

References:

[Appendix 28](#) - Chart Identification Labels - U.S., Alaska & Area Charts

Figure 3.9 Chart Identification Labels - U.S. and Alaska Charts



3.3.4.1 Chart Idents

In the conterminous U.S. each odd-numbered chart shall be identified by a unique ident tab staggered across the panel an overlapping the chart center fold line. Each ident tab shall be stacked within the portion below the center fold line. The first chart tab on the left side shall be for L-1 and increase to L-35 on the right side.

(AK) In the Alaska each ident tab shall be identified by the chart number of both the odd and even number charts, e.g., L-1/L-2, and L-3/L-4. In Alaska the ident tab for L-1 shall be positioned on the left half of the panel and the ident tab for L-3/L-4 shall be positioned on the right half of the panel.

3.3.4.2 Chart Effective Date

The effective date of the chart shall be shown below the center fold and consist of the day, month (abbreviated using the first three letters of the month) and year, shown centered above the area of coverage.

3.3.4.3 Area of Coverage

The area of coverage shall be either “UNITED STATES” or “ALASKA” as appropriate. The area chart identifier in all cases shall be shown centered below the chart effective date.

3.3.5 FAA Logo/Banner

The FAA logo/banner shall be shown directly below the chart identification label.

Figure 3.10 FAA Branding



3.3.6 Chart Index

A chart index showing IFR Enroute Low Altitude chart coverage of either the conterminous United States or Alaska shall be shown. The chart index shall be centered below the FAA logo/banner.

Area Chart Index specifications can be found in Section [3.10](#).

References:

[Appendix 29](#) - Chart Indexes - Dimensions - U.S.

Figure 3.11 Chart Index - U.S.


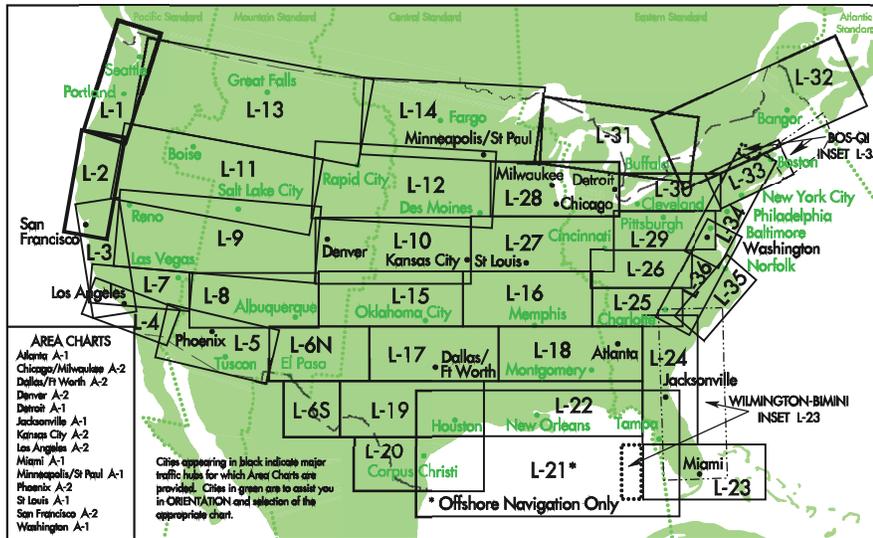


Figure 3.12 Chart Index - Alaska

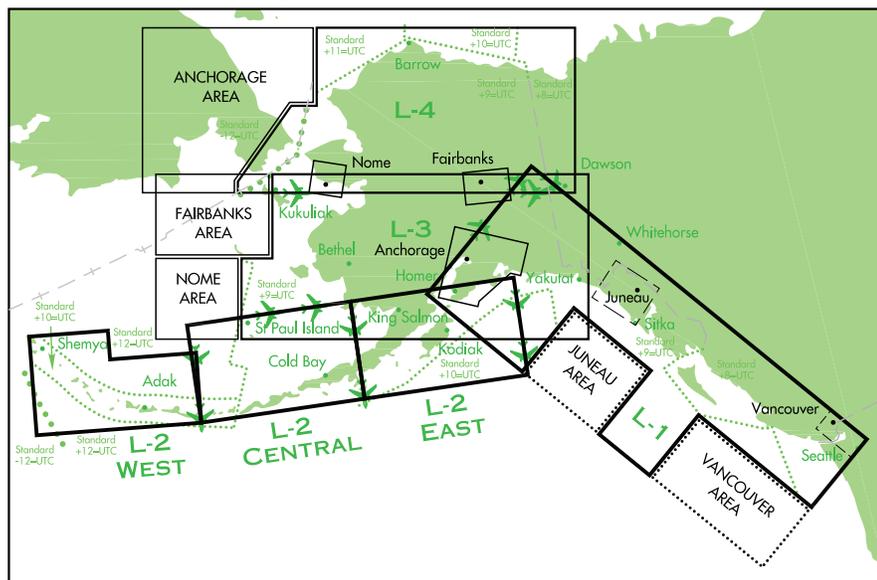

3.3.6.1 Land and Water Areas

The conterminous U.S., Mexico and Canada land areas shall be shown. Only the Great Lakes shall be shown. The land areas and bodies of water shall not be identified by name.

(AK) The U.S., Russia and Canada land areas shall be shown. The land areas shall not be identified by name.

3.3.6.2 International Boundaries

International boundaries shall be shown and symbolized by a repeating dashed lined. International boundaries shall not be identified by name.

(AK) The U.S./Russia Maritime Boundary shall be shown and symbolized by a repeating dash line with alternate dashes cross-hatched.

3.3.6.3 Low Altitude Chart Coverage

The limits of each low altitude chart shall be depicted. Each chart shall be identified by a chart number. Chart numbers shall be centrally positioned within the limits of each chart. The chart index shall be tailored for each individual sheet by indicating the particular limits of both the front and the back charts.

The limits of the inset chart coverage shall be defined using a dashed line. Inset charts shall be identified by name. In addition, inset chart placement on the appropriate Enroute Charts shall be depicted by dotted outlines, supported by lead lines and small arrowheads.

3.3.6.3.1 Offshore Navigation Only L-21

Within the Contiguous U.S. Chart Index, a note shall be asterisk to the L-21 chart designator (L-21*) and placed along and inside of the lower L-21 chart parameter which reads: “*Offshore Navigation Only”. See [Figure 3.11](#).

3.3.6.4 Area Chart Cities

Area chart names and geographic locations for all conterminous U.S. and Alaska Charts shall be shown. The geographic locations associated with these area charts shall be symbolized by a solid dot and identified.

3.3.6.4.1 U.S. Area Chart Coverage

An alphabetical listing of the conterminous U.S. Area Charts and associated Area Chart number shall be positioned in the lower left corner of the U.S. chart index. The list shall be flushed left and contained within a box with the title “AREA CHARTS” centered above and preceding the listing.

Figure 3.13 Area Chart Listing

AREA CHARTS	
Atlanta	A-1
Chicago/Milwaukee	A-2
Dallas/Ft Worth	A-2
Denver	A-2
Detroit	A-1
Jacksonville	A-1
Kansas City	A-2
Los Angeles	A-2
Miami	A-1
Minneapolis/St Paul	A-1
Phoenix	A-2
St Louis	A-1
San Francisco	A-2
Washington	A-1

The following note shall be shown positioned in the lower portion of the conterminous U.S. Enroute Low Chart index.

Figure 3.14 Area Chart Coverage Note

Cities appearing in black indicate major traffic hubs for which Area Charts are provided. Cities in green are to assist you in ORIENTATION and selection of the appropriate chart.

3.3.6.4.2 (AK) Alaska Area Chart Coverage

(AK) The Area Chart actual coverage, delineated by a line boundary shall be shown, in addition to area chart names and geographical locations.

Figure 3.15 (AK) Alaska Area Chart Depiction on Active Chart


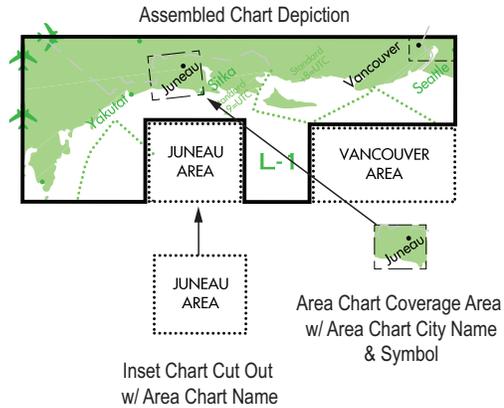


Figure 3.16 (AK) Alaska Area Chart Depiction on Inactive Chart

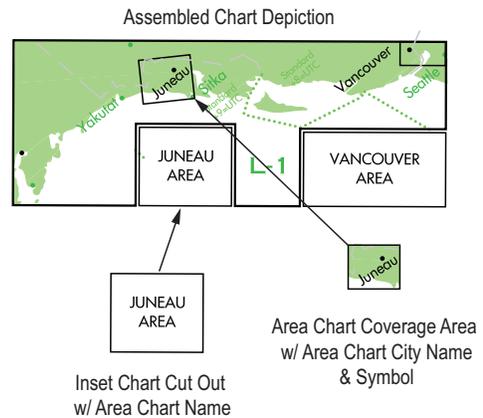

3.3.6.5 Prominent Cities

To assist in geographical orientation and general coverage of the individual Enroute Low charts, a selection of names and their geographical location shall be shown. These shall consist of the Low Altitude Area Chart city names and a selection of significant panel identification names. These names should be evenly distributed throughout the index with at least one geographical name and location within each of the Enroute Low Charts.

3.3.6.6 Time Zone Boundaries and International Dateline

Time zone boundaries and the International Dateline shall be shown and symbolized by a continuous series of dots. Time zones shall be identified by the official local standard time zone name, centered within the zone along the top of the index.

(AK) Time zones shall be labeled within the body of the index.

3.3.6.7 (AK) Wall Planning Chart Instructions (Airplane Silhouettes)

The chart index shall indicate the location of registration guide marks used for assembling a planning chart. These registration guide marks shall be in the form of miniature airplane silhouettes. Two airplane silhouette symbols shall be positioned along the individual Alaska Enroute Low Altitude Chart limits of adjoining charts. These symbols shall be positioned in the same general location as their larger counterparts on the chart proper.

An explanatory note, preceded by a sample miniature airplane symbol, shall be positioned outside, and immediately below the chart index, providing instructions for assembly of an Alaskan Wall Planning Chart.

Figure 3.17 Registration Marks (Airplane Silhouettes)/Wall Planning Instructions



3.3.7 Interagency Air Cartographic Committee (IACC) Credit Note

An IACC credit note shall be shown left justified below the Chart Index.

(AK) An IACC credit note shall be shown left justified, below the Registration Marks/Wall Planning Instructions.

Figure 3.18 IACC Credit Note

PUBLISHED IN ACCORDANCE WITH INTERAGENCY AIR CARTOGRAPHIC COMMITTEE SPECIFICATIONS AND AGREEMENTS, APPROVED BY: DEPARTMENT OF DEFENSE • FEDERAL AVIATION ADMINISTRATION

References:

[Appendix 29](#) - Chart Indexes - Dimensions - U.S.

3.3.8 QR Codes

The QR Code shall be positioned on the title panel.

3.3.9 Bar Codes

Bar code information and associated text, as indicated below, shall be positioned at the bottom of the title panel. The first line will show the FAA Product ID, depicted above the National Stock Number bar code. The second line will consist of bar codes for the National Stock Number (NSN) and the Effective Date (Julian date). The NSN and the Effective Date will be shown textually below the respective Bar Code on the third line. The NGA Reference Number will be shown textually on the fourth line.

Figure 3.19 Bar Codes



References:

[Appendix 32](#) - Bar Codes

3.4 LEGEND PANEL INFORMATION

Legend panel (U.S. and Alaska Charts) information shall be positioned to read perpendicular to the side trim of the charts. Refer to appendices referenced below for placement of legend panel information.

References:

Appendix 4 - Chart Layout - U.S. L-2 and L-8

Appendix 5 - Chart Layout - U.S. L-3, L-9, L-11, L-13, L-15, L-19, L-27 and L-29

Appendix 7 - Chart Layout - U.S. L-5

Appendix 9 - Chart Layout - U.S. L-17 and L-31

Appendix 12 - Chart Layout - U.S. L-21, L-33 and L-35

Appendix 14 - Chart Layout - U.S. L-23

Appendix 16 - Chart Layout - U.S. L-26

Appendix 20 - Chart Layout - Alaska L-2

Appendix 22 - Chart Layout - Alaska L-4

References:

Appendix 33 - Legend Panel - U.S. and Alaska

Appendix 34 - Legend Panel - Dimensions - U.S. and Alaska Charts

Appendix 35 - Legend Panel Information - U.S.

Appendix 36 - Legend Panel Information - Alaska

Appendix 37 - Legend Panel - Chart Identification Labels U.S. & Alaska

3.4.1 Chart Identification Area

References:

Appendix 33 - Legend Panel - U.S. and Alaska

Appendix 37 - Legend Panel - Chart Identification Labels U.S. & Alaska

3.4.1.1 **Chart Idents**

Charts shall be identified by the letter “L” and a number; together they shall be referred to as the chart ident. Chart idents shall be positioned in the upper left and upper right corners of the panel.

3.4.1.1.1 **U.S. Charts**

All odd-numbered chart idents for the conterminous U.S. Charts, except for L-25, shall be positioned in the upper left hand corner. The odd-numbered chart ident for L-25 shall be positioned in the upper right hand corner.

All even-numbered chart idents for the conterminous U.S. Charts, except for L-26, shall be positioned in the upper right hand corner. The even-number chart ident for L-26 shall be positioned in the upper left hand corner.

3.4.1.1.2 **(AK) Alaska Charts**

All odd-numbered chart idents for Alaska shall be positioned in the upper right corner. All even-numbered chart idents for Alaska shall be positioned in the upper left corner.

3.4.1.2 Arrowheads

Arrowheads shall be shown to indicate in which direction (left, right or up) the particular chart should be opened or turned to be read correctly.

3.4.1.2.1 U.S. Charts

Arrowheads for all even-numbered charts, except for L-20, L-22, L-26, L-28, L-30 and L-36, shall be centered and to the right of the chart number and point to the right.

Arrowheads for all odd-numbered charts, except for L-25, shall be centered and to the left of the chart number and point to the left.

Arrowheads for L-20, L-22, L-25, L-28, L-30 and L-36 shall be above and flush right with the chart number and point up.

Arrowhead for L-26 shall be centered and to the left of the chart number and point to the left.

3.4.1.2.2 (AK) Alaska Charts

Arrowheads for all even numbered Alaskan charts shall be centered and to the left of the chart number and point to the left.

Arrowheads for all odd numbered Alaskan charts shall be centered and to the right of the chart number and point to the right.

3.4.1.3 Panel Identification

The text “PANELS” shall be positioned below all chart numbers. The text shall be flush right with the chart number in the upper right corner and flush left with the chart number in the upper left corner. Panel identification shall be placed below the text “PANELS”.

3.4.1.3.1 U.S. Charts

Panel identification for charts covering the contiguous U.S. shall be placed as specified below:

- Charts with panels “ABCDE” and “ABCD”, panel identification shall be positioned below and flush left with the text “PANELS” except for chart L-25. Chart L-25 panel identification shall be positioned below and flush right with the text “PANELS”.
- Charts with panels “FGHIJ”, “FGHIJK” and “EFGHIJ”, panel identification shall be positioned below and flush right with the text “PANELS” except for Chart L-26. Chart L-26 panel identification shall be positioned below and flush left with the text “PANELS”.

3.4.1.3.2 Alaska Charts

Panel identification for charts covering the Alaska (AK) shall be placed as specified below:

- Panel identification for Alaska L-1 and L-3 shall be “ABCDE”, positioned below and flush right with the text “PANELS”.
- Panel identification for Alaska L-2 and L-4 shall be “FGHIJK”, positioned below and flush left with the text “PANELS”.

3.4.1.4 Chart Scales

The scale of each chart, expressed in terms of inches of nautical miles, shall be shown, positioned directly below the panel identification numbers. See Section [1.2.5](#) for scale values.

3.4.1.4.1 U.S. Charts

Chart scales for charts covering the contiguous U.S. shall be placed as specified below:

- Charts with panels “ABCDE” and “ABCD”, chart scale shall be positioned below and flush left except for chart L-25. Chart L-25 chart scale shall be position below and flush right.
- Charts with panels “FGHIJ”, “FGHIJK” and “EFGHIJ”, chart scale shall be positioned flush right except for Chart L-26. Chart L-26 chart scale shall be positioned flush left.

3.4.1.4.2 Alaska Charts

Chart scales for charts covering the Alaska (**AK**) shall be placed as specified below:

- Chart scale for Alaska L-1 and L-3 shall be positioned flush right.
- Chart scale for Alaska L-2 and L-4 shall be positioned flush left.

3.4.2 Title Area

References:

[Appendix 37](#) - Legend Panel - Chart Identification Labels U.S. & Alaska

3.4.2.1 Chart Title

The Chart Title shall be shown as described in Section [3.3.3.1](#).

3.4.2.2 Altitude Note

The Altitude note shall be shown as described in Section [3.3.3.2](#).

3.4.2.3 Horizontal Datum Note

A Horizontal Datum note shall be shown centered below the altitude note, as indicated below.

Figure 3.20 Horizontal Datum Note

HORIZONTAL DATUM: NORTH AMERICAN DATUM OF 1983

3.4.3 Chart Legend

A Chart Legend shall be shown centered below the Horizontal Datum note. The legend shall be complete in all respects, reflecting items detailed within these specifications, and shall be as compact as possible. Data contained within the legend shall be grouped in specific categories of information.

The title of these categories and appear as headings shall be:

Table 3.1 Chart Legend Title Headings

AIRPORTS
NAVAIDS
COMMUNICATION BOXES
AIR TRAFFIC SERVICES AND AIRSPACE INFORMATION
EXAMPLE OF GROUPING

References:

[Appendix 33](#) - Legend Panel - U.S. and Alaska

[Appendix 34](#) - Legend Panel - Dimensions - U.S. and Alaska Charts

[Appendix 35](#) - Legend Panel Information - U.S.

[Appendix 36](#) - Legend Panel Information - Alaska

3.5 TABULATED DATA AREA

Tabulated Data Area type and symbol specifications shall be shown as indicated in the appendices except as other indicated within these specifications.

References:

[Appendix 38](#) - Military Training Routes Tabulation - U.S. & Alaska

[Appendix 39](#) - SUA & MOA Tabulation - U.S. & Alaska

[Appendix 40](#) - Airport Locations Tabulation - U.S. & Alaska

Tabulated Data shall consist of five areas:

1. Military Training Routes (MTRs). See Section [3.5.1](#).
2. SUA and MOA Tabulation Legend. See Section [3.5.2](#).
3. Special Use Airspace (SUAs). See Section [3.5.3](#).
4. Military Operations Areas (MOAs). See Section [3.5.4](#).
5. Airport Locations. See Section [3.5.5](#).

Tabulations shall incorporate information from both front and back sides of the chart. Location of Tabulated Data shall be as indicated in Chart Layout as sited below.

References:

[Appendix 4](#) - Chart Layout - U.S. L-2 and L-8

[Appendix 6](#) - Chart Layout - U.S. L-4, L-10, L-12, L-14, L-16 and L-24

[Appendix 7](#) - Chart Layout - U.S. L-5

[Appendix 10](#) - Chart Layout - U.S. L-18 and L-32

[Appendix 11](#) - Chart Layout - U.S. L-20 and L-28

[Appendix 14](#) - Chart Layout - U.S. L-23

[Appendix 15](#) - Chart Layout - U.S. L-25

[Appendix 17](#) - Chart Layout - U.S. L-30

[Appendix 19](#) - Chart Layout - Alaska L-1

[Appendix 21](#) - Chart Layout - Alaska L-3

See Section [3.10.2](#) for Tabulated Data for Area Charts (A-1 and A-2).

3.5.1 Military Training Routes (MTR) Tabulation - U.S. & Alaska

References:

[Appendix 38](#) - Military Training Routes Tabulation - U.S. & Alaska

3.5.1.1 General

A tabulation of the appropriate and applicable all-inclusive altitudes for each military training route shown on the chart shall be provided. MTR Tabulation shall be positioned as indicated in the second set of References under Section [3.5](#).

MTRs shall be tabulated numerically by the route designator, e.g., IR-123, followed by the appropriate and applicable all-inclusive (composite) altitude range for each route graphically depicted on the chart, e.g., 3000 to 4000, 500 AGL to 7000.

As necessary due to space considerations on the panel, the MTR tabulation may be continued or carried over to an open area within the confines of the chart.

Figure 3.21 Military Training Routes Tabulation
MILITARY TRAINING ROUTES

NUMBER	ALTITUDE RANGE	NUMBER	ALTITUDE RANGE	NUMBER	ALTITUDE RANGE
IR-203	8000 TO 12000	IR-346	200 AGL TO FL290	VR-202	200 AGL TO 8000
IR-207	200 AGL TO 15000	IR-348	500 AGL TO 13000	VR-331	200 AGL TO 6000
IR-344	200 AGL TO 17000				

MTR Tabulation information for Area Chart (A-1/A-2) can be found in Section [3.10.2.1](#).

3.5.1.2 Title

The title “MILITARY TRAINING ROUTES” shall be centered above the tabulation.

3.5.1.3 Columns and Sub-columns

Tables will be three columns wide with each column made up of two sub-columns. Sub-column headings shall be “NUMBER” and “ALTITUDE RANGE.”

3.5.1.3.1 Number Column

The first column, titled “NUMBER”, shall be tabulated numerically by the route designator e.g., IR-203, VR-331, etc.

3.5.1.3.2 Altitude Range Column

The second column, titled “ALTITUDE RANGE”, shall list the corresponding and all-inclusive (composite) altitude range for each route geographically depicted on the chart.

3.5.2 Special Use Airspace (SUA) and Military Operations Areas (MOA) Tabulation Legend

The following SUA and MOA Tabulation Legend shall be positioned above the Special Use Airspace Tabulation on all U.S. charts.

Figure 3.22 SUA and MOA Tabulation Legend - U.S. Charts

ARTCC three letter idents: Albuquerque ZAB, Atlanta ZTL, Boston ZBW, Chicago ZAU, Cleveland ZOB, Denver ZDV, Fort Worth ZFW, Houston ZHU, Indianapolis ZID, Jacksonville ZJX, Kansas City ZKC, Los Angeles ZLA, Memphis ZME, Miami ZMA, Minneapolis ZMP, New York ZNY, Oakland ZOA, Salt Lake City ZLC, Seattle ZSE, Washington ZDC

P - PROHIBITED, R - RESTRICTED, A - ALERT, W - WARNING AREAS
 CANADA: CYA - ADVISORY, CYD - DANGER, CYR - RESTRICTED AREAS

All altitudes are MSL unless otherwise indicated
 FL - Flight Level
 Time - Hours shown are UTC unless otherwise indicated
 Days - Sunrise to Sunset except Canada where it means 1/2 hr before sunrise to 1/2 hr after sunset
 Nights - Sunset to Sunrise except Canada where it means 1/2 hr after sunset to 1/2 hr before sunrise

Cont - Continuous: 24 hrs a day, 7 days a week
 ‡ - During periods of Daylight Saving Time (DT) effective hours will be one hour earlier than shown.
 NOTAM - Use of this term in Restricted Areas indicates FAA And DoD NOTAM systems. Use of this term in all other Special Use areas indicates the DoD NOTAM system.

(AK) The following SUA and MOA Tabulation Legend shall be positioned above the Special Use Airspace Tabulation on all Alaska Low Enroute Charts.

Figure 3.23 SUA and MOA Tabulation Legend - AK Charts

ARTCC three letter idents: Anchorage ZAN, Oakland ZOA, Seattle ZSE
 A - Alert, P - Prohibited, R - Restricted, W - Warning Areas
 CANADA: CYA - Advisory, CYD - Danger, CYR - Restricted Areas

All altitudes are MSL unless otherwise indicated
 FL - Flight Level
 Time - Hours shown are UTC unless otherwise indicated
 Days - Sunrise to Sunset except Canada where it means 1/2 hr before sunrise to 1/2 hr after sunset
 Nights - Sunset to Sunrise except Canada where it means 1/2 hr after sunset to 1/2 hr before sunrise

Cont - Continuous: 24 hrs a day, 7 days a week
 ‡ - During periods of Daylight Saving Time (DT) effective hours will be one hour earlier than shown.
 NOTAM - Use of this term in Restricted Areas indicates FAA and DoD NOTAM systems. Use of this term in all other Special Use areas indicates the DoD NOTAM system.

3.5.3 Special Use Airspace (SUA) Tabulation

The tabulation shall be titled “Special Use Airspace”. The tabulation shall include Prohibited, Restricted, Alert and Warning Areas in the U.S. as well as foreign Special Use Airspace. Footnotes shall be added at the bottom left of the tabulation when needed.

Special Use Airspace with a floor of 18,000' MSL or above shall not be shown on this enroute low altitude chart.

Figure 3.24 Special Use Airspace (SUA) Tabulation
SPECIAL USE AIRSPACE

NUMBER	EFFECTIVE ALTITUDE	TIMES USED, UTC			WEATHER	CONTROLLING AGENCY A/G CALL	PANEL
		DAYS	HOURS				
P-51	To But Not Including 2500	Cont	Cont		VFR-IFR	No A/G	D
R-2531	To But Not Including 4000	Mon-Fri Occly Sat-Sun	1800-0450Z‡ By NOTAM		VFR-IFR	NORTHERN CALIFORNIA TRACON	F
R-6701	To 5000	By NOTAM	By NOTAM		VFR-IFR	NAS WHIDBEY IS APP CON	E
R-6703A	To 14000	Mon-Fri *1	1500-0700Z‡		VFR-IFR	SEATTLE-TACOMA APP CON	D
R-6703B,D	To 5000	Mon-Fri *1	1500-0700Z‡		VFR-IFR	SEATTLE-TACOMA APP CON	D
R-6703C	To 14000	By NOTAM	By NOTAM		VFR-IFR	SEATTLE-TACOMA APP CON	D
A-680	To 3000	Mon-Fri *1 Mon-Fri *1	1800-0930Z‡ Apr-Oct 1800-0759Z‡ Nov-Mar		VFR-IFR	No A/G	E
A-682	To 6000 N Of Line To 3000 S Of Line	Mon-Fri	1600-0500Z‡		VFR	No A/G	F,G
W-93 NORTH	To FL 500	Cont *1	1600-2400Z‡		VFR-IFR	ZSE CNTR/FSS	A,B,J,J
W-93 SOUTH	To FL 500	Cont *1	1600-2400Z‡		VFR-IFR	ZSE CNTR/FSS	I
W-237A,B LOW	To But Not Inclg FL 230	By NOTAM	By NOTAM		VFR-IFR	ZSE CNTR/FSS	D,E
W-240	To FL 600	Mon-Fri *1	1430-0500Z‡		VFR-IFR	ZOA CNTR/FSS	F,G
W-285B	To FL 190	Mon-Fri *1	1430-0500Z‡		VFR-IFR	NORTHERN CALIFORNIA TRACON	F
W-513	To FL 600	Mon-Fri *1	1430-0500Z‡		VFR-IFR	ZOA CNTR/FSS	F
W-570	To FL 500	By NOTAM	By NOTAM		VFR-IFR	ZSE CNTR/FSS	B,C
CYA 102	To 10000	By NOTAM	By NOTAM		VFR-IFR	VANCOUVER ACC	E
CYA 105	To 8000	Cont	Days		VFR	No A/G	E
CYA 110	To 2500	Occly By VICTORIA ATIS	Occly By VICTORIA ATIS		VFR	VICTORIA TOWER	E

3.5.3.1 Number Column

The first column, titled “NUMBER”, shall consist of the assigned or designated number of the area preceded by the letter designation for the type of area. SUA areas shall be grouped alphabetically and listed numerically. Foreign areas shall be grouped alphabetically and listed numerically after the U.S. areas.

3.5.3.2 Effective Altitude Column

The second column, titled “EFFECTIVE ALTITUDE”, shall list the effective altitude of the area in feet or as a Flight Level (FL). When the effective altitude is unlimited, use the abbreviation “Unltd”.

3.5.3.3 Time of Use Column

The third column, titled “TIMES USED, UTC”, shall list the times of use and shall be further broken out into three subcolumns. Should an area be activated by NOTAM, rather than at a designated time, the text “By NOTAM” shall be used instead. Using “By NOTAM” in Restricted areas indicates that the NOTAM is published in both FAA and DoD NOTAM systems. Using “By NOTAM” in all other Special Use Airspace areas indicates that the NOTAM is published only in the DoD NOTAM system.

3.5.3.3.1 Subcolumn One - “DAYS”

Subcolumn one, titled “DAYS”, shall indicate the specific days of the week that a SUA area is in effect. As examples, “Mon-Fri” indicates that the SUA area is not in effect Saturday and Sunday; “Continuous” (abbreviated as “Cont”) indicates that the SUA area is in effect seven days a week.

3.5.3.3.2 Subcolumn Two - “HOURS”

Subcolumn two, titled “HOURS”, shall indicate the specific hours of the day that a SUA area is in effect. As examples, “0600-1800Z”; “DAYS” indicates that the SUA area is in effect sunrise to sunset; “NIGHTS” indicates that the SUA area is in effect sunset to sunrise; and, “Continuous” (abbreviated as “Cont”) indicates that the SUA area is in effect 24 hours a day.

3.5.3.3.3 Subcolumn Three - “WEATHER”

Subcolumn three, titled “WEATHER”, shall indicate under what weather condition the SUA area is operational. As examples, “VFR” indicates that the SUA is operational when VFR weather conditions exist; “IFR” indicates that the SUA is operational when IFR weather conditions exist; and, “VFR-IFR” indicates that the SUA is operational when either VFR or IFR weather conditions exist.

3.5.3.4 Controlling Agency/Air Ground (A/G) Column

The fourth column, titled “CONTROLLING AGENCY A/G CALL”, shall indicate the agency which is authorized to permit enroute clearance through the area. Should a joint agreement exist which permits clearance by air route traffic control, the appropriate center shall be shown together with the Flight Service Station. “No A/G” indicates there is no air to ground frequency or agency available to call for enroute clearance.

3.5.3.5 Panel Column

The fifth column, titled “PANEL”, shall indicate the chart panel identifier where the SUA area is located. Multiple panels shall be listed when the SUA area is depicted on more than one panel.

3.5.4 Military Operations Areas (MOA) Tabulation

The tabulation shall be titled “MILITARY OPERATIONS AREAS”. Footnotes shall be added at the bottom left of the tabulation when needed.

**Figure 3.25 Military Operations Areas
MILITARY OPERATIONS AREAS**

NUMBER	EFFECTIVE ALTITUDE	TIMES USED, UTC			WEATHER	CONTROLLING AGENCY A/G CALL	PANEL
		DAYS	HOURS				
CHINA	3000 AGL *2	Cont	1600Z†-Sunset	VFR-IFR	ZOA CNTR/FSS	G,H	
CHINOOK A,B	300 To 5000	Intermittent	By NOTAM	VFR-IFR	NAS WHIDBEY IS APP CON	D,E	
DOLPHIN NORTH	11000 *2	Cont *1	1600-2400Z†	VFR-IFR	ZSE CNTR/FSS	A,B,J,J	
DOLPHIN SOUTH	11000 *2	Cont *1	1600-2400Z†	VFR-IFR	ZSE CNTR/FSS	I	
GOOSE NORTH	3000 AGL *2	Mon-Fri *1	1500-0300Z†	VFR-IFR	ZSE CNTR/FSS	I	
MAXWELL 1,2,3	11000 Or 3000 AGL Whichever is Higher *2	Mon-Fri *1	1300-0400Z†	VFR-IFR	ZOA CNTR/FSS	G,H	
OLYMPIC A,B	6000 *2	By NOTAM	By NOTAM	VFR-IFR	ZSE CNTR/FSS	D,E	
RAINIER 1,2,3	2000 To 9000	Intermittent	By NOTAM	VFR-IFR	SEATTLE-TACOMA APP CON	D	
WHITMORE 1,2,3	11000 Or 3000 AGL Whichever is Higher *2	Mon-Fri *1	1530-0030Z†	VFR-IFR	ZOA CNTR/FSS	H	

*1 Other Times By NOTAM
*2 To But Not Including FL 180

3.5.4.1 Number Column

The first column, titled “NUMBER”, shall consist of the assigned or designated name and/or number of the area preceded by the letter designation for the type of area. MOA areas shall be grouped alphabetically and listed numerically. Foreign areas shall be grouped alphabetically and listed numerically after the U.S. areas.

3.5.4.2 Effective Altitude Column

The second column, titled “EFFECTIVE ALTITUDE”, shall list the effective altitude of the area in feet or as a Flight Level (FL). When the effective altitude is unlimited, use the abbreviation “UNLTD”.

3.5.4.3 Time of Use Column

The third column, titled “TIMES USED, UTC”, shall list the times of use and shall be further broken out into three subcolumns. Should an area be activated by NOTAM, rather than at a designated time, the text “By NOTAM” shall be used instead. Using “By NOTAM” in the MOA indicates that the NOTAM is published only in the DoD NOTAM system.

3.5.4.3.1 Subcolumn One - “DAYS”

Subcolumn one, titled “DAYS”, shall indicate the specific days of the week that a MOA is in effect. As examples, “Mon-Fri” indicates that the MOA is not in effect Saturday and Sunday; “Continuous” (abbreviated as “Cont”) indicates that the MOA is in effect seven days a week.

3.5.4.3.2 Subcolumn Two - “HOURS”

Subcolumn two, titled “HOURS”, shall indicate the specific hours of the day that a MOA is in effect. As examples, “0600-1800Z”; “DAYS” indicates that the MOA is in effect sunrise to sunset; “NIGHTS” indicates that the MOA is in effect sunset to sunrise; and, “Continuous” (abbreviated as “Cont”) indicates that the MOA is in effect 24 hours a day.

3.5.4.3.3 Subcolumn Three - “WEATHER”

Subcolumn three, titled “WEATHER”, shall indicate under what weather condition the MOA is operational. As examples, “VFR” indicates that the MOA is operational when VFR weather conditions exist; “IFR” indicates that the MOA is operational when IFR weather conditions exist; and, “VFR-IFR” indicates that the MOA is operational when either VFR or IFR weather conditions exist.

3.5.4.4 Controlling Agency/Air Ground (A/G) Column

The fourth column, titled “CONTROLLING AGENCY A/G CALL”, shall indicate the agency which is authorized to permit enroute clearance through the MOA. Should a joint agreement exist which permits clearance by air route traffic control, the appropriate center shall be shown together with the Flight Service Station. “No A/G” indicates there is no air to ground frequency or agency available to call for enroute clearance.

3.5.4.5 Panel Column

The fifth column, titled “PANEL”, shall indicate the chart panel identifier where the MOA is located. Multiple panels shall be listed when the MOA is depicted on more than one panel.

3.5.5 Airport Locations Tabulation

An alphanumeric tabulation of civil, military and civil/military airports within the area of coverage for both the front and reverse side of the chart shall be provided. This tabulation shall normally be placed on the Special Use Airspace Tabulation panels and due to space considerations may be continued or carried over to an open area within the confines of the chart.

The title “AIRPORT LOCATIONS” shall be positioned above the tabulation.

Column headings shall be “NAME”, “ID” and “PANEL.”

Figure 3.26 Airport Locations
AIRPORT LOCATIONS

NAME	ID	PANEL	NAME	ID	PANEL	NAME	ID	PANEL
Abbotsford	CYXX	E	Harvey Fld	S43	D	Rancho Murieta	RIU	F
AJ Eisenberg	OKH	E	Hayfork	F62	H	Red Bluff Muni	RBL	H
Albany Muni	S12	B	Hayward Exec	HWD	F	Redding Muni	RDD	H
Alta Sierra Pvt	Ø9CL	G	Hobby Fld	77S	A	Reid-Hillview	RHV	F
Anacortes	74S	E	Hogan’s Corner Pvt	5WA8	D	Renton Muni	RNT	D
Angwin-Parrett Fld	2O3	G	Illinois Valley	3S4	I	Rio Vista Muni	O88	F
Arcata	ACV	I	Independence State	7S5	B	Roche Harbor Pvt	WAØ9	E
Arlington Muni	AWO	E	Jack Mc Namara Fld	CEC	I	Rogers Fld	OØ5	H
Ashland Muni	SØ3	I	Jefferson Co Intl	ØS9	D	Rogue Valley Intl	MFR	I
Astoria Rgnl	AST	C	Ken Jernstedt Arfld	4S2	C	Rohnerville	FOT	H
Auburn Muni	AUN	G	Kingdon Arpk	O2Ø	F	Roseburg Rgnl	RBG	A
Auburn Muni	S5Ø	D	Klamath Falls	LMT	I	Round Valley	OØ9	H
Aurora State	UAO	B	Lake CA Air Park Pvt	68CA	H	Ruth	T42	H
Bandon State	SØ5	A	Lampson Fld	1O2	G	Sacramento Exec	SAC	G
Beale AFB	BAB	G	Lincoln Rgnl	LHM	G	Sacramento Intl	SMF	G

3.5.5.1 Name Column

Airports shall be tabulated alphabetically by the airport name.

3.5.5.2 ID Column

The FAA Location Identifier will be shown at airports in the conterminous U.S. The ICAO Location Indicator, if available, will be shown outside the conterminous U.S.

3.5.5.3 Panel Column

The third column, titled ‘PANEL’, shall indicate the chart panel identifier where the airport is located.

3.6 MARGIN INFORMATION

Margin information shall be positioned between the neatline of the chart and the trim edge, but excluding title and legend panel information.

Margin information type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within the specifications.

Area Chart Margin Information specifications can be found in Section **3.10**.

3.6.1 Bar Scales

Bar scales shall be shown in nautical miles (NM).

References:

Appendix 41 - Margin Information - U.S. & Alaska

3.6.1.1 Placement

Bar scales shall be positioned on each chart parallel to the top and bottom borderline, centered between every two external folds above and below the chart area.

(AK) Bar scales shall be positioned on each chart parallel to and outside the top and bottom neatlines, centered within every two panel chart fold, i.e., between external folds.

Placement of Bar Scales on Alaskan charts AK L-1, L-3 and L-4:


- AK L-1 - On panel B, the top has one scale, the bottom has a different scale; panels C, D and E the top has one scale, the bottom two different scales
- AK L-3 - On panel A, scales both associated with the Area Charts for Fairbanks and Nome - 1"= 10NM.
- AK L-4 - On panel G, the top has one scale, the bottom has two different scales; H, the top has two different scales, the bottom has one scale.

3.6.1.2 Increments and Labels

3.6.1.2.1 U.S. Charts

Bar scales shall be subdivided into 10NM increments. The first 10NM increment shall be subdivided into 1NM increments. Bars scales shall be labeled in 10NM increments to the right of the division marks. The first and last labels shall be placed outside of and centered on the beginning and end of the bar scale respectively.


Figure 3.27 Chart Scale Increments - 10NM Increment Example



3.6.1.2.2 Offshore Navigation Chart L-21

Bar scales for Chart L-21 shall be subdivided into 20NM increments. The first 20NM increment shall be subdivided into 2NM increments.


Figure 3.28 Chart Scale Increments - 2NM Increment Example



3.6.1.2.3 Alaska Charts

Bar scales shall be subdivided into 25NM increments. The first 25NM increment shall be subdivided into 5NM increments.

Figure 3.29 Chart Scale Increments - 5NM Increment Example



Bar scales for the Area Charts for Juneau (L-1), Vancouver (L-1), Fairbanks (L-3), Nome (L-3) and Anchorage (L-4) shall be subdivided into 10NM increments. The first 10NM increment shall be subdivided into 1NM increments. Bar scales shall be labeled in 10NM increments to the right of the division marks as shown in [Figure 3.27](#).

3.6.1.3 Chart Scale

The scale factor, e.g., 1"=10NM, shall be shown centered within the last (extreme right) increment of the bar scale.

3.6.1.4 Nautical Mile Text

The text "NAUTICAL MILES" shall be centered within the first division of the scales immediately following the zero value.

3.6.2 Panel/Fold Identification

Panel/fold identification shall be shown at each end of a bar scale. Identification shall be with both a letter and the name of the most prominent and centrally located city or NAVAID within the panel. Consideration given to prominent Class B or C airspace or area charts. In instances when no NAVAID or city is found within a panel, i.e., where a panel depicts an area over a body of water, the body of water's name shall be used. Priority is to be given to NAVAID or City within U.S. Borders.

The letters ABCDE shall be used as the letter identifiers on odd number charts (front side) and the letters FGHIJ shall be used as the letter identifiers on even numbered charts (reverse side).

On charts L-5, L-21, L-33 and L-35, the letters ABCD shall be used as chart identifiers and on charts L-6, L-22, L-34 and L-36, the letters EFGHIJ shall be used as chart identifiers.

(AK) The letters ABCDE shall be used as the letter identifiers on odd number charts (fronts side) and the letters FGHIJK shall be used as the letter identifiers on even numbers charts (reverse side).

The city or NAVAID name shall be positioned 3/20" to the left (right) of each letter identifier, within the appropriate panel. The city or NAVAID name shall be aligned at the top, along the top of the chart scale and aligned at the bottom of the chart, along the bottom of the chart scale.

Figure 3.30 Top of Panel Fold Indication



Figure 3.31 Bottom of Panel Fold Indication



References:

[Appendix 41](#) - Margin Information - U.S. & Alaska

3.6.3 Chart Idents

Chart idents (L-1, L-2, etc.) shall be positioned along the top and bottom edge (long side) of all charts so that when opened or partially unfolded, the chart can be readily identified by number.

Chart idents shall be positioned centered on the bar scale. Placement of the chart idents shall be adjusted so as to avoid overprinting, or conflicting with airway lead name data.

Figure 3.32 Chart Number Identification



References:

[Appendix 41](#) - Margin Information - U.S. & Alaska

3.6.4 Airways/Routes Extending Past the Chart Neatline

Airways/Routes that extend past the chart neatline shall have information pertaining to the next point (NAVAID, NAVAID fix or waypoint) on the route shown in the margin area outside and parallel to the neatline. The content of this next point information will differ for routes that cross internal boundaries and routes that cross external boundaries. Boundaries are described in the paragraphs below.

Text shall be oriented to read “up” along the left side and read “down” along the right side.

Next point information shall be charted the same color as shown on the adjoining or overlapping U.S. chart and in accordance with the specifications herein. Next point information on VHF/UHF routes shall be shown in black; next point information on LF/MF routes shall be shown in brown; next point information on RNAV routes shall be shown in blue if a waypoint, black if a VHF/UHF fix or NAVAID, brown if a LF/MF fix or NAVAID; next point information on joint routes (either RNAV-VHF/UHF or RNAV-LF/MF) shall be shown in its appropriate color.

References:


[Appendix 41](#) - Margin Information - U.S. & Alaska

3.6.4.1 External CNFs & Unnamed Mileage Breaks

If the next point information is an unnamed mileage break depicted with an “X”, then the next point information shall be shown as an “X”.


If the next point information is a Computer Navigation Fix (CNF) depicted with an “X”, then the next point information shall be the CNF identifier enclosed in parentheses.

Figure 3.33 Airways/Routes Past Chart Boundary - External - CNF & Unnamed Mileage Break

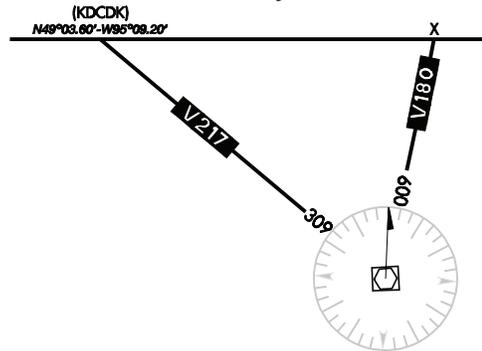

(AK) All Russian next point information shall be shown in brown.

Figure 3.34 Airways/Routes Past Chart Boundary - External - Russia



3.6.4.2 Internal Chart Boundaries

Internal chart boundaries are those boundaries where adjoining or overlapping U.S. or Alaska low charts exist. Table 3.2 below contains the information that shall be shown for each route type.


Table 3.2 Internal Boundary Next Point Information

Route Type	Fix	Waypoint	NAVAID
VHF/UHF or LF/MF	Name only	N/A	Freq, Ident, Channel
RNAV	Name only	Name only	Ident Only
Joint			
- Share a common point	Name only	N/A	Freq, Ident, Channel
- Do not share a common point	Name only	Name only	Freq, Ident, Channel

3.6.4.2.1 VHF/UHF or LF/MF Routes

For VHF/UHF or LF/MF routes, the next point information will consist of name only if it is a NAVAID fix, or frequency, ident and channel if it is a NAVAID.


Figure 3.35 Routes Past Chart Boundary - Internal - VHF/UHF and LF/MF Routes

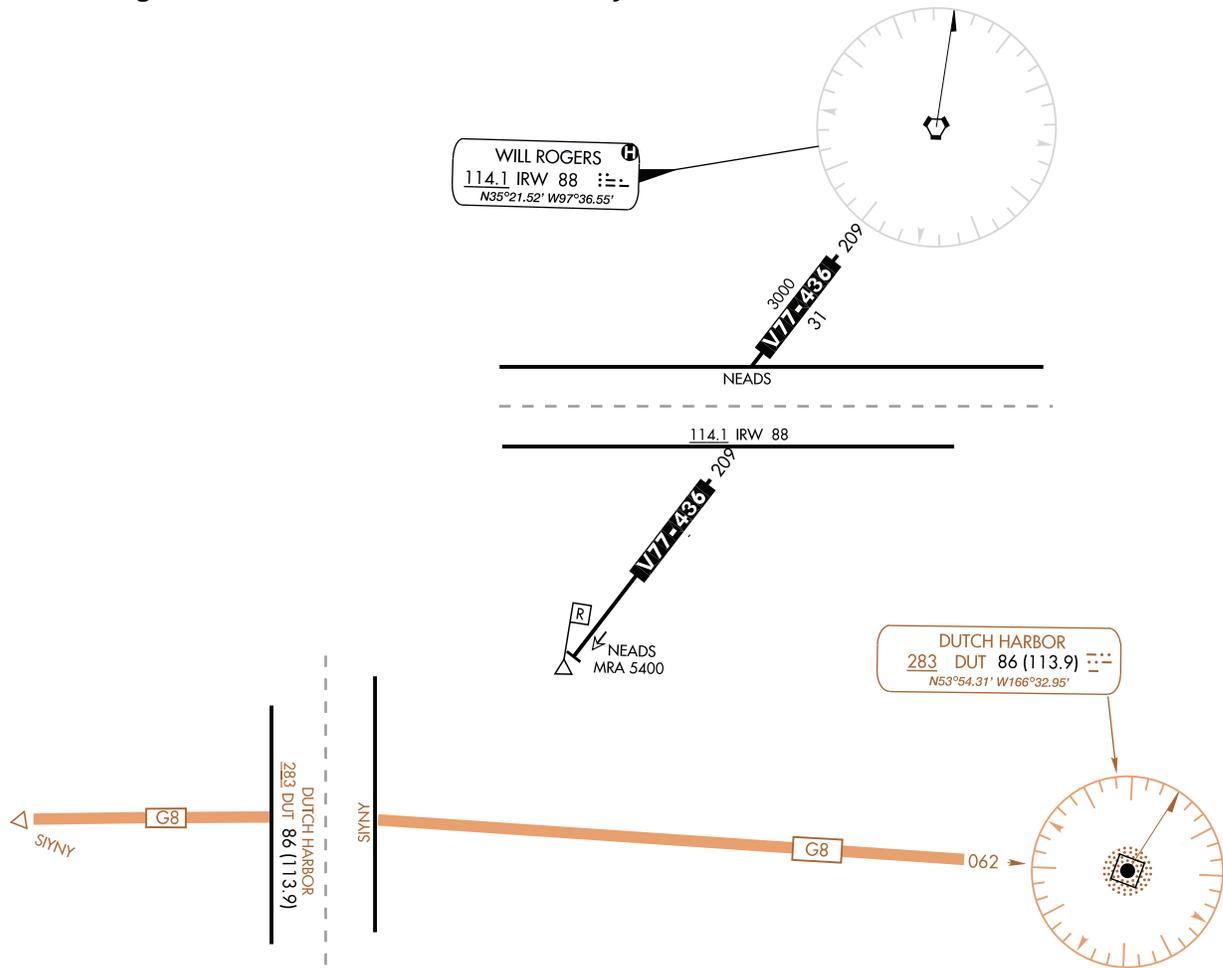

3.6.4.2.2 RNAV Routes

For RNAV routes - the next point information will consist of name only if it is a fix or way-point or, ident only if it is a NAVAID.


Figure 3.36 Routes Past Chart Boundary - Internal - RNAV Routes

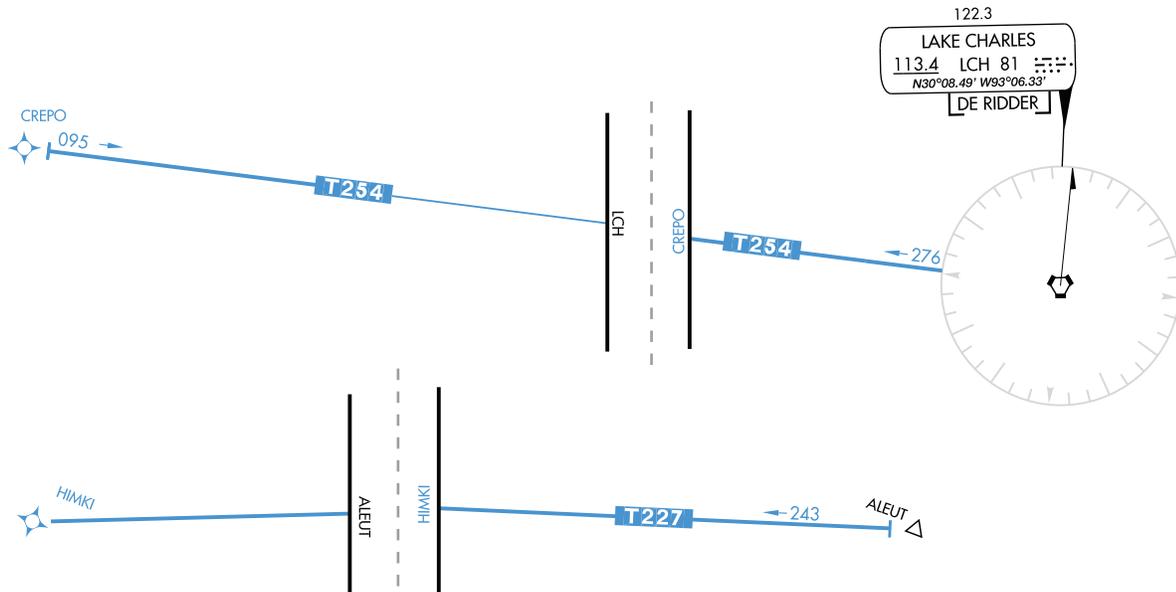

3.6.4.2.3 Joint Routes

For joint routes that share a common next point the next point information will consist of name only if it is a fix, or frequency, ident and channel if it is a NAVAID. For joint routes that do not share common next point the next point information for each route shall be as described in [Table 3.2](#).

Figure 3.37 Routes Past Chart Boundary - Internal - RNAV Joint Routes

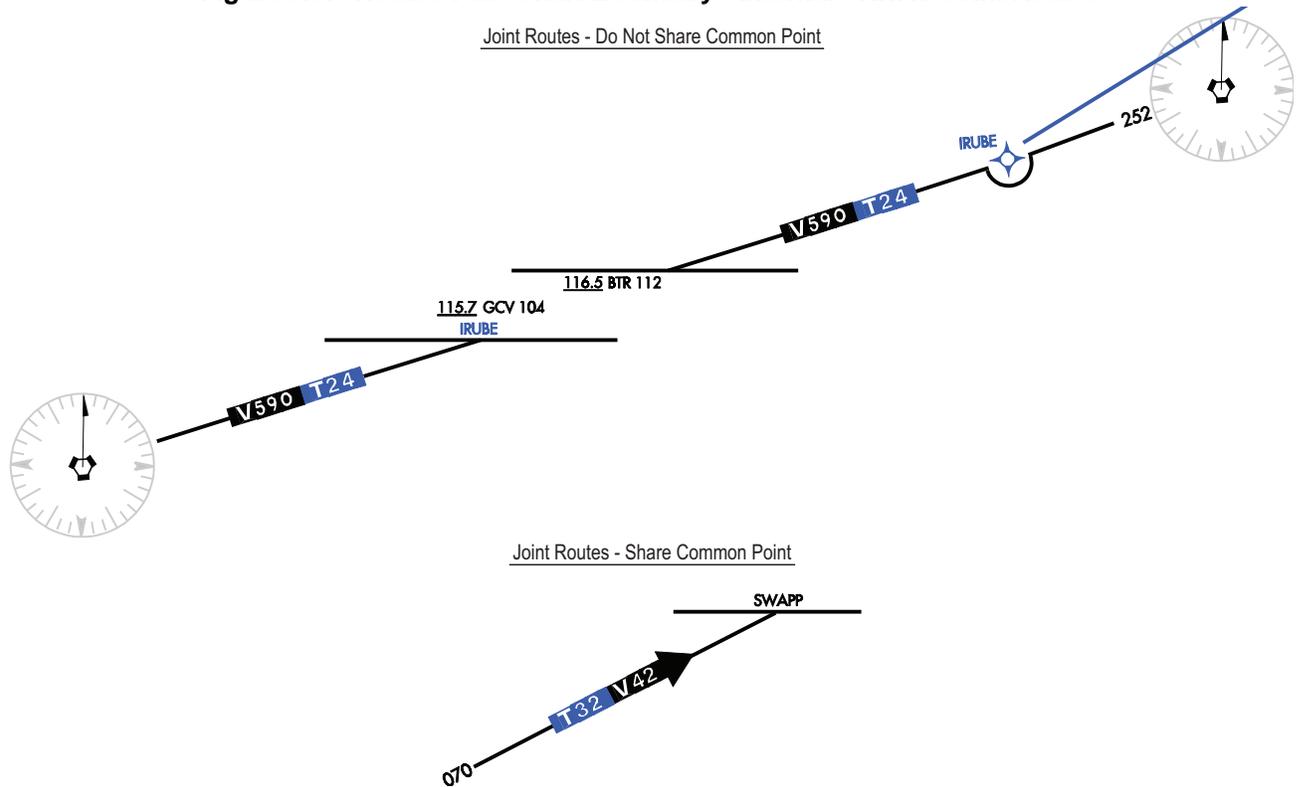

3.6.4.3 External Chart Boundaries

External chart boundaries are those chart boundaries where no adjoining or overlapping U.S. or Alaska low charts exists. [Table 3.3](#) below contains the information that shall be shown for each route type.


Table 3.3 External Boundary Next Point Information

Route Type	Fix	Waypoint	NAVAID
VHF/UHF or LF/MF	Name & coordinates	N/A	Name, Freq, Ident, channel and coordinates
RNAV	Name & coordinates	Name only	Ident Only
Joint			
- Share a common point	Name & coordinates	N/A	Name, Freq, Ident, channel and coordinates
- Do not share a common point	Name & coordinates	Name only	Name, Freq, Ident, channel and coordinates

3.6.4.3.1 VHF/UHF or LF/MF Routes


For VHF/UHF or LF/MF routes, the next point information shall consist of the name and coordinates if it is a fix, or name, frequency, ident, channel, and coordinates if the next point is a NAVAID.

Figure 3.38 Airways/Routes Past Chart Boundary - External - VHF/UHF and LF/MF Routes

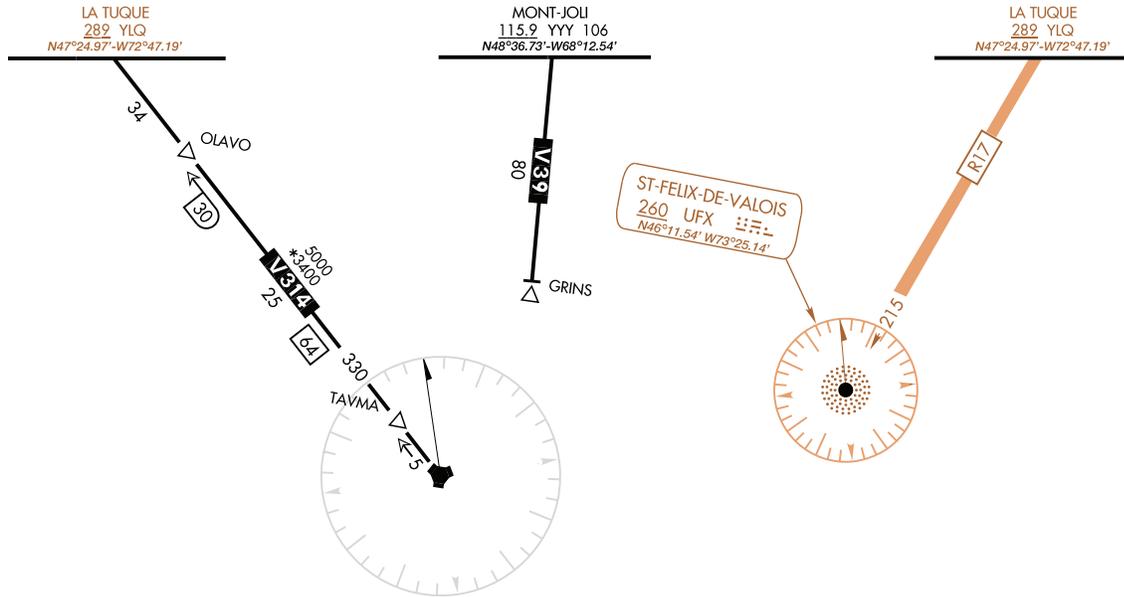

(AK) All external boundary next point information for Russian airspace shall consist of NAVAID or fix name and coordinates.


Figure 3.39 Airways/Routes Past Chart Boundary - External - Uncontrolled Route

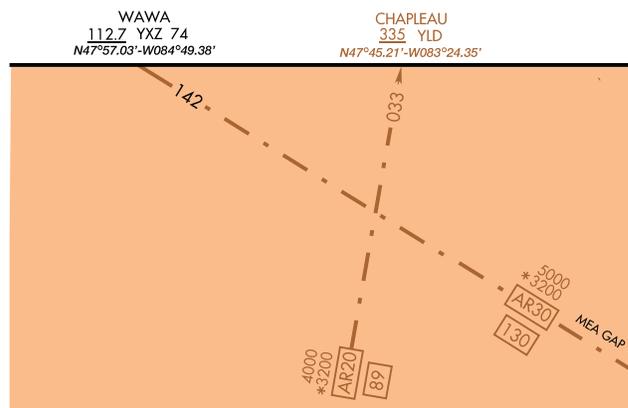

3.6.4.3.2 RNAV Routes

For RNAV routes, the next point information shall consist of name only if it is a fix or way-point, or by ident only if it is a NAVAID.


Figure 3.40 Airways/Routes Past Chart Boundary - External - RNAV Route

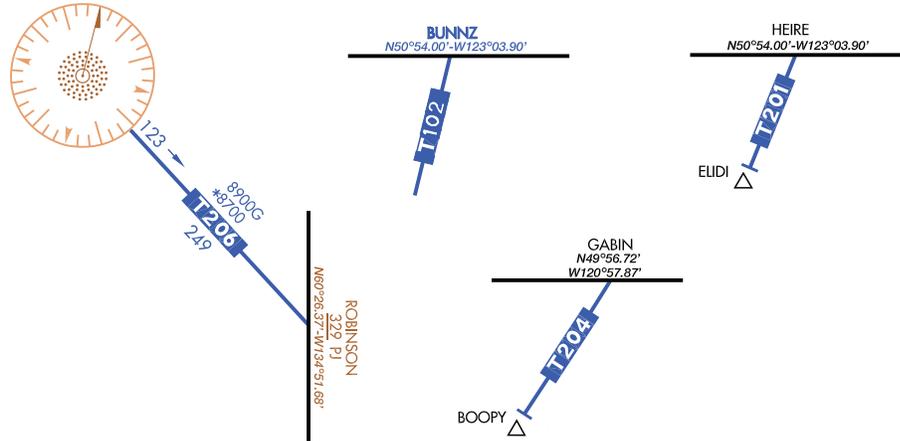

3.6.4.3.3 Joint Routes

For joint routes that share a common next point the next point information will consist of name and coordinates if its a fix, or name, identifier, frequency and coordinates if a NAVAID. For joint routes that do not share a common next point, the next point information for each route shall be as described in Table 3.3.

Figure 3.41 Airways/Routes Past Chart Boundary - External - Joint

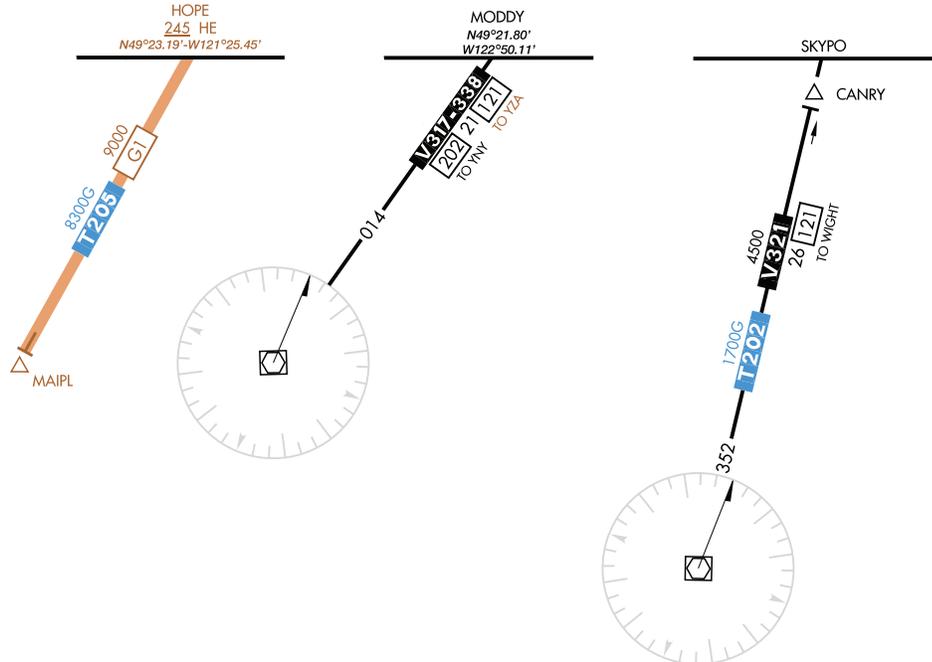

3.6.4.4 Placement of Next Point Information

Next point information shall be stacked and centered adjacent to the neatline at the intersection of the routes to which they pertain. In congested areas or where appropriate, next point information may be stacked or offset using a leader line.

Next point information and chart notes may be shifted to avoid overprinting.

3.6.4.4.1 Internal Boundary Next Point Information

Fix and waypoint names and NAVAID ident and frequency shall be placed adjacent and parallel to the neatline.

Figure 3.42 Next Point Information - Internal - NAVAID & Fix

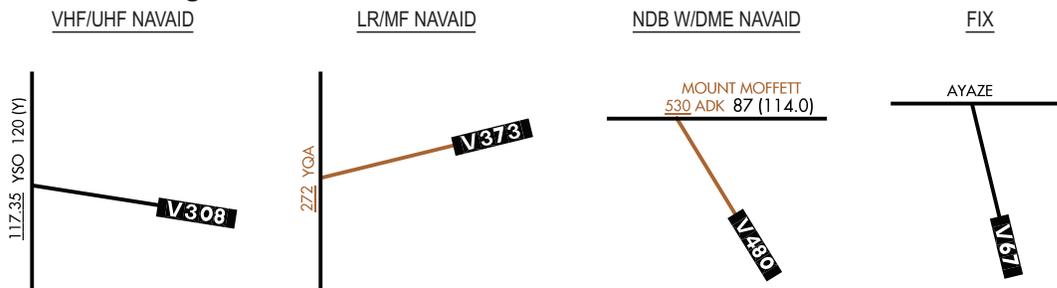


Figure 3.43 Next Point Information - Internal - RNAV


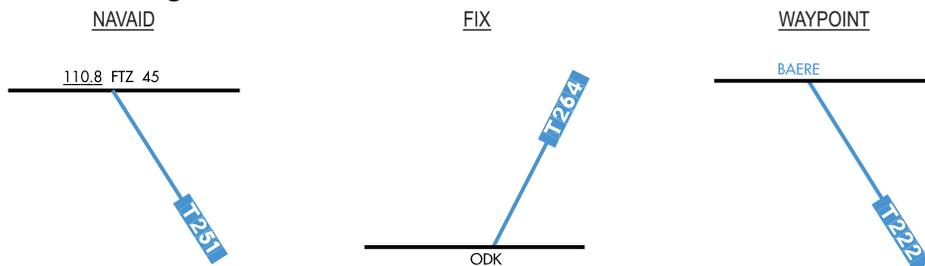


Figure 3.44 Next Point Information - Internal - Airways/Routes with Different Next Points

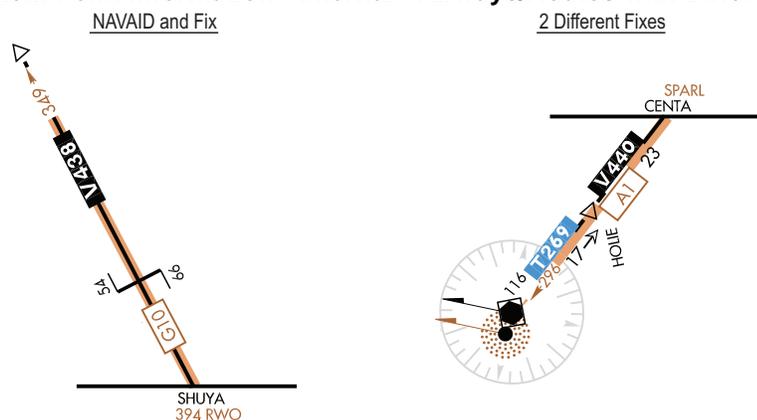

3.6.4.4.2 External Boundary Next Point Information

If the next point is a NAVAID, the coordinates shall be placed adjacent and parallel to the neatline, the NAVAID frequency and ident shall be placed on the second line away from the neatline, and the NAVAID name shall be placed on the third line away from the neatline.

If the next point is a fix, the coordinates shall be placed adjacent and parallel to the neatline and the fix name shall be placed on the second line away from the neatline.

If the next point is a waypoint, the name shall be placed adjacent and parallel to the neatline.

Figure 3.45 Next Point Information - External - NAVAID & Fix


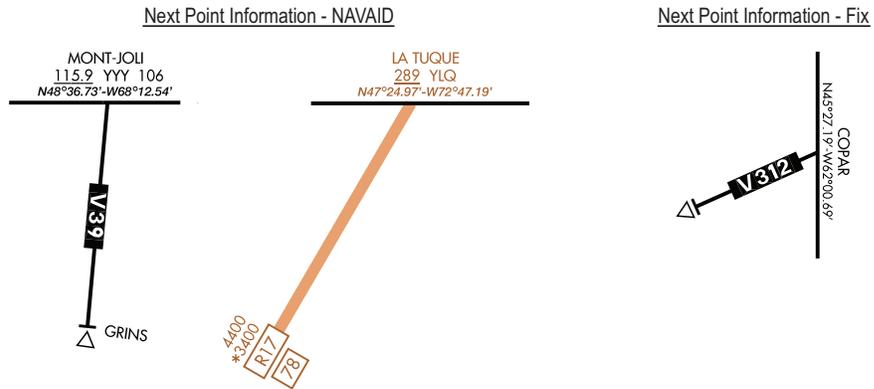


Figure 3.46 Next Point Information - External - Congested Area



3.6.5 Margin Notes for Adjoining/Overlapping Charts

Notes to indicate the appropriate adjoining/overlapping charts, e.g., Adjoins Chart L-4, shall be placed in the margin areas at internal boundaries. Notes shall be placed once per panel when located at the top or bottom of the chart and once per fold when located along the side of the chart. Text shall be oriented to read “up” along the left (West) side and read “down” along the right (East) side of the chart. Charts oriented North/South shall have the text on the “South” and “North” ends to read North up.

Notes placed at the bottom of a panel shall be centered between the chart edge and the bar scale. Notes placed at the top of a panel shall be centered between the bar scale and the chart edge. Notes may be shifted to avoid overprinting.

Figure 3.47 Margin Notes for Adjoining/Overlapping Charts

U.S. Charts - Adjoin And Overlap Notes

Adjoins Chart L-18

Adjoins Chart L-18 & L-22

Adjoins Chart L-23 & Overlaps Chart L-21

U.S. Charts - Inset Chart Overlap Notes

Overlaps Chart L-34 (Boston Inset)

Overlaps Chart L-23 (Wilmington-Bimini Inset)

DOD USERS: Overlaps DOD C&SA Chart Nr L-3

U.S. Charts - Canada and DoD Charts

Overlaps CANADA & NORTH ATLANTIC Chart LO-2 & Chart AK L-1

DOD USERS: Overlaps DOD C&SA Chart Nr L-3


Overlaps CANADA & NORTH ATLANTIC Chart LO-10

AK Charts - Overlap Notes

Overlaps Chart AK L-3, AK L-4 and CANADA AND NORTH ATLANTIC Chart Nr LO-5

Figure 3.48 Margin Notes for Adjoining Charts - Along the Top

Adjoins Chart L-15



114.1 IRW 88

114.1 IRW 88

HAVAK


114.1 IRW 88

LOBOE

Figure 3.49 Margin Notes for Adjoining Charts - Along the Sides



Figure 3.50 Margin Notes for Adjoining Charts - Along the Bottom

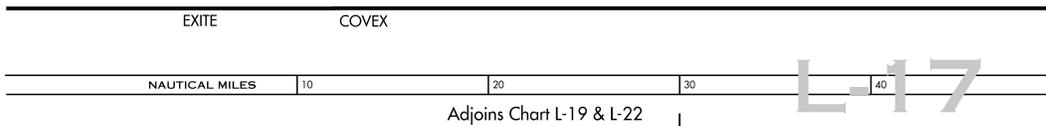

EXITE

COVEX

NAUTICAL MILES

10

20


30

40

Adjoins Chart L-19 & L-22

Notes for adjoining/overlapping Canadian Low Charts shall be shown. Notes specific for DoD users shall be shown to assist in identifying adjoining/overlapping DoD charts.

Figure 3.51 Margin Notes for Adjoining Charts - Canadian and DoD Charts

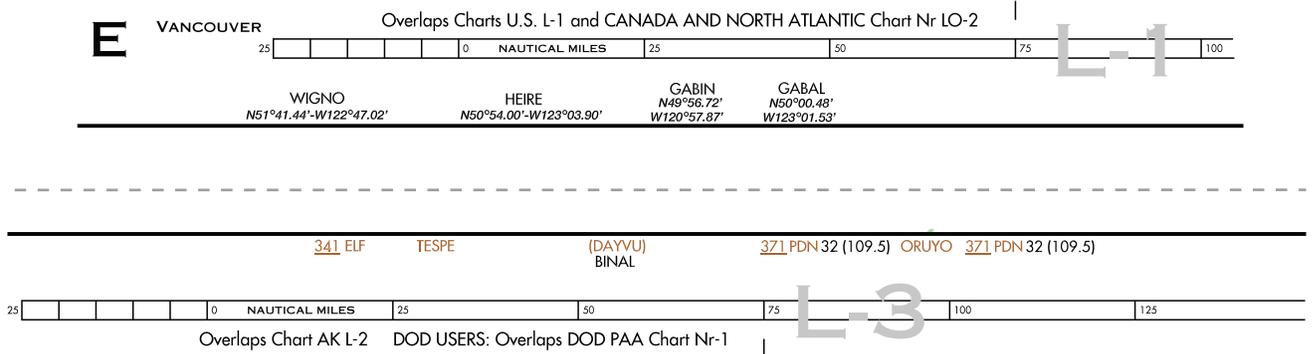

3.7 CHART DETAIL

Chart Detail information type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

References:

- [Appendix 42](#) - Chart Detail - Projection Lines - U.S. & Alaska
- [Appendix 43](#) - Base Detail - U.S. & Alaska
- [Appendix 44](#) - Airports - U.S. & Alaska
- [Appendix 45](#) - NAVAID North Arrows & Compass Roses
- [Appendix 46](#) - NAVAID Identification Boxes
- [Appendix 47](#) - Flight Service Stations & Remote Communications Outlets
- [Appendix 48](#) - Automated Weather Broadcasting Systems
- [Appendix 49](#) - Airspace Information
- [Appendix 50](#) - Airspace

The following data is required to be shown:

3.7.1 Projection Lines

Projection type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

References:


- [Appendix 42](#) - Chart Detail - Projection Lines - U.S. & Alaska

3.7.1.1 General

Projection lines and ticks shall not be partially deleted or removed for overprinting text of symbols. Projection values may be shifted to provide clarity and avoid unnecessary clutter. Projection values may be eliminated only when absolutely necessary.

Projection lines shall be shown throughout the coverage of the charts for every degree of latitude/longitude. Each line shall be labeled parallel to and preferably below and to the right of the intersecting lines. Projection type shall be shifted to avoid overprinting. In extremely congested areas, projection type may be deleted if necessary.


Figure 3.52 Projection Lines



3.7.1.2 Latitude

Each degree of latitude shall be ticked every ten minutes. Each ten-minute tick shall be ticked to the north along the longitude. Each thirty-minute tick shall be ticked to the north along the longitude.


Figure 3.53 Latitude



3.7.1.3 Longitude

Each degree of longitude shall be ticked every ten-minutes. Each ten-minute tick shall be ticked to the west along the latitude. Each thirty-minute tick shall be ticked to the west along the latitude.

Figure 3.54 Longitude



3.7.1.4 (AK) Alaska Charts


3.7.1.4.1 General

Projection lines shall be shown throughout the coverage of the chart for every two degrees (even-numbered values) of latitude/longitude. Even-numbered lines shall be labeled parallel to and preferably below and to the right of the intersecting lines.

3.7.1.4.2 (AK) Latitude

Each even degree of longitude shall be ticked every ten minutes. Each ten-minute tick shall be ticked to the west. Each thirty-minute tick shall be ticked to the west. Each full degree shall be ticked, centered on the line and labeled to read perpendicular to the projection, e.g., N59°.


Figure 3.55 (AK) Latitude

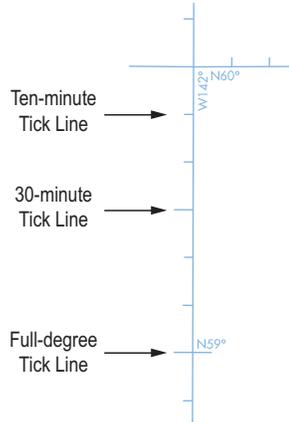

3.7.1.4.3 (AK) Longitude

Each even degree of longitude shall be ticked every ten minutes. Each ten minute tick shall be ticked to the north. Each thirty minute tick shall be ticked to the north. Each full degree shall be ticked, centered on the line and labeled to read parallel to the projection, e.g., W143°.

Figure 3.56 Longitude (AK)

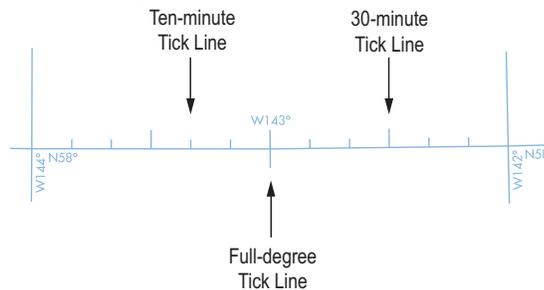

3.7.2 Base Detail

Base Detail type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

References:

[Appendix 43](#) - Base Detail - U.S. & Alaska

3.7.2.1 Shoreline

A generalized shoreline shall be shown for coastal areas, the Great Lakes, Salt Lake and St. Lawrence Seaway, providing a generalized portrayal that is proportional to the chart.

Figure 3.57 Shoreline



3.7.2.2 International Boundary

International boundaries shall be charted and identified by the name of the bordering countries. The names shall be positioned within their respective country area, adjacent and parallel to the boundary. Identification of the boundary shall be shown at sufficient intervals along the boundary, at least once between external folds.

Figure 3.58 International Boundary Lines



When the international boundary and the delimiting lines of an ARTCC, ADIZ or FIR coincide, the international boundary symbol shall not be shown; however the country names shall be retained.

Figure 3.59 Omission of International Boundary Lines



3.7.2.3 (AK) United States/Russia Maritime Boundary

The United States/Russia Maritime Boundary shall be charted and identified by the name of the countries. The names shall be positioned within their respective country area, adjacent and parallel to the boundary. Identification of the boundary shall be shown at sufficient intervals along the boundary, at least once between external folds.

Figure 3.60 United States/Russian Maritime Boundary



When the United States/Russian Maritime Boundary and other linear boundary symbols coincide, the maritime boundary shall be offset.

3.7.2.4 Time Zones

Time zone boundaries shall be shown and identified by name and the number of hours needed to equal Coordinated Universal Time (UTC), e.g., Eastern Std + 5 = UTC. Time zones shall be identified adjacent to both sides of the time zone boundary, near the chart neatline and readable in relation to True North. When international boundaries or other linear features coincide with the time zone boundary, the time zone symbol shall be offset from the other linear feature.

Figure 3.61 Time Zones




When a chart lies entirely within a single time zone, the appropriate “Local Time + Hours = UTC” note shall be shown, placed in an open area and centered along the neatline on all four sides of the chart.

3.7.2.5 International Date Line

The International Date Line shall be shown, symbolized by the time zone symbol, enlarged to twice the size.

The International Date Line shall be identified and appropriately positioned along and parallel to the symbol, supported on either side, as appropriate, by the designation of SUNDAY or MONDAY.

Figure 3.62 International Date Line



3.7.2.6 Lines of Equal Magnetic Variation (Isogonic Lines)

Isogonic lines within the conterminous U.S. shall be shown for each degree of variation and symbolized throughout the face of the chart. Isogonic lines and values appearing on the chart shall be based on the five (5) year epoch.

Figure 3.63 Lines of Equal Magnetic Variation (Isogonic Lines)



(AK) In Alaska isogonic lines shall be shown approximately 5" apart. However, depending upon the convergence of the lines, portrayal may be modified to every other even degree of variation, or greater, depending upon the scale factor of the specific chart, to provide adequate coverage and satisfy operational requirements.

The value (e.g., 8° E) of each isogonic line shall be centered on and breaking the line 1" in from the border. Value shall read with the line.

3.7.2.7 Off-route Obstruction Clearance Altitude (OROCA)

An OROCA will be depicted within each quadrangle bounded by ticked lines of latitude and longitude. The OROCA will be depicted in 100 foot increments. The hundreds value shall be slightly elevated above the thousands value and the OROCA value shall be depicted as near as possible to the center of the quadrangle.

Figure 3.64 OROCA Value Example - 12,500 Feet


12⁵

OROCA figure shall be depicted within each grid square on all charted areas within the U.S. Continental ADIZ.

OROCA figure shall be depicted within each grid within Caribbean, Canada and Mexico Airspace beyond the U.S. continental ADIZ.

(AK) OROCA values shall be shown for each grid square on all chart airspace within the Alaska ADIZ. Russian Airspace shall not have OROCA values depicted.

Figure 3.65 OROCA Figure Placement

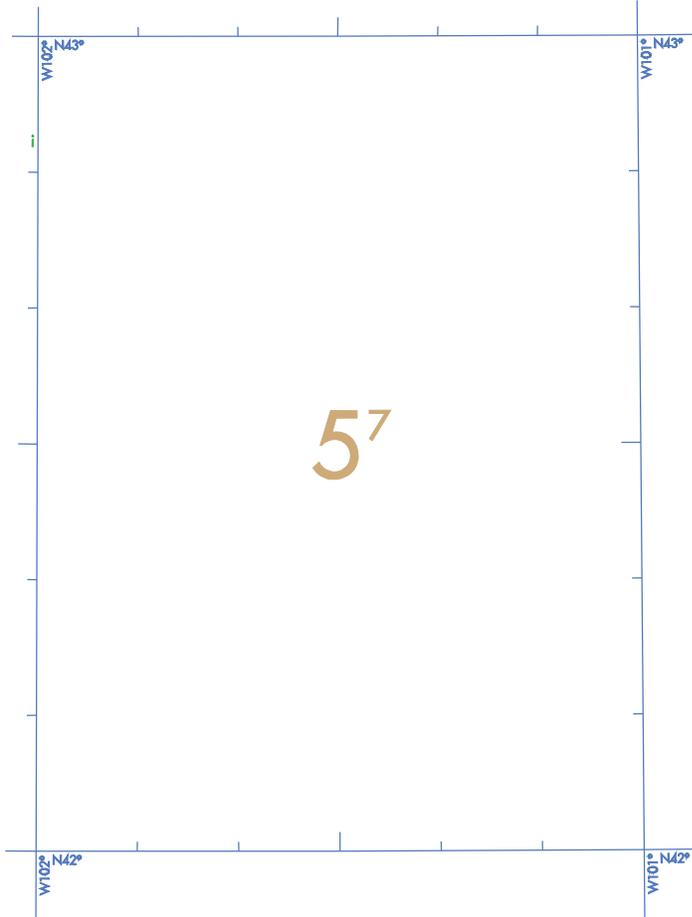

3.7.2.7.1 OROCA Notice

An explanatory boxed note shall be shown, centered above the center fold line of the title panel and shall be depicted as illustrated below:

Figure 3.66 OROCA Notice

ATTENTION

THIS CHART CONTAINS OFF ROUTE OBSTRUCTION CLEARANCE ALTITUDES (OROCA).
 The off route obstruction clearance altitudes shown in quadrangles bounded by ticked lines of latitude and longitude are represented in THOUSANDS and HUNDREDS of feet above mean sea level. The OROCA is based on information available concerning the highest known features in each quadrangle, including terrain and obstructions. OROCA provides obstruction clearance with a 1000 foot buffer in designated non-mountainous areas and a 2000 foot buffer in designated mountainous areas within the United States. For areas in Mexico and the Caribbean which are located outside of the U.S. ADIZ, OROCA provides obstruction clearance with a 3000 foot buffer. This altitude is provided for obstruction clearance only. It does not provide for NAVAID signal coverage or communication coverage, and would not be consistent with altitudes assigned by Air Traffic Control.

12⁵

Example: 12,500 feet

3.7.3 Airports

Airport type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

References:

Appendix 44 - Airports - U.S. & Alaska

3.7.3.1 Charting Criteria

All active airports with hard surface runways (hard and soft surface in Alaska) of 3000' (before rounding) or longer and/or with an Instrument Approach Procedure shall be shown, when they are located in:

1. the continental United States and
2. Mexico and Canada within 30NM of the international boundaries, and/or within 30NM of airways/routes and/or associated with a NAVAID.

Additional selected airports/seaplane bases shall be shown as requested by the using Agency.


Airports that have received an “Objectionable” airspace determination from the FAA Office of Airports shall not be charted.

3.7.3.2 Airport Symbolology

Airports shall be symbolized as either military, civil, or civil-military airports. Federal airports, i.e., NASA (National Aeronautics and Space Administration), USFS (United States Forest Service), etc., shall be symbolized as civil airports.

Airports shall be shown in blue if they have an Instrument Approach Procedure (IAP) or RADAR MINIMA published in the DoD Terminal High Altitude Flight Information Publication (FLIP). Airports shall be shown in green if they have an approved IAP or RADAR MINIMA published only in the FAA Terminal Procedures Publications. Airports with IAPs published in Canada-approved IAP publications shall be shown in green. Airports not having an approved IAP shall be shown in brown.

Figure 3.67 Airport Classification/Symbolology



Airports shall be plotted to true geographic position unless in conflict with a NAVAID at or close to the same location. In such cases, the airport shall be displaced from, or superimposed upon (in the case of collocated NDBs) the NAVAID. When displacing, the relationship between the airport and the NAVAID shall be retained.

3.7.3.2.1 Heliports

Heliports with a published Instrument Approach Procedure, or as requested by a using agency, shall be charted and identified by name with FAA identification in parentheses on the second line.

Figure 3.68 Heliports Symbology and Data



3.7.3.2.2 Seaplane Bases

Seaplane bases shall be identified by name with FAA identification in parentheses on the second line.

Figure 3.69 Seaplane Bases Symbology and Data



3.7.3.3 Airport Abbreviations

To reduce clutter, airport names should be abbreviated/truncated whenever possible. If an airport name includes any of the following terms then that portion of the name shall be abbreviated using the list below. Periods published in the official airport name shall not be shown (ex., V.S. Watson Regional will be shown as V S Watson Rgnl).


Table 3.4 Airport Abbreviations

General Airport Abbreviations		Military/Federal Airport Designators	
Airpark	Arpk	Army Air Field	AAF
Airport	Arpt	Air Force Base	AFB
County	Co	Air Force Station	AFS
Executive	Exec	Air Force Reserve Base	ARB
Field	Fld	Air Station	AS
Intercontinental	Intcntl	Marine Corps Air Station	MCAS
International	Intl	Marine Corps Outlying Field	MCOLF
Memorial	Mem	Naval Air Facility	NAF
Metropolitan	Metro	Naval Auxiliary Landing Field	NALF
Municipal	Muni	Naval Air Station	NAS
Private	Pvt	National Air & Space Administration	NASA
Regional	Rgnl	Naval Air Weapons Station	NAWS
		Naval Outlying Field	NOLF
		Strategic Expeditionary Landing Field	SELF
		U.S. Forest Service	USFS

3.7.3.4 Airport Data Block

The airport data block shall contain, when applicable, associated city name(s), airport name, airport identifier, airport airspace, elevation, runway lighting, runway length, runway surface, and ATIS or AFIS frequency(-ies) on Alaskan charts.

Figure 3.70 Airport Data Block

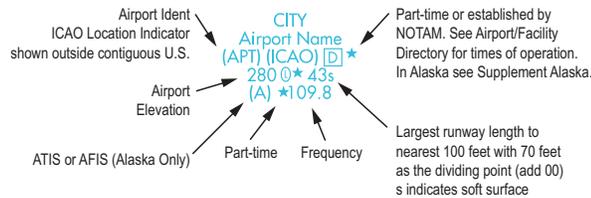

3.7.3.4.1 Associated City Names

Public-use and joint-use airports shall be identified by airport name and the associated city name when the associated city name is different from the airport name. The associated city name will be in all caps and may be placed above the airport name or, as needed, on the same line. When on the same line, it will precede the airport name and the two will be separated by a “/”; e.g., Cleveland/Luskin Fld-Orange Co. In Canada, associated city names shall be shown for public-use airports only if the airport is included in the Airport/Facility Directory, the Terminal Procedure Publications or the Alaska Supplement. Associated city names will not be charted for private-use airports or for military-only airports.

If there are multiple airport names and the first name is the same as the associated city name, do not indicate the associated city. However, if the second airport name is the same as the associated city, show the associated city.

Figure 3.71 Associated City Names



Duplication shall be avoided whenever possible. In congested areas, when the airport name is same name as NAVAID and no misinterpretation will result, the NAVAID name may suffice for the airport name. The airport data shall be appropriately positioned to support the airport symbol and/or the suffix designation.

3.7.3.4.2 Airport Names

Official airport names shall be shown in their entirety. Private use airports shall be additionally identified with the abbreviation “Pvt” immediately following the airport name. For military airports, the appropriate military abbreviations e.g., AFB, NAS, NAF, MCAS, AAF, etc., shall immediately follow the airport name. Federal airports, e.g., NASA (National Aeronautics and Space Administration), USFS (United States Forest Service), etc., shall show the appropriate abbreviations preceding the airport name. For very long airport names or because of congested charting the airport name may be placed on multiple lines.

3.7.3.4.2.1 FAR Part 93 (SFAR) Airports

Those airports cited in FAR Part 93 identified as having special air traffic rules governing operations to and from the airport shall be additionally identified by enclosing the airport name within a box. The color will be the same as the airport name.

Figure 3.72 Airports Identified Under Part 93

ANCHORAGE
Ted Stevens Anchorage Intl
 (ANC) (PANC) C
 152 L 116
 (A) 118.4

3.7.3.4.3 Airport Identifiers

For public-use and military airports within the contiguous United States, the FAA airport identifier will be placed in parenthesis immediately after the airport name or on the second line if more appropriate. For private-use airports in the contiguous U.S., the FAA airport identifier will be placed in parenthesis centered on the line immediately following the word “Pvt”. Airports outside the contiguous U.S. shall be charted with both FAA airport identifier, if one exists, and ICAO location identifier, if one exists. When an ICAO location indicator does not exist for an airport, the FAA designated identifier will be used. All zeros used as part of the airport identifier shall have the zero shown with a slash.

Figure 3.73 Airport Identifiers

Los Alamitos AAF (SLI) NASA Shuttle Landing Facility Pvt (TTS) Big Mountain Pvt (37AK)(PABM)

Figure 3.74 Examples of Airport Identifiers

Airports Outside U.S. (Mexico, Canada) General R Fierro Villalobos Intl (MMCU)	Airports Outside U.S. /Alaska Holy Cross (HCA) (PAHC)	Airports Within Contiguous U.S. Washington Dulles Intl (IAD)
--	--	---

3.7.3.4.4 Airport Airspace

The letter C or D, enclosed within a box, shall be placed immediately after the airport identifier to indicate those airports (U.S. only) having Class C or D airspace. Part time controlled airspace, including times established by NOTAM, shall be indicated by a 5-point star following the box. For additional information and examples. See [Figure 3.70](#).

3.7.3.4.5 Airport Elevation

The airports elevation shall be the highest point on an airport’s usable runways. Elevations are express in feet above or below mean sea level (MSL). When the elevation is at sea level, the elevation shall be charted as “00”. If the elevation is below sea level a minus (-) shall precede the figure.

3.7.3.4.6 Runway Lighting

Runway lighting is a system of lights defining the usable runway surface. Lighting symbolization indicates availability of runway lighting at military and public-use airports, and shall be shown below the airport name following the elevation.

Lighting in operation sunset to sunrise shall be indicated by the letter “L”. The availability of pilot controlled lighting shall be indicated by the symbol “@”. Lighting available sunset to sunrise only on request or operating part of the night only; shall be indicated by the symbol “L★”.

Figure 3.75 Example of Lighting Symbology at an Airport

Washington Dulles Intl (AD) 312 L 115 (A) 134.85	Laurel (N06) 30 @ 32s	BARROW Wiley Post-Will Rogers Mem (BRW) (PABR) 44 L★ 65
---	-----------------------------	--

The availability of runway lights at private airports shall not be shown; a short dash in lieu of the lighting symbol will be shown.

The absence of night landing capability shall be indicated by a short dash in lieu of the letter “L”.

Figure 3.76 Example of Availability of Runway Lights at Private Airport

Josephs Pvt
 (DE49) 
 42 - 45

3.7.3.4.7 Runway Length

Runway length shall be the actual length of the longest runway (pavement, end to end) including displaced thresholds, but excluding those areas designated as overruns.

The runway length shall be shown in hundreds of feet, using 70 feet as the division point for the next highest hundred, e.g., 59 indicates a runway length of at least 5870 feet.

3.7.3.4.8 Runway Surface

Hard surface runways are considered to be: (ASP) Asphalt, Bed Rock, Brick, (CON) Concrete. When the longest runway length is not a hard surface, a small letter “s” shall be shown following the runway length to indicate soft surface.

3.7.3.4.9 Automatic Terminal Information Service (ATIS)

ATIS shall be shown by the letter “(A)” and the specific frequency(ies) centrally positioned immediately below the airport elevation, runway lighting and runway length data. A five point star shall be shown to the left of the frequency(ies) when operation is less than continuous.

When the service is provided on one frequency for both arrival and departure information, it shall be shown as in [Figure 3.77](#).

When the service is provided on more than one frequency for both arrival and departure information, it shall be shown as in [Figure 3.77](#).

When the service provided is either arrival and/or departure on different frequencies, it shall be shown as in **Figure 3.77**.

Figure 3.77 ATIS Arrival and Departure Frequencies

Arrival & Departure Single Frequency	Arrival & Departure Multiple Frequencies	Arrival & Departure Different Frequencies
CITY Airport Name (APT) (ICAO) [D] ★ 280 @★ 43s (A) 115.4	CITY Airport Name (APT) (ICAO) [D] ★ 280 @★ 43s (A) 115.4 117.7	CITY Airport Name (APT) (ICAO) [D] ★ 280 @★ 43s (A) ARR 115.4 SW 117.7 NE 128.725 DEP 115.1

3.7.3.4.10 (AK) Automatic Flight Information Service (AFIS)

AFIS shall be indicated by the letter “(A)” and the specific frequency(ies) centrally positioned immediately below the airport elevation, lighting and runway length data. A star shall be shown immediately preceding each frequency when operation is less than continuous.

3.7.3.5 FAR Part 91 - Fixed Wing/Special Visual Flight Rules/SFAR 50-2

Airports at which fixed-wing Special VFR operations are prohibited shall be charted with the text “NO SVFR” centered above the airport or city name.

These airports are listed in the *Code of Federal Regulations Part 91.157 (Special VFR Weather Minimums, Appendix D, Section 3)*.

Figure 3.78 NO SVFR Example

NO SVFR Baltimore/Washington Intl Thurgood Marshall (BWI) 146 L 105 (A) 115.1 127.8	NO SVFR Portland Intl (PDX) [C] 31 L 110 (A) 128.35 269.9
--	---

3.7.3.6 (AK) Alaska - Part Time Controlled Airspace

Part time controlled airspace shall have time of operation depicted on the chart. For example, 0100-2300Z Mon-Fri.

3.7.4 Radio Aids to Navigation (NAVAIDs)

NAVAID type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

References:

Appendix 45 - NAVAID North Arrows & Compass Roses

Appendix 46 - NAVAID Identification Boxes

Appendix 47 - Flight Service Stations & Remote Communications Outlets

Appendix 48 - Automated Weather Broadcasting Systems

3.7.4.1 Charting Criteria

All public-use commissioned IFR VHF/UHF and IFR LF/MF NAVAIDs shall be shown symbolized and identified in black. NAVAIDs identified as “VFR use only” shall not be shown unless reclassified for an interim period.

All private-use military owned and operated TACANs shall be shown.

All private use NAVAIDs (outside the U.S. airspace) utilized in the definition of an airway, shall be shown.

Additional NAVAIDs selected to meet special requirements which are consistent with the intent and purpose of the IFR Enroute Low Altitude Chart series may be shown when identified (by name) by the requesting agency.

3.7.4.2 NAVAID Symbology

NAVAIDs shall be symbolized as either a VOR, VOR/DME, TACAN, VORTAC, NDB or NDB/DME. The color of the NAVAID text and the facility identification box shall match the color of the associated NAVAID symbol. NAVAIDs shall be plotted to their true geographic position.

Figure 3.79 NAVAID Symbols

VHF/HF NAVAIDs		LF/MF NAVAIDs	
	VHF Omnidirectional Range Station (VOR)		LF/MF Non-directional Radio Beacon (NDB)
	VHF Omnidirectional Range Station and Distance Measuring Equipment (VOR/DME)		LF/MF Non-directional Radio Beacon and Distance Measuring Equipment (NDB/DME)
	Tactical Air Navigation (TACAN)		
	VHF Omnidirectional Range/Tactical Air Navigation (VORTAC)		

If a NAVAID is designated as a flyover enclose the NAVAID symbol in a circle, e.g.,  .

3.7.4.3 Compulsory/Non-Compulsory Reporting Points

All NAVAIDs upon which airways/routes are predicated shall be depicted as having non-compulsory reporting function, unless otherwise designated.

Figure 3.80 NAVAID Symbols with Compulsory and Non-Compulsory Reporting

	VOR	VOR / DME	TACAN	VORTAC	NDB	NDB / DME
Non-compulsory Reporting						
Compulsory Reporting						

3.7.4.4 NAVAID North Arrow

NAVAIDs shall be shown with a North arrow oriented to slave magnetic North. The North arrow shall be the same color as the NAVAID symbol. The North arrow shall originate from the center of the NAVAID symbol.


Figure 3.81 NAVAID North Arrow Orientation



3.7.4.5 Compass Roses

Compass roses shall be charted centered on those NAVAIDs which have routes predicated on them. Compass roses shall be shown around other NAVAIDs where the placement of the compass rose does not create additional unnecessary clutter or congestion. In congested areas, normally one compass rose shall suffice around the NAVAID upon which the airway is predicated.

The size of the compass roses may vary dependent upon local conditions. Compass roses may be 1.25" in diameter, however, in areas of congestion, or due to the close proximity of stations, the size may be reduced in increments of .25", compatible with the local area. In reducing, however, the line weights, type size, etc., shall remain consistent. Extreme care should be exercised when the rose may be in conflict with other symbolization. In extreme circumstances the compass rose shall be no less than .75" in diameter.

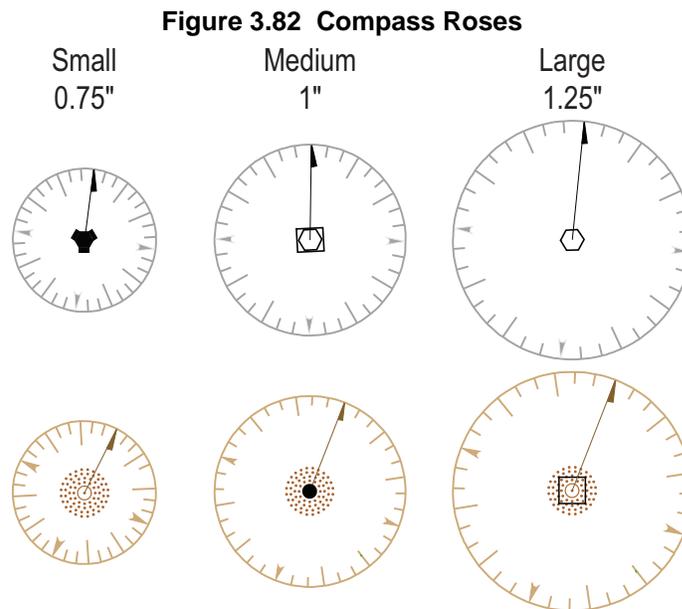

NAVAID compass roses shall be properly oriented to slave magnetic north. Every effort shall be made to keep textual data from being positioned within the rose. Cardinal point values shall not be shown.


3.7.4.6 NAVAID Identification Boxes

3.7.4.6.1 General

NAVAID data shown in the NAVAID identification box shall include the official NAVAID name, standard service volume (SSV)(if applicable), frequency, identification letters, channel number (if applicable) and morse code. Periods shall not be shown in the official NAVAID names.

The NAVAID name shall appear as centered above all NAVAID data within the NAVAID identification box. The NAVAID identification box shall be of a size consistent with the information contained within. NAVAID identification boxes and data shall be the same color as the NAVAID symbol.

Figure 3.83 NAVAID Identification Boxes

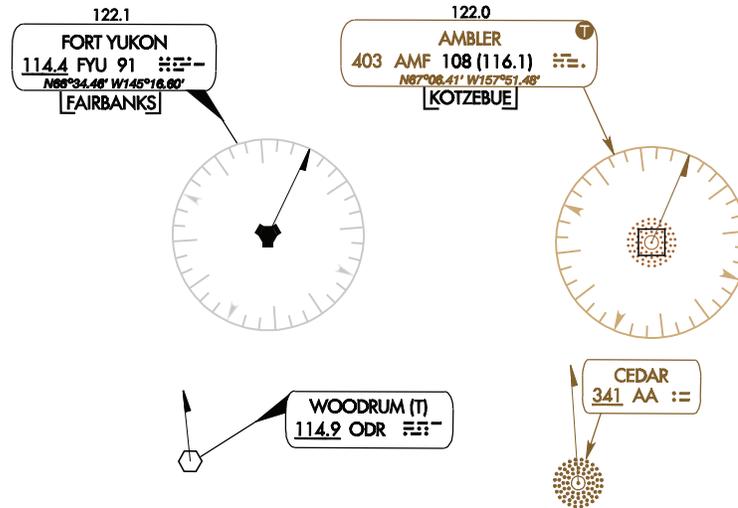

Extremely long NAVAID names may be shown on two lines.

Figure 3.84 Extremely Long NAVAID Name



A pointer with VHF/UHF NAVAID identification boxes, as indicated above, shall be shown from all boxed data extending from the data box (corners of the box preferred) to the appropriate compass rose, or NAVAID symbol.

A leader line with arrowheads shall be used to associate LF/MF only boxed data with the NAVAID symbol.

Duplication of data shall be avoided. When multiple NAVAIDs have the same name and facility identification box with different frequencies or channel numbers and/or identification letters, and no misinterpretation will result, the name of the NAVAID shall be indicated only once within the identification box. VHF/UHF NAVAID names and identification boxes take preference in same name NAVAIDs identifications. The frequency only, or the frequency, identification and morse code, when different, of same name NAVAIDs shall be positioned below the associated VHF/UHF NAVAID identification, incorporated within a common identification box. TACAN channel numbers shall be positioned as described for the frequency, when same name as VHF/UHF NAVAID.

The color differentiations shall be maintained in combined NAVAID identifications.

When necessary for clarity of detail, leader lines or pointers from combined NAVAID identifications shall be individually portrayed, utilizing the appropriate color differentiation.

3.7.4.6.2 Y Mode Channel

TACAN, VORTAC, VOR/DME, NDB/DME, and LOC/DME, facilities that operate in the Y-mode for DME reception, shall be shown with a (Y) suffixed to the channel number.

Figure 3.85 Examples of Y Mode Channel



3.7.4.6.3 No Voice, Part Time and On Request Frequencies

NAVAID frequencies shall be underlined when voice on the frequency is unavailable. TACAN frequencies shall not be underlined. NAVAIDS, operating less than continuous or on request, shall be indicated by the placement of a small five-pointed star before the frequency, within the identification box.


Figure 3.86 NAVAID Operating Less than Continuous & No Voice



3.7.4.6.4 Geographic Coordinates

NAVAIDS that make up part of a route/airway or a holding pattern, will include geographic coordinates. The geographic coordinates to the hundredth of a minute shall be shown as indicated below.

Figure 3.87 NAVAIDs - Coordinates




3.7.4.6.5 Standard Service Volume (SSV) Classifications (Frequency Protection)

VOR, VOR/DME, VORTAC and TACAN NAVAIDS shall indicate the SSV when other than “H” (High Altitude) or “L” (Low Altitude). A capital letter “T” in parentheses; i.e., (T), shall be shown within the facility identification box following the NAVAID name, to indicate facilities classified as Terminal facilities.

NAVAIDS that have a frequency protection of “H” (High Altitude) or “L” (Low Altitude) shall not be indicated as such on the chart.

Figure 3.88 NAVAID Standard Service Volume (SSV)



3.7.4.6.6 Abnormal Status

NAVAIDs published as “Shutdown” shall be charted. The applicable frequency and/or channel shall be overprinted with diagonal lines in a NE to SW direction.

Figure 3.89 NAVAIDs - Abnormal Status



The diagonal line symbol shall also overprint the applicable frequency or channel number that are shown within a facility locator boat.

3.7.4.6.7 Private NAVAIDS

NAVAIDs identified, as privately owned and operated shall be identified by the word “PRIVATE” positioned above the identification box.

Figure 3.90 Private NAVAID




When the NAVAID is used to define a charted route or holding pattern, the geographic coordinate shall be shown.

3.7.4.7 NAVAID Types

3.7.4.7.1 VHF Omnidirectional Range Station (VOR)

VOR stations shall be identified by the VOR symbol. The NAVAID identification box shall contain the NAVAID name on the first line and SSV, as appropriate. The second line shall contain, in the order listed, frequency, identification letters and morse code.


Figure 3.91 VOR



3.7.4.7.2 VHF Omnidirectional Range Station and Distance Measuring Equipment (VOR/DME)

VORs with DME shall be identified by the VOR/DME symbol. The NAVAID identification box shall contain the NAVAID name on the first line and SSV, as appropriate. The second line shall contain, in the order listed, the frequency, identification letters, channel number and morse code. The third line shall contain, in the order listed, the frequency, identification letters, channel number and morse code. Geographic coordinates shall be shown on the third line.

Figure 3.92 VOR/DME



3.7.4.7.3 Tactical Air Navigation (TACAN)

TACAN facilities shall be indicated by the TACAN symbol. The NAVAID identification box shall contain the NAVAID name on the first line and SSV, as appropriate. The second line shall contain, in the order listed, the TACAN channel, the identification letters, morse code, frequency in parentheses. Geographic coordinates shall be shown on the third line.


Figure 3.93 TACAN



3.7.4.7.4 VHF Omnidirectional Range – Tactical Air Navigation (VORTAC)

VORTAC facilities shall be identified by the VORTAC symbol. The NAVAID identification box shall contain the NAVAID name on the first line and SSV, as appropriate. The second line shall contain, in the order listed, frequency, identification letters, channel number and morse code.

Figure 3.94 VORTAC



3.7.4.7.5 Non-Directional Radio Beacons (NDB)

NDBs shall be identified by the NDB symbol. The NAVAID identification box shall contain the NAVAID name on the first line. The second line shall contain, in the order listed, the frequency, identification letters and morse code.

Figure 3.95 LF/MF NDBs



3.7.4.7.6 Non-Directional Radio Beacons and Distance Measuring Equipment (NDB/DME)

NDB/DMEs shall be identified by the NDB/DME symbol. The NAVAID identification box shall contain the NAVAID name on the first line. The second line shall contain, in the order listed, the frequency, the identification letters, the DME channel and its paired frequency enclosed in parentheses. The DME channel and the frequency shall be shown in black.

Figure 3.96 NDB/DME



3.7.4.7.7 Marine Radio Beacons


Marine Radio Beacons shall be symbolized and identified in the same manner as described for Non-Directional Radio Beacons. See Section 3.7.4.7.5.

3.7.4.7.8 ILS Components

3.7.4.7.8.1 Compass Locator Beacons

Compass Locator Beacons shall be identified by the Compass Locator Beacon symbol only when used in the designation of airways, or when designated as serving in the formation of reporting points used by Air Traffic Control in the low altitude airway structure. The NAVAID identification box shall contain the NAVAID name on the first line. The second line shall contain, in the order listed, the frequency, identification letters and morse code.


Figure 3.97 Compass Locator Beacon

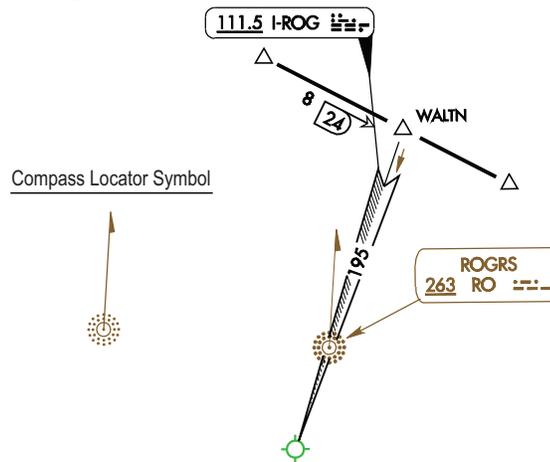

3.7.4.7.8.2 Localizer Course

ILS Localizer Course (either the front, back or both courses) from the airport shall be shown when designated as having an enroute Air Traffic Control function, i.e., when used as a controlling factor in the designation of airways and when designated as serving in the formation of reporting points.

Figure 3.98 ILS Localizer Course with Frequency & Identifier




The ILS course shall depict the magnetic inbound bearing to the airport. The inbound bearing value shall be shown centered on and breaking the course symbol.

ILS courses shall normally be one inch or more in length with a 5° spread. The ILS course may be shortened or extended to preclude the overlapping or overprinting of airways and other text and symbolic data as deemed necessary for clarity of detail. The ILS course shall be broken for the placement of type and symbolization. The ILS course need not be extended to overprint a reporting point to indicate its formation.

ILS localizer courses shown shall be identified by frequency, identification letters and morse code. The identification or call letters shall be preceded by the letter “I” and a short dash.

The “back course” of the ILS localizer, when designated as having an air traffic control function, shall be identified as “BACK COURSE”.

Figure 3.99 ILS Back Course

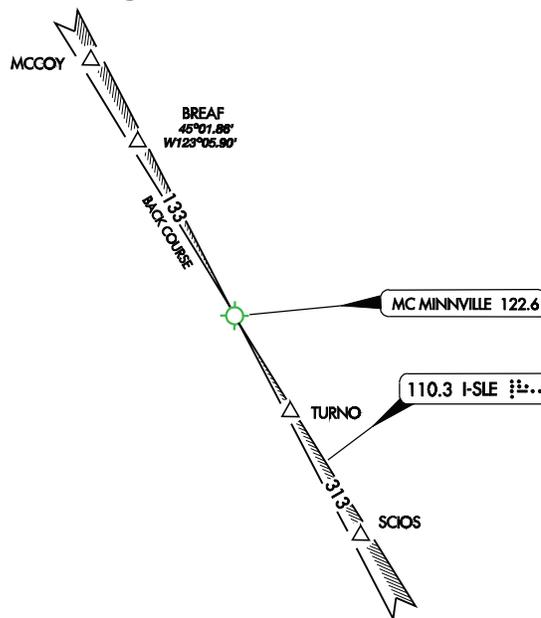

3.7.4.7.9 Non-collocated VOR and TACAN Facilities

VOR and TACAN facilities, not collocated and separated by more than 200' but frequency paired, and with both identifications provided within a common identification box shall provide a note positioned adjacent to the box to indicate that the TACAN facility provides the DME; e.g., “DME from the MARCH TACAN.”

Identification boxes, such as when the frequency paired facilities do not have the same name and/or identification, or as necessary for clarity of information, may be shown separately. When shown separately, the note shall be provided adjacent to the VOR facility identification box.

3.7.5 Flight Service Stations (FSS) & Remote Communications Outlets (RCOs)

FSS & RCO type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications. All RCO frequencies shall be depicted.

References:


[Appendix 47](#) - Flight Service Stations & Remote Communications Outlets

3.7.5.1 General

All Flight Service Stations (FSS), except those with the same name as a NAVAID or designated RCOs shall be shown, symbolized and identified by name, and identifier letters, enclosed within a shadow box as shown.

NAVAIDS having the same name as the FSS and not designated as a Remote Communications Outlet (RCO), shall be considered as the FSS. This same NAVAID identification box will be augmented with a shadow box.

Figure 3.100 FSSs with the Same Name as NAVAID and Not Designated RCO

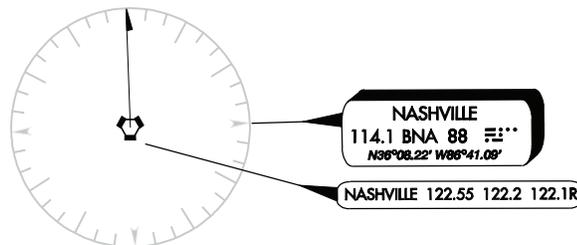


FSSs with the same name as the NAVAID, but with a different identifier, shall be shown independently of the NAVAID; i.e., separate identification box with name and identifier.

The FSS Airport Advisory Frequency shall be indicated in the legend as: “Certain FSSs provide Airport Advisory Service, see A/FD.”

3.7.5.2 FSS Frequencies

FSS frequencies shall be shown centered above the FSS box. If more than one low altitude discrete frequency is shown, then the frequencies shall be in descending order, left to right.

Figure 3.101 FSS Frequencies



FSS standard frequencies in the United States (122.2, 255.4 and emergency 121.5, 243.0) and Canada (121.5, 126.7 and 243.0) shall not be shown. FSS frequencies that transmit or receive only shall be indicated by a “T” or “R”, respectively, following the frequency.

3.7.5.3 FSS Associated with a NAVAID

An FSS and a NAVAID may be collocated on the charts if the FSS and the NAVAID have the same name, identifier, and are located within 10NM of each other. These collocated FSS and NAVAID identification boxes shall be shown as a shadow box.

Frequencies for an FSS collocated with an LF/MF NAVAID shall be shown in black while the shadow box shall be shown in brown.


Figure 3.102 FSS Associated with a NAVAID



3.7.5.4 FSS Not Associated with a NAVAID

FSS not associated with a NAVAID shall be charted as a single line FSS shadow box. FSS name and identifier shall be shown within the box. Those FSS in Canada shall only show the FSS name (no identifier). FSS frequencies other than the standard group of frequencies shall be centered above the shadow box. If more than one frequency is shown, then the frequencies should be shown in the descending numerical order, left to right. FSS shall be charted at its true geographic position indicated by a circle and dot symbol. A pointer shall be used, extending from the FSS shadow box to the location symbol. If an FSS is located at or in close proximity to an airport, then the airport symbol shall suffice for the location symbol.


Figure 3.103 FSS Not Associated with a NAVAID

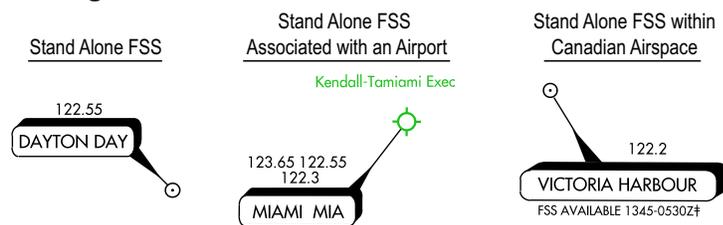

3.7.5.5 Part-time FSS

Part-time FSSs shall be supplemented with a note describing the operational hours and alternate FSS. Operational hours shall be shown as UTC. The note should be placed immediately below the FSS shadow box.

Figure 3.104 Part-time FSS



3.7.5.6 RCO and DRCOs Associated with NAVAIDs

RCOs or Dial-up Remote Communications Outlets (DRCOs) in Canada, may be collocated with NAVAIDs if they are associated with the same FSS, have the same name and are located within 10NMs of each other. These collocated RCOs and DRCOs shall show the FSS frequency(s) remoted to the RCO/DRCO centered above the NAVAID box and the name of the FSS providing the service enclosed within “L” brackets below the NAVID box. If more than one frequency is shown, the frequencies shall be shown in descending numerical order, left to right.

In Canada DRCO frequencies shall be charted with a “D” following the frequency, e.g., 123.55D. When the FSS radio name is longer than the box, the bottom of the box shall be extended left/right, depending upon space limitations.

Figure 3.105 RCOs Associated with a NAVAID




3.7.5.7 RCOs and DRCOs Not Associated with a NAVAID

RCOs or Dial-up Remote Communications Outlets (DRCOs) in Canada, not associated with a NAVAID shall be charted as a single line box. RCO/DRCO FSS name and frequency shall be shown within the box. If more than one frequency is charted, then the frequencies shall be charted with a “D” following the frequency, e.g., 123.55D.

RCO/DRCOs shall be charted at their true geographic position with a circle and dot symbol. A pointer shall be used, extending from the RCO/DRCO identification box to the location symbol. If the RCO/DRCO is located at or in close proximity to an airport, then the airport symbol shall suffice for the location symbol.

Figure 3.106 RCOs Not Associated with a NAVAID



3.7.5.8 International FSS

International FSS frequencies and the station name and identifier letters shall be enclosed in a plain box positioned off-shore in the general area of the station.

Figure 3.107 International FSS



3.7.6 Automated Weather Broadcast System (AWBS)

AWBS type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

References:

[Appendix 48](#) - Automated Weather Broadcasting Systems

3.7.6.1 Automated Weather Broadcast Service Associated with a NAVAID

Automated weather broadcast system(s) associated with a NAVAID shall be indicated by using the appropriate symbol(s) as shown below. If only one service is available the symbol shall be placed in the upper right corner of the NAVAID box. A second service that is available shall have the symbol placed in the upper left hand corner. The circle will be the same color as the associated NAVAID.

Figure 3.108 Automated Weather Broadcast Systems

-  Automated Surface Observing System (ASOS) or Automated Weather Observing System (AWOS)
-  Hazardous Inflight Weather Advisory Service (HIWAS)
-  Transcribed Weather Broadcast (TWEB)


Figure 3.109 Automated Weather Broadcast System Associated with a NAVAID



3.7.6.2 Stand Alone AWOS & ASOS

Stand alone AWOS and ASOS, i.e., not associated with an airport or NAVAID, shall be identified by name, type of facility and frequency and charted as a single box. These systems shall be charted to their true geographical position, indicated by a circle and a dot symbol. A pointer shall be used, extending from the AWOS or ASOS box to the location symbol.

Figure 3.110 Stand Alone AWOS and ASOS



3.7.7 Airspace Information

Airspace type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

References:


[Appendix 49](#) - Airspace Information

3.7.7.1 General Air Traffic Service (ATS) Area Information

The information described in this section is in addition to the boundary or limits of the areas described under individual subject sections. ATS areas include Flight Information Regions (FIR), Control Areas (CTA), and Oceanic Control Areas (OCA).

Information content for ATS areas applicable to the low enroute altitude structure shall be shown. ATS information shall include: type of service, identification name, ICAO ident, vertical limits of control when designated with the upper and lower limits separated by a line, the call sign and all applicable frequencies paired to the appropriate service. ATS information shall be shown as centered, enclosed within a box. The ATS box shall be positioned as near the center of the area as possible. The ATS box and information may be repeated depending up on the size of the ATS area charted. If the ATS box is placed outside the ATS area, then a point shall be used extending from the box into the area.

Figure 3.111 General Air Traffic Service (ATS) Area Information

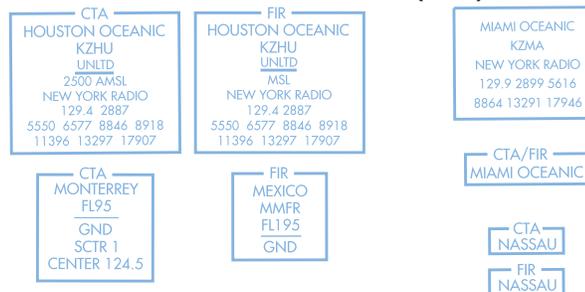

3.7.7.1.1 Type of Service

The type of air traffic service – e.g., FIR, CTA, or CTA/FIR, etc., shall be centered on and breaking the top line of the identification box.

3.7.7.1.2 Identification Name and ICAO Ident

Identification name and, as applicable, the ICAO four letter identifier of the air traffic service shall be shown.

3.7.7.1.3 Vertical Limits

Vertical limits of control, when designated and implemented, shall be shown. The upper and lower limits shall be separated with the placement of a line between.

Should a variance occur or be designated between the lower vertical limits for flight over land areas versus over water areas, such limits shall be shown. To clarify such variances, a note or phrase “OVERLAND” or “OVERWATER” shall be shown centered immediately beneath the applicable altitude.

3.7.7.1.4 Call Sign and Frequencies

The call sign and VHF/UHF and/or HF frequencies, applicable to the appropriate air traffic service, for specific and available A/G voice communications shall be shown, when available. When the call sign is a different name from the air traffic service name, the different name shall be shown as part of the call sign. When specific call signs are not available, or have not been designated for a particular service, only the A/G voice VHF/UHF or HF communications frequencies shall be provided.

The call sign and frequencies provided shall be those which are for use in enroute flight and assigned to the airspace over which the aircraft is operating.

Typical example of content is:

- FIR
- CON (Control)
- METRO (Meteorology)
- INFO (Information)
- RADAR
- CENTER

3.7.7.1.5 Explanatory Notes

Special explanatory notes, as required to cite deviations and/or discrepancies when the informational data within the box does not pertain to the entire area, shall be shown immediately outside and adjacent to the identification box.

3.7.7.2 Airspace Notes

3.7.7.2.1 United States Airspace Note

The following FAA ATS note shall be positioned in an open water area of all charts depicting airspace assignments beyond the territorial limits of the United States.

Figure 3.112 U.S. Airspace Notes

FAA AIR TRAFFIC SERVICE OUTSIDE U.S. AIRSPACE IS PROVIDED IN ACCORDANCE WITH ARTICLE 12 AND ANNEX 11 OF ICAO CONVENTION. ICAO CONVENTION NOT APPLICABLE TO STATE AIRCRAFT BUT COMPLIANCE WITH ICAO STANDARDS AND PRACTICES IS ENCOURAGED

3.7.7.2.2 Foreign Airspace Notes - Canada

The following note for Canada shall be enclosed within a box and positioned inside Canadian airspace near the U.S./Canadian border. If congestion does not permit placement within Canadian airspace, the box may be placed within the U.S. The airspace note shall be placed once between external chart folds.

Figure 3.113 Canadian Airspace Note

NOTE: REFER TO CURRENT CANADIAN CHARTS AND FLIGHT INFORMATION PUBLICATIONS FOR INFORMATION WITHIN CANADIAN AIRSPACE

The following airspace note shall be enclosed within a box and charted at least once within Canadian airspace.

Figure 3.114 Canadian VFR Airspace Restriction

VFR AIRSPACE RESTRICTION
NO VFR FLIGHT WITHIN CANADIAN CLASS & AIRSPACE
PERMITTED ABOVE 12,500' WITHOUT AN ATC CLEARANCE.
FOR ADDITIONAL DETAILS SEE APPROPRIATE PUBLICATIONS.


The following airspace note shall be enclosed within a box and charted at least once within Canadian airspace.

Figure 3.115 Canadian Airspace Note

AIRSPACE CLASSIFICATION (SEE CANADA FLIGHT
SUPPLEMENT) AND OPERATIONAL REQUIREMENTS
(DOD USERS SEE DOD AREA PLANNING AP/1) MAY
DIFFER BETWEEN CANADA AND THE UNITED STATES.

The following Canadian Cruising Altitude diagram shall be shown once with Canadian airspace. Should there not be enough room within depicted Canadian Airspace to show the Canadian Cruising Altitude Diagram, it shall then be depicted in U.S. Airspace, close to the U.S.- Canadian Border.

Figure 3.116 Cruising Altitude Diagram - Canada



3.7.7.2.3 Foreign Airspace Notes - Mexico

The following airspace notes for Mexico shall be boxed, except for the “Report to FAA” note, and positioned in Mexican airspace near the U.S./Mexico border. These airspace notes shall be placed once between external chart folds.

Figure 3.117 Mexican Airspace Notes


ALTIMETER
Use Altimeter setting within Monterrey CTA
QNE above 2000' over
oceanic areas more than 100 NM from coast
QNH at or below 18000'
over land and coastal areas

MEXICAN LOW ALTITUDE AIRSPACE IS
EFFECTIVE TO BUT NOT INCLUDING FL 195

REPORT TO FAA RADIO
PRIOR TO ENTERING ADIZ

The following Mexican Cruising Altitude Diagram shall be shown once within the Mexican airspace.

Figure 3.118 Cruising Altitude Note - Mexico

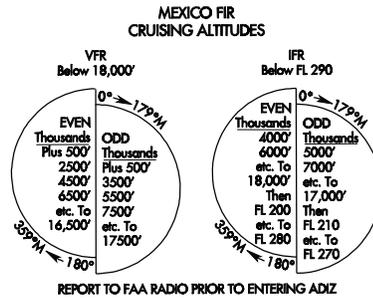

3.7.7.2.4 Foreign Airspace Notes - All Excluding Canada

The following airspace note for Mexico and other foreign airspace, excluding Canada, shall be positioned in the foreign airspace near the U.S. border. The airspace note shall be placed once between external folds.

Figure 3.119 Foreign Airspace Notes - DoD Users

DOD USERS
REFER TO CURRENT DOD (NGA) CHARTS
AND FLIGHT INFORMATION PUBLICATIONS FOR
INFORMATION OUTSIDE OF U.S. AIRSPACE

3.7.7.2.5 Foreign Airspace Notes - HAVANA FIR

The following note shall be positioned near the Havana FIR boundary.

Figure 3.120 Havana FIR Note

CAUTION - ACCURACY OF AIR TRAFFIC
SERVICES RELATIVE TO HAVANA FIR CANNOT
BE CONFIRMED CONSULT NOTAMS

3.7.7.2.6 Other Miscellaneous Airspace Notes

Other miscellaneous airspace notes approved by the appropriate authority should be placed as near the airspace affected as possible.

3.7.7.3 Airspace Types and Boundaries

References:

[Appendix 50](#) - Airspace

3.7.7.3.1 General

There are two categories of airspace or airspace areas: Regulatory (Class A, B, C, D and E airspace areas, restricted and prohibited areas) and non-regulatory (military operation areas (MOAs), warning areas, alert areas, and controlled firing areas).

Within these two categories, there are four types:

- controlled
- uncontrolled
- Special use
- Other airspace

Chart items related controlled airspace can be found in the following locations:

- [3.7.7.3.2](#) - Class B Airspace
- [3.7.7.3.3](#) - Class C Airspace
- [3.7.7.3.4](#) - Class D Airspace
- [3.7.7.3.5](#) - Class E Airspace

Chart items related uncontrolled airspace can be found in the following locations:


- [3.7.7.3.6](#) - Class G Airspace (Uncontrolled) Airspace

Chart items related to Canadian airspace (controlled and uncontrolled airspace) can be found in Section [3.7.7.3.8](#) - Canadian Airspace.

3.7.7.3.2 Class B Airspace

Class B airspace shall be shown as screened blue areas with solid blue boundary lines. The boundary lines define the Class B outer lateral limits. A boxed note shall be shown once within each Class B area. In congested situations the note may be placed outside the Class B area and using a leader and arrow to point into the area. Each note shall uniquely identify the VFR Terminal Area Chart associated with the Class B Airspace.

Figure 3.121 Class B Airspace

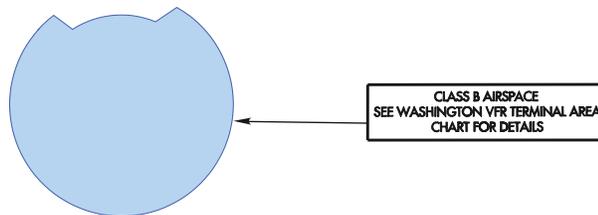

3.7.7.3.3 Class C Airspace


Class C airspace shall be shown as screened blue areas with dashed blue boundary lines. The boundary lines define the Class C outer lateral limits. When Class B and Class C airspace boundaries underlie or coincide, only the Class B and boundary shall be shown. If Class C overlaps Class B only that portion of Class C that doesn't overlap shall be charted.

A letter "C", enclosed by a box, shall be shown following the FAA or ICAO identifier of the primary airport(s) associated with the Class C airspace. Part-time Class C airspace shall be additionally identified by a five-point star "★" following the boxed letter C.

Part-time Class C airspace is indicated in FAA Order JO 7400.9, Airspace Designations and Reporting Points, by the text *"This Class C airspace area is effective during the specific dates and times established in advance by a Notice to Airman. The effective date and time will thereafter be continuously published in the Airport/Facility Directory."*

For additional information on Airport Data Block. See Section [3.7.3.4](#).

Figure 3.122 Class C Airspace

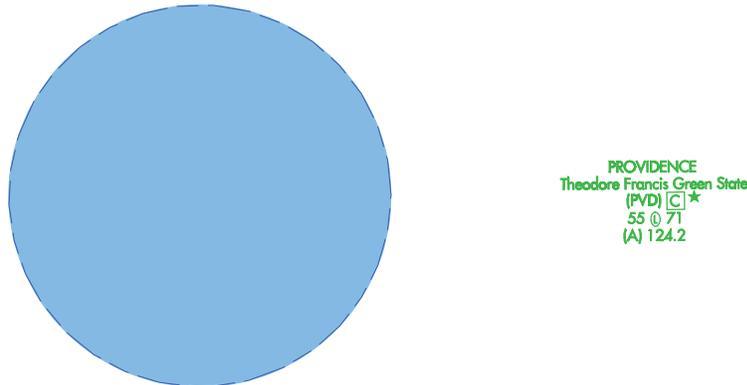

3.7.7.3.4 Class D Airspace

Class D airspace shall be depicted as open area (white) with no boundaries being charted.

A letter “D”, enclosed by a box, shall be shown following the FAA or ICAO identifier of the primary airport(s) associated with the Class D airspace. Part-time Class D airspace shall be additionally identified with the five point star “★” following the boxed letter D.

Figure 3.123 Part Time Airspace - Class D

NEW HAVEN
Tweed-New Haven
(HVN) [D]★
12 0 56
(A) 133.65

Part-time Class D airspace is indicated in FAA Order JO 7400.9, Airspace Designations and Reporting Points, by the text “*This Class D airspace area is effective during the specific dates and times established in advance by a Notice to Airman. The effective date and time will thereafter be continuously published in the Airport/Facility Directory.*”

For additional information on Airport Data Block. See Section [3.7.3.4](#).

3.7.7.3.5 Class E Airspace

Airspace that is not Class B, C, or D, and is controlled airspace, is Class E airspace. Class E airspace, except for offshore airspace, shall be shown as open (white) areas with no boundaries or associated text charted. Federal Airways are Class E airspace areas and unless otherwise specified, extend upward from 1,200' AGL to, but not including, 18,000' MSL.

Class E airspace includes:

- Federal Airways
- Airspace for transition to/from the terminal or enroute environments
- Enroute domestic and offshore airspace areas designated below 18,000 feet MSL

Class E airspace does not include airspace at 18,000 feet MSL and above.

Airway airspace is associated with centerlines of airways that makes up the Federal Airway system and includes Victor Airways, Colored Airways, RNAV T and RNAV TK Routes (See Section 3.7.8 - Airways/Routes). This includes the airspace within a defined width on either side of an airway centerline. Victor and Colored airways also include airspace between lines, based on a set angle, that emanate from airway NAVAIDs.

Foreign airway airspace if charted, only includes the airspace within a defined width on either side of an airway centerline. Russian airway airspace will not be charted.


3.7.7.3.5.1 Offshore Airspace Areas

Offshore Airspace Areas are classified as Class E Airspace and extend upward from a specified altitude to, but not including 18,000' MSL. See Section 3.7.7.3.18.2.

Offshore Airspace Areas shall be shown as open (white) areas with solid brown boundary lines defining each individual area. If a centerline radial or bearing is published within the airspace description, this should be charted, supplemented by a MEA, when designated, and appropriate mileages between applicable NAVAIDs and fixes.

Offshore Airspace Area identifications shall be positioned within their respective area, adjacent and parallel to the boundary symbol, and should appear at least once between external chart folds or as frequently as necessary in order to readily identify the boundary. The second line of text from the boundary shall be the altitude, centered on the area name. Large areas may require text to be placed within the area readable relative to true north. If space does not permit charting within the airspace area, text may be placed outside, using a leader and arrow to point into the area. Special notes, as required, shall be shown centered within or immediately outside the area.

Figure 3.124 Offshore Airspace Area

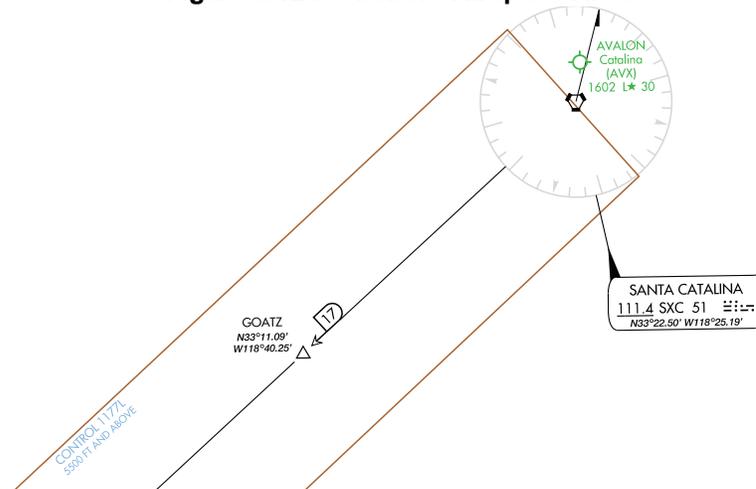

3.7.7.3.6 Class G Airspace (Uncontrolled) Airspace

Class G airspace (uncontrolled) shall be shown as screened brown areas with no boundaries being charted.

Class G airspace (uncontrolled) is the portion of airspace that has not been classified as being Class B, C, D or E Airspace. It includes only uncontrolled airspace from the surface to but not including 14,500' MSL.

Figure 3.125 Class G (Uncontrolled) Airspace



Airways/Routes that pass through Mexican and other international airspace will be depicted as provided by source.

3.7.7.3.7 Mode C Required Areas

Mode C Required shall be shown with a solid blue 30NM circle around the Class B primary airport(s). When Mode C and Class B airspace overlap only the portion of the Mode C boundary that doesn't overlap shall be charted. Additionally, stacked text "Mode C" and "30 NM", shall be shown outside the circle, respectively. Text shall be shown sufficiently to provide ready identification of the boundary.

Figure 3.126 Mode C Required Area



3.7.7.3.8 Canadian Airspace

3.7.7.3.8.1 Canadian Class B Airspace

Canadian Class B airspace having a floor of 12,500' MSL shall be shown and symbolized with the reverse grid symbol (waffle pattern). Class B airspace, shown by the waffle pattern, shall have charting priority over any underlying airspace. Any associated text is not required to be shown.


Figure 3.127 Canadian Class B Airspace with a Floor of 12,500' MSL



3.7.7.3.8.2 Canadian Class C Airspace

Canadian Class C airspace shall be shown and symbolized the same as U.S. Class E airspace. The letter "C", enclosed within a box, shall be shown following the airport ident of the primary airport(s) associated with the Class C airspace. Part-time Class C airspace shall be additionally identified by a five-point star following the boxed letter C.

Figure 3.128 Canadian Class C Airspace



For additional information on Airport Data Block, refer to Section [3.7.3.4](#).

3.7.7.3.8.3 Canadian Class D Airspace

Canadian Class D airspace shall be shown and symbolized as U.S. Class E airspace. The letter “D”, enclosed within a box, shall be shown following the airport ident of the primary airport(s) associated with the Class D airspace. Part-time Class D airspace shall be additionally identified by a five-point star following the boxed letter D.

Figure 3.129 Canadian Class D Airspace



For additional information on Airport Data Block, refer to Section [3.7.3.4](#).

3.7.7.3.8.4 Canadian Class E Airspace

Canadian Class E airspace, shall be shown, and symbolized the same as U.S. Class E airspace. Any associated text, is not required to be shown.

3.7.7.3.8.5 Canadian Class F Airspace

Canadian Class F airspace shall be shown and symbolized the same U.S. Special Use Airspace. Canadian Class F airspace may be restricted airspace or advisory airspace, military operations areas or danger areas.

References:

[3.7.7.3.11](#) - Special Use Airspace (SUA) and Military Operation Areas (MOA)

3.7.7.3.8.6 Canadian Class G and Uncontrolled Airspace

Canadian Class G airspace shall be shown and symbolized the same as U.S. Class G airspace. Any associated text is not required to be shown.

Figure 3.130 Canadian Class G Airspace



3.7.7.3.9 Oceanic Control Areas

Oceanic Control Areas shall be shown the same as U.S. Class E airspace, however, the boundaries are symbolized with a screened blue line. Identifications shall be positioned within their respective areas, adjacent and parallel to the boundary symbols and should appear at least once between external chart folds or as frequently as necessary in order to readily identify the boundary. If space does not permit charting within the airspace area, text may be placed outside, using a leader and arrow to point into the area.

Boundaries or limits of Oceanic Control Areas shall be shown, symbolized by a blue line and identified by name, e.g., NEW YORK OCEANIC. Identification shall be positioned within the area, adjacent and parallel to the delimiting line. See Section [3.7.7.3.18.2](#).

The area encompassed by or within these boundaries or limits shall be considered as controlled airspace.

3.7.7.3.10 Other Foreign Airspace

Airspace outside of the U.S., other than those specified above, shall be depicted as directed by the DoD.

3.7.7.3.10.1 Russian Airspace (AK)

(AK) All Russian controlled and uncontrolled airspace shall be shown and symbolized the same as U.S. Class G Airspace.

Figure 3.131 Class G (Uncontrolled) Airspace



3.7.7.3.10.2 Mexican Airspace

All Mexican controlled airspace shall be shown and symbolized the same as U.S. Class E Airspace.

3.7.7.3.11 Special Use Airspace (SUA) and Military Operation Areas (MOA)

Domestic Special Use Areas with an effective altitude range that penetrates into or falls completely within the enroute low altitude structure shall be shown. All foreign SUAs, except Russian SUAs, shall also be shown.

All SUA text and boundaries shall be shown as screen blue, except for MOAs and Alert areas which shall be shown as screen brown.

All domestic and foreign SUA information shall be tabulated together, except for MOAs which shall be tabulated separately. See [3.5.3](#) - Special Use Airspace (SUA) Tabulation and [3.5.4](#) - Military Operations Areas (MOA) Tabulation.

Special Use Airspace with a floor of 18,000' MSL or above shall not be shown on low altitude enroute charts.

SUA shall be identified by the designated name, e.g., R-4801, positioned within and as near the center of the appropriate area as possible. When SUA area identification type is positioned outside the area, then a leader with an arrow shall be used, extending from the identifier into the SUA area.

Foreign SUA identification, except MOAs, shall be preceded by ICAO country code (ex., CYR-157, MYP-3002).

3.7.7.3.11.1 Special Use Airspaces (SUAs) Charted: U.S. and Alaska

The following is a current list of charted SUAs:

- Prohibited (P)
- Restricted (R)
- Alert (A)
- Warning Areas (W)
- Military Operations Area (MOA)

3.7.7.3.11.2 Special Use Airspace (SUAs) Charted: Canada

The following Canadian SUA areas shall be shown:

- Canadian Advisory Areas (CYA)
- Canadian Danger Areas (CYD)
- Canadian Restricted Areas (CYR)

3.7.7.3.11.3 Special Use Airspace (SUAs) Charted: Mexico

The following foreign SUA areas shall be shown:

- Prohibited Area (MMP).

3.7.7.3.11.4 Special Use Airspace (SUAs) Charted: Cuba

The following foreign SUA areas shall be shown:

- Danger Areas (MUD).


3.7.7.3.11.5 Special Use Airspace (SUAs) Charted: Bahama Islands

The following foreign SUA areas shall be shown:

- Danger Areas (MYD)
- Prohibited Area (MYP).

3.7.7.3.11.6 SUA & MOA External Boundaries

SUA and MOA external boundaries shall be symbolized by tick marks, evenly spaced, perpendicular to the external boundaries, and extending into the area. External boundaries shall only encompass SUA areas with similar names, that adjoin or overlap. SUA internal boundaries shall use a line to subdivide the individual SUAs area.

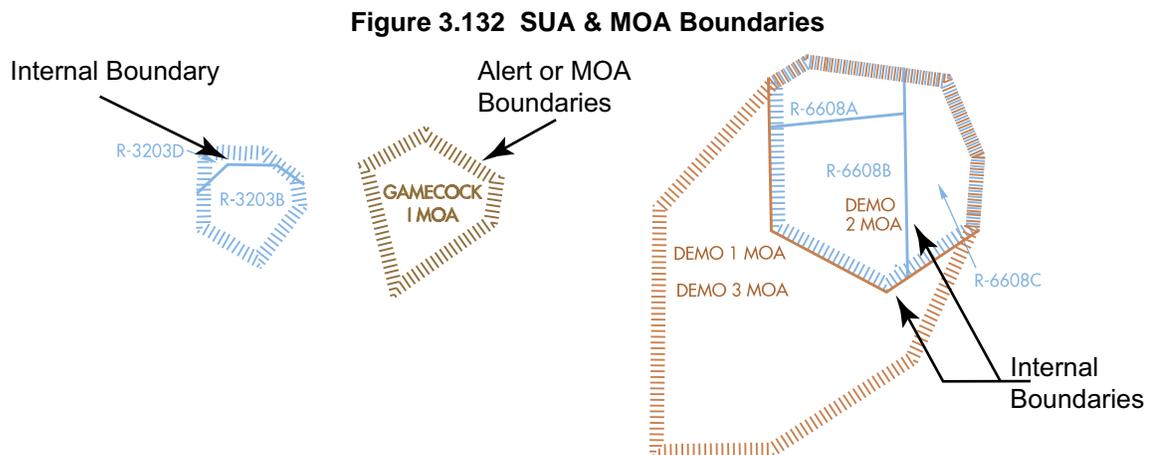

3.7.7.3.11.7 SUA Boundaries - Small Areas

SUAs be too small for portraying the specified line pattern, shall be proportionately reduced the size of the tick marks as to adequately portray the area shape. Areas too small for portraying the line pattern with reduced size ticks, shall be shown using a standardized circle.

Figure 3.133 SUA Boundaries - Small Areas



3.7.7.3.11.8 SUA & MOA Exclusion Area and Exclusion Notes

SUA exclusion area and exclusion area notes pertaining to the enroute low altitude structure shall be shown. Exclusions areas are delineated by a line in the same color as the associated SUA. An exclusion note associated with the each exclusion area shall be shown and placed within the exclusion area as space permits. When the exclusion note is place outside the SUA area due to congestion, a leader with an arrow shall be used to relate the text to the specific area.

Figure 3.134 SUA & MOA Exclusion Area with Notes



Special operational notes pertaining to flight through or over SUA shall be shown as an operational note.


3.7.7.3.12 Special Flight Rules Area (SFRA)

Special Flight Rules Areas located in Part 93 Special Air Traffic Rules are charted only by special request.

3.7.7.3.12.1 Washington DC Metropolitan Area Special Flight Rules Area

The external boundary described by the Special Flight Rules Area for the Washington DC Metropolitan Area shall be charted. Text “WASHINGTON D.C. METROPOLITAN SFRA” labeling the boundary shall be shown stacked and parallel to the boundary, sufficient to readily identify the boundary. A boxed note as shown below shall also be charted.


Figure 3.135 Special Flight Rules Area Boundary (SFRA)

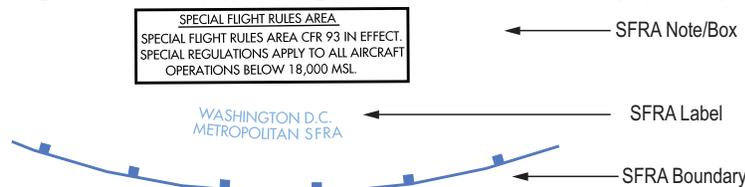

3.7.7.3.12.2 Grand Canyon National Park Special Flight Rules Area

The external boundary described by the Special Flight Rules (SFAR 50-2) for the Grand Canyon National Park shall be charted. Text labelling the boundary shall not be added, however a boxed note as shown below shall be charted.

Figure 3.136 Grand Canyon National Park SFRA Note



3.7.7.3.13 Air Defense Identification Zones (ADIZ, CADIZ) and Defense Areas

Air Defense Identification Zones (ADIZ) and Defense Areas shall be shown, along with defining boundaries. Those charted shall include the Alaska ADIZ, Conterminous U.S. ADIZ and the Canada ADIZ. Identification shall be positioned within the area, adjacent and parallel to the boundary symbol, and should appear at least once between external chart folds or as frequently as necessary in order to readily identify the boundary.

Figure 3.137 ADIZ and Defense Area Boundaries



The Defense Area for the conterminous U.S. shall be shown using the same boundary symbology as the ADIZ. Only along the Mexican and Canadian international boundaries will the text “DEFENSE AREA” be shown. Identification shall be positioned within the area, adjacent and parallel to the boundary symbol, and should appear at least once between external chart folds or as frequently as necessary in order to readily identify the boundary. It shall not be labeled as such, when beyond the U.S. continental limits

When two ADIZs share a common boundary, the dot portion of the symbology shall be shown on either side of a common boundary.

Figure 3.138 Adjoining ADIZ Boundaries



When an ADIZ, or two adjoining ADIZs share a common boundary with another linear features boundary, i.e., FIR, international boundary, projection line, or OCA, the other linear features’ boundary shall suffice for the ADIZ boundary.

When an FIR boundary coincides with the boundary of an ADIZ, the ADIZ symbol without the line shall be positioned adjacent to the FIR symbol, utilizing a common delimiting line.

Figure 3.139 FIR Boundary Coincides with the Boundary of an ADIZ



3.7.7.3.14 Flight Information Regions (FIR)

Flight Information Regions (FIR) shall be shown the same as U.S. Class G airspace, along with defining boundaries. These boundaries shall be symbolized by tick marks, evenly spaced, perpendicular to and extending into the area. Identification shall be positioned within the area, adjacent and parallel to the boundary symbol, and should appear at least once between external chart folds or as frequently as necessary in order to readily identify the boundary. Large FIR airspace areas require text to be placed within the area, readable relative to true north. If a space does not permit charting within the FIR airspace area, text may be placed outside, using a leader and arrow to point to the area.

Figure 3.140 FIR Boundary



When two FIRs share a common boundary, the “tick” portion of the symbology shall be shown on either side of the common boundary equally spaced and alternating.

Figure 3.141 Adjoining FIRs




When oceanic control is implemented within a FIR and is available in addition to the FIR services, the areas shall be designated as CTA/FIR. The CTA/FIR areas shall be shown as open (white) areas (Class E Airspace).

Figure 3.142 Adjoining CTA/FIRs



When air traffic control is implemented within a portion of an FIR area, the portrayal techniques of open area (white) for Class E airspace (CTA/FIR), and the screened area (tone) for Class G/Unclassified airspace (FIR) shall be employed. The boundary shall be supported on either side by the appropriate and applicable FIR or CTA/FIR identification data.

Figure 3.143 CTA/FIR collocated with a FIR & with Class G/Unclassified Airspace



3.7.7.3.15 Air Route Traffic Control Center (ARTCC), Area Control Center (ACC), Remote Center Air/Ground (RCAG) and Peripheral Station (PAL)


U.S. Air Route Traffic Control Center (ARTCC) shall be shown as open (white) areas (Class E airspace), along with defining boundaries. Identification shall be positioned within the area, adjacent and parallel to the boundary and should appear at least once between external chart folds or as frequently as necessary in order to readily identify the boundary. Canadian Area Control Centers (ACC) are comparable to U.S. ARTCCs, and shall be shown similarly.

Figure 3.144 ARTCC or ACC Boundary




Remote Communications A/G (RCAG) site boxes, if possible, should be located at their correct geographical positions or within 25 NM. Canadian Peripheral Stations are comparable to the U.S. RCAG site and shall be shown similarly. Location symbol for the site location shall not be shown.

Figure 3.145 ARTCC Remote Communications A/G (RCAG)



When ARTCC boundaries are collocated with other linear boundaries (ex., ADIZ, FIR), the ARTCC symbology shall be offset into the ARTCC side. The ARTCC or ACC symbology shall not be offset, but centered upon projections or SUA external or internal boundaries.


Figure 3.146 ARTCC Boundaries Collocated with Other Linear Symbols

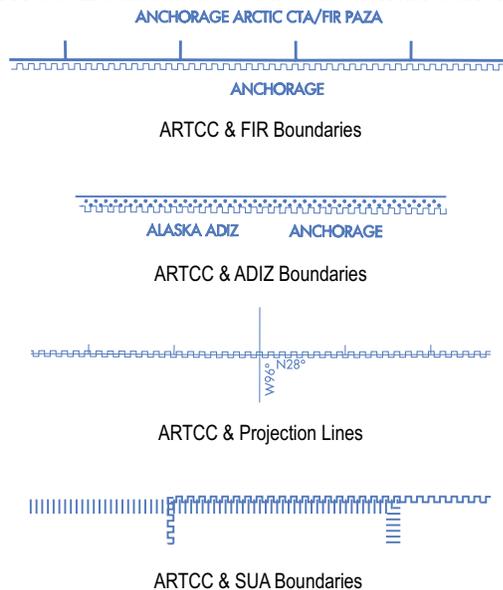

3.7.7.3.16 Continental Control Boundary (U.S.)

The boundary of the U.S. Continental Control (12 mile limit) shall be shown as a continuous unbroken brown line. There shall be no identification of the Continental Control boundary.

Figure 3.147 Example of Continental Control Boundary (U.S.)

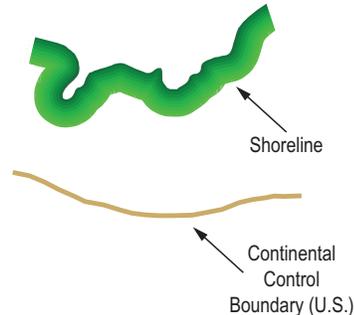

3.7.7.3.17 Altimeter Setting


Altimeter settings for certain areas and the location or point of change of altimeter settings shall be indicated on the charts.

The word “ALTIMETER” shall be shown:

1. at the point of change; i.e., edge of a control area, on a FIR or CTA/FIR boundary or other land area boundary or when within 100 NM of land area; or
2. to indicate an altimeter setting change area such as a control area or a FIR.

“ALTIMETER”, when shown at the point of change shall be supported on both sides by the applicable altimeter setting; i.e., QNH or 29.92 and/or notes, as appropriate.

Figure 3.148 Example of Altimeter Settings

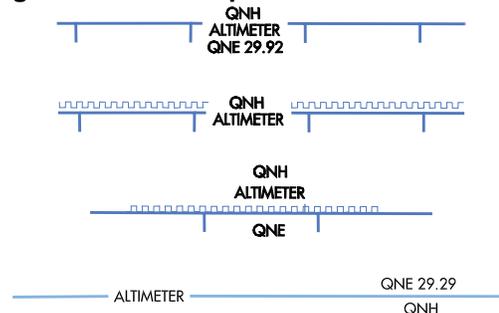

An appropriate note, such as “Use altimeter setting of QNH within control area” may be shown to indicate a specific altimeter setting for a particular area of the chart.

An appropriate note indicating an altimeter setting area, such as control area or a FIR or CTA/FIR shall be shown for each such area unless it is stated that the altimeter setting information shown is applicable for the entire chart area.

Transition level (TL) or transition altitude (TA), may also be shown in conjunction with the word “ALTIMETER”, when appropriate.


Small arrowheads, when deemed necessary, may be used in conjunction with the symbols and/or notes to more clearly define the direction or area to which the change applies.

3.7.7.3.18 Additional Control Areas

3.7.7.3.18.1 Additional Control Areas

Additional Control Areas, both domestic and offshore, shall be shown, plotted as designated, symbolized as open area white, within the uncontrolled airspace screen, as specified in Section 3.7.7.3.18.2.

To specifically define the limits of each offshore, additional control area within that area defined and depicted as controlled airspace boundaries of the Additional Control Areas shall be shown, symbolized by a brown line.

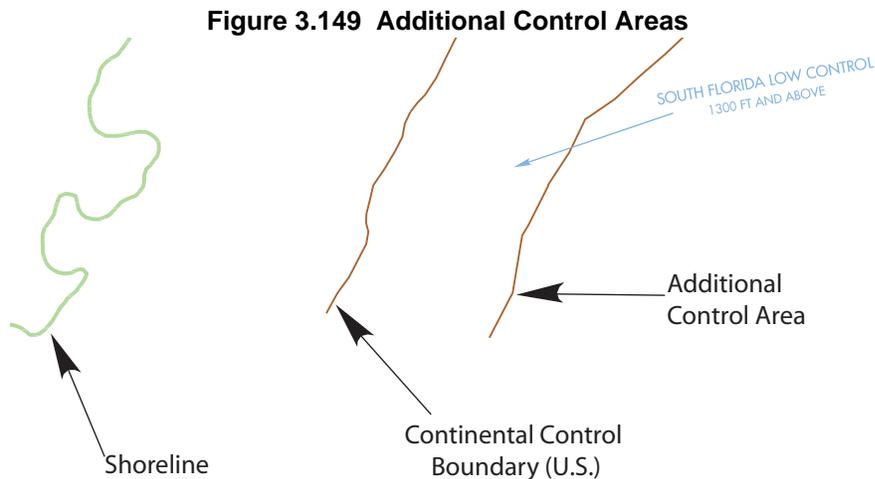

A bearing or radial line shall be used as the center line, supplemented by the MEA, when designated, and the appropriate mileages between applicable NAVAIDS and reporting points.

Notes, as required, pertaining to Additional Control Areas, shall be shown centered within or immediately outside the area. See

3.7.7.3.18.2 Offshore Additional Control Areas

Offshore Additional Control Areas shall be identified and positioned immediately within and parallel to the limits of the area.

Figure 3.150 Offshore Airspace Areas - Vertical Limits



3.7.8 Airways/Routes

Airways/Routes type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

Reference:

[Appendix 51](#) - Airway/Route Types

3.7.8.1 General

Airways/routes designated by the FAA for charting as well as foreign airways/routes approved for depiction by the FAA or DoD shall be shown on the Enroute Low Altitude Charts.

Centerlines shall be partially deleted to avoid overprinting NAVAIDs, intersections, waypoints, and mileage breaks when designated as part of the airway structure. Additionally, airways should be partially deleted whenever text and point symbology (e.g., airports, NAVAIDs, etc.) cannot be relocated.

In addition to partially deleting centerlines to avoid overprinting, bypass symbols should be used in those instances where Victor airways, RNAV routes, or Tracks pass through NAVAIDs, intersections or waypoints and not designated as part of the airway structure. The symbology shall be the same color and line width as the airway.

Figure 3.151 Bypass Symbol



Victor airways, RNAV T and RNAV TK routes predicated on NAVAIDs with charted compass roses, in areas of less congestion, should not be shown with centerlines within the compass rose. Airways or routes will begin immediately after the radial value outside the compass rose.

Notes containing operational or explanatory information, such as, altitude limitations, traversing of SUA area, special Air Traffic rules, etc., shall be shown as required.

Figure 3.152 Supplementary Explanatory Notes

J108 BETWEEN TCS AND INK
NORMALLY UNAVAILABLE WITHIN
RESTRICTED AREAS DAYS MON-FRI

AR5 EXCLUDES THE AIRSPACE
ABOVE FL 430 OUTSIDE THE U.S.

NAVIGATIONAL EQUIPMENT OTHER THAN LF OR VHF REQUIRED


3.7.8.2 Airway/Route Types

All airways charted in Russian controlled airspace shall be shown by a LF/MF centerline, regardless of the NAVAID types designated as part of the airway structure.

3.7.8.2.1 Victor Airways

All Victor Airways shall be shown.

Figure 3.153 Victor Airways

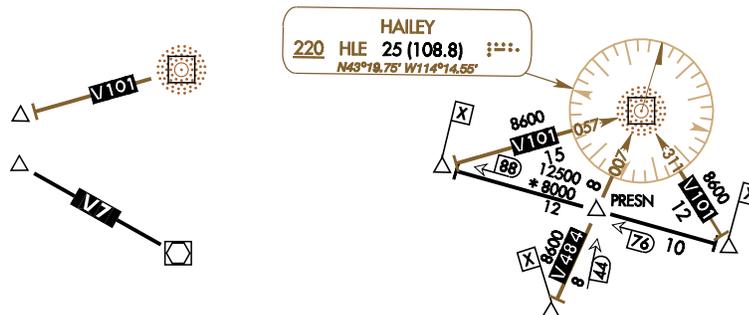

Color for the airway centerline symbology shall be predicated by the type of NAVAID, i.e., VHF/UHF, LF/MF, defining the route. Airway segments predicated on VHF/UHF and LF/MF NAVAIDS should change centerline symbology at the changeover point.

3.7.8.2.2 LF/MF Airway

All LF/MF Airways shall be shown.

Figure 3.154 LF/MF Airway




Color for the airway centerline symbology shall be determined by the type of NAVAID, i.e., VHF/UHF, LF/MF, defining the route. Airway segments predicated on VHF/UHF and LF/MF NAVAIDS should change centerline symbology at the changeover point.

3.7.8.2.3 Oceanic, Atlantic, Gulf, Puerto Rico and Bahamas Routes

Oceanic, Bahamas, Atlantic, Gulf and Puerto Rico routes shall be charted.

Color for the route centerline symbology shall be determined by the type of NAVAID, i.e., VHF/UHF, LF/MF, defining the route. Airway segments predicated on VHF/UHF and LF/MF NAVAIDS should change centerline symbology at the changeover point.


Figure 3.155 Oceanic, Atlantic and Bahamas Routes

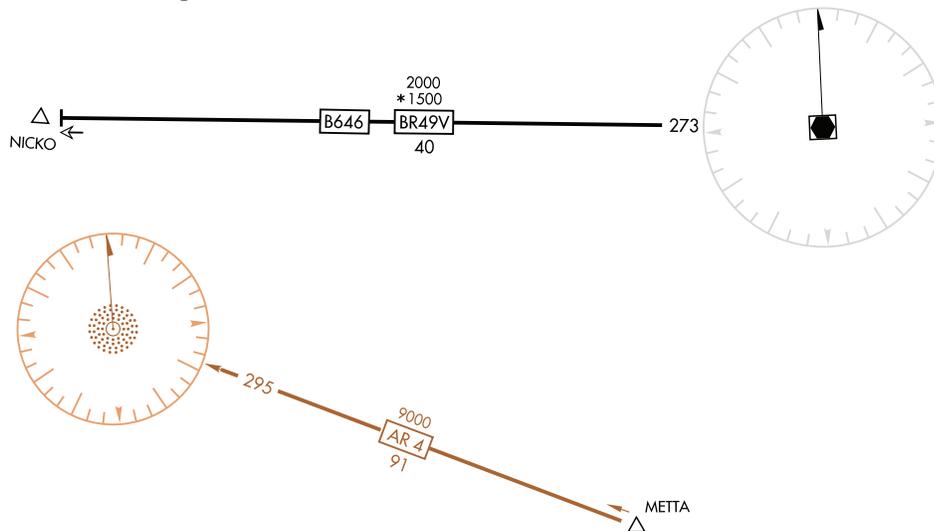

3.7.8.2.4 Air Traffic Service (ATS) Routes

ATS routes shall be charted as illustrated below.

Figure 3.156 Air Traffic Service Routes

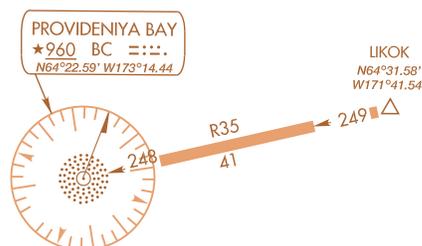


Color for the route centerline symbology shall be determined by the type of NAVAID, i.e., VHF/UHF, LF/MF, defining the route. Airways segments predicated on VHF/UHF and LF/MF NAVAIDs should change centerline symbology at the changeover point.

3.7.8.2.5 Area Navigation (RNAV) T-Routes and TK-Routes

Low altitude “T” and “TK” (helicopter) RNAV Routes will be depicted.

(AK) In Alaska, low altitude “T” RNAV routes, requiring TSO-C145 or C146, shall be shown.

Figure 3.157 RNAV T and TK Routes

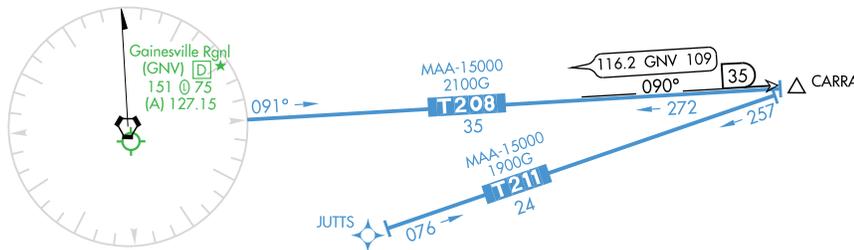

When “T” Routes are coincident with Victor airways, information common to both routes will be shown only once and in black, and information unique to the RNAV Route will be depicted in blue. The center line of the RNAV routes, requiring GNSS, shall not be shown.

Figure 3.158 RNAV T and TK Routes - Coincident



3.7.8.2.5.1 (AK) Chart Notice - GPS/WAAS Navigation Operations in Alaska

A Chart Notice titled ‘Implementation of Instrument Flight Rules (IFR) Area Navigation (RNAV) Operations Using Global Positioning System (GPS) in Alaska’ shall be shown centered below the ‘Corrections, Comments and/or Procurement Note’ and above the OROCA Notice.

Figure 3.159 (AK) GPS/WAAS Chart Note

CHART NOTICE

**Implementation of Instrument Flight Rules (IFR)
Area Navigation (RNAV) Operations Using
Global Positioning System (GPS) in Alaska**

Under SFAR No. 97, operators using IFR-certified TSO C145a and TSO C146a GPS/WAAS navigation systems will be permitted to conduct operations over selected routes in AK beyond the service volume of ground-based navaids at the lowest minimum en route altitude (MEA) based only on route obstacle assessments and ATC two-way voice communication capability.


The MEAs for these routes will be depicted on the IFR Enroute Low Altitude-AK charts in blue type with a ‘G’ suffix. For instance, a GPS MEA of 2000 feet MSL will be depicted as “2000G” in blue. Standard MEAs will be depicted in black type and be ‘stacked’ above the GPS MEA.

See SFAR No. 97 for equipment, training and operational requirements.

3.7.8.2.6 Gulf of Mexico “Q” (RNAV) Routes

Low Altitude RNAV “Q” Routes located only in the Gulf of Mexico area shall be shown. The route designator will use a height level “Q” letter identifier for the prefix with a three digit number (e.g., Q201). All route data shall be shown as black with the exception of waypoint symbology.


Figure 3.160 Q Routes

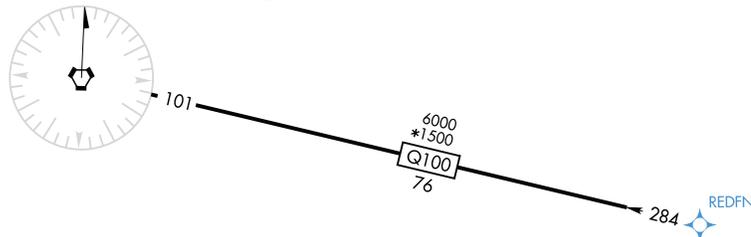

3.7.8.2.7 Direct Routes

Direct routes identified to meet special requirements consistent with the intent and purpose of the IFR Enroute Low Chart series shall be shown when specifically identified by the FAA.

Figure 3.161 Direct Routes

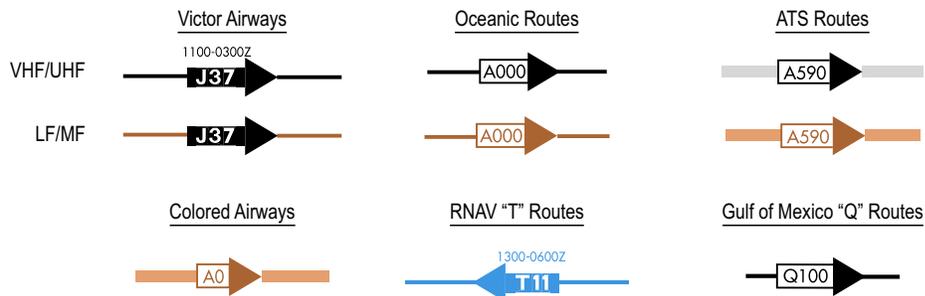

3.7.8.2.8 Unusable Airway/Route Segments

Airways/Routes segments designated by the FAA as unusable, and required for charting, shall be shown.

Figure 3.162 Unusable Airway/Route Segment



The unusable airway/route symbol shall be centered on the unusable airway/route centerline segments. The symbology shall not be broken for, identifications, mileages, changeover points, fixes or mileage break points.

The symbology for a unusable route, however, shall be partially deleted for bearings or radial values associated with the unusable airway/route segments shall be overprinted with lines in a NE to SW direction similar to those used for NAVAID frequencies. See 3.7.4.6.6 - Abnormal Status.

3.7.8.2.9 Substitute Airway/Route

Airways/routes officially designated by the FAA as substitute airways/routes and in effect for at least 28 days in the life cycle of the chart, shall be charted.

Figure 3.163 Substitute Airway/Route Symbol



All substitute airway/route data shall be portrayed in accordance with criteria established in this section and in Section 3.7.8.3 - Airway/Route Data.

An operational note, e.g., “CHECK NOTAMS”, shall be shown when the enroute NAVAID is shut down and the route structure is not materially changed.


3.7.8.2.9.1 Substitute Airways/Routes Not Coincident with Another Airway/Route

A substitute route centerline symbology, not coincident with another airway or route, and the associated data, shall be shown in brown.

NAVAIDs and designated points normally not shown on the Enroute Low Charts, because they do not meet charting criteria, shall be shown when required for the designation of substitute routes. These features shall be added for the period of time the substitute route is in effect and depicted in accordance with the following sections:

- Section 3.7.4 - Radio Aids to Navigation (NAVAIDs)
- Section 3.7.9 - Navigational and Procedural Information.

Figure 3.164 Substitute Airway/Route Non Coincident

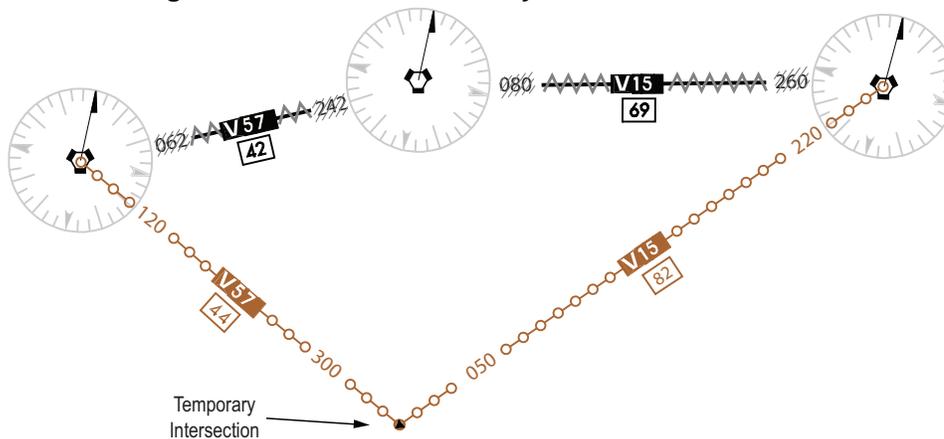

3.7.8.2.9.2 Substitute Airways/Routes Coincident with Another Airway/Route


The substitute route centerline symbology, coincident with another airway or route, shall be shown centered on the coinciding route centerline. Existing route information shall not be over printed by the substitute route symbology.

Substitute route centerline symbology and associated route data shall be shown in brown. The substitute route data is only shown, however, if it doesn't duplicate the airway data of the coincidental unusable route.

Unusable intersections shall be labeled with the text “unusable” under the intersection name.

NAVAIDs affected and shutdown shall be identified as provided in Section 3.7.4.6.6.

Figure 3.165 Substitute Airway/Route Coincident

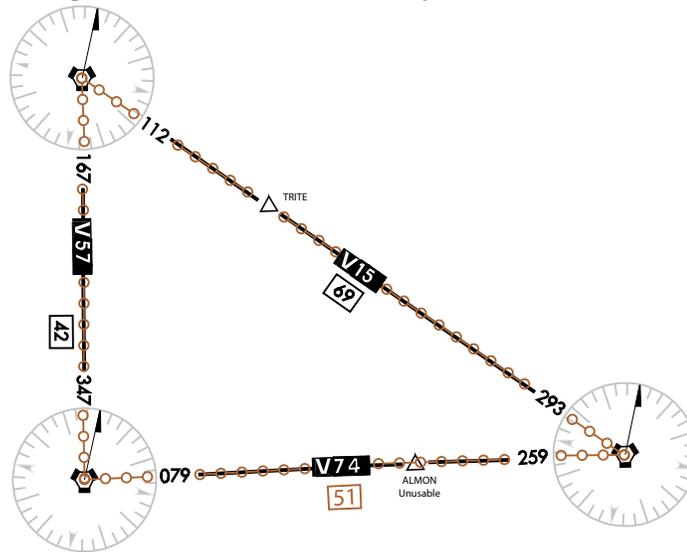

3.7.8.2.9.3 Special Notice for Substitute Route

If substitute airways/routes cannot readily be charted, and/or when provided by source, a chart note may be required, i.e., Safety Alert, NOTAM, etc. An operational note shall be placed in the vicinity of the substitute route, using a leader line when appropriate.

Figure 3.166 Substitute Routes - NOTAM and Special Notice Notes

See NOTAMs or appropriate publications for specific information.

3.7.8.2.10 Military Training Routes (MTR)


IFR (IR) MTRs shall be shown. Those individual segments considered to be alternate entries or exits shall not be shown.

VFR (VR) MTRs having route designators of up to five characters and flight elevation is above 1500' AGL, even though some segments may be below 1500', shall be shown. Those individual segments considered to be alternate entries or exits shall not be shown.

All segments of IR or VR MTRs, having route widths of 5NM or less on both sides of the centerline, shall be shown by a continuous .020" brown line.

All segments of IR and VR MTRs, having a route widths greater than 5NM, on either side of the centerline, shall be shown by a continuous .035" brown line.

Figure 3.167 Military Training Routes (MTRs)

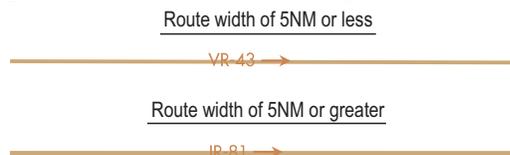

MTRs shall be identified by the route designator, e.g., IR-123, VR-321. Route designators shall be positioned, centered on the unbroken route centerline, and positioned at least once between external chart folds and as frequently as necessary in order to readily identify the route.

Figure 3.168 IR and VR MTRs on Same Route Segment



VR-201-202 →
IR-207 →

The repetitious use of “IR” or “VR” shall be eliminated when two or more IR or VR routes are coincident over the same airspace, e.g., IR-201-205-227. IR and VR MTRs shall always be identified with separate text. In congested areas multiple route designators may be stacked or leadered to the applicable route.

Routes numbered 001 to 099 shall be shown without leading zero digits (e.g. VR-010 shown as VR-10).

Direction of flight for IFR and VFR MTRs shall be indicated by the placement of an arrowhead, centered on the centerline and adjacent to the route designator.

Figure 3.169 MTRs Directional Arrowheads

Single Direction



VR-43 →

All MTRs and altitudes shall be tabulated. See Section [3.5.1](#).

3.7.8.2.11 Uncontrolled Airways

VHF/UHF and LR/MF uncontrolled airways shall be shown when identified by the FAA as required for charting.

Uncontrolled airways shall be symbolized by a black (VHF/UHF) or brown (LF/MF) dashed centerline. Associated airway data shall be depicted black or brown respectively, in accordance with criteria established in the following section, **3.7.8.3** - Airway/Route Data.

Figure 3.170 Canadian Uncontrolled LF/MF Airway


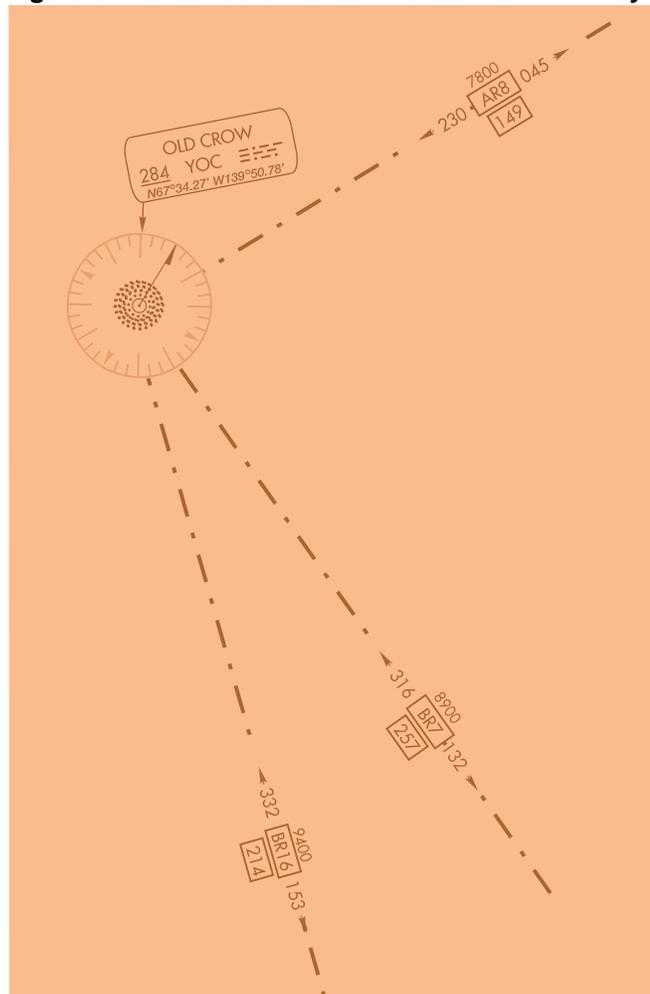



Figure 3.171 Uncontrolled LF/MF & VHF Airways

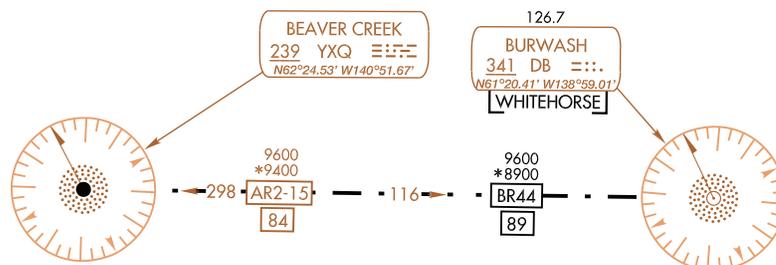

3.7.8.3 Airway/Route Data

3.7.8.3.1 General

Airway and route data (i.e., identification, MEA, MOCA, MAA, segment and total mileage), shall be grouped together.

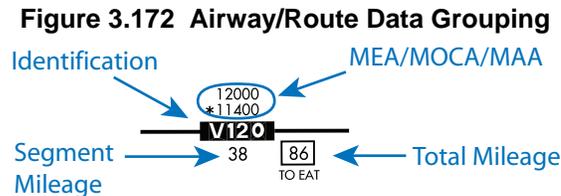

If necessary, to avoid overprinting of other symbology or text, data may be shifted from its normal position.

Partial or complete airway/route data may be omitted when such data cannot be shown for short segments which extend off the chart as long as this data is shown on overlapping or adjacent charts.

The color of the airway/route data is determined by the associated airway/route type.


3.7.8.3.2 Identification

Every airway/route shall be uniquely identified by a letter(s) and number, to indicate the type of airway/route and the specific airway/route.

Victor Airway, RNAV “T” and RNAV “TK” route identification shall be shown as negative type, centered on and breaking the centerlines.

LF/MF, uncontrolled, Oceanic (includes Atlantic, Puerto Rico, Gulf and Bahama), Gulf of Mexico RNAV “Q” airway/route identification shall be enclosed within a box. ATS identification shall not be enclosed within a box.

Victor, LF/MF, Oceanic (includes Atlantic, Puerto Rico, Gulf and Bahama), RNAV “T”, RNAV “TK” and Gulf of Mexico RNAV “Q” airway/route identifications shall be centered on and breaking the centerlines. ATS route identifications shall be centered above the route centerline. Canadian Uncontrolled Airway identifications shall be centered above the route centerline. Bahama Routes shall show the suffix of “V” or “L”, as designated, following the route number, e.g., “BR63V”.

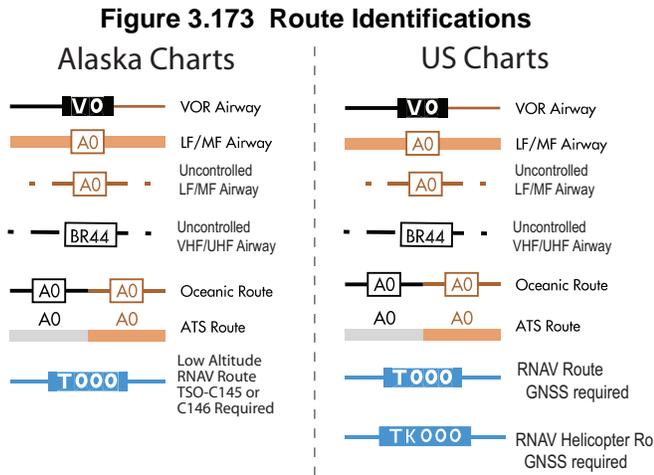

Airways/routes shall be identified and shown aligned with and centrally located on airway segments where necessary, and if possible. Identify at least once between external chart folds and as frequently as necessary in order to readily identify the airway/route.


When two or more airways/routes of the same type have been designated concurrently over the same airspace, i.e., coincidental routes, then identifications shall be shown in numerically ascending order and the repetitious letter of the identifications shall be eliminated. When coincidental routes separate each individual route segment shall be identified.

Figure 3.174 Coincidental Routes of the Same Classification




In congested areas identifications may be offset, either above or below, but should remain flush with the centerline. In extremely congested areas identification may be shown off the centerline and a pointer used from the identification to the airway/route centerline, however, in such cases the identification should remain aligned to the centerline.

Figure 3.175 Airway/Route Identifications in Congested Areas



3.7.8.3.3 Single Direction Airways/Routes


Single direction airways/routes shall be shown with an arrowhead symbol adjoining the airway/route identification and pointing in the direction of flight. ATS route identifications, normally shown above the centerline, shall be enclosed within an identification box with an arrow, and centered on the centerline. Single direction hours of operation, when other than continuous, shall be shown above the route identification in Coordinated Universal Time (UTC).

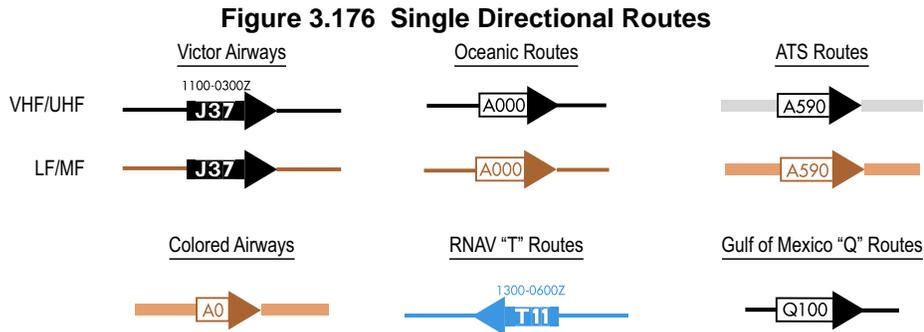

3.7.8.3.4 Radials and Bearings

All airways/routes shall be shown with magnetic radial or bearing values at NAVAIDs.

Airway/route segments predicted on VHF/UHF NAVAIDs shall be shown with magnetic outbound radial values. Those airway/route segments predicated on LF/MF NAVAIDs shall be shown with magnetic inbound bearing values, supplemented with an arrowhead symbol adjacent to the bearing and pointing towards the NAVAID. These value shall be shown centered on and breaking the airway/route centerlines and adjacent to the compass rose if shown.



RNAV "T" and "TK" route magnetic reference bearings values shall be shown above the route centerline, near the NAVAID, fix or waypoint, and supplemented with an arrowhead symbol adjacent to the bearing pointing away from the NAVAID, fix or waypoint. Only those NAVAIDs and waypoints that were part of the original route docket description will be shown with magnetic reference bearings.

Figure 3.178 RNAV T Route Magnetic Reference Bearings



Gulf of Mexico RNAV "Q" route magnetic reference bearing values shall be shown centered on and breaking the route centerline, near the NAVAID, fix or waypoint, supplemented with an arrowhead symbol adjacent to the bearing pointing away from the NAVAID or waypoint.

Figure 3.179 Gulf of Mexico Q Routes



ATS and Oceanic (includes Atlantic, Puerto Rico, Atlantic and Gulf) routes shall be shown with magnetic outbound bearings, centered on and breaking the route centerline, adjacent to the fix or waypoint, and supplemented with an arrowhead symbol adjacent to the bearing pointing arrow from the fix or waypoint.


In congested areas, or to avoid overprinting, radial and bearing values may be offset above or below the centerline, further out or closer to the NAVAID, intersection or compose rose.

3.7.8.3.4.1 Airways/Routes with Unusable Radials or Bearings

Airways at NAVAIDs having bearings or radials restricting usage to certain altitudes, distances, or as entirely unusable, as published in the MEA Consolidation, shall be shown.

Airway bearings or radial values that are entirely unusable at all altitudes and distances shall be over printed with lines in a NE to SW direction using similar symbology as the NAVAID Abnormal Status A note indicating the bearing restriction shall be shown adjacent to bearing. See 3.7.4.6.6 - Abnormal Status.

Figure 3.180 Unusable Radial

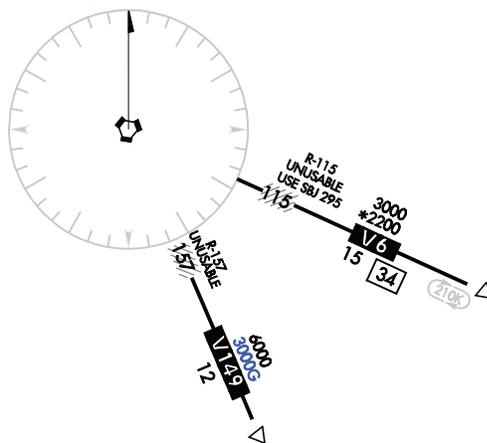


Notes restricting usage of airway or route bearing values to certain altitudes and distances, shall be shown by placing a note adjacent to the bearing value. The bearing or radial values shall not be overprinted with lines in a NE to SW direction.

3.7.8.3.5 Minimum Enroute Altitudes (MEA), Minimum Obstruction Clearance Altitude (MOCA) and Maximum Authorized Altitudes (MAA)

Minimum Enroute Altitudes (MEA) shall be shown, normally positioned above the airway/route identification box. MEAs for RNAV “T” and “TK” routes will be identified with a “G” suffix. RNAV MEAs for GNSS RNAV aircraft will be depicted in blue type.

Figure 3.181 MEAs

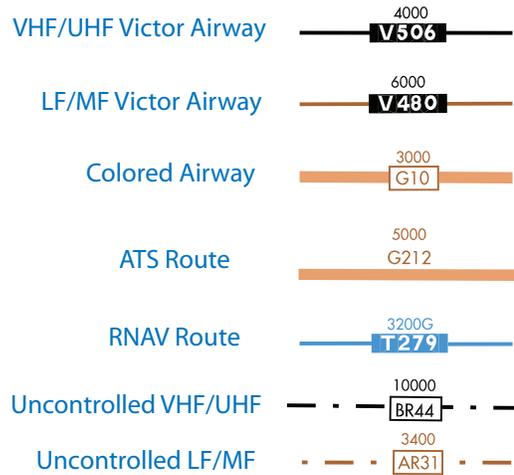


Airway segments designated as having a different MEA in each direction shall show the lowest altitude next to the airway symbol or identification box. The MEA figures shall be supported by arrowheads (the same as used to designate the formation of reporting points) (see [Figure 3.182](#)), centered on the MEA, parallel with the airway and pointing in the appropriate direction.

Figure 3.182 Different MEAs



Minimum Obstruction Clearance Altitude (MOCA) shall also be shown when lower than the minimum enroute altitude. When shown, the MOCA shall be preceded by an asterisk (*) and shall be positioned as prescribed for the MEA. The MEA shall then be relocated directly above the MOCA.

Figure 3.183 MOCAs

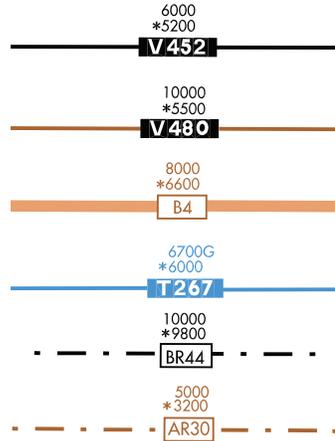

Maximum Authorized Altitude (MAA) shall be shown centrally positioned above the MEA. The MAA value shall be preceded by the appropriate abbreviation, e.g., MAA-14000.

Figure 3.184 MAAs



Figure 3.185 MEAs and MAAs





Figure 3.186 MEA and MAA Along Uncontrolled Airways

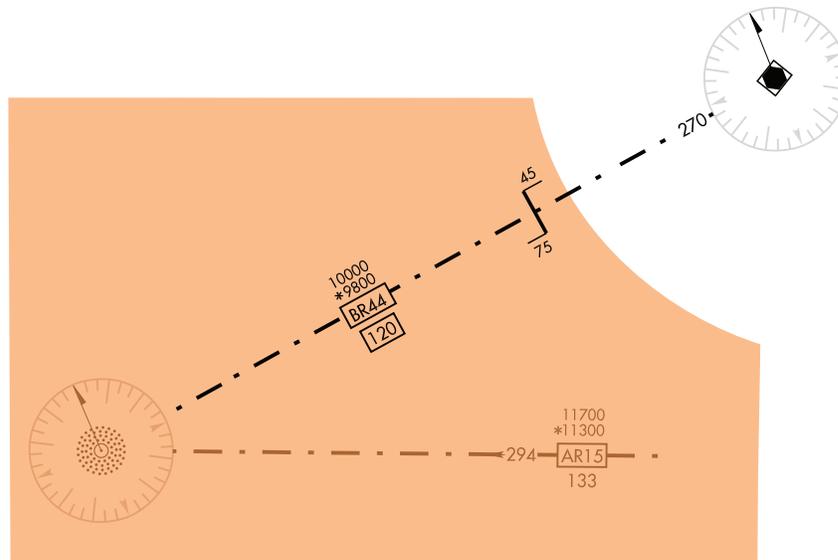


MEA, MOCA, and MAA changes along a route, when established at fixes other than NAVAIDS, shall be shown using “T” symbols. When there is no named fix involved, a symbol “x” shall be shown between the altitude change symbols to indicate mileages thereto. Airway/route centerlines shall always be broken when the altitude change symbol is shown. Only one MEA, MOCA and/or MAA value shall be shown between the change symbols and/or NAVAIDS.

Figure 3.187 “T” Symbol



Figure 3.188 Altitude Changes Along a Route

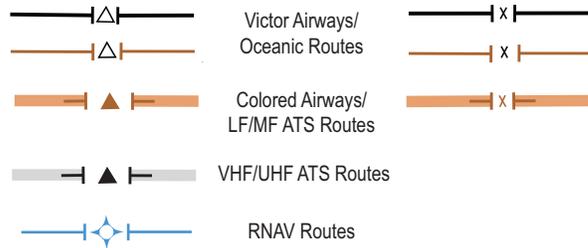

NAVAIDS used in designating a change in MEAs, MOCAs, and/or MAAs shall be identified. Normally, these NAVAIDS are located on the chart and are identified. NAVAIDS, however, located off the chart, used in designating altitude changes along airways, shall be identified as described in Section 3.7.9.1.4.

3.7.8.3.5.1 Direction of Flight Indicator (Canadian)

Within Canadian airspace, when the required cruising altitude is in conflict with the Cruising Altitude Diagram (Figure 3.114), the word “EVEN” with an arrowhead shall be shown adjacent to the MEA, normally to the right, indicating the even altitude direction of flight.


Figure 3.189 Direction of Flight Indicator (Canadian)



3.7.8.3.6 MEA Gap

Navigational signal gap notes, e.g., “MEA GAP”, shall be shown above route segments between the NAVAIDs, fix or mileage breaks defining the route segment where the signal gap exists. The “MEA GAP” note shall be to the right of airway/route identification if one is shown in that location. If a VOR changeover point is designated in conjunction with an MEA GAP, the gap note should be placed in proximity to the changeover point so there will be no question concerning the probable location of the signal gap.

Figure 3.190 MEA Gap

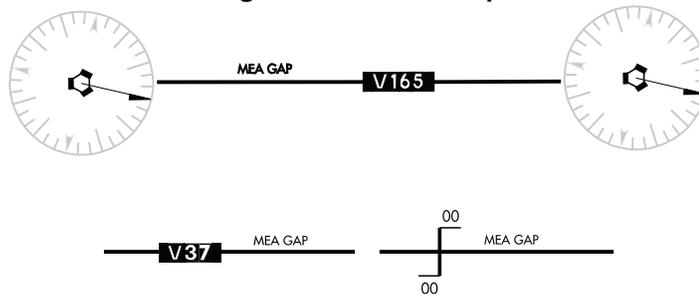

3.7.8.3.7 Minimum Crossing Altitudes (MCA) and Minimum Turning Altitudes (MTA)

MCAs and MTAs associated with a NAVAID or fix shall be shown with the MCA/MTA symbol (flag containing an “X”) attached to the top of the NAVAID or fix symbol. The flag should be orientated to drape downward. In congested areas, the MCA/MTA symbol may be rotated, shortened or attached elsewhere on the NAVAID or fix symbol. MCA/MTA textural information shall consist of route identification, altitude and direction. MCA/MTA flag symbol and identification shall be shown in the same color as prescribed for the airway to which they pertain.

Figure 3.191 MCA/MTA Flag Symbol



For a fix, the information shall be centered below the fix name. MCA text associated with fixes, if an MTA has not been established at the same location, need not include the text “MCA”. MTA text associated with fixes will always include the text “MTA”. When both an MCA and an MTA are associated with a single fix, the lines of associated text be identified as “MCA” and “MTA” respectively.

Figure 3.192 MCA and MTA Data at a Fix


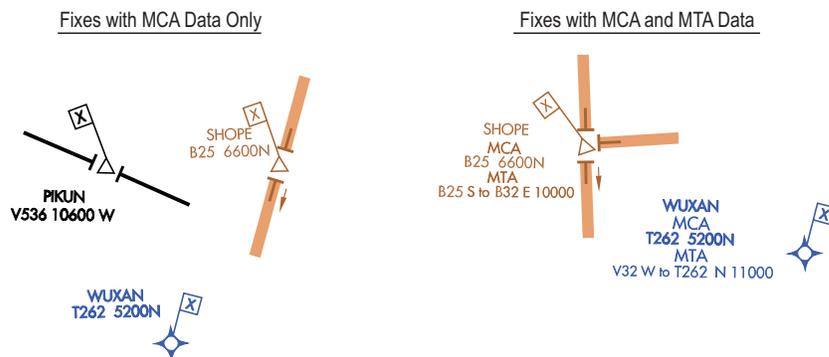


Figure 3.193 MCA & MTA Data Complex Example




For a NAVAID, the information shall be positioned in close proximity to the NAVAID symbol or facility box. When associated with a NAVAID, both MTA and MCA text shall always be preceded by identifying “MTA” or “MCA”.

Figure 3.194 Minimum Crossing Altitudes (MCA) at a NAVAID


MCA Information Adjacent to MCA Flag

MCA Information Adjacent to NAVAID ID Box

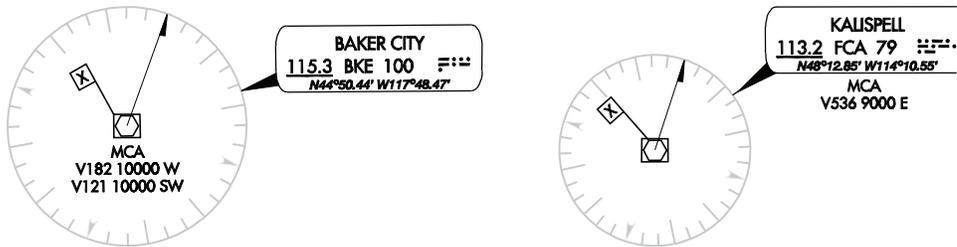


In areas of congestion when MCA and/or MTA data cannot be positioned in close proximity to the subject symbol or facility box, the text may be leadered to the symbol and shall always include identifying “MCA” or “MTA” text for clarification.

Figure 3.195 MCA in a Congested Area with Leader Line

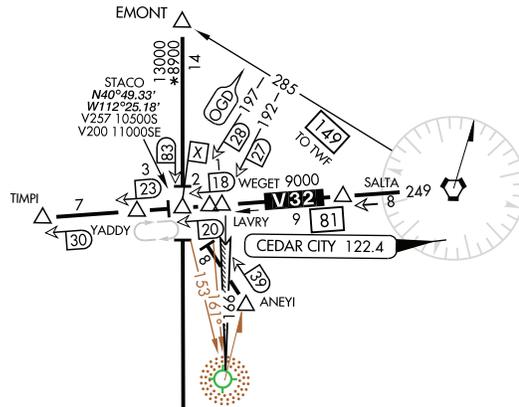

Multiple MCA data, applicable to a single point, may be consolidated when altitudes and direction of flight are identical, precluding unnecessary duplication, e.g., V11-181-238 6800W, V49-81 4400W. MCA data may not be consolidated with MTA in a single note, but must be listed separately, each restriction clearly prefaced by “MCA” or “MTA”.

Figure 3.196 Multiple Minimum Crossing Altitude (MCAs)

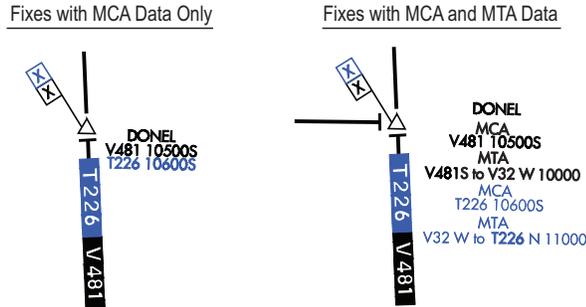


Multiple MTA data, applicable to a single point, may not be consolidated and must be charted exactly as sourced.

3.7.8.3.8 Minimum Reception Altitudes (MRA)

MRAs shall be shown and identified by a flag symbol attached to the top point of the associated symbols. MRA flag symbol shall be oriented so that the flag portion drapes downward either to the left or right. In congested areas, the flag symbol should be rotated, shortened or attached elsewhere on the fix symbol. Text for an MRA shall consist of “MRA” and the altitude, centered below the fix name. MRA symbol and identification shall be shown in the same color as prescribed for the airways to which they pertain.

Figure 3.197 Minimum Reception Altitudes (MRA)




3.7.8.3.9 Mileage Distances

Two types of mileages may be both shown on an airway/route, segment mileage and box mileage.

Segment mileage shall be shown for each route segment. These segment mileages should be centered below each airway/route segment midpoint. If an airway/route identification is shown, the segment mileage should be placed below the identification. In congested areas, the mileage distances may be offset or in extremely congested areas, positioned above the route.

Figure 3.198 Segment Mileages

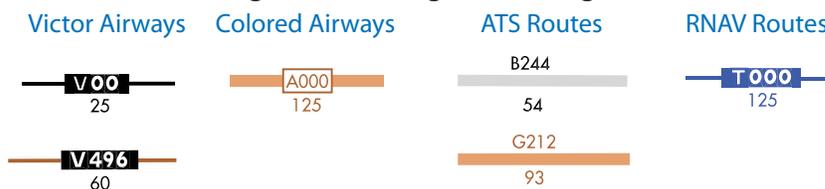

Box mileages shall be shown for each airway/route only between NAVAIDs, NAVAIDs and compulsory fixes, and/or between two compulsory fixes. Box mileage shall not be shown on RNAV “T” and “TK” Routes.

Box mileage shall be enclosed within a box and positioned below and parallel to the route identification. If a segment mileage is present at the same location, the box mileage shall be offset to the right. In congested areas, box mileages may be offset along the route. In extremely congested areas, box mileages may be placed above the route.

In congested areas, the type size may be reduced and the mileage box proportionally reduced.



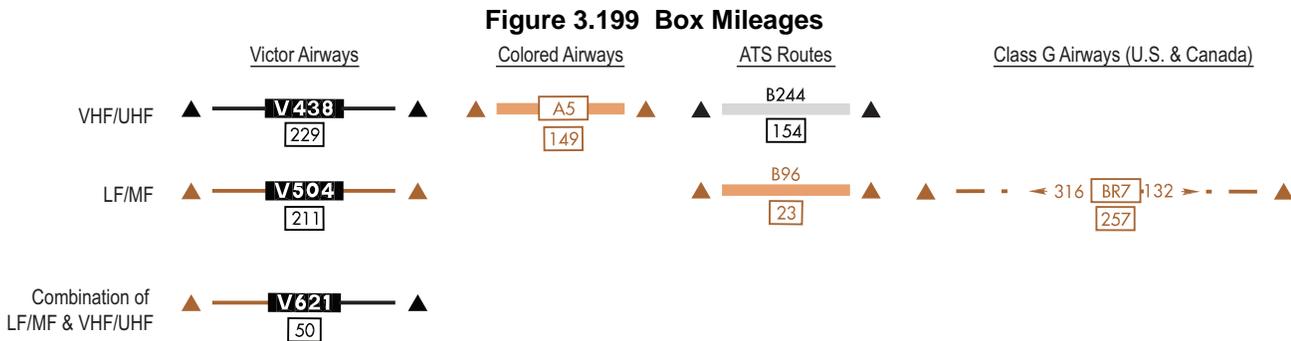


Figure 3.200 Box Mileages Offset by Segment Mileage




On coincidental airways/routes, box mileages shall be positioned below their associated airway/route identification, shifting segment mileage as necessary. If coincidental airways/routes diverge, the box mileages shall then be positioned below their respective airway/route identifications.

Figure 3.201 Box Mileages - Coincidental Routes

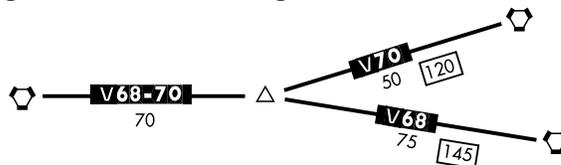


To clarify which NAVAID or fix a box mileage is referring to, a “TO” note shall be used. When the “TO” note is referring to a NAVAID, only the NAVAID identifier shall be shown. For a compulsory fix, only the name of the fix shall be shown. The “TO” note shall be shown below the box mileage. In congested areas, the note may show to the right of the box mileage.

Figure 3.202 Box Mileages - “TO” Notes



In the absence of fixes and NAVAIDs, the symbol “x” shall be used to indicate mileage breaks and intersections or airway/route turning points. Mileages shown for this purpose shall not be boxed.

Figure 3.203 Mileage Breaks



3.7.8.3.10 VOR Changeover Points (COP)

COPs shall be shown except for those at the midpoint between two NAVAIDs or a doglegs. COP symbols shall be centered on and perpendicular to the route, located at the proper distance from the defining NAVAID. When located at intersections or mileage breaks, the COP symbol shall be broken and not touch the intersection or mileage break. Mileages shall be shown in whole miles. Mileages from the COP to the NAVAIDs shall be positioned outside and parallel with the short ‘pointer’ line. COP mileages shall be omitted when the COP is located at an intersection with a DME mileage on the route.

Figure 3.204 Changeover Points (COP)





Figure 3.205 Changeover Points (COP) - LF/MF Establishing COP

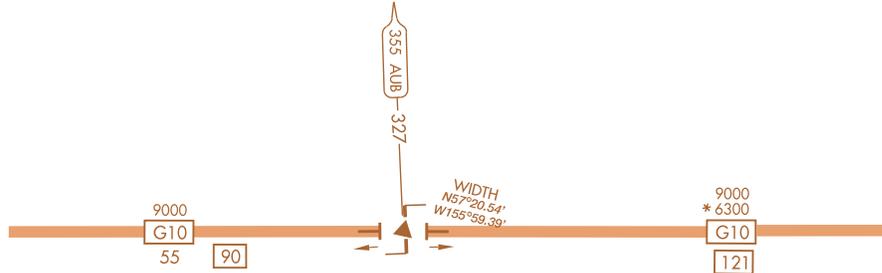

NAVAIDs used in establishing VOR airway COPs shall be identified. Normally, these NAVAIDs are located on the chart and identified. However, NAVAIDs located off the chart used in establishing COPs along airways shall be identified as described in Section 3.7.9.1.4.

Figure 3.206 Changeover Points (COP) - LF/MF with DME


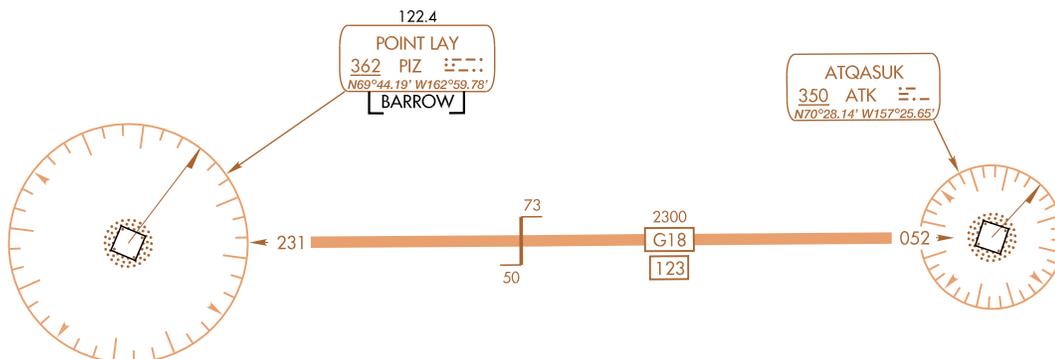


Figure 3.207 Canadian Class G Airway Changeover Points (COP)

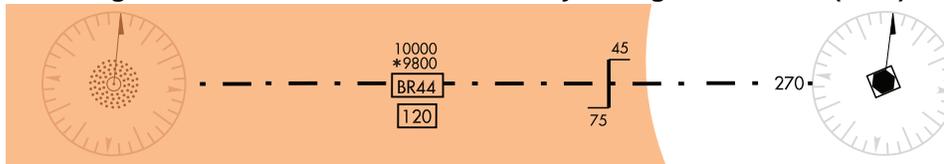

3.7.9 Navigational and Procedural Information

Navigational and Procedural Information type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

References:

[Appendix 53](#) - Navigational & Procedural Information

3.7.9.1 Fixes

3.7.9.1.1 Operational Notes

Operational notes pertaining to fixes shall be shown.

Figure 3.208 Operational Notes



3.7.9.1.2 Flyover Symbolology

If the fix is designated as a flyover then the appropriate symbol, waypoint or fix shall be enclosed in a circle.


Figure 3.209 Flyover Symbolology



3.7.9.1.3 Radio Intersections & DME Fixes

Intersections and DME fixes designated for enroute low charting shall be identified by name and with a compulsory or non-compulsory reporting function. All low makeups associated with an intersection or fix shall be shown. Fixes associated with a VHF/UHF route shall be shown in black and those associated with a LF/MF route shall be shown in brown.

Figure 3.210 Radio Fixes

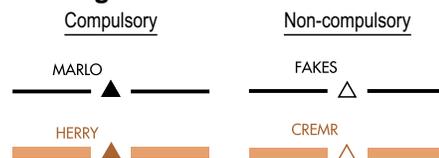

Offshore fixes without makeups and not associated with a route shall be shown in brown.

Figure 3.211 Offshore Fixes without Makeups



No additional name is necessary when the NAVAID and the fix have the same name. NAVAID name shall suffice for both.

When no misinterpretation will result, same name fixes applicable to LF/MF and VHF/UHF systems shall be identified (name) only once, in black.

3.7.9.1.3.1 Radio Fix Geographic Coordinates

Coordinates shall be shown for:

- fixes with compulsory reporting function,
- fixes beyond the continental control boundary,
- fixes charted with a holding pattern,
- or fixes on ATS routes.

Coordinates shall be stacked and placed below the intersection/fix name. Coordinates type shall be the same color as the fix name and symbol.

Figure 3.212 Radio Fix Geographic Coordinates



3.7.9.1.3.2 Radio Fix Make Ups

3.7.9.1.3.2.1 Non DME Radio Fix Makeups

Radio fixes with a makeup defined from a NAVAID without DME capability which is located on the same route as the radio fix, shall be shown with a solid facility arrow symbol positioned below and parallel to the route, adjacent to the fix symbol. VHF/UHF NAVAID facility arrow symbols are black and point toward the fix, and LF/MF NAVAID facility arrow symbols a brown and point toward the NAVAID. In congested areas, the facility arrows may be placed above the routes.

Figure 3.213 NAVAIDS without DME Capability



3.7.9.1.3.2.2 DME Radio Fix Makeups

Radio fixes with a makeup defined from a NAVAID with DME capability, i.e., VOR/DME, TACAN, VORTAC and NDB/DME, which is located on the same route as the radio fix, shall be shown with an open DME arrow symbol positioned below and parallel to the route, adjacent to the fix symbol. In congested areas, DME arrows may be placed above the route. Mileage associated with a DME make up should be the same as the route segment mileage; if not, then the DME mileage shall take precedence and the segment mileage will be adjusted.


Figure 3.214 NAVAIDS with DME Capability



3.7.9.1.3.2.3 DME “Boats”

DME “boats” shall be used for each DME fix makeup beyond the first fix, along a route. The mileage from the NAVAID to the fix shall be placed within the DME boat and positioned below, parallel to the route and adjacent to the fix. In congested areas, DME boats may be placed above the routes and/or reduced in size. Mileage associated with a DME make up should be the same as the sum of the individual route segment mileages; if not, then the individual route segment mileages shall be adjusted so that the sum is equal to the DME mileage.

Figure 3.215 DME Boats




3.7.9.1.3.2.4 Off Route Radio Fix Makeups

Fix makeups defined from NAVAIDs off route shall be shown with a radial or bearing line between the NAVAID and the fix. Radial and bearing lines shall be shown only on the chart where the fix is located.

Makeups from a VHF/UHF NAVAID with only a radial value shall end with a facility arrow pointing toward the fix. Fixes with an additional DME mileage makeup shall end with a DME boat. The boat should be placed above and on the radial line.

Makeups from a LF/MF NAVAID with only a radial value shall end with a facility arrow pointing toward the NAVAID.


Figure 3.216 NAVAIDs Used for Fix Makeups

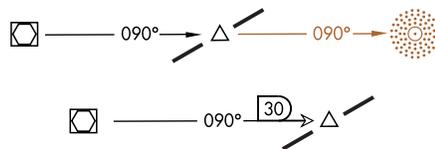

3.7.9.1.3.2.5 Offshore Fixes Not Falling within Chart Coverage

Offshore fixes not falling within chart coverage shall be indicated by the use of a lead name supported by the geographic coordinates.

Figure 3.217 Radio Fix Makeup for Offshore Fixes

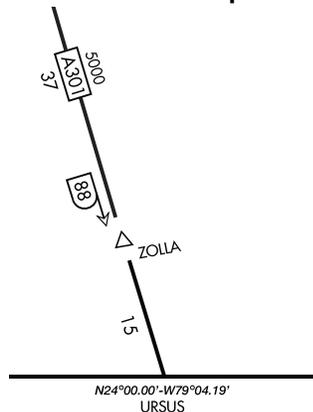


3.7.9.1.3.2.6 Magnetic Radial/Bearing Values

Radial and bearing magnetic values shall be placed on and breaking the radial/bearing line on the half nearest the reporting point for VHF/UHF NAVAIDs or on the half nearest the NAVAID for LF/MF NAVAIDs.

Radial values shall be outbound and shown in black and bearing values shall be inbound and shown in brown.

Figure 3.218 Magnetic Radial/Bearing Values



3.7.9.1.4 Facility Locator Boats

Facility locator boats shall be used to provide NAVAID information for fix makeups, establishing Minimum Enroute Altitude (MEA) change and Victor Airway COPs. They shall consist of frequency, no voice underline, identification, frequency protection, channel and paired frequency, and “Y” mode.

Figure 3.219 VOR and VOR/DME Capability Facility Locator Boats

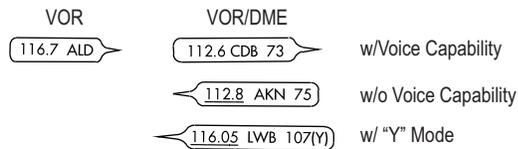


Figure 3.220 NDB and NDB/DME Facility Locator Boats



Facility locator boats are used whenever a NAVAID that defines a fix, establishes MEA changes or Victor Airway COPs, is located beyond the chart neatline. Facility locator boats can be used to minimize chart clutter when defining fixes within a chart. When radials/bearings are long and shortening them is necessary for clarity or congestion, facility locator boats should be used.

Figure 3.221 Facility Locator Boats


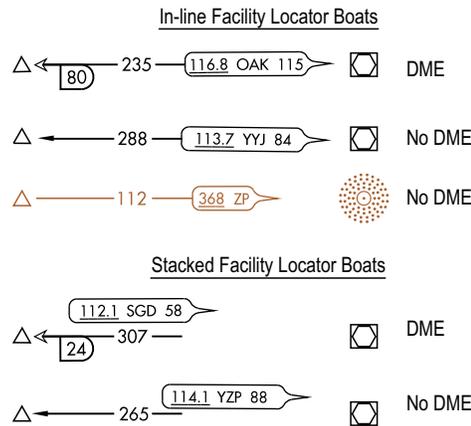



Figure 3.222 Facility Locator Boats

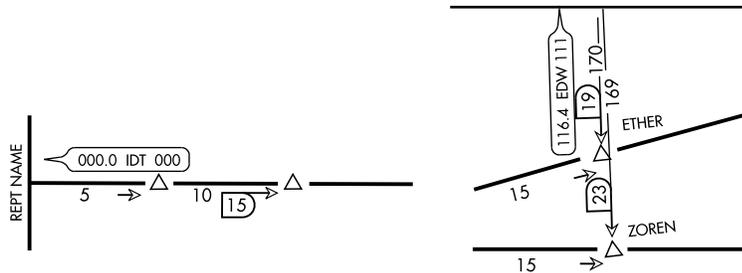

Facility locator boats shall be centered on the end of radials and point toward the NAVAID used in the formation of the fix. When used on the end of LF/MF bearings, the bearing arrowhead shall be omitted. In congested areas, a facility locator boat should be placed either above or below, and parallel to the radial or bearing line.


In very congested areas, facility locator boats should be shortened to contain only the NAVAID identification.

Figure 3.223 Facility Locator Boats in Congested Areas

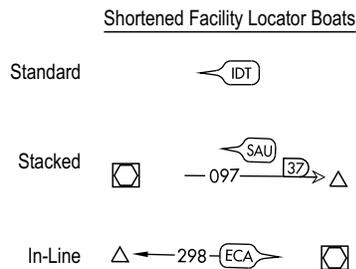

When locator boats are associated with a NAVAID that is published as “Shutdown”, the applicable frequency and/or channel shall be overprinted with diagonal lines in a NE to SW direction.

Figure 3.224 Facility Locator Boats - Unusable NAVAID



3.7.9.1.5 RNAV Waypoints

RNAV waypoints required for enroute low charting shall be shown and identified by name and symbolized with either a compulsory or noncompulsory reporting function. Enclose the waypoint if the waypoint is designated as a flyover waypoint. Symbol, identification and coordinates shall be in blue.

Figure 3.225 RNAV Waypoints Reporting & Flyover Function



Waypoints not part of a route description and those located on or beyond the boundary of the U.S. Continental Control (12 mile limit) shall be shown with geographic coordinates. Coordinates shall be stacked below the waypoint name and shown to the hundredth of a minute. Waypoints which are part of a route description or are located within the U.S. Continental Control shall not have coordinates charted.

Figure 3.226 Waypoints - Not Part of a Route Description



Waypoints shall not be shown if located in the same geographical position as existing reporting point or NAVAID.

3.7.9.2 Computer Navigation Fixes (CNF)

CNFs shall be shown and identified by name, enclosed within parentheses. CNFs shall use the same symbol as a mileage break point, e.g., “x”.

Figure 3.227 Computer Navigation Fixes





Figure 3.228 Computer Navigation Fixes - Victor Airway Examples

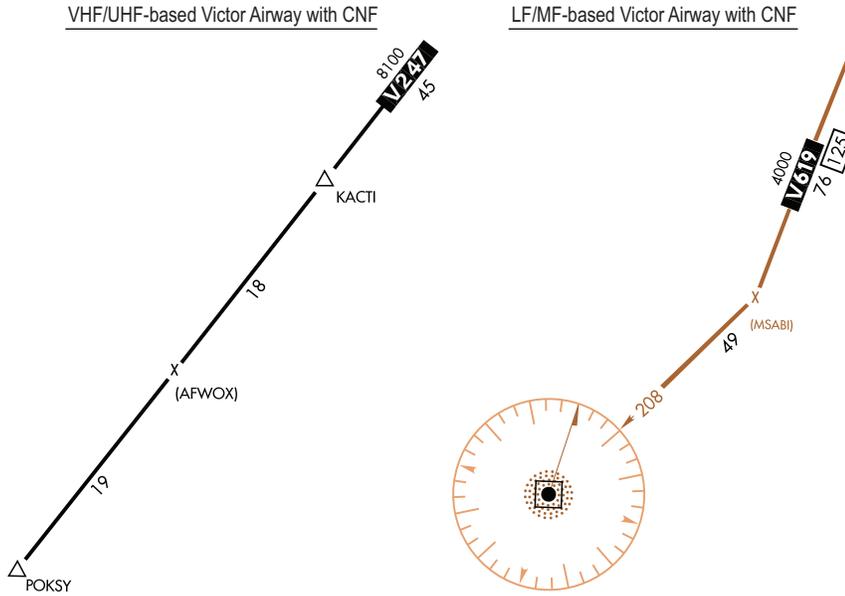


3.7.9.3 Holding Patterns

Holding patterns approved by the FAA for enroute low charting shall be shown.

3.7.9.3.1 NAVAID-based Holding Patterns

Only one holding pattern shall be charted at an intersection or NAVAID. Holding patterns located on routes should be shown as close to the point of holding as possible and offset from the airway centerline to avoid overprinting.

Figure 3.229 Conventional Holding Patterns



Maximum restricted airspeeds shall be depicted within the holding pattern symbol. For restricted airspeeds, 210 KIAS applies to altitudes above 6000 feet to and including 14,000 feet and 175 KIAS applies to all altitudes.

Figure 3.230 Holding Patterns with Speed Restriction



Off route holding patterns shall be shown with radial or bearing lines for positioning and alignment. Holding patterns based on LF/MF NAVAIDs shall be charted with inbound bearing values with an arrowhead placed on the end pointing toward the NAVAID symbol and those based on VHF/UHF NAVAIDs shall be charted with outbound radial values with an arrowhead pointing away from the NAVAID symbol. Magnetic radial/bearing values shall be placed on and breaking the radial/bearing lines. The holding pattern should be shown as close to the point of holding as possible and offset from the radial/bearing line to avoid overprinting.

Figure 3.231 Off Route NDB Holding Pattern





Figure 3.232 Off Route Holding Pattern within Compass Rose

Within Large Compass Rose Within Small Compass Rose

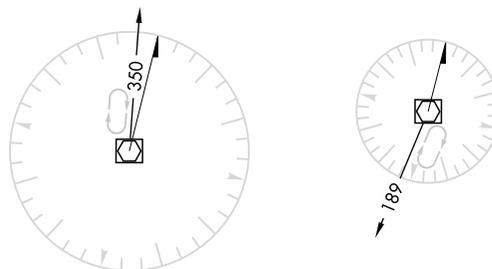

Geographic coordinates shall be shown for all holding patterns established over off route fixes.

Figure 3.233 Off Route Holding Pattern Off a TACAN

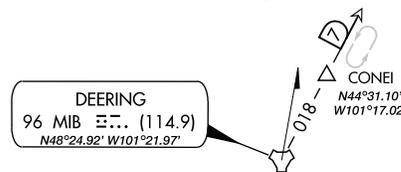


Figure 3.234 Offroute VHF Defined Fix Holding Pattern with Extended Radial Line


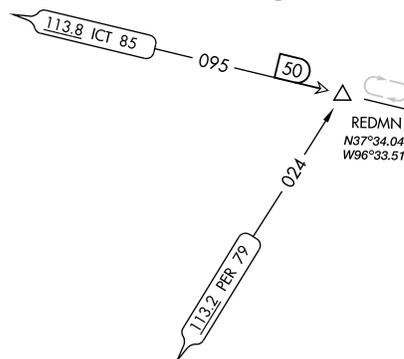


Figure 3.235 Off Route VHF Defined Fix Holding Pattern

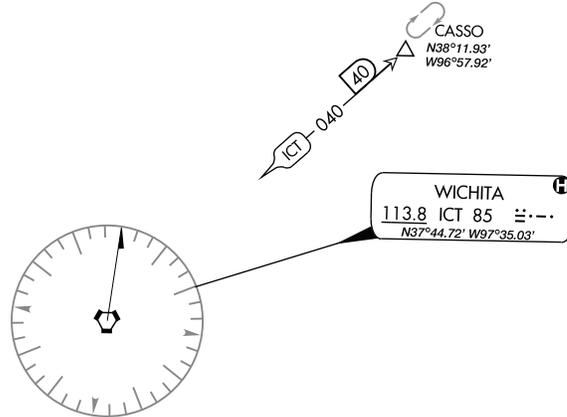

3.7.9.3.2 RNAV-based Holding Patterns

RNAV holding patterns shall be shown with a magnetic reference bearing value and line for positioning and alignment. Holding patterns shall be charted with outbound values and an arrowhead placed on the end of the line and pointing away from the fix. Coordinate values will be shown only for holding patterns beyond the U.S. Continental Control (12 mile limit).

Figure 3.236 RNAV Holding Patterns




Figure 3.237 RNAV Holding Pattern Beyond U.S. Continental Control



When a NAVAID-based holding pattern and an RNAV holding pattern are established at any fix or facility, only the NAVAID-based holding pattern will be shown.

3.7.10 Area Chart Coverage Areas on Enroute Charts

Area Chart Coverage Areas type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

References:

[Appendix 54](#) - Chart Area of Coverage - Area Charts

3.7.10.1 General

Area Chart coverage areas shall be clearly defined by using a dashed outline and supported by an appropriate note, positioned along and parallel to the delimiting line, at least once within every two panels.

Figure 3.238 Area Chart Coverage Area Boundary within Enroute Charts



Additional notes may be required for clarity, dictated by the size of the area and chart folds.

In congested areas, notes may be located outside the area's dashed outline. These notes shall be located adjacent and parallel to the dashed outline.

(AK) Area Chart coverage areas on Alaska enroute charts shall be identified by an appropriate note, providing the area name, title and chart number, e.g., "SEE VANCOUVER AREA CHART FOR DETAIL."

3.7.10.2 Data Depicted Within the Outlined Areas

The data depicted within the outlined areas on the enroute chart which delineate the area charts charted within the contiguous United States and Alaska, except for the Washington Area and Vancouver Area, shall be skeletonized and information within the area chart shall be as such to provide transition to and from the enroute chart and the area chart. Information shall be charted and shown according to basic specifications described elsewhere within this specification.

3.7.10.2.1 Data Depicted within the Outlined Area for Washington

Data depicted within the outlined area for Washington Area shall not be skeletonized and is just a composite of the Washington Area to aid end users to be able to see airspace depicted from Charts L-29, L-30, L-34 and L-36.

3.7.10.2.2 (AK) Data Depicted within the Outlined Area for Vancouver

Data depicted within the outline area for Vancouver shall comply with the following:

- Airports shall not be depicted.
- NAVAIDs depicted with the Area Chart Boundary area for Vancouver (AK L-1) shall be skeletonized. NAVAID boxes will only contain the NAVAID ident. Should the NAVAID be paired with an FSS, a shadow box is used, FSS frequencies will not be listed.

Figure 3.239 (AK) NAVAIDS Depicted within Vancouver Area Chart Boundary Area



(Refer to AK L-1 - Vancouver Area)

- No route data will be depicted within the outlined area.
- Mode C boundary depiction is omitted within the Area Chart Boundary area for Vancouver - AK L-1.
- Airway/Route depictions are omitted within the Area Chart Boundary area for Vancouver - AK L-1.

3.7.10.2.3 Chart Detail within the Outline Areas

3.7.10.2.3.1 Airports

Airports shall be shown by symbol and name only (conterminous U.S. only). FAR 93 (SFAR) airports shall be appropriately identified.

3.7.10.2.3.2 NAVAIDs

NAVAIDs upon which an airway is predicated shall be shown and identified in full. Additional NAVAIDs located within the area shall be shown:

1. to portray the formation of fixes, and;
2. when the NAVAID (including NDBs which are used as an LOM) is the initial approach fix in an instrument procedure (high or low) servicing an airport located outside of the area.

The additional NAVAIDs shall be identified in full, except in extremely congested areas, where they may be identified by the identification call letters and frequency. However, the shadow box feature, channel number, controlling FSS with associated frequencies, and operational notes shall be retained.

3.7.10.2.3.3 Airspace Information

The following airspace information shall be shown:

- ADIZ, CADIZ, SFRA, etc., boundaries shall be shown and identified.
- Oceanic Control Area/Channels shall be shown and identified.
- FIR boundaries shall be shown and identified.
- ARTCC boundaries and Remote Communication Air to Ground (RCAG) shall be shown and identified.
- Airspace (controlled/uncontrolled) shall be shown.
- Mode C boundaries shall be shown and identified.
- SUAs and MOAs shall be shown and identified.

3.7.10.2.3.4 Airways/Routes

The following Airway/Route information shall be shown:

- All airways/routes shall be shown and identified. Identification shall consist of the airway identification, bearing/radial, mileage, VOR changeover points, MCA, MRA, MAA, MOCA and MEA.
- Airways data within area chart coverage may be skeletonized when data cannot be legibly depicted.
- Military Training Routes shall be shown and identified by route designator.

3.7.10.2.3.5 Navigational and Procedural Information

The following Navigational and Procedural Information shall be shown:


- All compulsory reporting points shall be shown and identified. All non-compulsory reporting points, identified as having an enroute function, shall be shown and identified. This is intended to include:
 1. A change in MEA, MOCA, MAA.
 2. The designation of an MCA or MRA.
 3. DME fixes.
 4. To clarify the airway structure.
 5. To clarify an airway distance.
 6. When they service an airport located outside of the area.
- Holding patterns, when specifically identified as an enroute holding fix.

3.7.11 (AK) Registration Guide Marks for Wall Chart Assembly

The Alaska series of enroute charts serves dual purposes, i.e., for in-flight use and for assembly into a wall chart for planning purposes. The method of assembly may pose a problem to users, but can be overcome by the placement of registration guide marks, in the form of half airplane silhouettes are used in conspicuous positions on the charts to insure correct alignment.

Alignment of registration guide marks is critical to insure that aeronautical information matches when the charts are assembled. Care should be taken in compilation to provide for similar location of adjoining data on matching charts.

Figure 3.240 (AK) Registration Marks

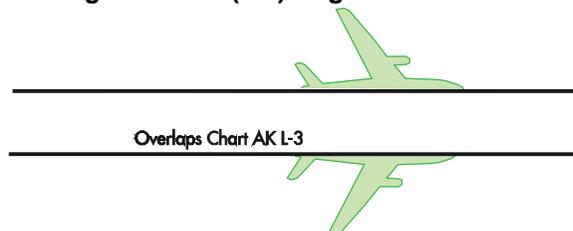

The following chart sequence of assembly is suggested. The marginal area (that area from the border line to the trim) on charts No. 3 (north, east and south) and No. 2 (north and east) must be removed prior to registration and assembly. The entire marginal area on all charts may be removed for the most desirous results of appearance.

The registration guide marks shall be positioned far enough apart along each adjoining chart edge to afford the most accurate chart alignment possible. However, care should be exercised in the placement of registration guide marks in order to avoid overprinting.

The airplane silhouette shall be encompassed by a continuous line. The line shall not be shown along or at the joining edge or middle of the airplane symbol.

References:

[Appendix 53](#) - Navigational & Procedural Information

3.8 INSET CHARTS

3.8.1 General

Inset charts are defined as small scale charts appearing within a specified portion of an open water area on the basic enroute chart. These Inset Charts, therefore, bring within the scope of the chart series, coverage of those areas (providing primarily over-water routings) that lie outside the basic sheet line limits of the chart series.

Except for scale and those items described herein, content and portrayal techniques of the Inset Chart shall be the same as the Enroute Chart as described in Section 3.1 through Section 3.7.

References:

[Appendix 14](#) - Chart Layout - U.S. L-23

[Appendix 18](#) - Chart Layout - U.S. L-34

3.8.2 Border Information

3.8.2.1 Inset Chart Title


The title of each Inset Chart and scale factor shall be shown in black centered above the charted area, within the margin area specified in Section 2.1.2.2.

Figure 3.241 Inset Chart Title
BOSTON - YARMOUTH INSET

3.8.2.2 Bar Scale

A nautical mile bar scale, similar to that contained on the Enroute Chart, shall be shown, positioned within the chart area, parallel to and adjoining the bottom (lower) border line. Bar scale shall extend the full length of the charted area.

Figure 3.242 Inset Chart Bar Scale

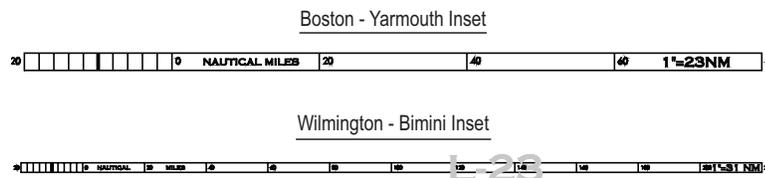

Refer to Section 1.2.5.2 for specific information on individual Inset Chart Scales.

3.8.2.3 Overlap Notes

Applicable overlap notes, e.g., “Overlaps Enroute Chart No. L-22”, indicating adjoining Enroute Charts, other than that upon which the Inset Chart is positioned, shall be shown, appropriately positioned between the two border lines, or when this area is not appropriate, within the marginal area of the Enroute Chart.

Figure 3.243 Inset Chart Overlap Note
 Overlaps with U.S. Charts Overlaps with Non-U.S. Charts
 Overlaps Chart L-32 Overlaps CANADA & NORTH ATLANTIC Chart LO-10

3.8.2.4 Airways

Airway lead names shall be positioned 1/40" within the Inset Chart, along and parallel to the double border, and 1/40" outside and parallel to the normal enroute border line within the marginal area.

3.8.3 Chart Detail

Chart detail shall be such as to provide a means of transition from the Enroute Chart to and from the Inset Chart with specific attention to the following items:

- Projection lines, ticks and values
- Vignetted shoreline
- Airports shall not be shown
- Only NAVAIDs upon which the over-water oceanic routes are predicated, or are used in establishing a reporting point or fix along the route, shall be shown, symbolized and identified in full.

3.8.3.1 Airspace Information

The following airspace information shall be shown as depicted on the Enroute Charts:

- Only airways (Victor and Colored Airways) that tie in and/or provide transition to the Oceanic Routes shall be shown.
- All over water Oceanic Routes, primary and secondary, as designated, shall be shown.
- Military Training Routes shall not be shown.

3.8.3.2 Airway Data

Airway data shall be shown for those airways depicted.

Oceanic Routes shall be identified by the appropriate and applicable name or identification, mileage, radial or bearing and minimum enroute altitude (MEA). Inbound bearings shall be shown at all fixes along the Oceanic Route.

3.8.3.3 Navigation and Procedural Information

All navigation and procedural information shall be shown; however, only those reporting points and fixes upon which the airways and Oceanic Routes are predicated shall be depicted.

Radial and/or bearing lines used in establishing these reporting points and fixes shall be shown, so as to provide positive identification.

3.9 AREA CHARTS - U.S. (A-1 & A-2) AND ALASKA (AK)

Area Charts shall be prepared as required and specified.

Approval must be obtained from the appropriate authority prior to:

- The initial production of any new Area Chart.
- A change to the number appearing on an approved Area Chart
- Changing the scale or coverage of an existing chart.

The Area Charts shall be produced and distributed as an integral part of the basic IFR Enroute Chart Series.

Area Chart type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

References:

[Appendix 63](#) - Terrain Contours - Area Charts

3.9.1 Chart Detail

Except for scale and those items described herein, content and portrayal techniques of the Area Chart shall be the same as the Enroute Chart as described in Section 3.1 through Section 3.7. The following items, however, shall not be shown: Time Zones, Altimeter Settings and Cruising Altitude Diagrams.

3.9.1.1 Projection Lines

Projection lines and ticks shown shall generally be in accordance with that specified for the enroute chart, but shall be adequately supplemented to identify the latitude and longitude within the charted area, i.e., at least two lines of longitude. See Section 3.7.1.


3.9.2 Terrain Contours on Area Charts

References:

[Appendix 63](#) - Terrain Contours - Area Charts


The initial contour value (lowest elevation) depicted will be at least 1000', but not more than 2000', above the airport elevation. The initial contour value may be less than 1000' above the airport elevation only if needed to depict a rise in the terrain close to the airport. Subsequent contour values will be depicted at whole 1000' increment (2000'/4000' etc., NOT 2500'/4500', etc.). Contour intervals, after the initial contour value, will be constant and at the most suitable intervals, 2000' or 3000', to adequately depict the rising terrain.

Figure 3.244 Example No. 1 - Contour Lines every 2,000 feet

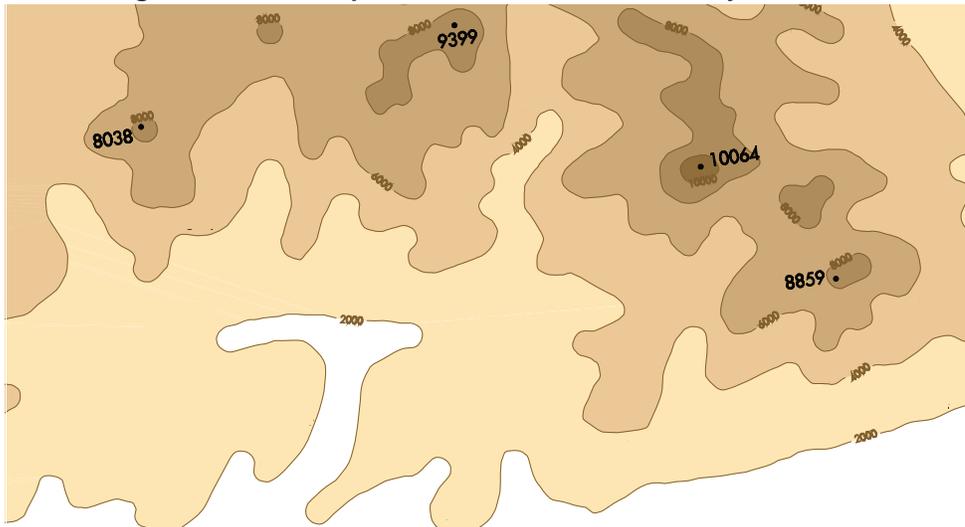

Contour lines and contour values will be shown with a brown tint that is darker than the darkest tint used for the contour layers. Contour lines will be broken to depict the contour value. Contour layers will be shown in brown tints (no more than four), with consecutively darker tints used for consecutively higher contour layers. When more than 4 tinted contour layers are needed to depict the terrain, the fifth and subsequent layers will contain the same brown tint, but will be separated by contour lines and values.

Figure 3.245 Example No. 2 - Contour Lines every 3,000 feet

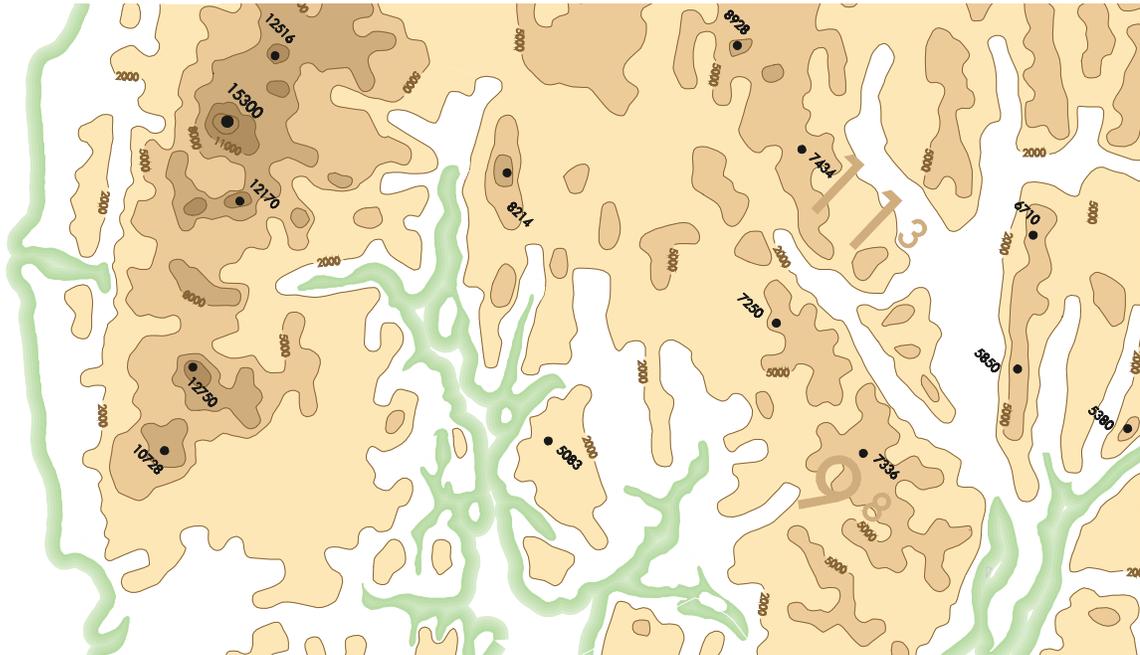

Spot Elevations and the highest point on the area chart will be shown in solid black and differentiated as they are currently on visual and IAP charts.

3.9.2.1 Terrain Contour Note

The following boxed note will be placed in or near each Area Chart that contains contours.

Figure 3.246 Terrain Contour Note

NOTE: TERRAIN CONTOURS HAVE BEEN ADDED TO THOSE AREA CHARTS WHERE THE TERRAIN ON THE CHART IS 1000 FOOT OR GREATER THAN THE ELEVATION OF THE PRIMARY AIRPORT

3.9.3 Airspace Notes

The following boxed note will be placed in or near each Area Chart that contains Uncontrolled Airspace.

Figure 3.247 Uncontrolled Airspace Note

UNCONTROLLED AIRSPACE BOUNDARIES ARE DEPICTED WITH A SOLID BROWN LINE AND A 0.125" WIDE SHADED BAND. THE SHADED SIDE REPRESENTS THE UNCONTROLLED SIDE.

3.10 AREA CHART (A-1 & A-2)


Area Chart type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

References:

- Appendix 54** - Chart Area of Coverage - Area Charts
- Appendix 55** - Chart Layout - Area Chart A-1
- Appendix 56** - Chart Layout - Area Chart A-2
- Appendix 57** - Title Panel Information - Area Charts
- Appendix 58** - Chart Identification & Title Area - Area Charts
- Appendix 59** - Chart Index - Area Charts
- Appendix 60** - Margin Information - Bar Scales - Area Charts
- Appendix 61** - Military Training Routes Tabulation - Area Charts
- Appendix 62** - SUA & MOA Tabulation - Area Charts

3.10.1 Title Panel

The following data shall be positioned to read perpendicular to the side trim in the extreme left panel of what will be referred to as the front or title panel of the charts. This panel shall be printed in black, unless otherwise noted, and shall serve as the outside “fold” or title panel on the chart (sheet) when completely folded.

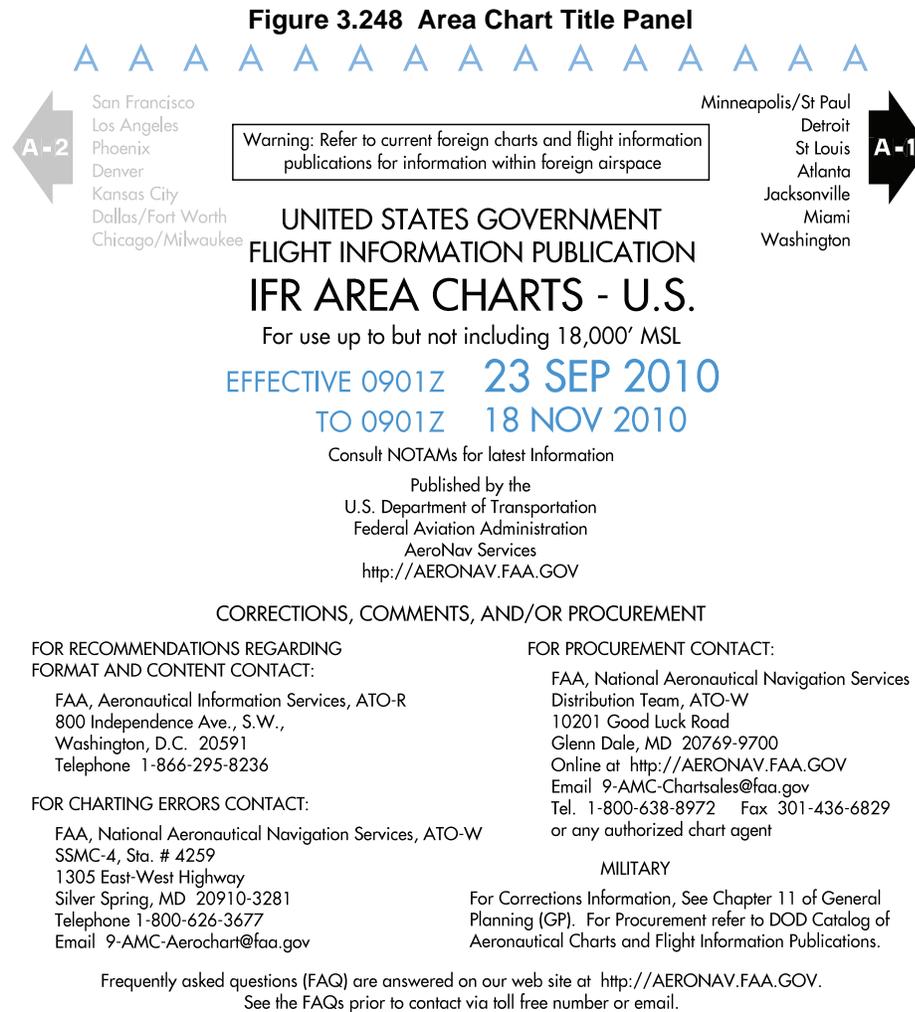

References:

- Appendix 57** - Title Panel Information - Area Charts
- Appendix 58** - Chart Identification & Title Area - Area Charts

3.10.1.1 Area Chart Distinctive Header

A series of “A's” and alternating blank spaces of equal size shall be positioned along the top of the panel as specified in **Appendix 58**.



3.10.1.2 Foreign Airspace Warning Note

The Foreign Airspace Note as is given in Section 3.3.1 shall be shown positioned as specified in the Appendices.

3.10.1.3 Chart Identification Area

3.10.1.3.1 Chart Numbers

Area charts shall be dual identified by the letter “A” and number, e.g., A-1 and A-2. The letter and number combined shall be termed the chart number. Chart numbers shall be positioned on both sides (left and right) of the panel within the arrowhead, using white or open numbers, providing positive identification of charts appearing on both sides of the sheet.



3.10.1.3.2 Arrowheads

Odd numbered arrowhead identifiers (chart numbers) shall be positioned on this panel, in the upper right corner.

Even numbered arrowhead identifiers (chart numbers) shall be positioned on this panel, in the upper left corner.

An arrowhead shall be shown, indicating in which direction (left or right) the chart should be opened.

3.10.1.3.3 Area Chart Names

The names of each individual Area Chart shall be positioned to the right/left of the arrowhead staff, in order of appearance from left to right when the chart is fully opened, starting at the top edge of the arrowhead.

3.10.1.4 Title Area

3.10.1.4.1 Chart Title

The title shall be depicted as indicated in [Appendix 58](#).

Figure 3.251 IFR Area Chart Title Format

UNITED STATES GOVERNMENT
 FLIGHT INFORMATION PUBLICATION
IFR AREA CHARTS - U.S.

3.10.1.4.2 Altitude Note

The Altitude Note, as depicted in Section 3.3.3.2, shall be shown and placed centered and below the Chart Title.

3.10.1.4.3 Effective Dates and Times Note

The effective dates and times note, as depicted in Section [3.3.3.3](#), shall be shown and placed centered and below the Altitude Note.

3.10.1.4.4 NOTAM Note

A NOTAM note, as depicted in Section [3.3.3.4](#), shall be centered below the effective dates and times note.

3.10.1.4.5 Legend Reference Note

A legend reference note shall be shown below the NOTAM Note.

Figure 3.252 Legend Information

Consult ENROUTE CHARTS for LEGEND Information

3.10.1.4.6 Publishers Credit Note

The publishing agency credit note or seal, identical to that depicted from [3.3.3.5](#), shall be shown below the Legend Reference Note.

3.10.1.4.7 Corrections, Comments, and/or Procurement

The corrections, comments, and/or procurement information as depicted in Section [3.3.3.6](#), shall be shown centered and below the Publishers Credit Note.

3.10.1.4.8 OROCA Note

The OROCA Note, as depicted in Section [3.7.2.7.1](#), shall be shown and placed centered and at the bottom of the title panel.

3.10.1.5 Chart Identification Labels

This is a system of chart identification to facilitate a rapid identification of individual charts by number.

Figure 3.253 Chart Identification Labels

23 SEP 2010
UNITED STATES

3.10.1.5.1 Chart Numbers

The odd numbered chart, i.e., A-1, shall be identified by a tab straddling the center fold. See [Appendix 28](#).

The tab shall be identified by the chart numbers of the charts (sheets) appearing on the front and back; e.g., A-1, A-2. The odd numbered chart identification shall be shown first, and the even numbered chart identification positioned directly below, centered within the tab, and 1/20" from the lower limits of the tab using white or open numbers on a solid background.

References:

[Appendix 28](#) - Chart Identification Labels - U.S., Alaska & Area Charts

3.10.1.5.2 Chart Effective Date

The effective date of the chart shall be shown and consist of the day, month (abbreviated) and year.

3.10.1.5.3 Area of Coverage

The area of coverage, i.e., "UNITED STATES", shall be shown. The area chart identifier shall be positioned centered below the chart effective date.

3.10.1.6 FAA Logo/Banner

The FAA logo/banner shall be shown directly below the chart identification label.


3.10.1.7 Chart Index

A chart index showing the complete Low Enroute Chart coverage of the conterminous United States and tailored to depict the Area Chart coverage of individual area charts, shall be positioned beneath the FAA Logo/Banner.

The area of coverage shall be consistent with that specified in Section 1.2.4.1 and Section 1.2.4.2.

Layout and format shall generally conform to that shown in the Appendices. The index chart shall be contained within a .012" border line, approximately 2.75" (high) x 4.6" (wide).

Figure 3.254 Area Chart Indexing

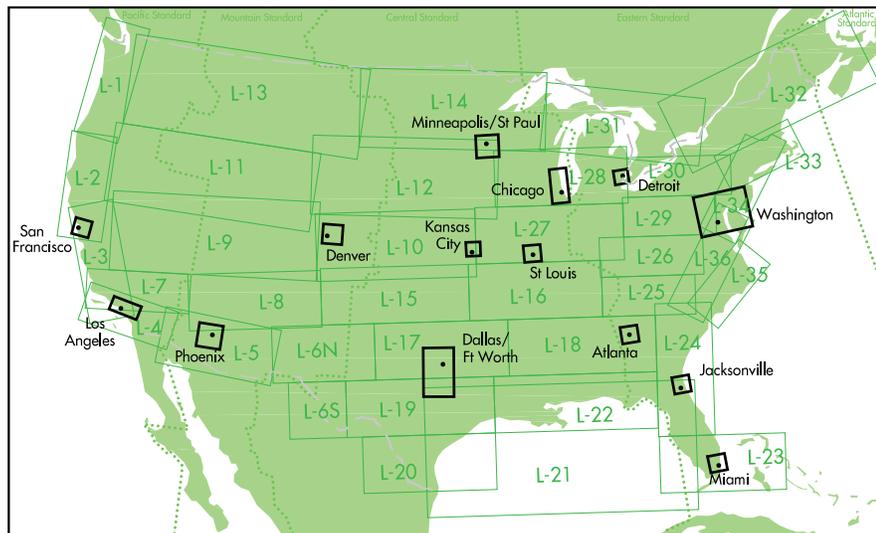

References:

[Appendix 59](#) - Chart Index - Area Charts

3.10.1.7.1 Land and Water Areas

Land area shall be shown and symbolized as described in Section 3.3.6.1

3.10.1.7.2 International Boundaries

International boundaries shall be shown as described in Section 3.3.6.2.

3.10.1.7.3 Low Altitude Chart Coverage

The limits of each low altitude chart shall be depicted by a green line. Each chart shall be identified, in green, by a chart number. Chart numbers shall be centrally positioned within the limits of each chart.

3.10.1.7.4 Depiction of Area Chart Coverage & Cities

The chart index shall be tailored for each individual sheet by indicating the particular limits of both the front and the back charts in a black line. Area charts shall be identified by name adjacent to the location of the city, depicted by a black symbol.

Figure 3.255 Area Chart Listing



3.10.1.7.5 Time Zone Boundaries and International Dateline

Time zone boundaries and the International Dateline shall be shown, symbolized and identified as specified in Section [3.3.6.6](#).

3.10.1.8 Interagency Air Cartographic Committee (IACC) Credit Note

The Interagency Air Cartographic Committee (IACC) credit note as described in Section [3.3.7](#) shall be shown below the chart index.

3.10.1.9 Bar Code

Bar code information and associated text as described in Section [3.3.9](#), and shall be positioned at the bottom of the title panel. Refer to [Appendix 58](#) for specifications on exact placement of Bar Code within Title Panel of Area Chart A-1/A-2.

3.10.2 Tabulated Data Area

Military Training Routes, Special Use Airspace and Military Operations Areas tabulations are included where space permits on the back side of the chart with the data and layout as specified in the references listed below. Airport Locations tabulation is omitted.

References:

[Appendix 56](#) - Chart Layout - Area Chart A-2

3.10.2.1 Military Training Routes (MTR) Tabulation

A tabulation of the appropriate and applicable all-inclusive altitudes for each military training route shown on the chart shall be provided, and consist of the following information:

- Tables will be two columns wide with each column made up of three sub-columns. Sub-column headings shall be “NUMBER,” “ALTITUDE RANGE” and “AREA.”

Figure 3.256 Military Training Routes Tabulation
MILITARY TRAINING ROUTES

NUMBER	ALTITUDE RANGE	AREA	NUMBER	ALTITUDE RANGE	AREA
IR-18	5000 TO 7000	Jacksonville	VR-163	500 AGL TO 3000	Dallas/Fort Worth
IR-32	5000 TO 7000	Jacksonville	VR-223	500 AGL TO 9000	Phoenix
IR-33	500 AGL TO 6000	Jacksonville	VR-231	100 AGL TO 7000	Phoenix
IR-103	100 AGL TO 5000	Dallas/Fort Worth	VR-239	300 AGL TO 9500	Phoenix
IR-105	100 AGL TO 7000	Dallas/Fort Worth	VR-241	300 AGL TO 9500	Phoenix
IR-139	100 AGL TO 6000	Dallas/Fort Worth	VR-242	300 AGL TO 9000	Phoenix
IR-614	500 AGL TO 8000	St Louis	VR-243	300 AGL TO 9500	Phoenix
IR-207	200 AGL TO 15000	San Francisco	VR-244	300 AGL TO 9000	Phoenix
IR-415	300 AGL TO 8000	Denver	VR-245	300 AGL TO 9000	Phoenix
IR-714	SURFACE TO 6000	Washington	VR-267	300 AGL TO 6000	Phoenix
IR-720	5000 TO 8000	Washington	VR-268	300 AGL TO 6000	Phoenix
IR-760	SURFACE TO 6000	Washington	VR-269	300 AGL TO 6000	Phoenix
VR-104	300 AGL TO 10000	Dallas/Fort Worth	VR-704	100 AGL TO 11000	Washington
VR-118	500 AGL TO 15500	Dallas/Fort Worth	VR-705	100 AGL TO 10000	Washington
VR-142	500 AGL TO 4000	Dallas/Fort Worth	VR-708	100 AGL TO 5500	Washington
VR-158	500 AGL TO 5000	Dallas/Fort Worth			

- As necessary due to space considerations on the panel, the MTR tabulation may be continued or carried over to an open area within the confines of the chart.
- The title “MILITARY TRAINING ROUTES” shall be positioned above the tabulation.
- MTRs shall be tabulated numerically by the route designator, e.g., IR-123, followed by the appropriate and applicable all-inclusive (composite) altitude range for each route.

3.10.2.1.1 Number Column

The first column, titled “NUMBER”, shall be tabulated numerically by the route designator e.g., IR-203, VR-331, etc.

3.10.2.1.2 Altitude Range Column

The second column, title “ALTITUDE RANGE”, shall list the corresponding and all-inclusive (composite) altitude range for each route geographically depicted on the chart.

3.10.2.1.3 Area Column

The third column, titled “AREA”, shall list the name of the Area Chart where the MTR is depicted.

3.10.2.2 Special Use Airspace (SUA) and Military Operations Area (MOA) Tabulation Legend

The following SUA and MOA Tabulation Legend shall be positioned above the Special Use Airspace Tabulation on the Area Chart.

Figure 3.257 SUA and MOA Tabulation Legend

ARTCC three letter idents: Albuquerque ZAB, Atlanta ZTL, Chicago ZAU, Cleveland ZOB, Denver ZDV, Fort Worth ZFW, Jacksonville ZJX, Kansas City ZKC, Los Angeles ZLA, Miami ZMA, Minneapolis ZMP, Oakland ZOA, Washington ZDC

A - Alert, P - Prohibited, R - Restricted, W - Warning Areas

All altitudes are MSL unless otherwise indicated

Cont - Continuous: 24 hrs a day, 7 days a week

FL - Flight Level ‡ - During periods of Daylight Saving Time (DT) effective hours will be one hour earlier than shown.

Time - Hours shown are UTC unless otherwise indicated

Days - Sunrise to Sunset except Canada where it means 1/2 hr before sunrise to 1/2 hr after sunset

NOTAM - Use of this term in Restricted Areas indicates FAA and DoD NOTAM systems. Use of this term in all other Special Use areas indicates the DoD NOTAM system.

Nights - Sunset to Sunrise except Canada where it means 1/2 hr after sunset to 1/2 hr before sunrise

3.10.2.3 Special Use Airspace (SUA) Tabulation

A tabulation of the appropriate and applicable data for all SUA depicted in each area chart shall be shown. The SUA Tabulation shall be organized by Area Chart and depicted in alpha order by Area Chart title. The SUA tabulation will be presented as one table with the same column and information layout used on Low Altitude enroute charts with the addition of a row, spanning the width of the table, with the name of Area Chart title centered in the row. See Section 3.5.3 for detailed explanation for the columns.

Figure 3.258 SUA Table - Area Chart
SPECIAL USE AIRSPACE

NUMBER	EFFECTIVE ALTITUDE	TIMES USED, UTC			CONTROLLING AGENCY A/G CALL	PANEL
		DAYS	HOURS	WEATHER		
CHICAGO						
R-6903	To FL 450	Intermittent	By NOTAM	VFR-IFR	ZMP CNTR/FSS	A
DALLAS/FORT WORTH						
P-49	To 2000	Cont	Cont	VFR-IFR	No A/G	H
JACKSONVILLE						
P-50	To But Not Including 3000	Cont	Cont	VFR-IFR	No A/G	D
R-2904A	To But Not Including 1800	Apr-Aug Cont *1	1300-2200Z‡	VFR-IFR	JACKSONVILLE TRACON	D
		Sep-Mar Sat-Sun *1	1300-2200Z‡			
W-158E	To 1200	Intermittent	By NOTAM	VFR-IFR	JACKSONVILLE TRACON	D
W-158F	1200 To 1700	Intermittent	By NOTAM	VFR-IFR	JACKSONVILLE TRACON	D

*1 Other Times By NOTAM
*2 To But Not Including FL 180

3.10.2.4 Military Operations Areas (MOA) Tabulation

A tabulation of the appropriate and applicable data for all military training routes depicted in each area chart shall be shown. The MOA tabulation will be presented as one table with the same column and information layout used on Low Altitude enroute charts with the addition a row, spanning the width of the table, with the name of Area Chart title centered. See Section 3.5.4 for detailed explanation for the columns.

Figure 3.259 MOA Table - Area Chart
MILITARY OPERATIONS AREAS

NUMBER	EFFECTIVE ALTITUDE	TIMES USED, UTC			CONTROLLING AGENCY A/G CALL	PANEL
		DAYS	HOURS	WEATHER		
CHICAGO						
MINNOW	10000 *2	Intermittent By NOTAM	Normally Days	VFR-IFR	ZAU CNTR/FSS	A
JACKSONVILLE						
MAYPORT HIGH	3000 *2	Intermittent	2300-0300Z‡	VFR-IFR	ZJX CNTR/FSS	C
MAYPORT LOW	1500 To But Not Including 3000	Intermittent	1300-0300Z‡	VFR-IFR	ZJX APP CON	C

*1 Other Times By NOTAM
*2 To But Not Including FL 180

3.10.3 Margin Information

Margin information shall be positioned between the neatline of the chart and the trim edge, but excluding title and legend panel information.

3.10.3.1 Bar Scales

A nautical mile bar scale, similar to that contained on the enroute chart, shall be shown for all individual Area Charts, positioned outside the chart area, parallel to and .2" from the border line, as illustrated in the Appendices. Bar scales shall be compatible with the limits of individual area chart coverage.

Exception to the enroute Chart Bar Scales shall be that the mile division breakdown of the scale shall be shown and labeled on both sides of the bar scale.

Refer to [1.2.5.3](#) for specific information on individual Area Chart Scales.

3.10.3.2 Area Chart Title

Each individual area chart shall be identified by area name, the scale factor, e.g., 1" = 10 NM and, in parenthesis, the enroute chart number(s) on which the area is located. The title data shall be shown on one line, centrally positioned adjacent and above the top border line, or the bar scale, of each chart.

Figure 3.260 Area Chart Title
MIAMI 1" = 6 NM (On Chart L-23)

3.10.3.3 Panel Fold Information

A two-fold system, whereby every two panels of the chart area is identified by a letter identifier and by the name of the Area Chart contained therein. These names will enable the user to readily locate the specific area chart desired.

These panel/fold identifications shall be positioned along both the top and bottom trim edges of all charts, on both sides of each two panels within each two-panel fold of the chart, as indicated in the Appendices.

The letters A, B, C, D, E and F shall be used as the letter identifier on odd numbered charts (front side) and the letters G, H, I, J, K and L shall be used as the letter identifier on even numbered charts (reverse side). Letter identifiers shall be positioned .1" down (up) from the trim edge and 3/20" to the right of the first, third, fifth and seventh folds and also 3/20" to the left of the third, fifth and seventh folds and the right trim edge of all charts.

The Area Chart name shall be positioned 3/20" to the left/right of each letter identifier, within the appropriate panel.

The Area Chart name and letter identifier shall be aligned at the top and bottom edges of the chart.

3.10.3.4 Reverse Side - Even Numbered Charts

The following data shall be positioned to read perpendicular to the side trim in the extreme left panel of the reverse chart (even numbered chart). This panel shall be printed in black, unless otherwise noted, and shall serve as the reverse or inside "fold" or panel on the chart (sheet) when completely folded. Maximum width of the data appearing on this panel shall be 4.6".

References:

[Appendix 56](#) - Chart Layout - Area Chart A-2

3.10.3.5 Airway/Route Leads

Airway/route leads shall be positioned outside the chart area immediately adjacent to the border line in their appropriate color.

3.11 CHART L-21 - OFFSHORE NAVIGATIONAL CHART

Offshore Navigational Chart type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

The Offshore Navigational Charts is a skeletonized chart depicting the airspace of the Gulf of Mexico.

References:

[Appendix 64](#) - Title Panel Layout - U.S. L-21

3.11.1 Title Panel Information

3.11.1.1 L-21 Offshore Navigation Only Note

The L-21 Offshore Navigation Note will be placed centered above the OROCA note.

Figure 3.261 Offshore Navigation Note

L-21 is intended for offshore navigation only.
Detailed onshore information has been intentionally omitted.
Refer to charts L-19/20, L-22, L-23/24 for detailed onshore information.

References:

[Appendix 64](#) - Title Panel Layout - U.S. L-21

3.11.2 Margin Information

3.11.2.1 Bar Scales

Bar scales for Chart L-21 shall be subdivided into 20NM increments. The first 20NM increment shall be subdivided into 2NM increments.

3.11.3 Chart Detail

Chart detail shall be such as to provide a means of transition from the enroute chart to and from the Offshore Navigation Chart.

3.11.3.1 Airports

3.11.3.1.1 Charting Criteria

Airports shall be symbolized as either military, civil or civil-military airports. Seaplane Bases shall be symbolized. See Section [3.7.3.2](#).

3.11.3.1.2 Airport Names

Airports within the contiguous United States shall be identified by airport name. For public, private, military airports and seaplane bases, the FAA airport identifier will be placed in parentheses immediately after the airport name.

Airports outside the contiguous United States shall be identified by airport name and ICAO identifier placed in parentheses immediately after the airport name.

Figure 3.262 Airports Naming



Those airports cited in FAR Part 93 identified as having special air traffic rules governing operations to and from the airport shall be additionally identified by enclosing the airport name within a .010" line weight box. The color will be the same as the airport name.

Figure 3.263 Airports Under SFAR



3.11.3.2 NAVAIDs


3.11.3.2.1 Charting Criteria

Only NAVAIDs upon which the over water oceanic routes are predicated, or are used in establishing a reporting point or fix along the route, shall be shown, symbolized and identified in full.

3.11.3.2.2 NAVAID Identification Boxes Criteria

Arrangement of NAVAID data within the box shall be in the following sequence: NAVAID Name, Frequency, Call or Identification Letters and Channel Numbers.

Figure 3.264 NAVAID Identification Boxes

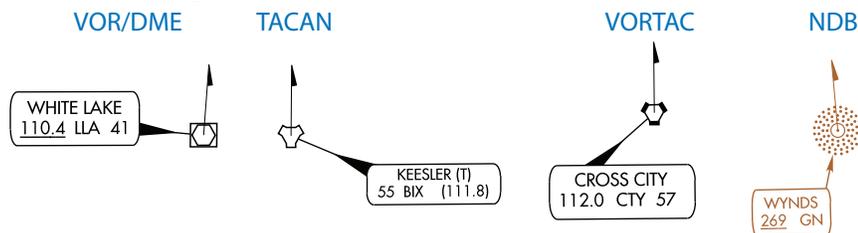

3.11.3.3 Airspace Information

Class B and Class C airspace information shall be shown. Mode C information shall be shown. All SUAs and MOAs airspace information shall be shown.

References:

[3.7.7.3.2](#) - Class B Airspace

[3.7.7.3.3](#) - Class C Airspace

[3.7.7.3.7](#) - Mode C Required Areas

[3.7.7.3.11](#) - Special Use Airspace (SUA) and Military Operation Areas (MOA)

3.11.3.4 Airways/Routes

Only airways/routes (Victor Airways, RNAV T Routes and Colored Airways) that tie in and/or provide transition to the Oceanic Routes or RNAV Q Routes shall be shown.

All over-water Oceanic Routes, primary and secondary, as designated, shall be shown.

Military Training Routes shall not be shown.

3.12 (AK) L-2 - LOW ALTITUDE ROUTE SELECTION CHART

3.12.1 General

A route selection chart shall be provided, positioned on chart L-2 as illustrated in [Appendix 20](#).

Alaska Low Altitude Route Selection Chart type and symbol specifications shall be shown as indicated in the appendices except as otherwise indicated within these specifications.

All type shall be 6 point. Unless otherwise specified, all symbols shall be as specified for the IFR Enroute Chart series, except they shall be reduced 25%.

The titles shall be shown, positioned above and below the chart in the same manner as provided for panel identifier. Type size shall be 12 point (C/L).

References:

[Appendix 20](#) - Chart Layout - Alaska L-2

3.12.2 Chart Detail

3.12.2.1 Base Detail

3.12.2.1.1 Land and Water Areas

Only major bodies of water shall be shown using the shoreline symbology as shown in Section [3.7.2.1](#).

3.12.2.1.2 International Boundaries

International Boundaries shall be shown as described in Section [3.7.2.2](#).

3.12.2.1.3 U.S. - Russia Maritime Boundary

The U.S. – Russia Maritime Boundary be shown as described in Section [3.7.2.3](#).

3.12.2.2 Radio Aids to Navigation (NAVAIDs)

All NAVAIDs upon which airways or routes are predicated, shall be shown, symbolized and identified by name. Additional NAVAIDs may be shown when specifically requested.

NAVAIDS (UHF/VHF, black; LF/MF, brown).

3.12.2.3 Airways/Routes

Airways and Routes consisting of symbolization, identification, mileages and MEAs shall be shown.

VHF/UHF airways centerline – black.

LF/MF airway centerline – brown.

3.12.2.4 Navigational and Procedural Information

3.12.2.4.1 Compulsory and Non-compulsory Reporting Points

All fixes with that are compulsory reporting points which are a part of the airway/route system shall be shown and identified by name.


Fixes that are non-compulsory reporting points shall be shown only to clarify the airway/route structure or to provide a reference point where airways/routes begin or terminate at places other than NAVAIDs.

3.12.2.5 Operational and/or Information Notes

Operational and/or information notes, as may be required, shall be shown. Type size may vary depending on the importance of the note and space limitation.


APPENDIX 1
LOW ENROUTE CHART AREA OF COVERAGE – U.S.

IFR ENROUTE LOW ALTITUDE CHARTS
UNITED STATES CHART INDEX

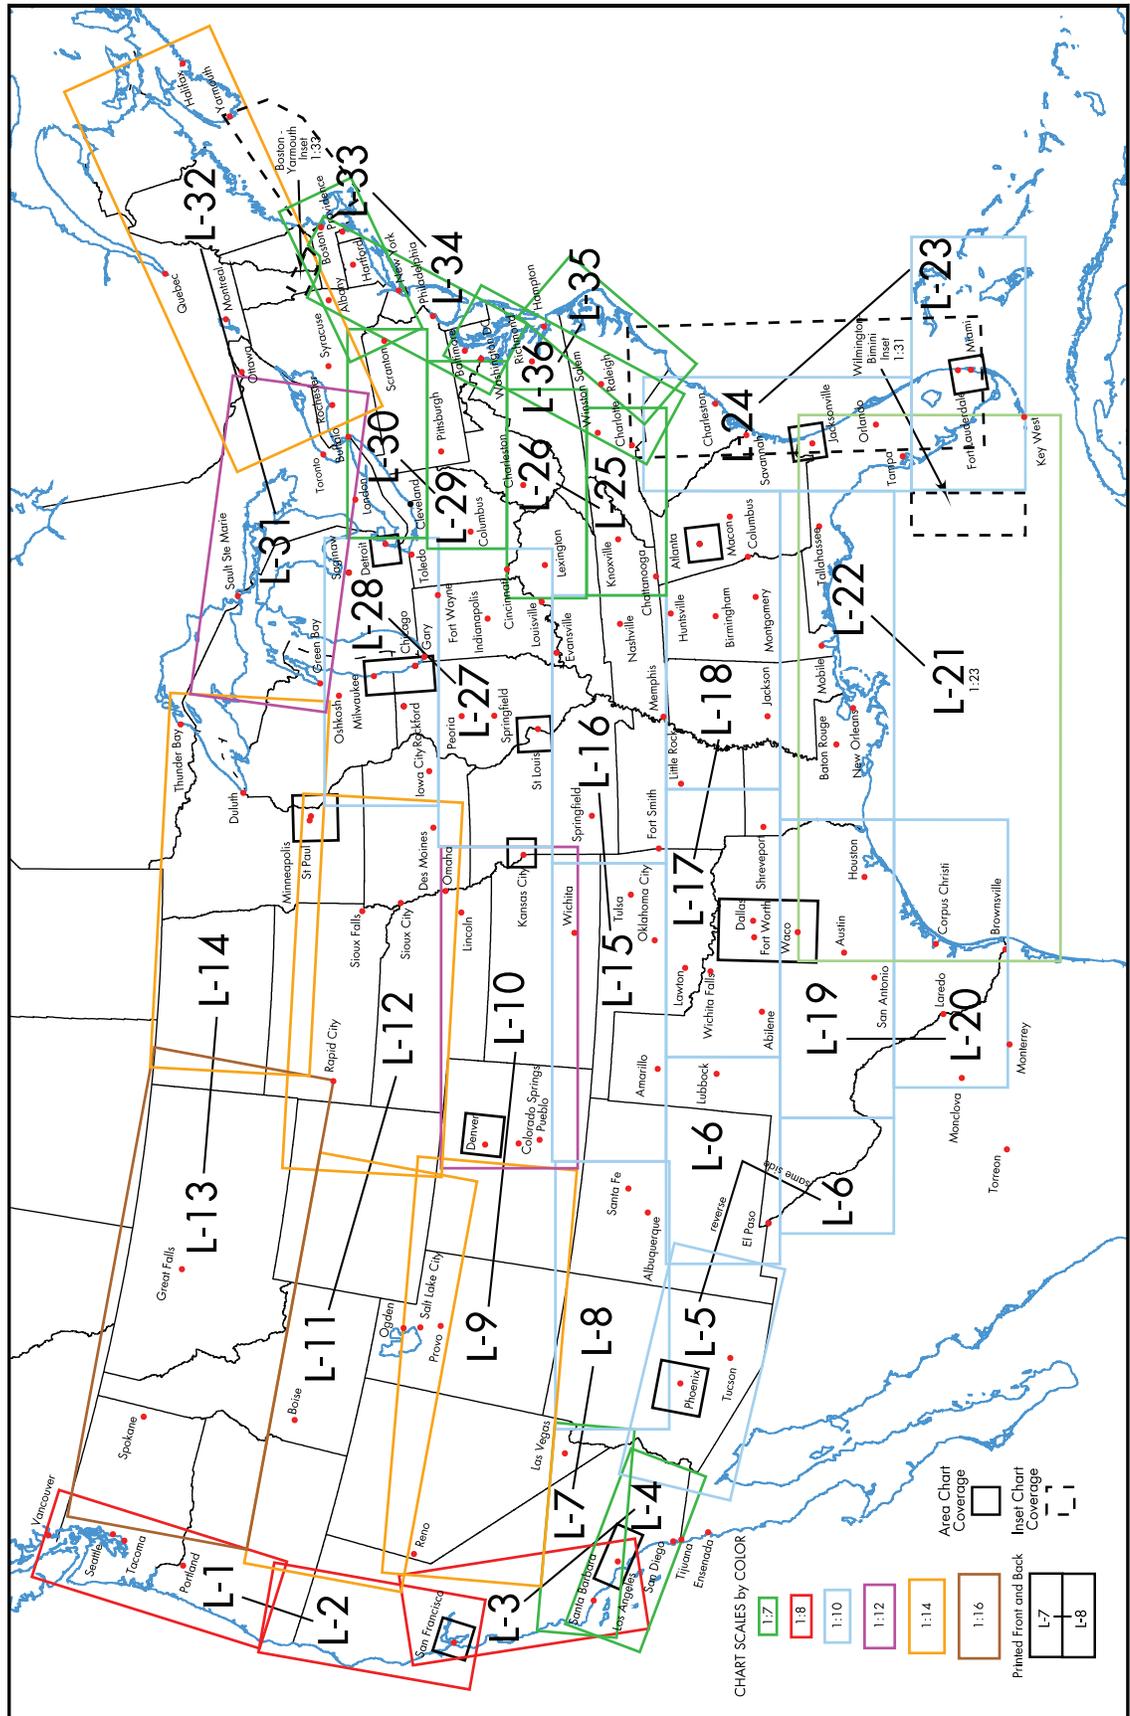


APPENDIX 2 ALASKA LOW ENROUTE CHART AREA OF COVERAGE

IFR ENROUTE LOW ALTITUDE CHARTS ALASKA CHART INDEX

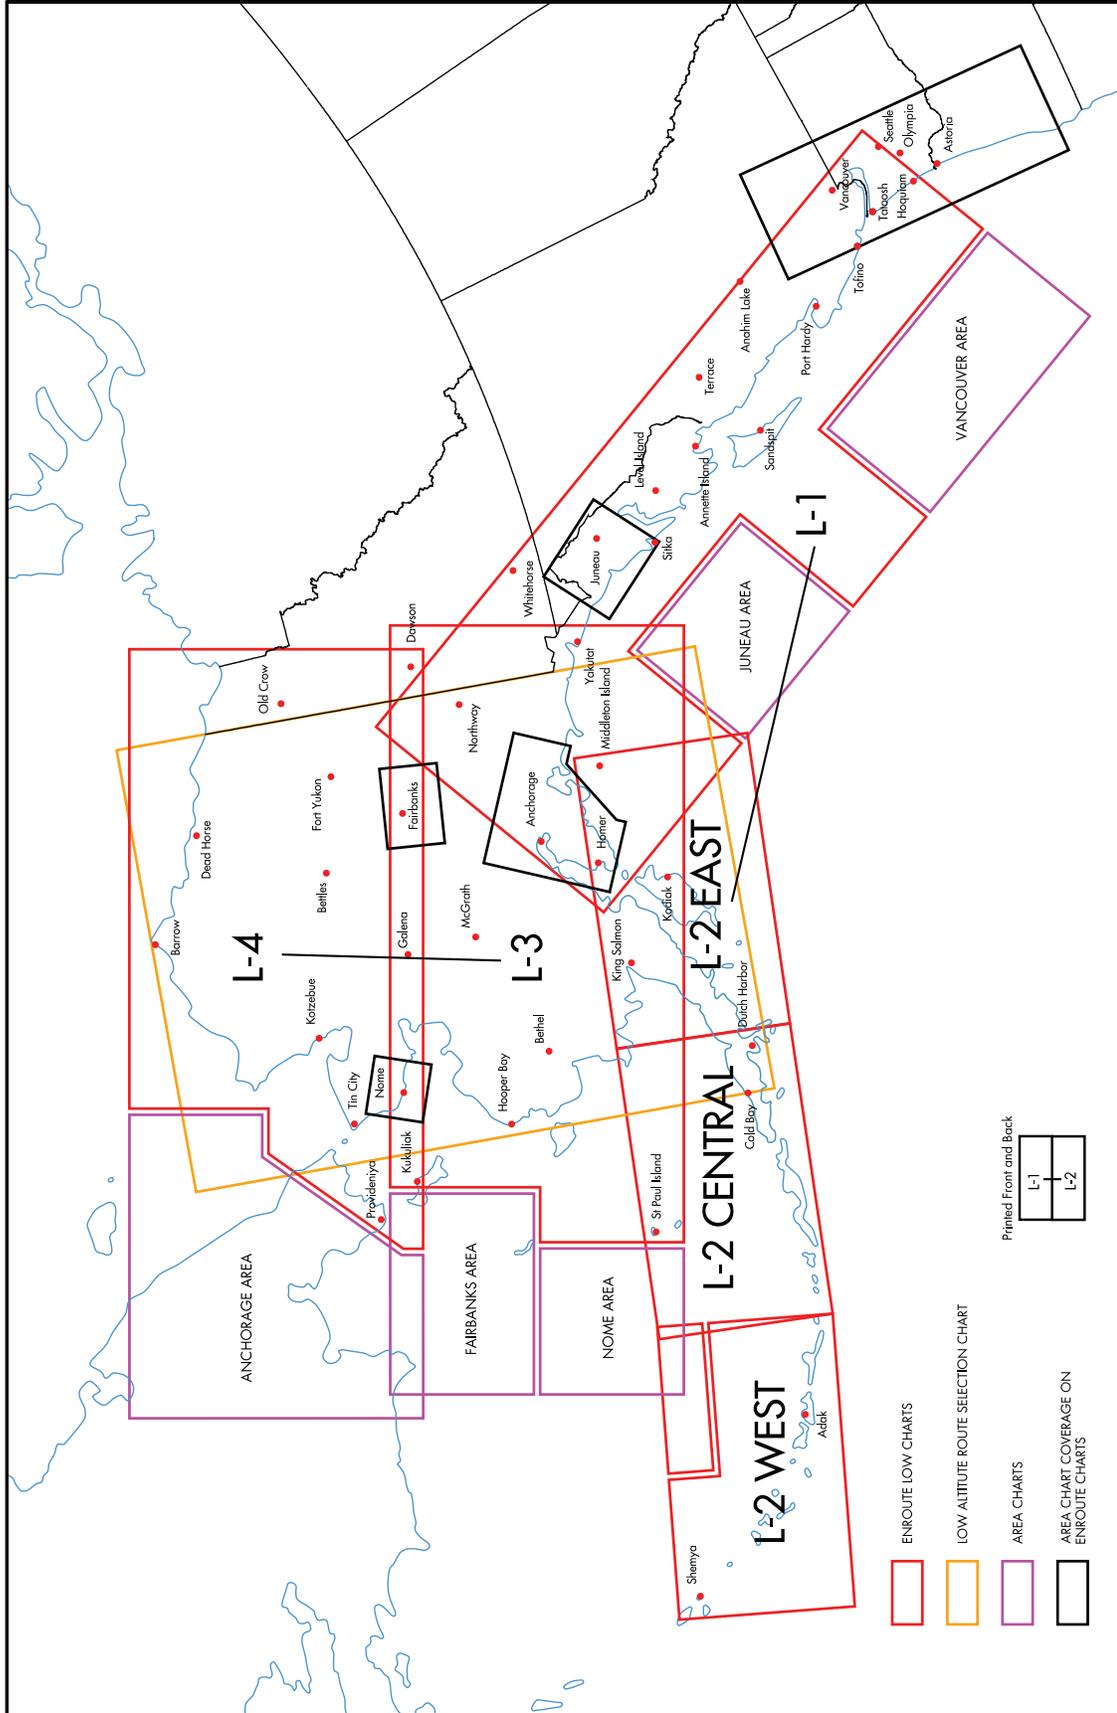


APPENDIX 3 CHART LAYOUT - U.S. L-1 AND L-7

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-1 and L-7

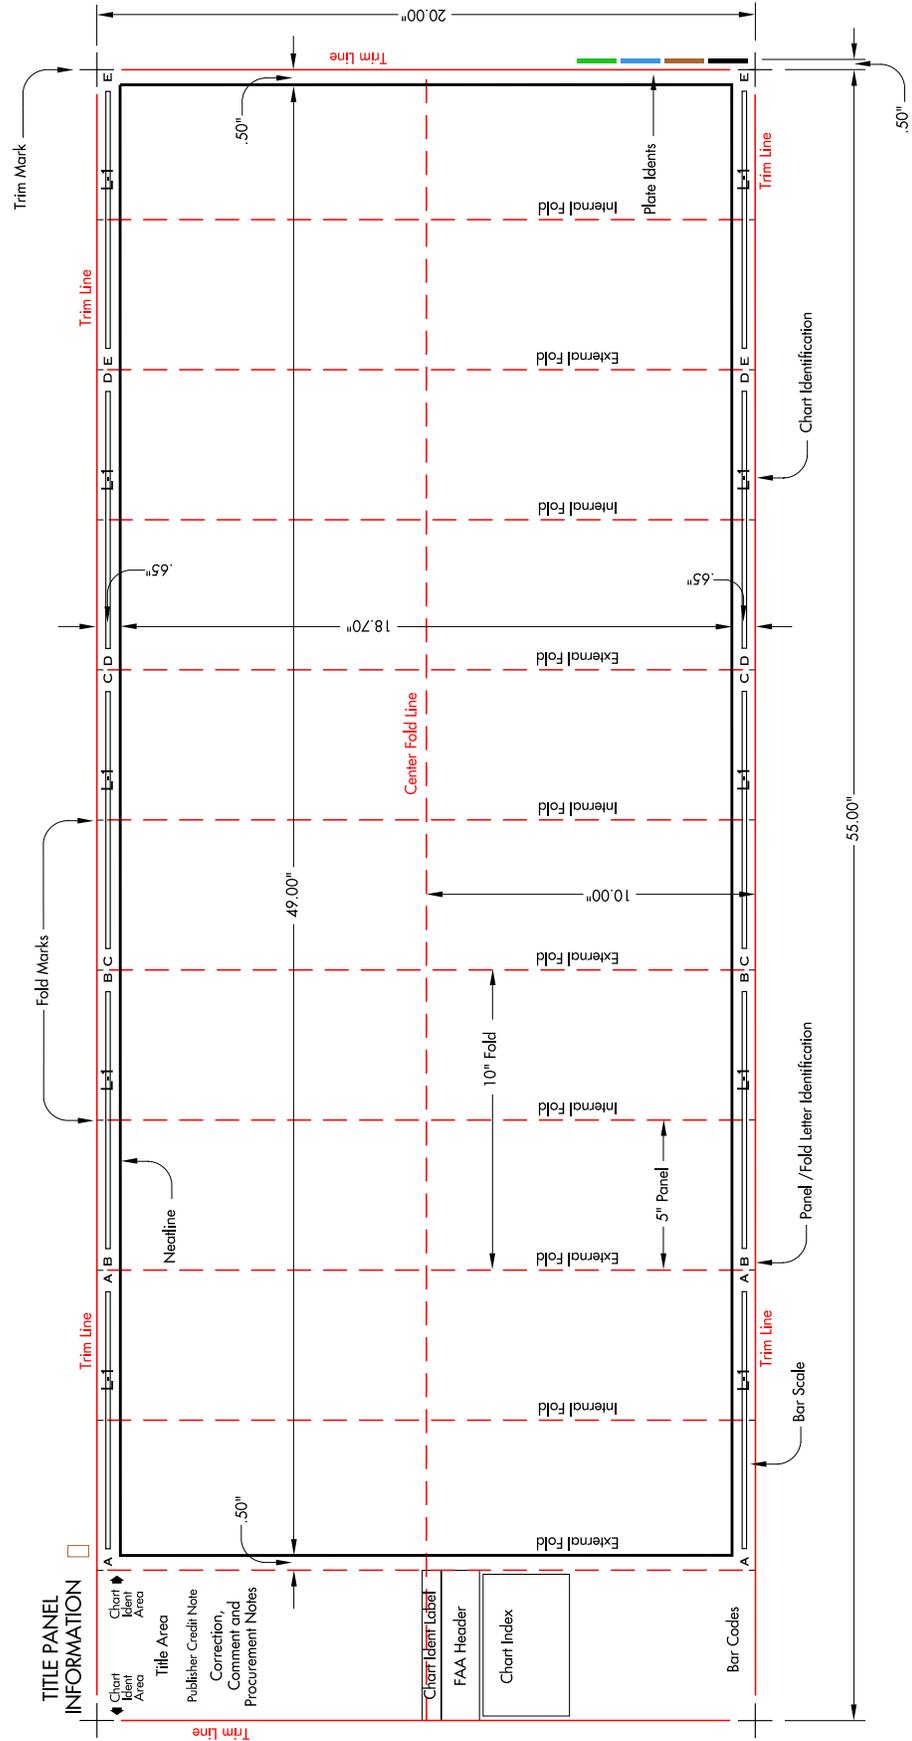


APPENDIX 5
CHART LAYOUT - U.S. L-3, L-9, L-11, L-13, L-15, L-19, L-27 AND L-29

IFR ENROUTE LOW ALTITUDE CHARTS
CHART LAYOUT
U.S. L-3, L-9, L-11, L-13, L-15, L-19, L-27 and L-29

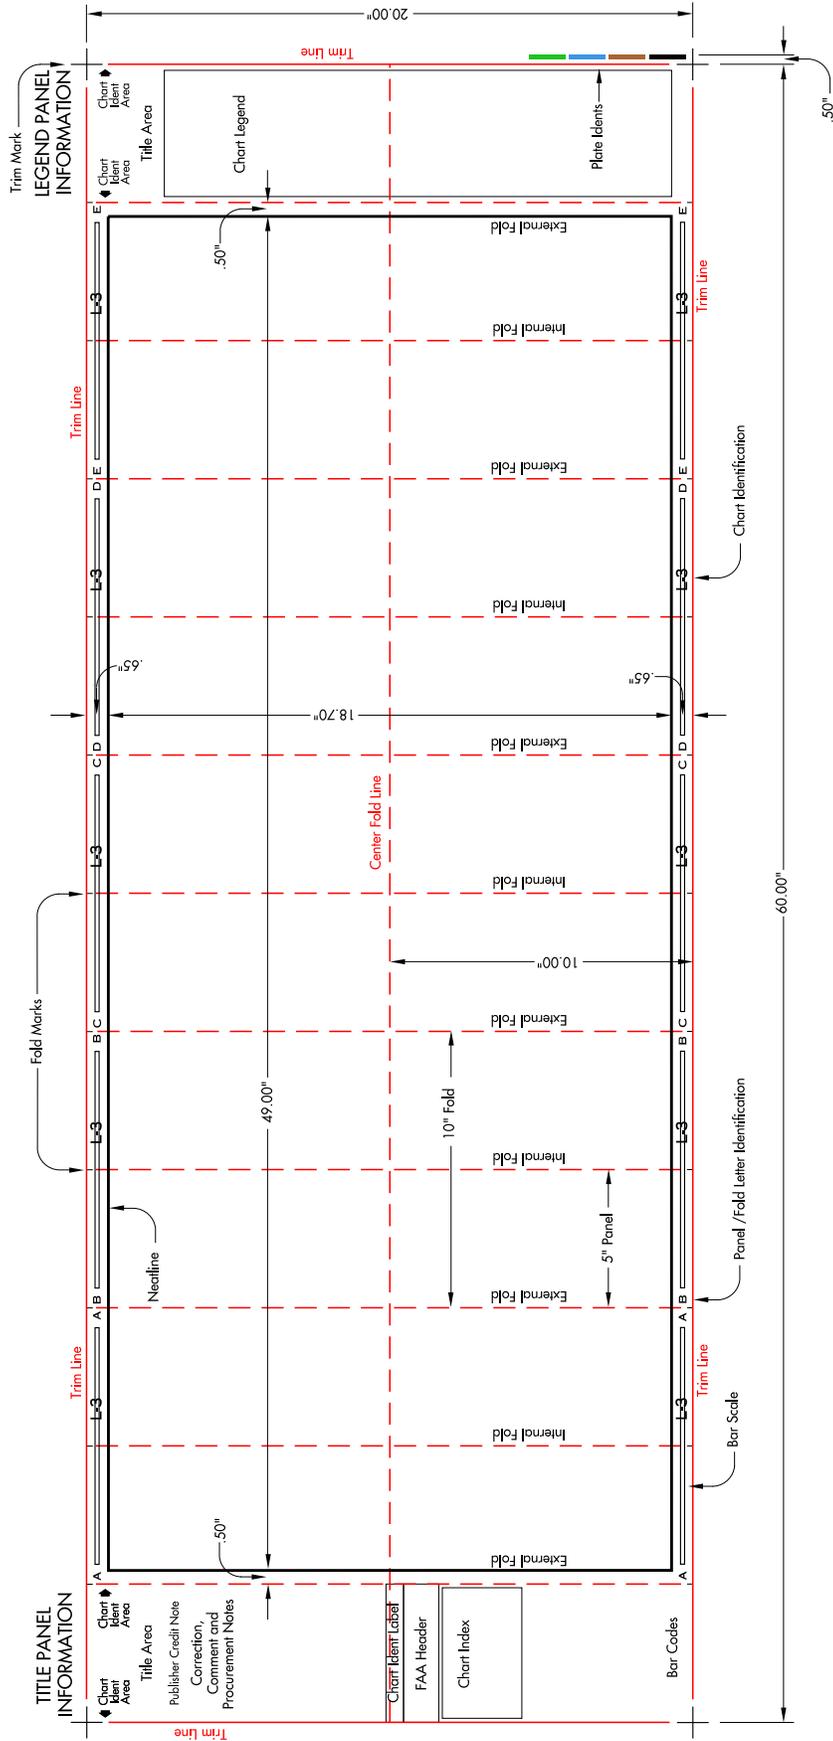


APPENDIX 6 CHART LAYOUT - U.S. L-4, L-10, L-12, L-14, L-16 AND L-24

IFR ENROUTE HIGH ALTITUDE CHARTS CHART LAYOUT U.S. L-4, L-10, L-12, L-14, L-16 and L-24

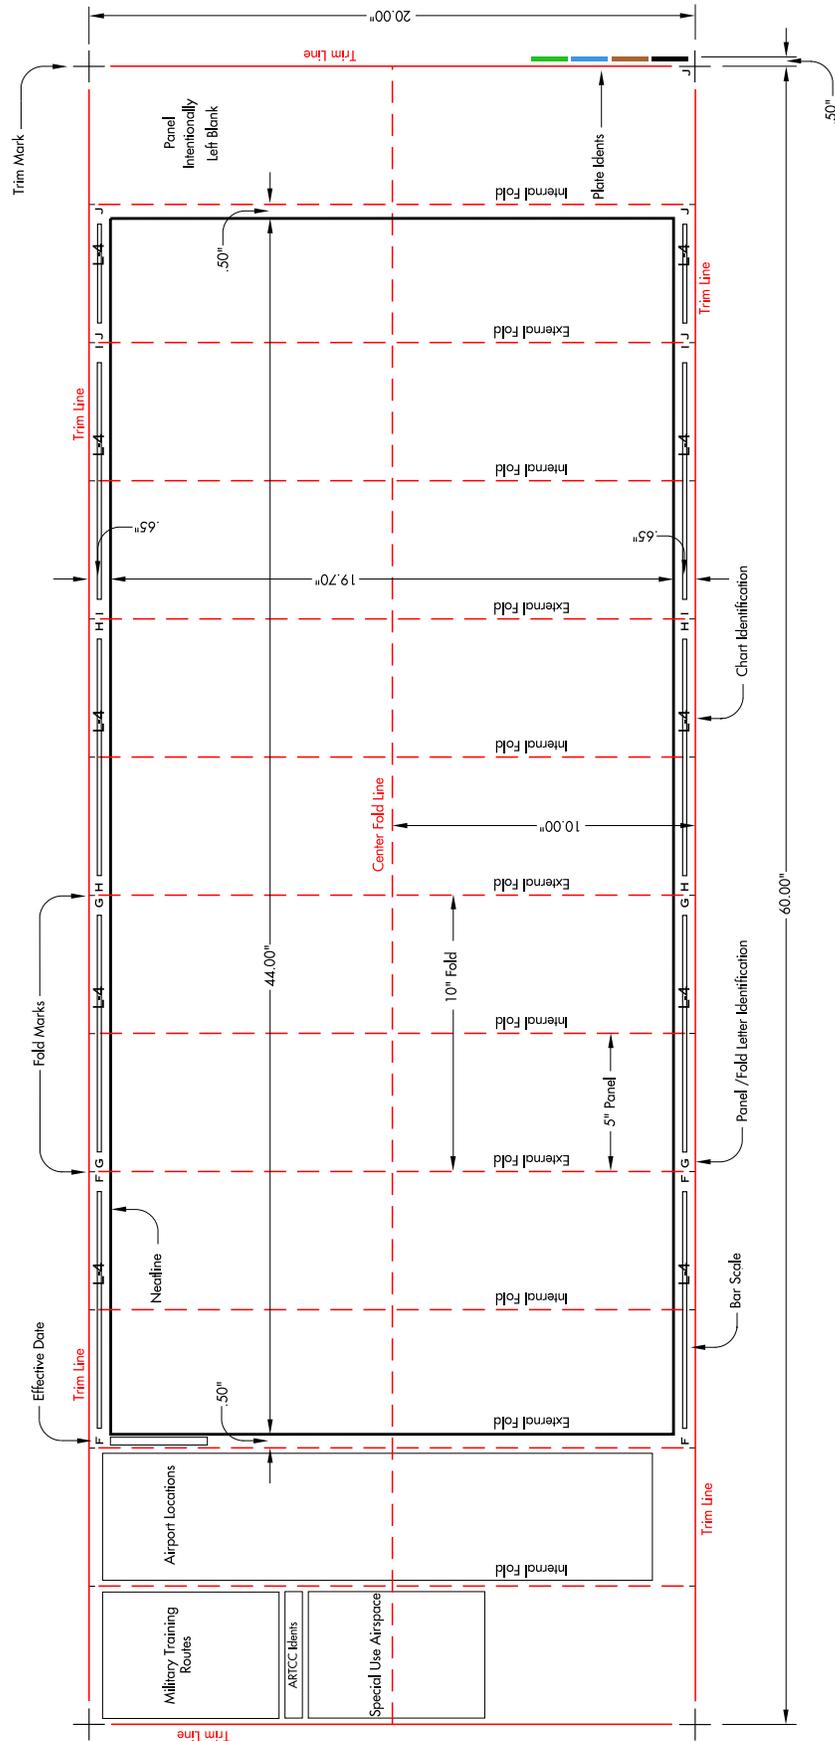


APPENDIX 7 CHART LAYOUT - U.S. L-5

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-5

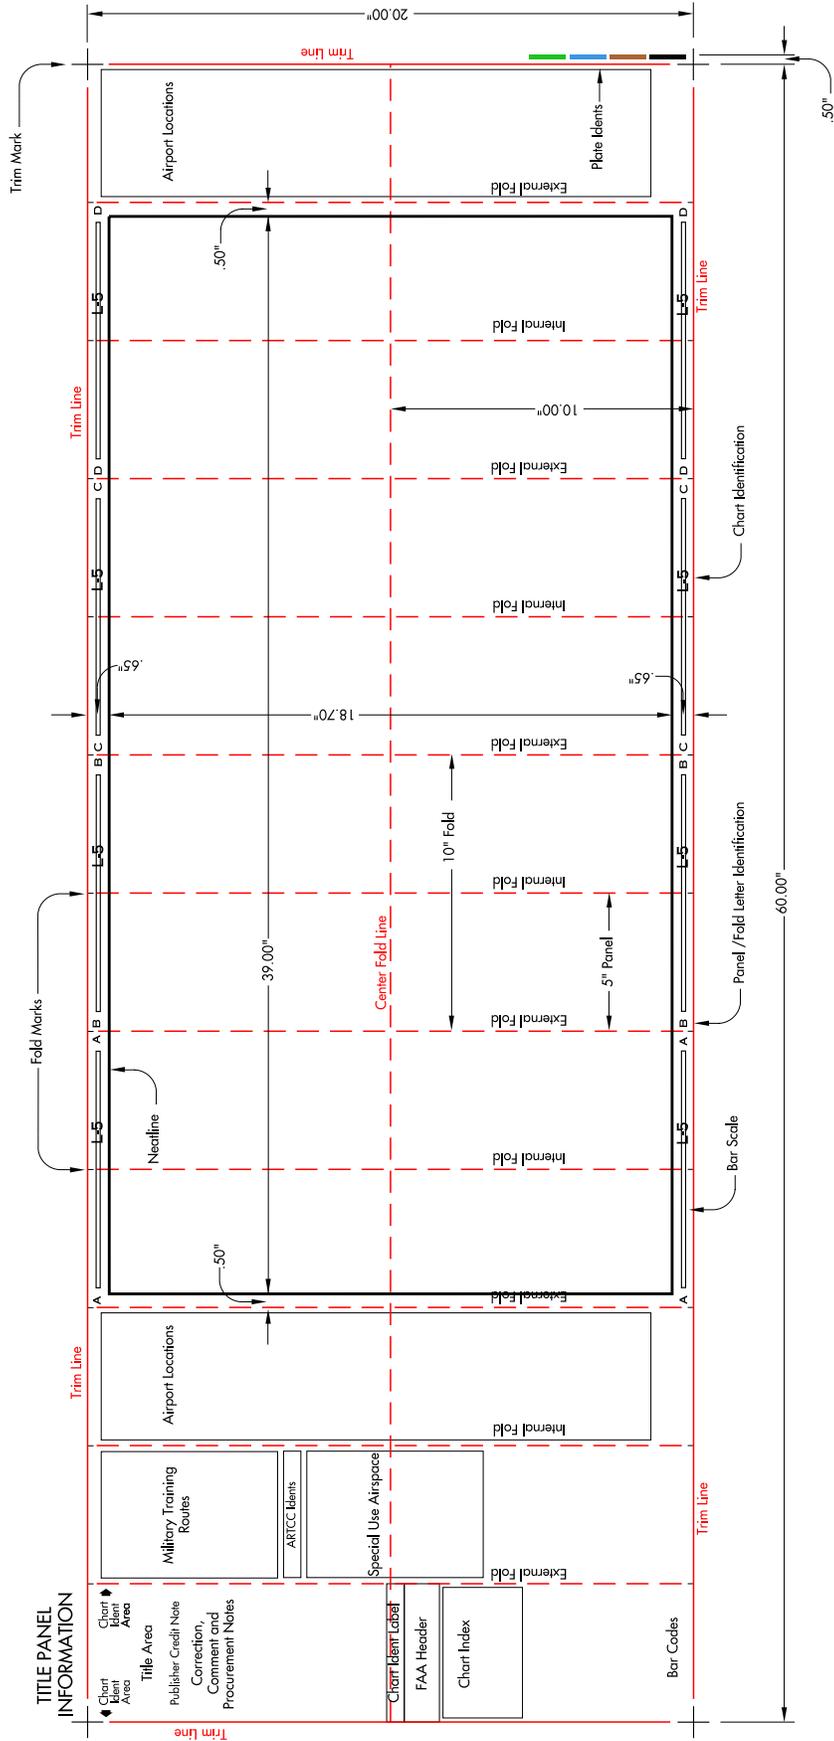


APPENDIX 8 CHART LAYOUT - U.S. L-6

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-6

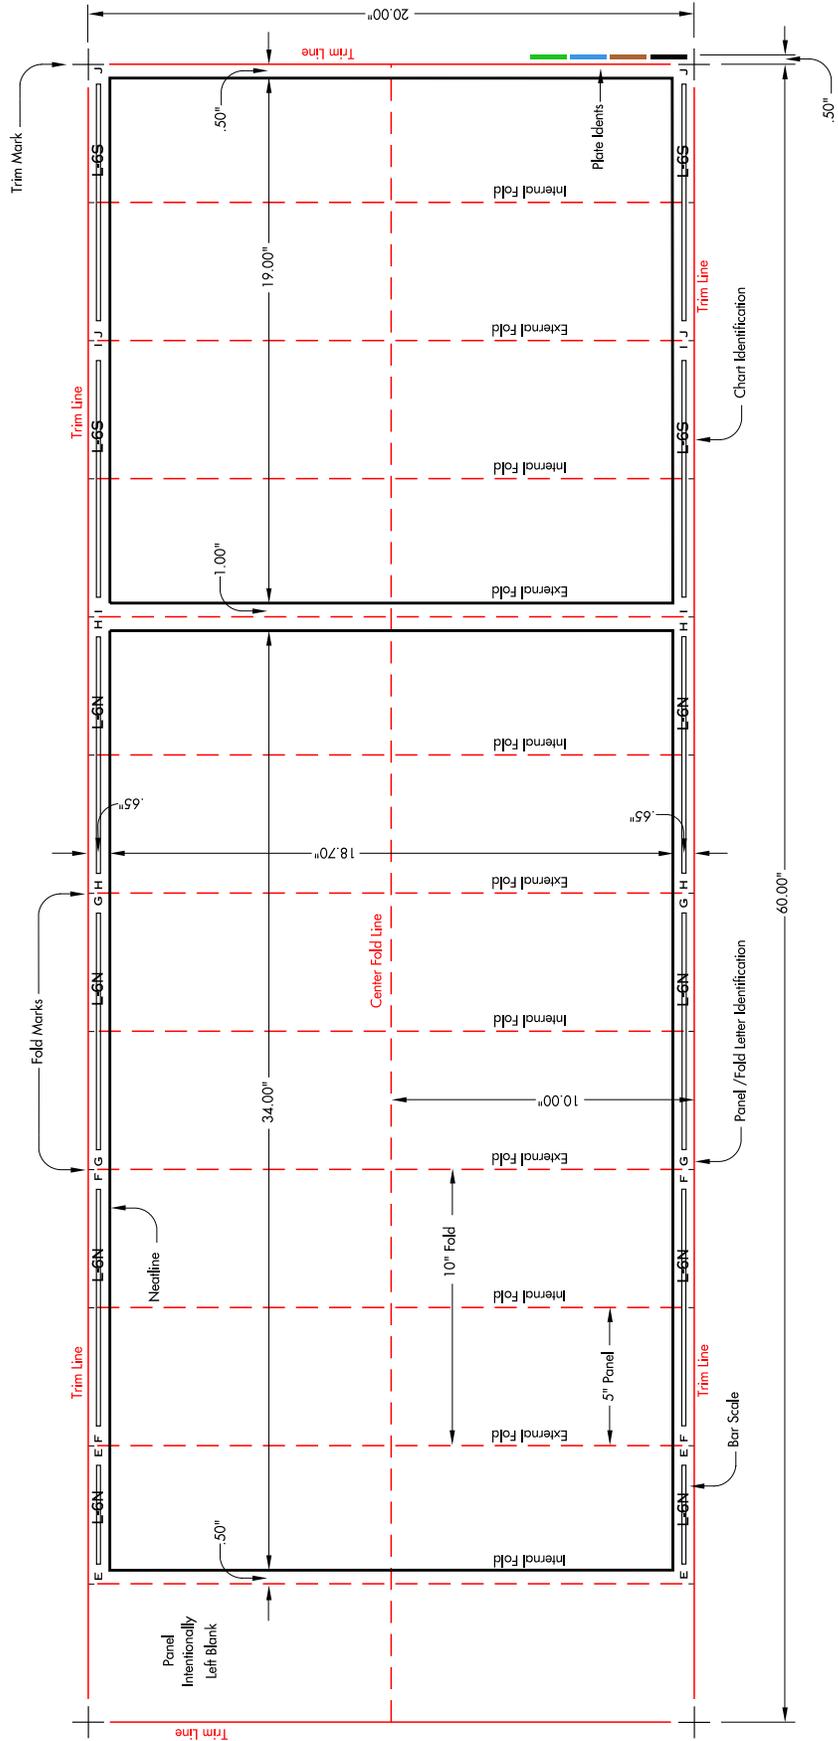


APPENDIX 9 CHART LAYOUT - U.S. L-17 AND L-31

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-17 and L-31

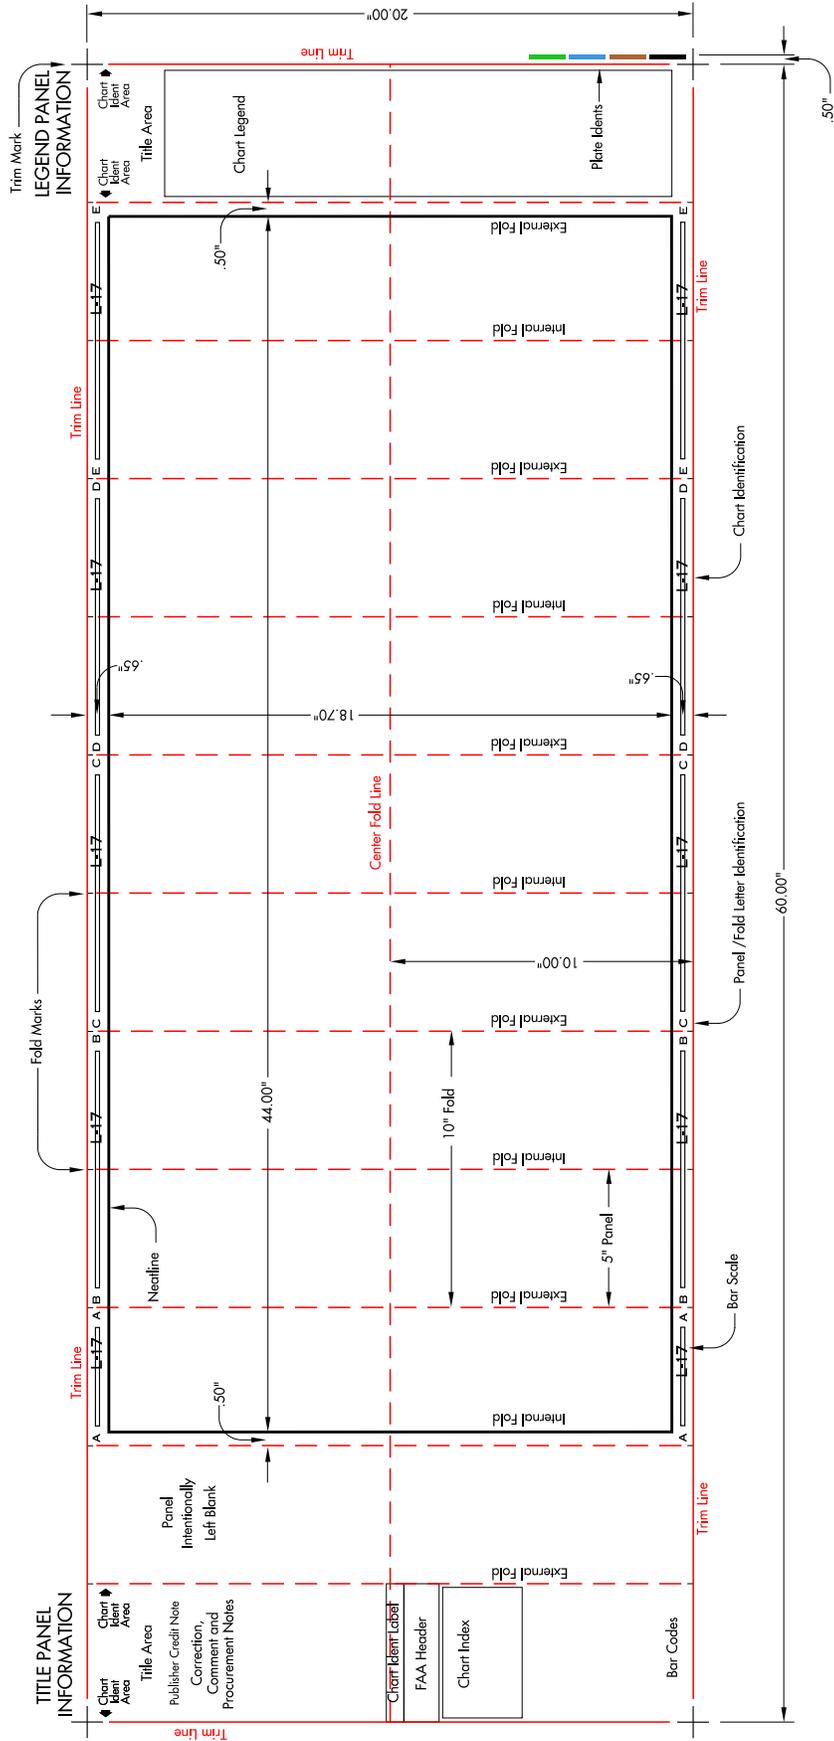


APPENDIX 10 CHART LAYOUT - U.S. L-18 AND L-32

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-18 and L-32

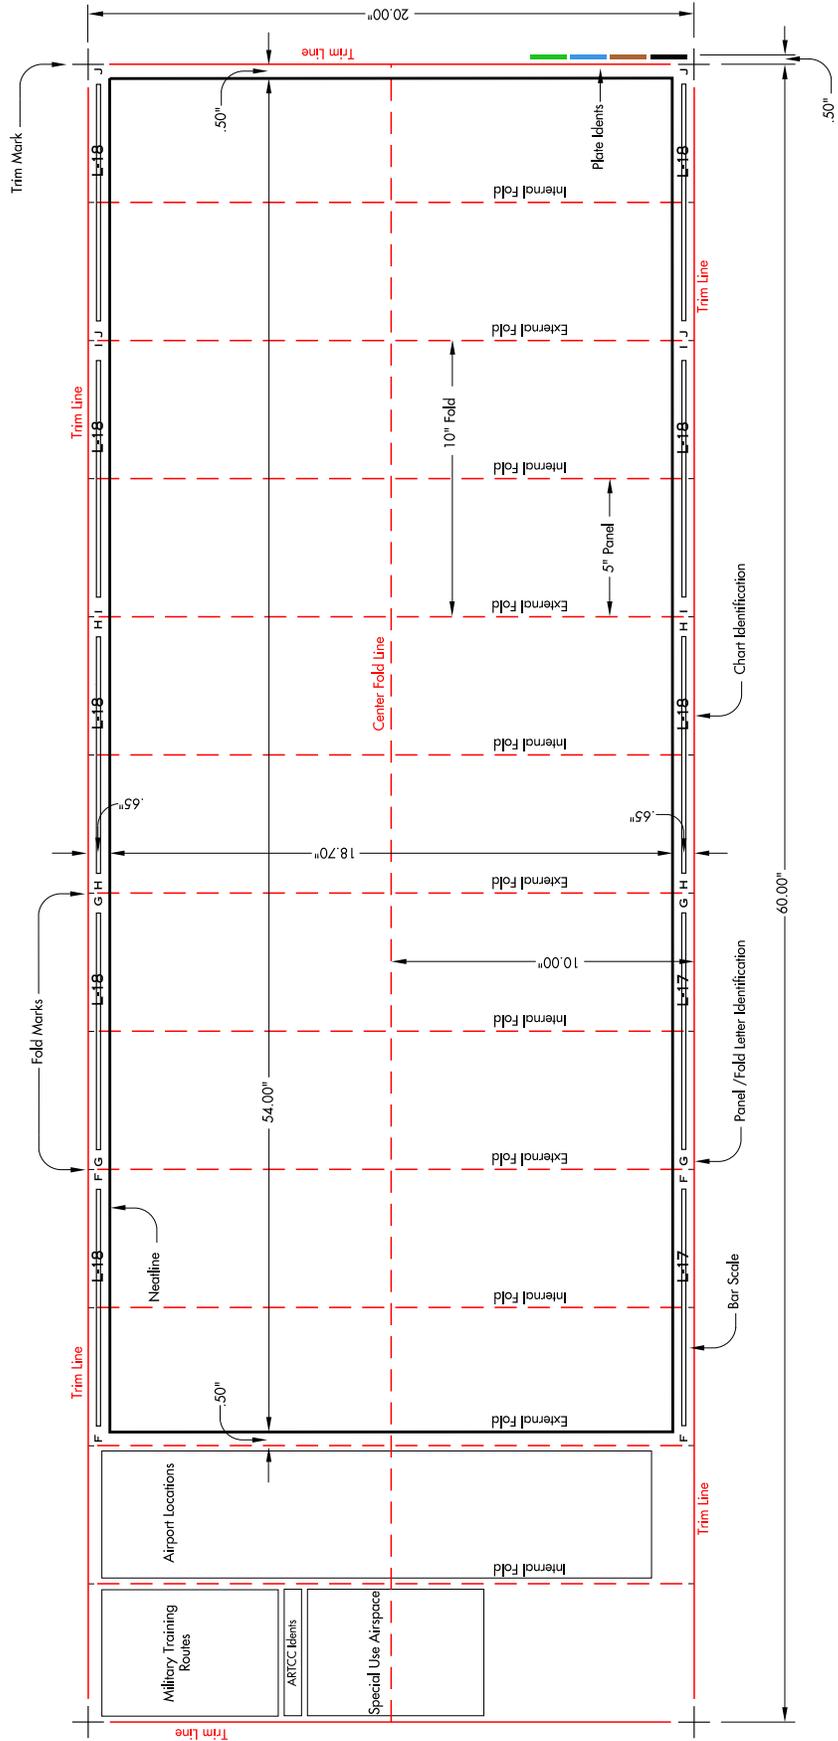

APPENDIX 11 CHART LAYOUT - U.S. L-20 AND L-28


IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-20 and L-28

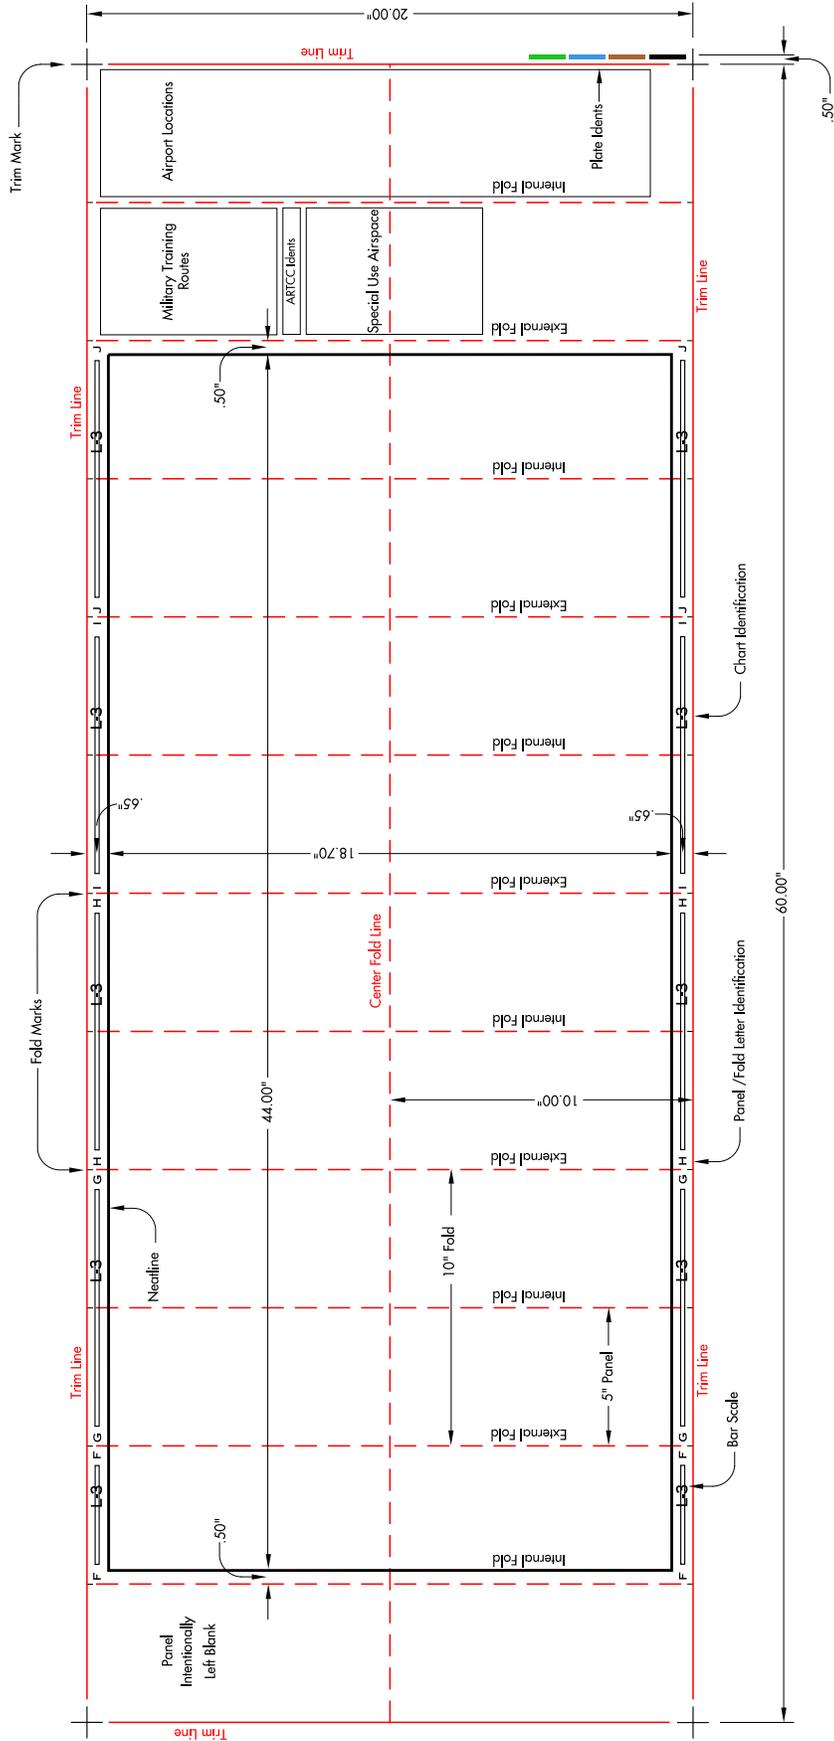

APPENDIX 12 CHART LAYOUT - U.S. L-21, L-33 AND L-35

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-21, L-33 and L-35


NOTE
AIRPORT LOCATIONS TABULATION WILL BE SHOWN ON L-33 AND L-35. SPECIAL USE AIRSPACE TABULATION WILL BE SHOWN ON L-21.

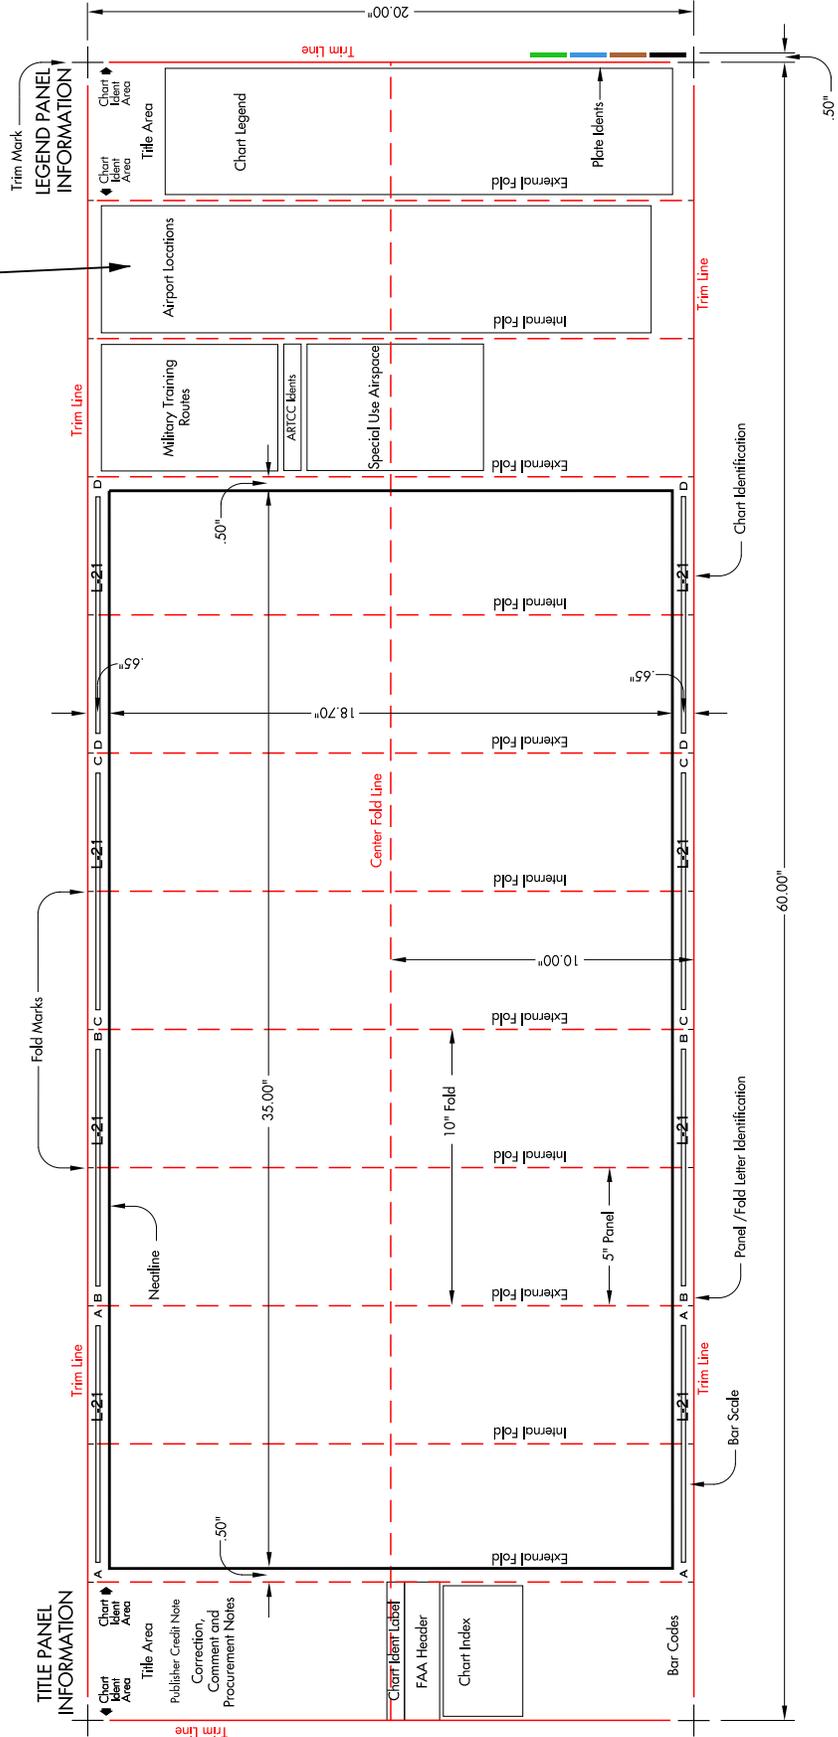

APPENDIX 13 CHART LAYOUT - U.S. L-22 AND L-36


IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-22 and L-36

NOTE
AIRPORT LOCATIONS TABULATION WILL BE SHOWN ON
H-22, PANEL WILL BE LEFT BLANK ON H-36

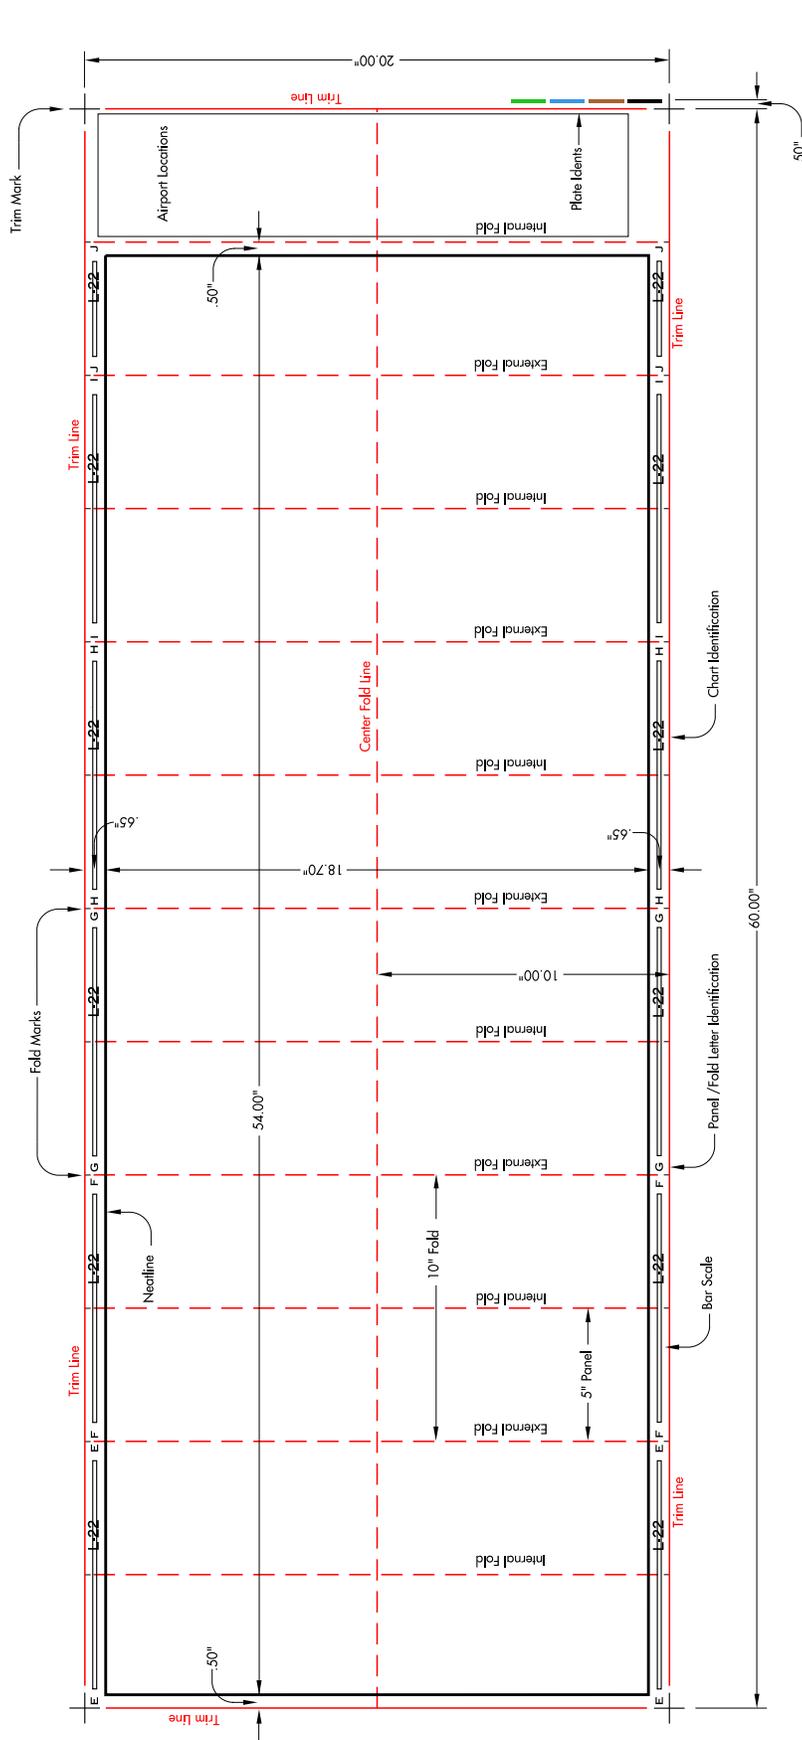


APPENDIX 14 CHART LAYOUT - U.S. L-23

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-23

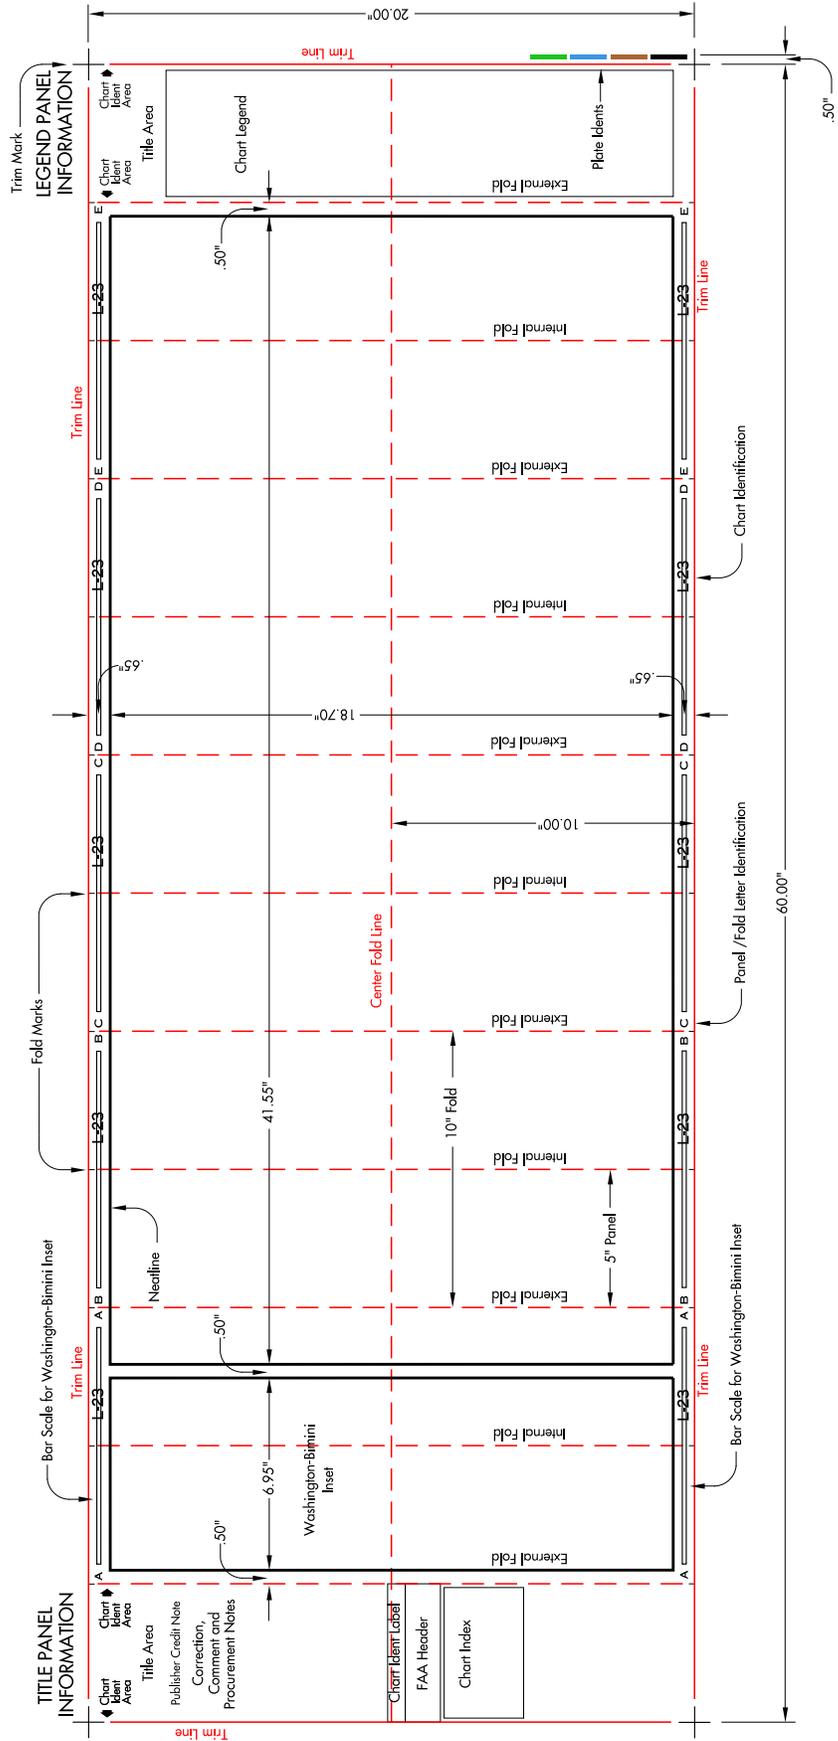


APPENDIX 15 CHART LAYOUT - U.S. L-25

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-25

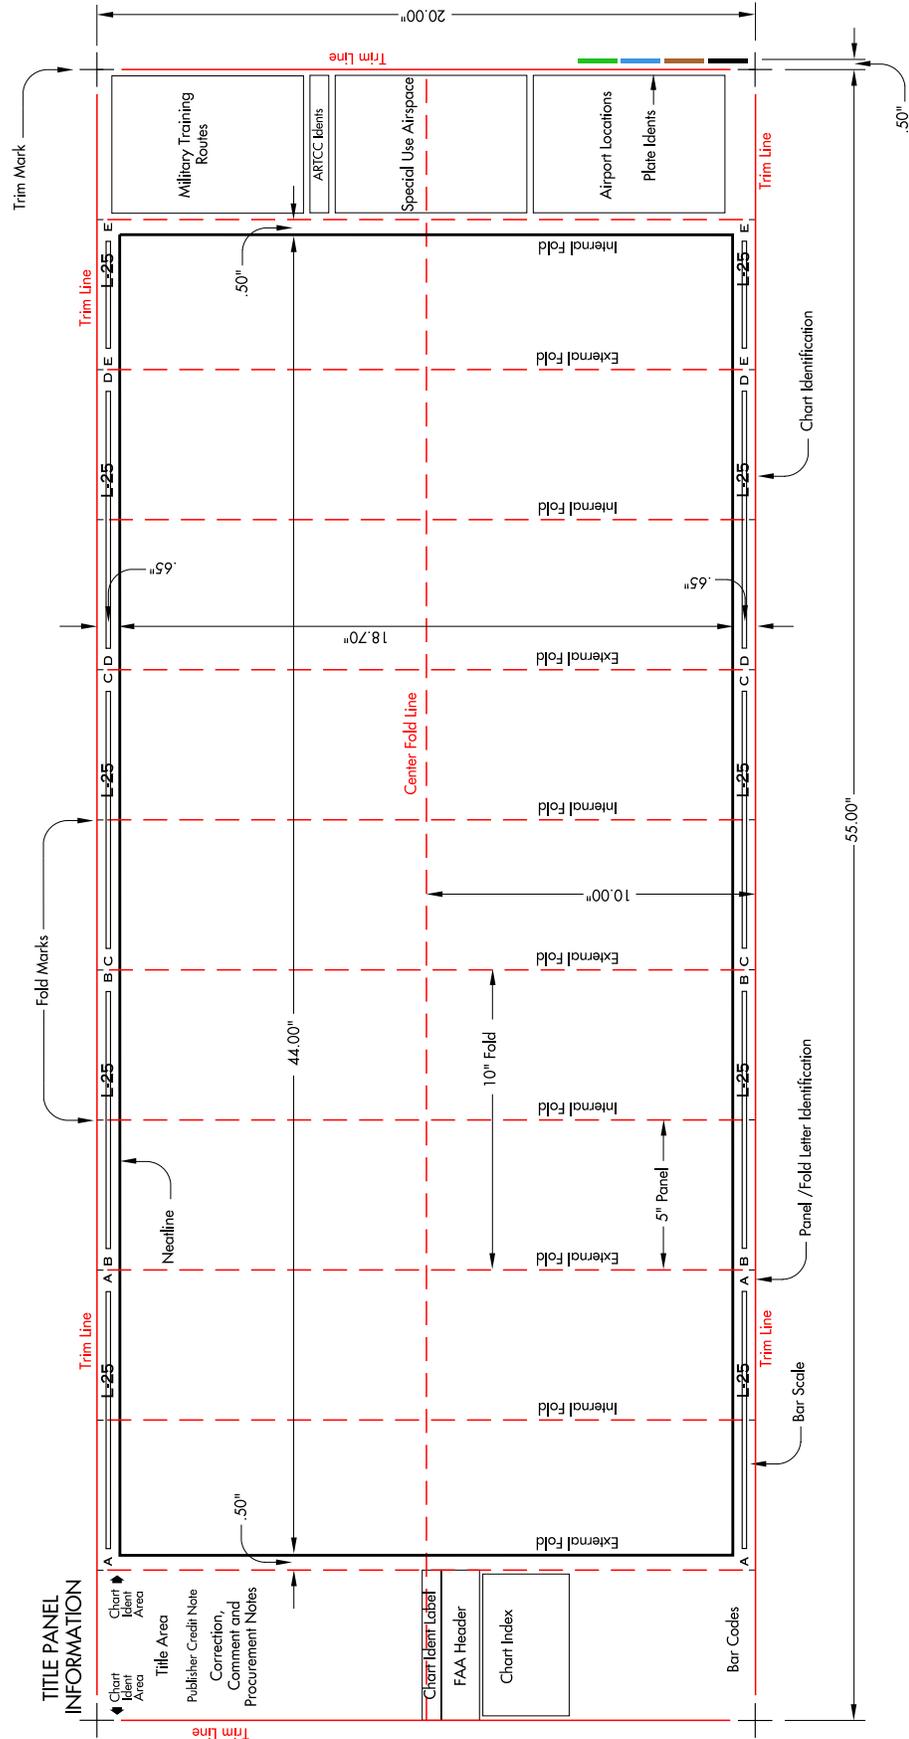


APPENDIX 16 CHART LAYOUT - U.S. L-26

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-26

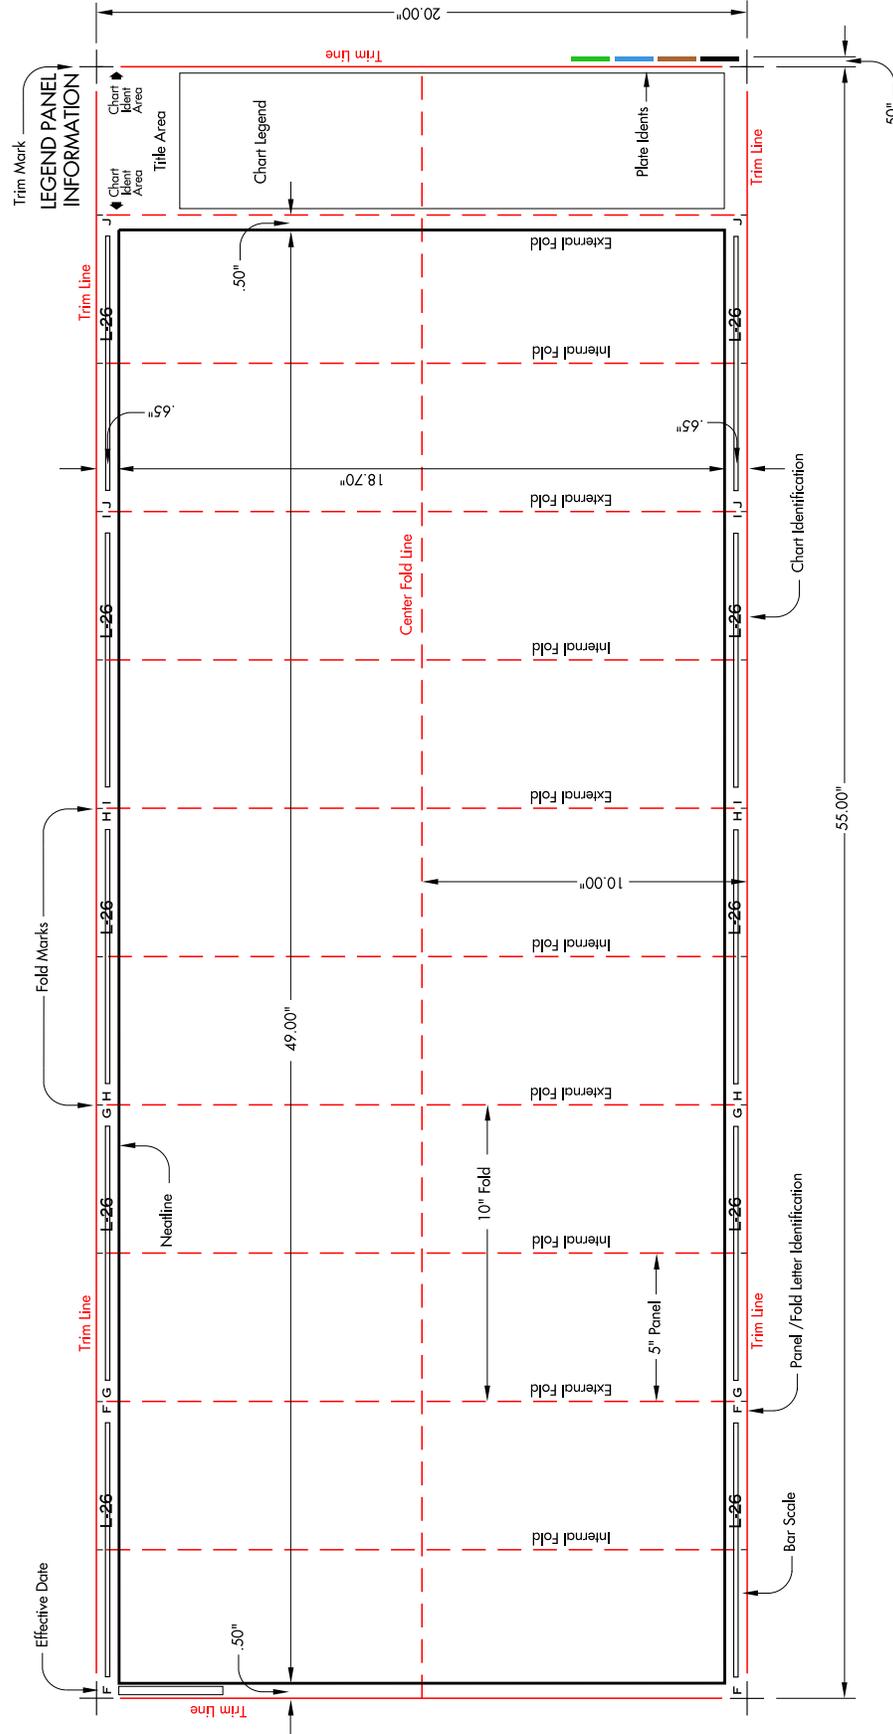


APPENDIX 17 CHART LAYOUT - U.S. L-30

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-30

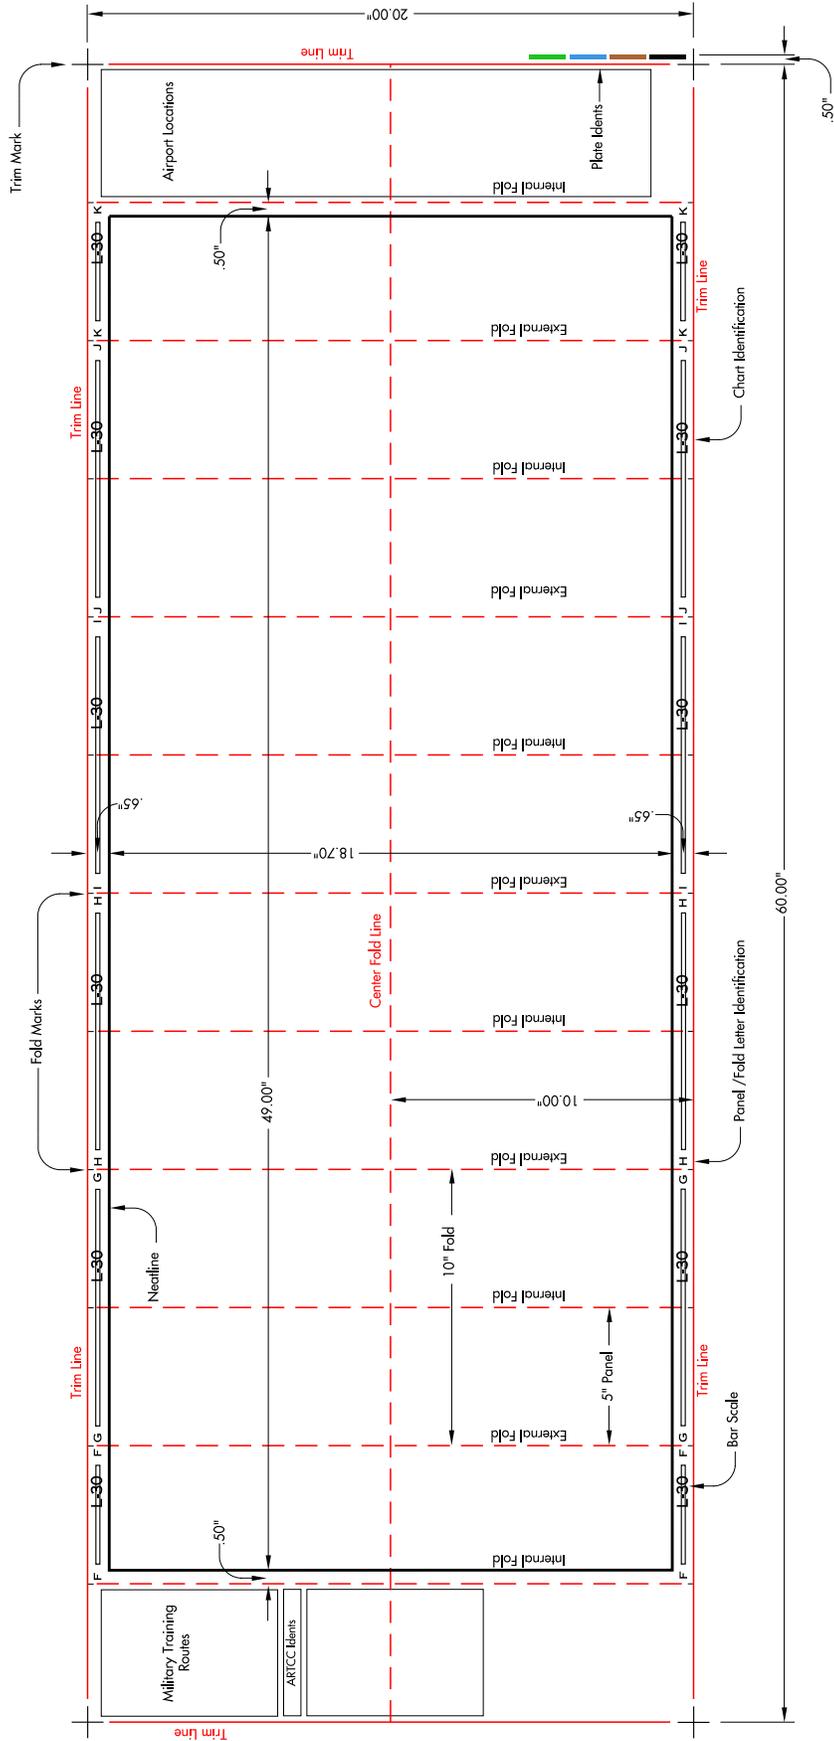


APPENDIX 18 CHART LAYOUT - U.S. L-34

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT U.S. L-34

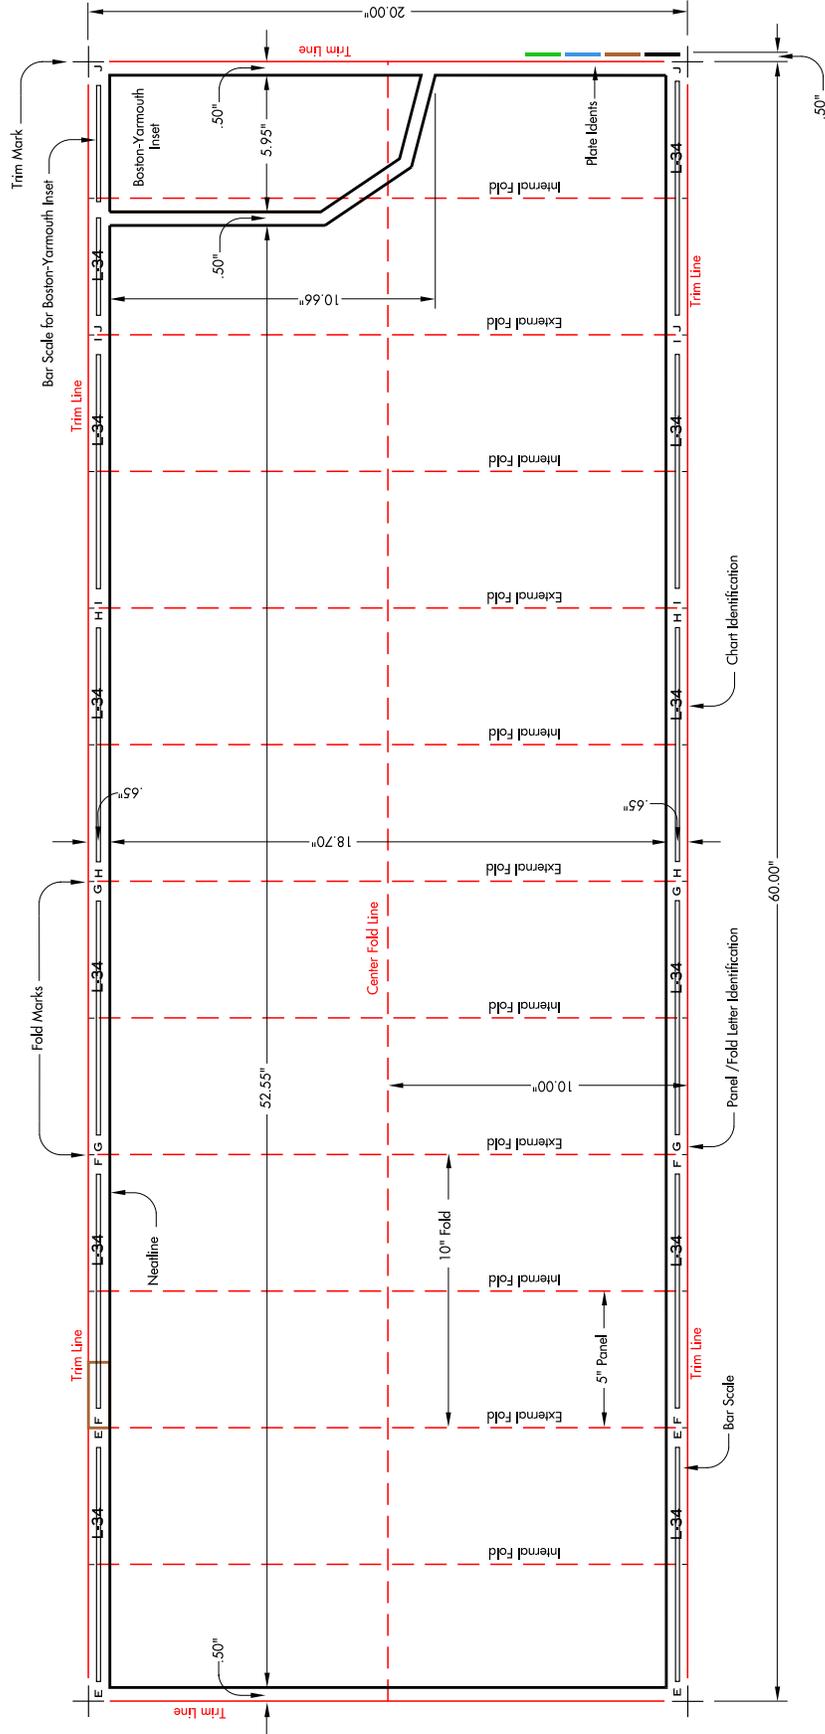


APPENDIX 19 CHART LAYOUT - ALASKA L-1

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT ALASKA L-1

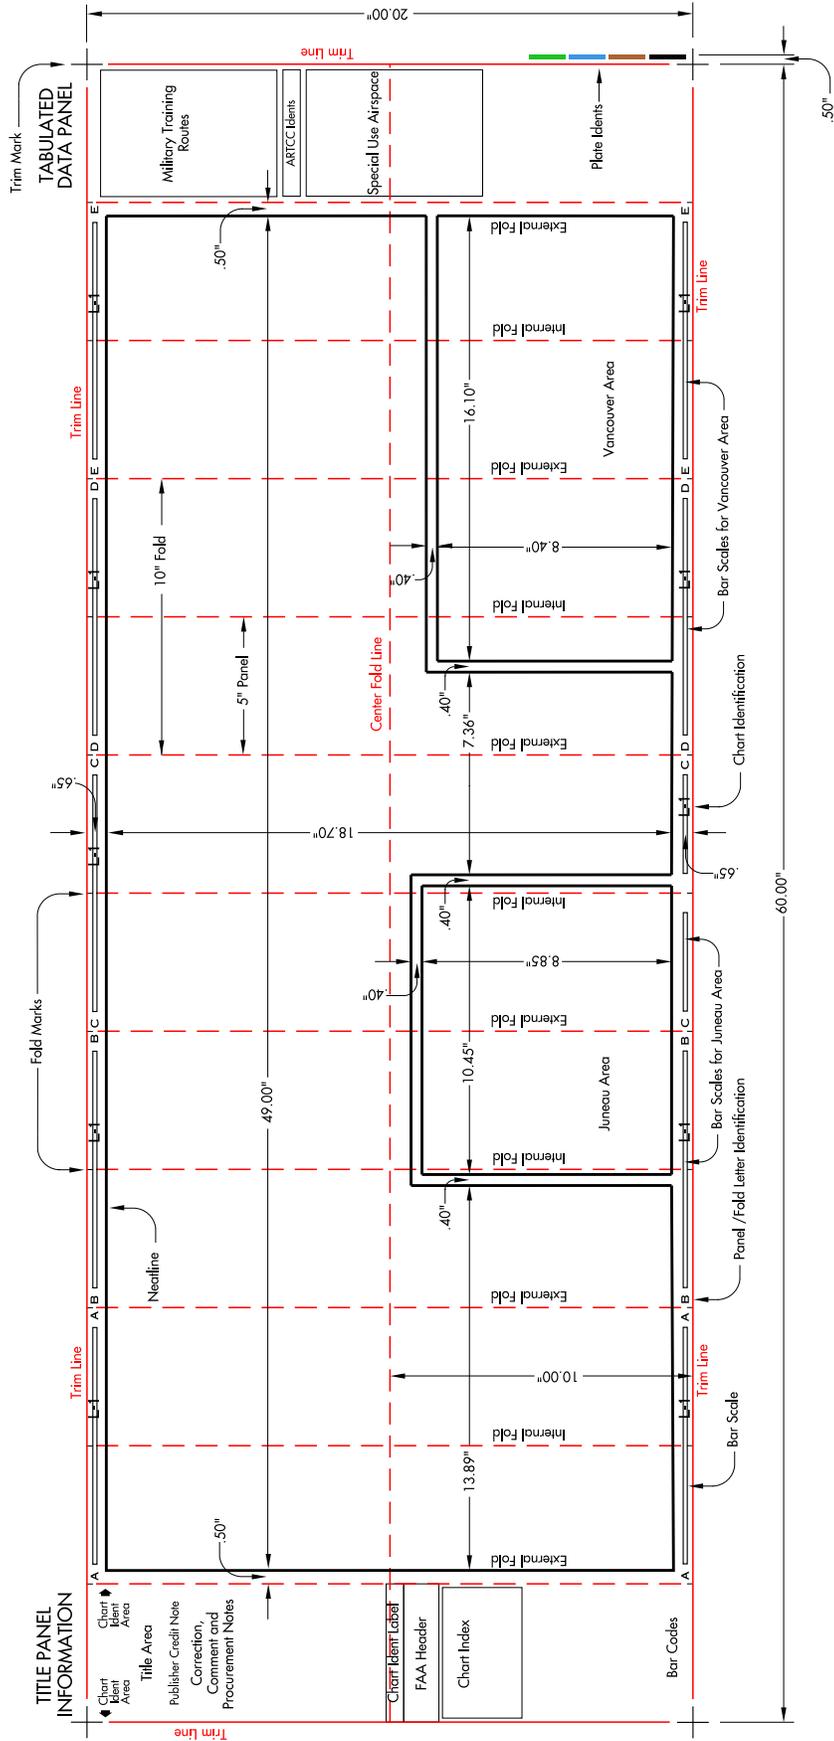


APPENDIX 20 CHART LAYOUT - ALASKA L-2

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT ALASKA L-2

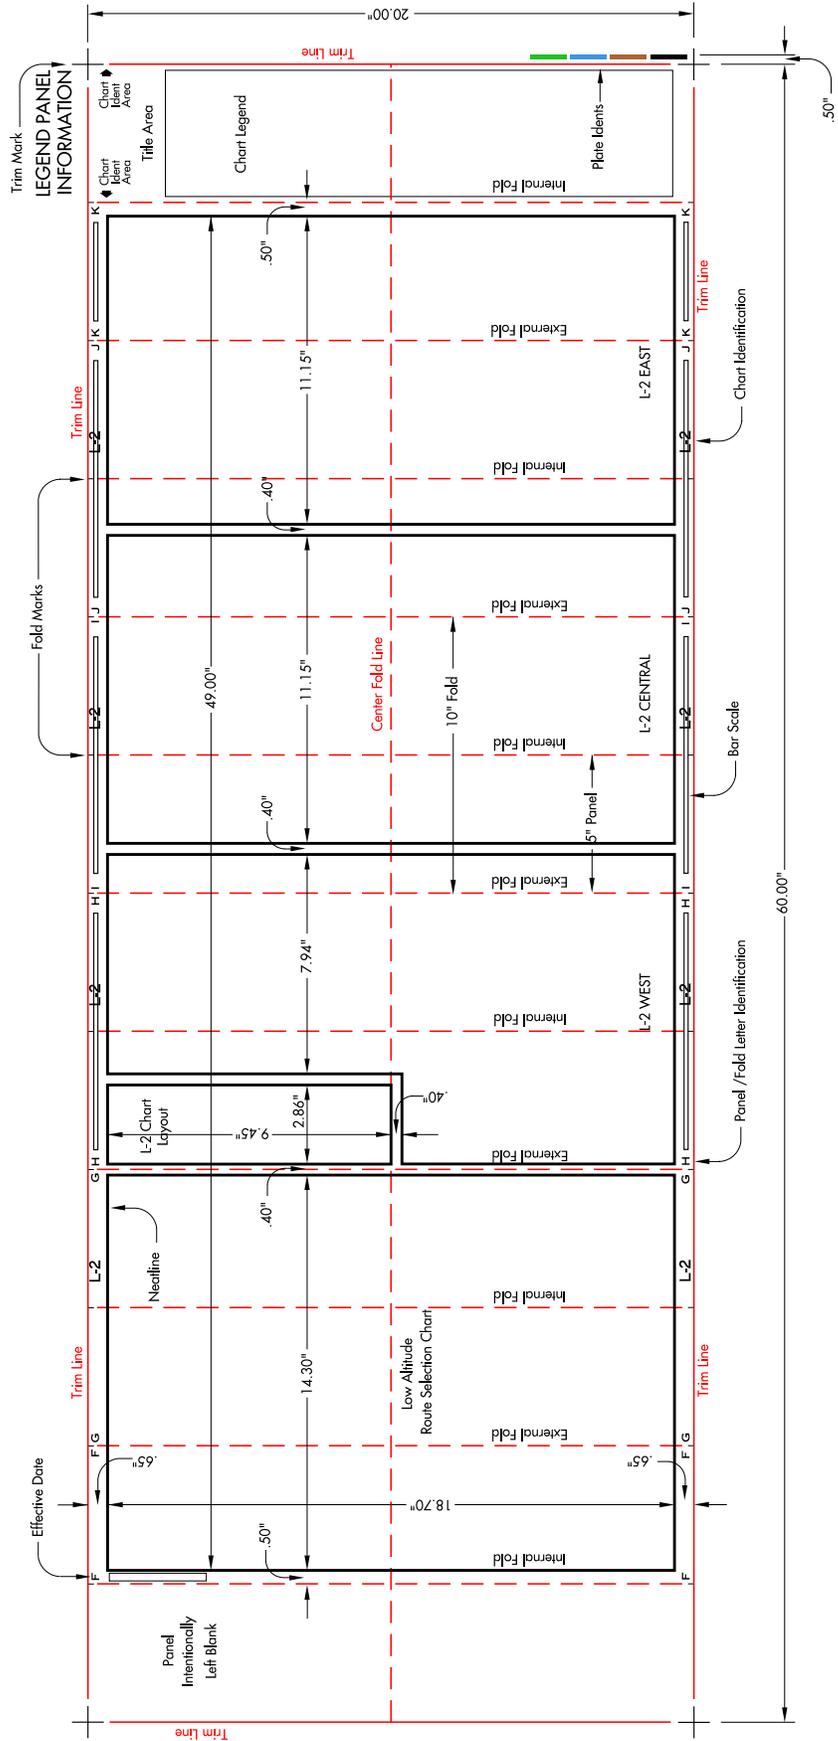

APPENDIX 21 CHART LAYOUT - ALASKA L-3

IFR ENROUTE LOW ALTITUDE CHARTS CHART LAYOUT ALASKA L-3

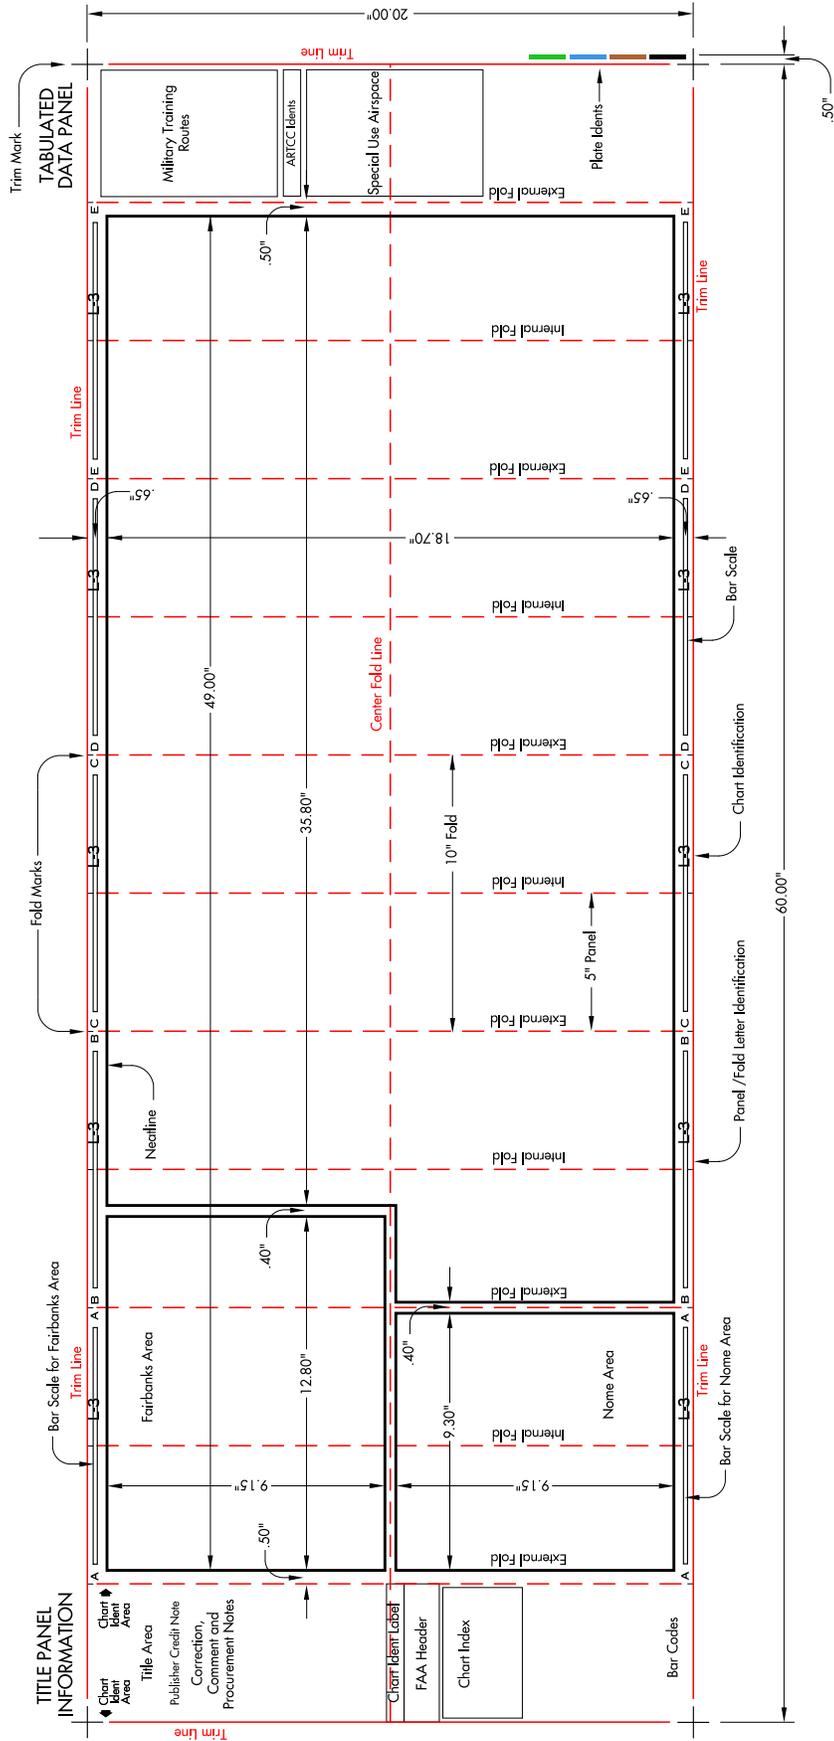

APPENDIX 23 TITLE PANEL INFORMATION - U.S. & ALASKA

TRIM LINE

Warning: Refer to current foreign charts and flight information publications for information within foreign airspace

L-2
PANELS
FGHIJ
1'-8 NM

L-1
PANELS
ABCD E
1'-8 NM

**UNITED STATES GOVERNMENT
FLIGHT INFORMATION PUBLICATION
IFR ENROUTE LOW ALTITUDE - U.S.**

For use up to but not including 18,000' MSL

**EFFECTIVE 0901Z 10 MAR 2011
TO 0901Z 5 MAY 2011**

Consult NOTAMs for latest information

Published by the
U.S. Department of Transportation
Federal Aviation Administration

CORRECTIONS, COMMENTS, AND/OR PROCUREMENT

FOR CHARTING ERRORS, OR RECOMMENDATIONS REGARDING FORMAT AND CONTENT CONTACT:

Current Charting Errors, or Recommendations Address

FOR PROCUREMENT CONTACT:

Current Procurement Address

MILITARY

For Corrections Information, See Chapter 11 of General Planning (GP). For Procurement refer to DOD Catalog of Aeronautical Charts and Flight Information Publications.

Frequently asked questions (FAQ) are answered on our web site at <http://eronav.faa.gov>. See the FAQs prior to contact via toll free number or email.

ATTENTION

THIS CHART CONTAINS OFF ROUTE OBSTRUCTION CLEARANCE ALTITUDES (OROCA). The off route obstruction clearance altitudes shown in quadrangles bounded by ticked lines of latitude and longitude are represented in THOUSANDS and HUNDREDS of feet above mean sea level. The OROCA is based on information available concerning the highest known features in each quadrangle, including terrain and obstructions. OROCA provides obstruction clearance with a 1000 foot buffer in designated non-mountainous areas and a 2000 foot buffer in designated mountainous areas within the United States. For areas in Mexico and the Caribbean which are located outside of the U.S. ADIZ, OROCA provides obstruction clearance with a 3000 foot buffer. This altitude is provided for obstruction clearance only. It does not provide for NAVAID signal coverage or communication coverage, and would not be consistent with altitudes assigned by Air Traffic Control.

12⁵

Example: 12,500 feet

L-1

**10 MAR 2011
UNITED STATES**

**Federal Aviation
Administration**

PUBLISHED IN ACCORDANCE WITH INTERAGENCY AIR CARTOGRAPHIC COMMITTEE SPECIFICATIONS AND AGREEMENTS, APPROVED BY: DEPARTMENT OF DEFENSE • FEDERAL AVIATION ADMINISTRATION

FAA Product ID: ELUS1

NSN 7641014109653

NSA REF. NO. ENRXXUSLCHT01

EXP. DATE 11069

TRIM LINE

TRIM LINE

Warning: Refer to current foreign charts and flight information publications for information within foreign airspace

L-2
PANELS
FGHIJ
1'-8 NM

L-1
PANELS
ABCD E
1'-8 NM

**UNITED STATES GOVERNMENT
FLIGHT INFORMATION PUBLICATION
IFR ENROUTE LOW ALTITUDE - ALASKA**

For use up to but not including 18,000' MSL

**EFFECTIVE 0901Z 10 MAR 2011
TO 0901Z 5 MAY 2011**

Consult NOTAMs for latest information

Published by the
U.S. Department of Transportation
Federal Aviation Administration

CORRECTIONS, COMMENTS, AND/OR PROCUREMENT

FOR CHARTING ERRORS, OR RECOMMENDATIONS REGARDING FORMAT AND CONTENT CONTACT:

Current Charting Errors, or Recommendations Address

FOR PROCUREMENT CONTACT:

Current Procurement Address

MILITARY

For Corrections Information, See Chapter 11 of General Planning (GP). For Procurement refer to DOD Catalog of Aeronautical Charts and Flight Information Publications.

Frequently asked questions (FAQ) are answered on our web site at <http://eronav.faa.gov>. See the FAQs prior to contact via toll free number or email.

CHART NOTICE

Implementation of Instrument Flight Rules (IFR) Area Navigation (RNAV) Operations Using Global Positioning System (GPS) in Alaska

Under SFAR No. 97, operators using IFR-certified TSO C145a and TSO C146a GPS/WAAS navigation systems will be permitted to conduct operations over selected routes in AK beyond the service volume of ground-based navigaids at the lowest minimum en route altitude (MEA) based only on route obstacle assessments and ATR, two-way voice communication capability. The MEAs for these routes will be depicted on the IFR Enroute Low Altitude (AK) charts in blue type with a "G" suffix. For instance, a GPS MEA of 2000 feet MSL will be depicted as "2000G" in blue. Standard MEAs will be depicted in black type and be "stacked" above the GPS MEA. See SFAR No. 97 for equipment, training and operational requirements.

ATTENTION

THIS CHART CONTAINS OFF ROUTE OBSTRUCTION CLEARANCE ALTITUDES (OROCA). The off route obstruction clearance altitudes shown in quadrangles bounded by ticked lines of latitude and longitude are represented in THOUSANDS and HUNDREDS of feet above mean sea level. The OROCA is based on information available concerning the highest known features in each quadrangle, including terrain and obstructions. OROCA provides obstruction clearance with a 1000 foot buffer in designated non-mountainous areas and a 2000 foot buffer in designated mountainous areas within the United States. For areas in Mexico and the Caribbean which are located outside of the U.S. ADIZ, OROCA provides obstruction clearance with a 3000 foot buffer. This altitude is provided for obstruction clearance only. It does not provide for NAVAID signal coverage or communication coverage, and would not be consistent with altitudes assigned by Air Traffic Control.

12⁵

Example: 12,500 feet

L-1/L-2

**10 MAR 2011
ALASKA**

**Federal Aviation
Administration**

INSTRUCTIONS FOR ASSEMBLY OF WALL PLANNING CHART
Obtain two copies of each chart.
Assemble charts by matching airplane altitudes printed on each chart.

PUBLISHED IN ACCORDANCE WITH INTERAGENCY AIR CARTOGRAPHIC COMMITTEE SPECIFICATIONS AND AGREEMENTS, APPROVED BY: DEPARTMENT OF DEFENSE • FEDERAL AVIATION ADMINISTRATION

FAA Product ID: ELAK1

NSN 7641014970163



NSA REF. NO. ENRXXAKLCHT01

EXP. DATE 11069

TRIM LINE

APPENDIX 24

CHART IDENTIFICATION & TITLE PANEL AREA LAYOUT - U.S. & ALASKA

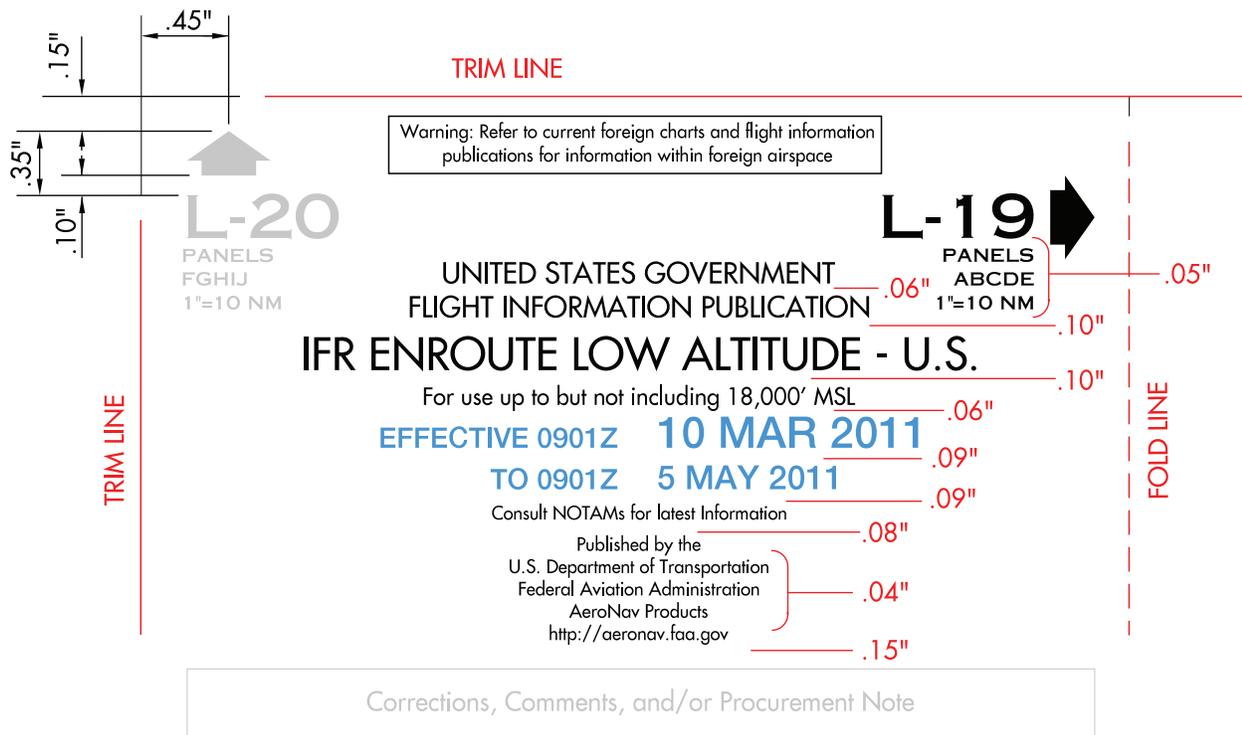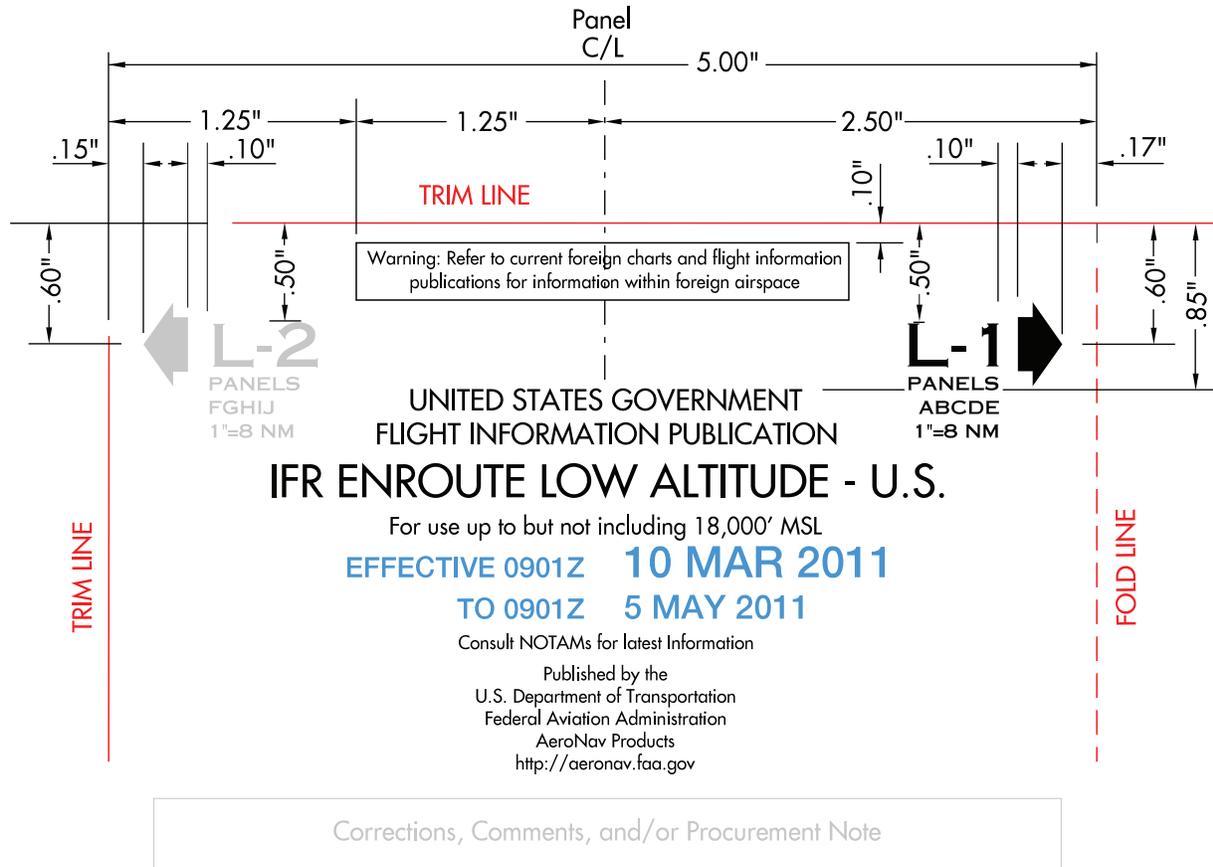

APPROXIMATE LINE SPACINGS SHOWN IN RED


APPENDIX 24

CHART IDENTIFICATION & TITLE PANEL AREA LAYOUT - U.S. & ALASKA (CONTINUED)

TITLE PANEL - LOW ENROUTE CHARTS					
Foreign Airspace Warning Text Box Lineweight & Color	C/L	.07" Futura Medium/Black .008"/Black		Warning: Refer to current foreign... 	
Chart Identification Area Chart Idents Text Color Arrowheads Panel Identifications Text Color Chart Scales Text Color	CAPS	Even Numbers	Odd Numbers	Even Numbers	Odd Numbers
		.23" Copperplate Gothic 31		L-2	L-1
		45% Black	Black		
	45% Black		Black		
	CAPS	.07" Copperplate Gothic 31		PANELS FGHIJ	PANELS ABCDE
		45% Black	Black		
CAPS	.07" Copperplate Gothic 31		1"-8 NM	1"-8 NM	
	45% Black	Black			
Chart Title First and Second Lines Third Line Altitude Note	CAPS CAPS	.11" Futura Medium/Black .17" Futura Medium/Black .09" Futura Medium/Black		UNITED STATES... IFR ENROUTE... For use up to but not...	
Effective Date & Times Note Effective Time Effective Date Expiration Time Expiration Date	CAPS CAPS CAPS CAPS	.11" Helvetica 65 Medium/Solid Blue .17" Helvetica 65 Medium/Solid Blue .11" Helvetica 65 Medium/Solid Blue .13" Helvetica 65 Medium/Solid Blue		EFFECTIVE 0901Z 18 NOV 2010 TO 0901Z 13 JAN 2011	
NOTAM Note Publishers Credit Note	C/L	.07" Futura Medium/Black .07" Futura Medium/Black		Consult NOTAMs for latest Information Published by the U.S. Department of Transportation	

APPENDIX 25

CORRECTIONS, COMMENTS AND/OR PROCUREMENT AREA LAYOUT - U.S. & ALASKA

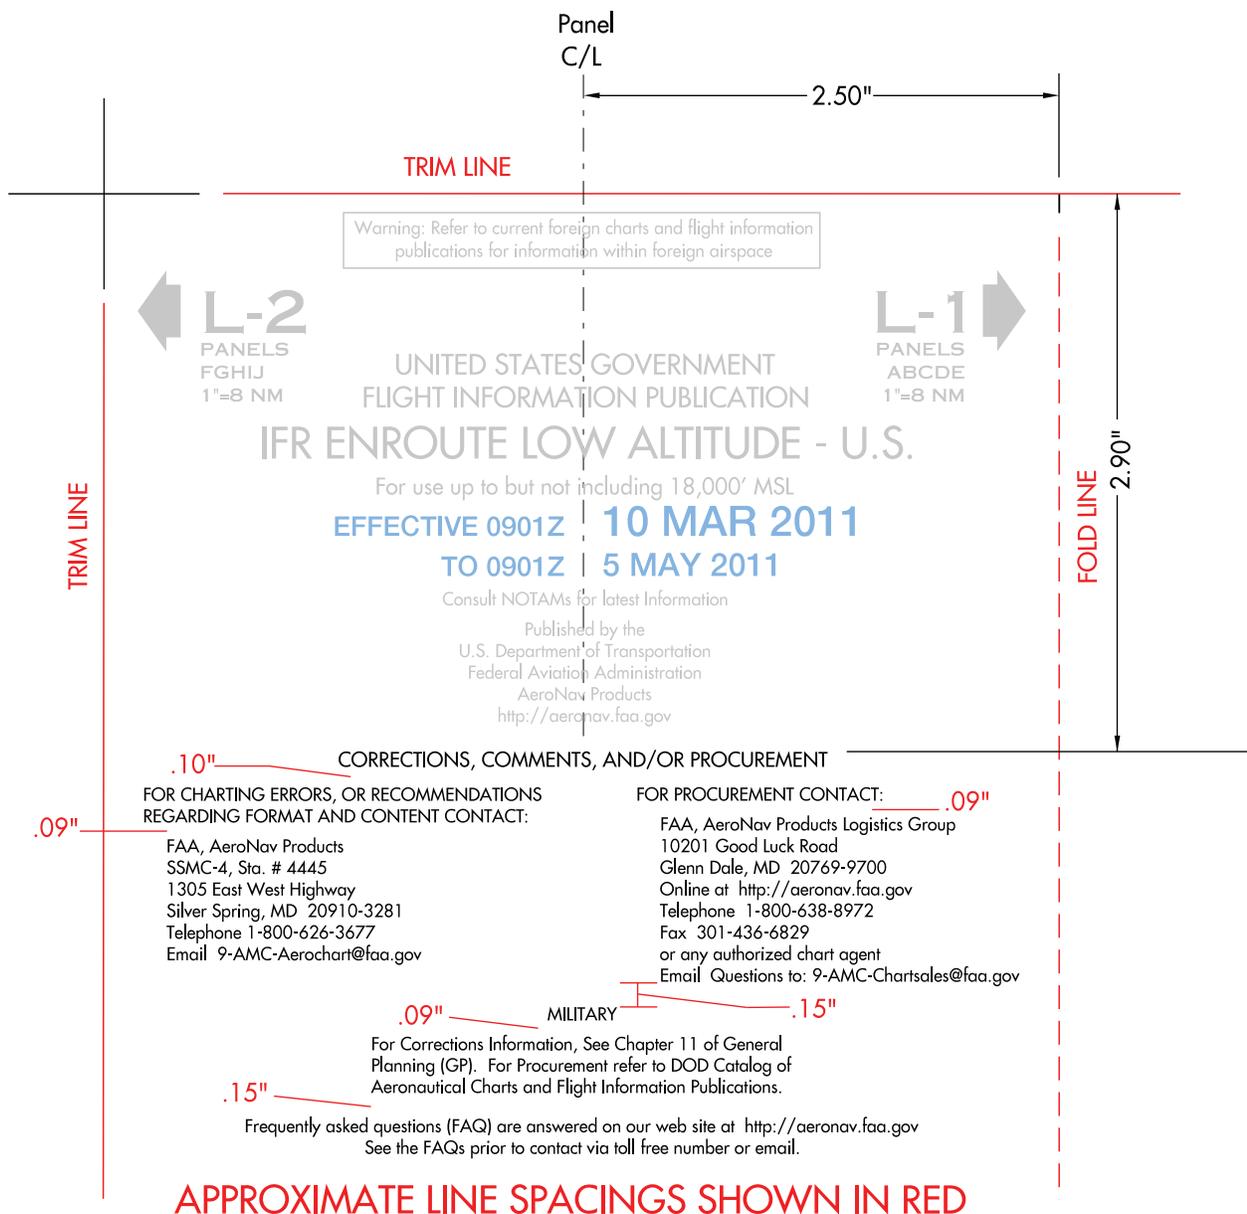

CORRECTIONS, COMMENTS AND/OR PROCUREMENT NOTES			
Main Heading	CAPS	.08" Futura Medium/Black	CORRECTIONS, COMMENTS, AND...
Secondary Headings	CAPS	.07" Futura Medium/Black	FOR CHARTING ERRORS, OR...
Other Text	C/L	.07" Futura Medium/Black	FAA, AeroNav Products For Corrections Information...
Frequently Asked Questions	Lowercase	.07" Futura Medium/Black	Frequently asked questions (FAQ)...

**APPENDIX 26
OROCA NOTICE**

ATTENTION

THIS CHART CONTAINS OFF ROUTE OBSTRUCTION CLEARANCE ALTITUDES (OROCA).
 The off route obstruction clearance altitudes shown in quadrangles bounded by ticked lines of latitude and longitude are represented in THOUSANDS and HUNDREDS of feet above mean sea level. The OROCA is based on information available concerning the highest known features in each quadrangle, including terrain and obstructions. OROCA provides obstruction clearance with a 1000 foot buffer in designated non-mountainous areas and a 2000 foot buffer in designated mountainous areas within the United States. For areas in Mexico and the Caribbean which are located outside of the U.S. ADIZ, OROCA provides obstruction clearance with a 3000 foot buffer. This altitude is provided for obstruction clearance only. It does not provide for NAVAID signal coverage or communication coverage, and would not be consistent with altitudes assigned by Air Traffic Control.

12⁵

Example: 12,500 feet

OROCA NOTICE			
Main Heading	CAPS	.09" Futura Medium/Black	<p>ATTENTION THIS CHART CONTAINS OFF ROUTE ... The off route obstruction clearance ...</p> <p>Example: 12,500 feet ..</p> <p>12⁵</p> <p>□</p>
First Line	CAPS	.07" Futura Medium/Black	
Remaining Text	Lowercase	.07" Futura Medium/Black	
Example			
Text	Lowercase	.07" Futura Medium/Black	
OROCA			
Thousands of feet		.36" Futura Medium/25% Brown	
Hundreds of feet		.16" Futura Medium/25% Brown	
Box Lineweight		.007"/Black	

**APPENDIX 27
SFAR NO. 97 CHART NOTICE - ALASKA**

CHART NOTICE

Implementation of Instrument Flight Rules (IFR)
Area Navigation (RNAV) Operations Using
Global Positioning System (GPS) in Alaska


Under SFAR No. 97, operators using IFR-certified TSO C145a and TSO C146a GPS/WAAS navigation systems will be permitted to conduct operations over selected routes in AK beyond the service volume of ground-based nav aids at the lowest minimum en route altitude (MEA) based only on route obstacle assessments and ATC two-way voice communication capability.

The MEAs for these routes will be depicted on the IFR Enroute Low Altitude-AK charts in blue type with a 'G' suffix. For instance, a GPS MEA of 2000 feet MSL will be depicted as "2000G" in blue. Standard MEAs will be depicted in black type and be 'stacked' above the GPS MEA.

See SFAR No. 97 for equipment, training and operational requirements.

SFAR NO. 97 - CHART NOTICE			
Title	CAPS	.09" Futura Medium/Black	CHART NOTICE
Content	C/L	.08" Futura Medium/Black	Implementation of Instrument...
First Paragraph		.07" Futura Medium/Black	Under SFAR No. 97, operators...
Remaining Paragraphs			
Box Lineweight		.007"/Black	<div style="border: 1px solid black; width: 40px; height: 15px; margin: 0 auto;"></div>

APPENDIX 28 CHART IDENTIFICATION LABELS - U.S., ALASKA & AREA CHARTS

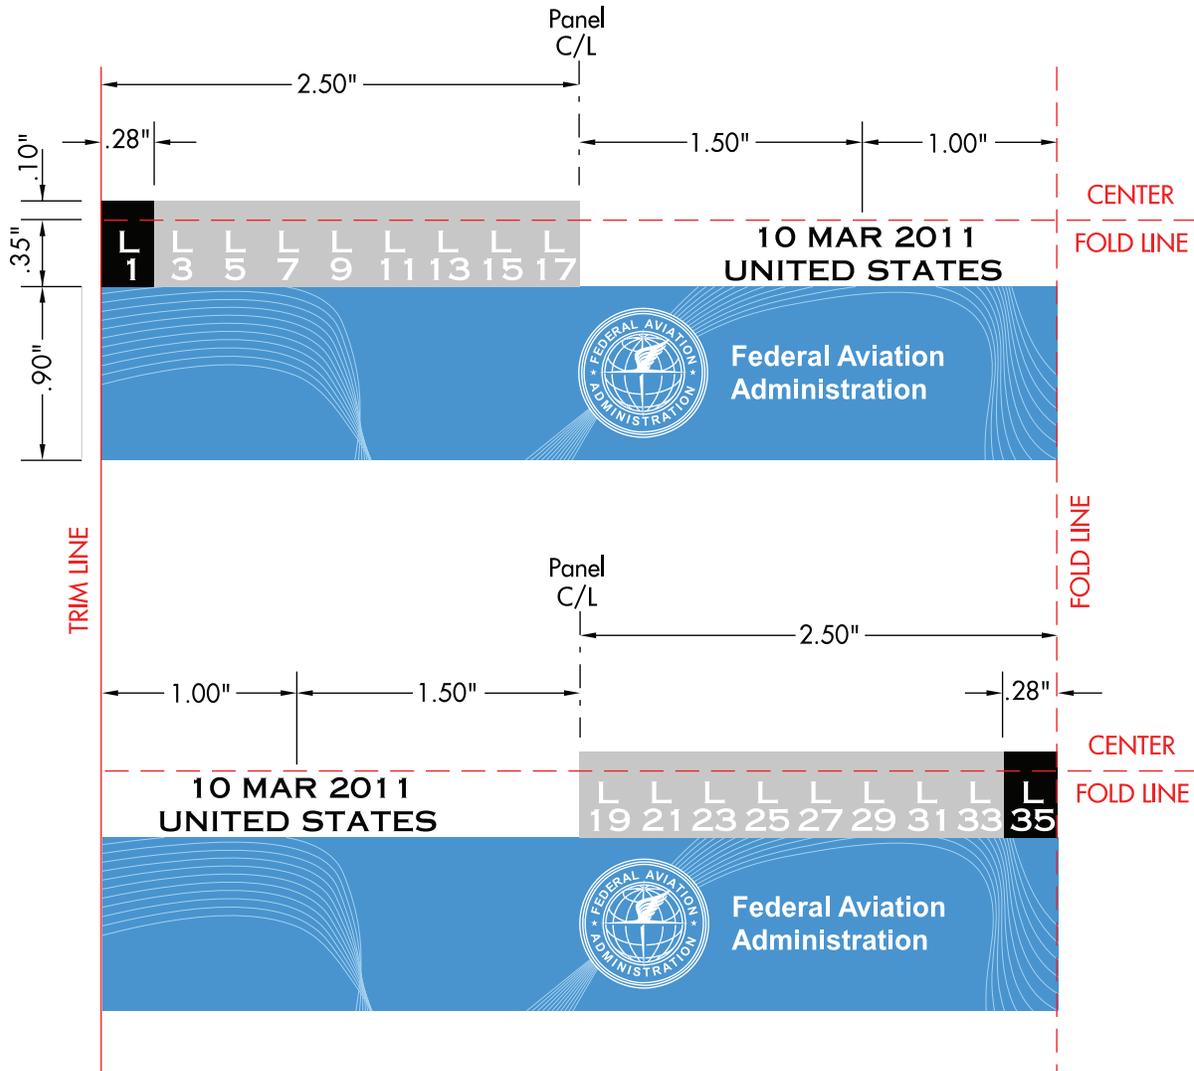

NOTE: All U.S. IFR Enroute Low Altitude chart indentifications are .28" in width.

**APPENDIX 28
CHART IDENTIFICATION LABELS - U.S., ALASKA & AREA CHARTS (CONTINUED)**


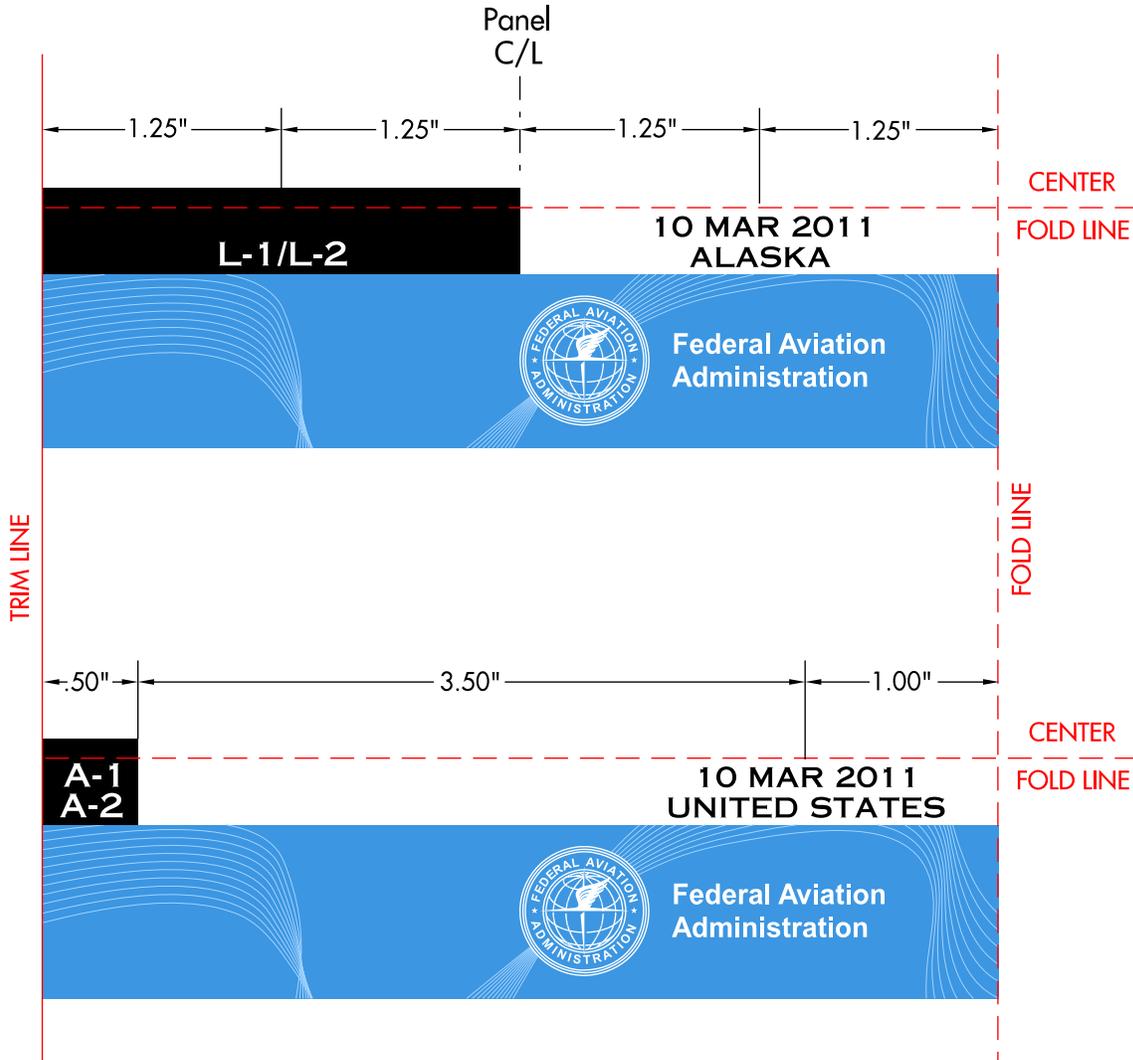



CHART IDENTIFICATION LABELS			
Chart Numbers Area & U.S.	CAPS	.12" Copperplate Gothic 31	L 1 A-1 A-2
Alaska	CAPS	.12" Copperplate Gothic 31	L-1/L-2
Chart Effective Date	CAPS	.11" Copperplate Gothic 31/Black	10 MAR 2011
Area of Coverage	CAPS	.11" Copperplate Gothic 31/Black	UNITED STATES

APPENDIX 29 CHART INDEXES - DIMENSIONS - U.S.

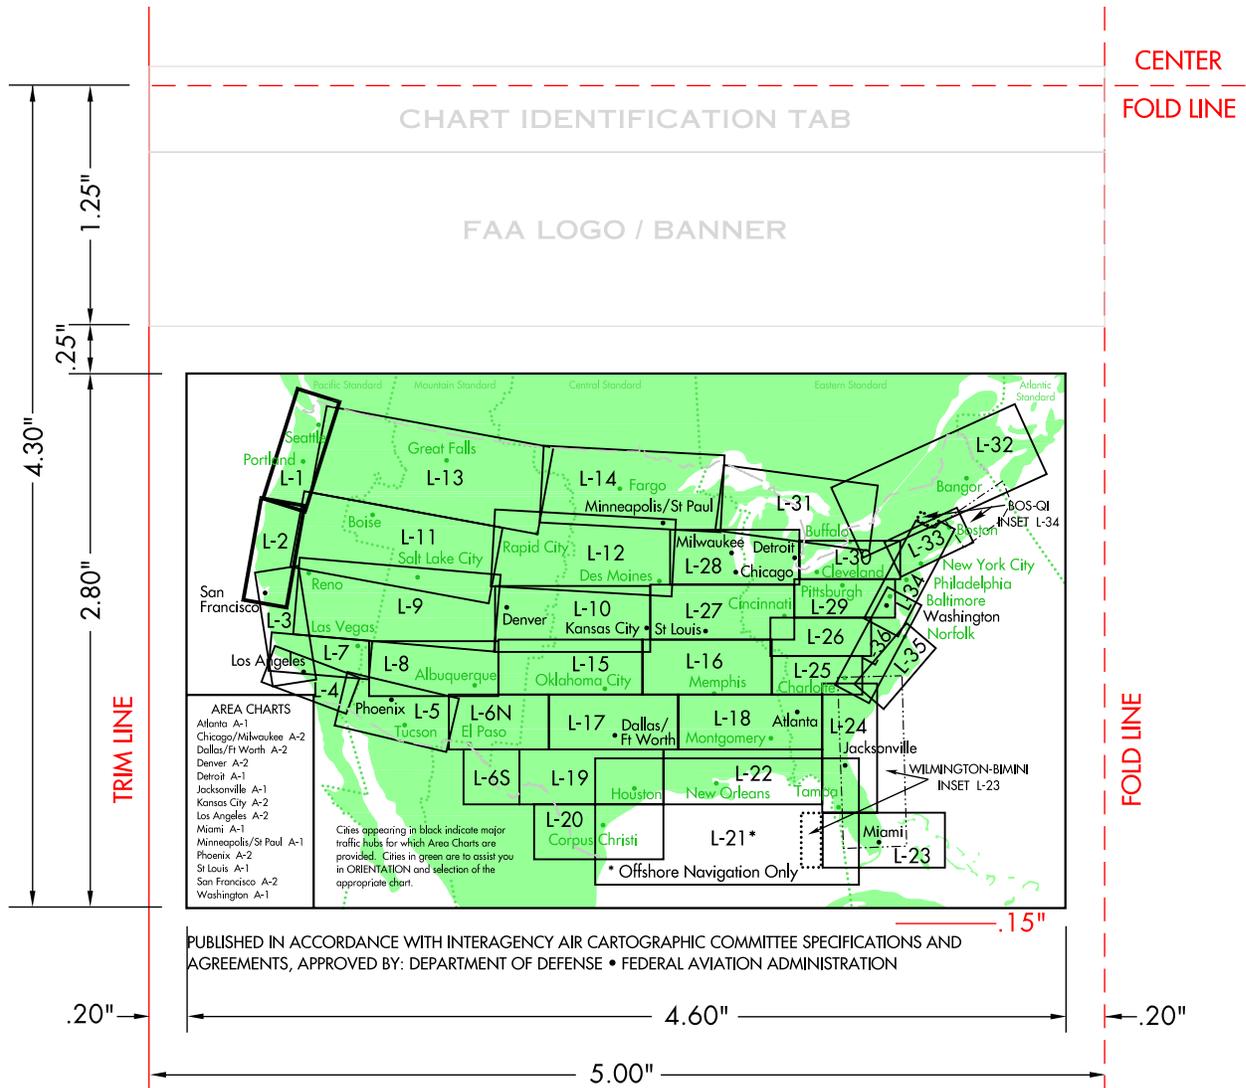

APPROXIMATE LINE SPACINGS SHOWN IN RED

**APPENDIX 30
CHART INDEXES - DIMENSIONS - ALASKA**

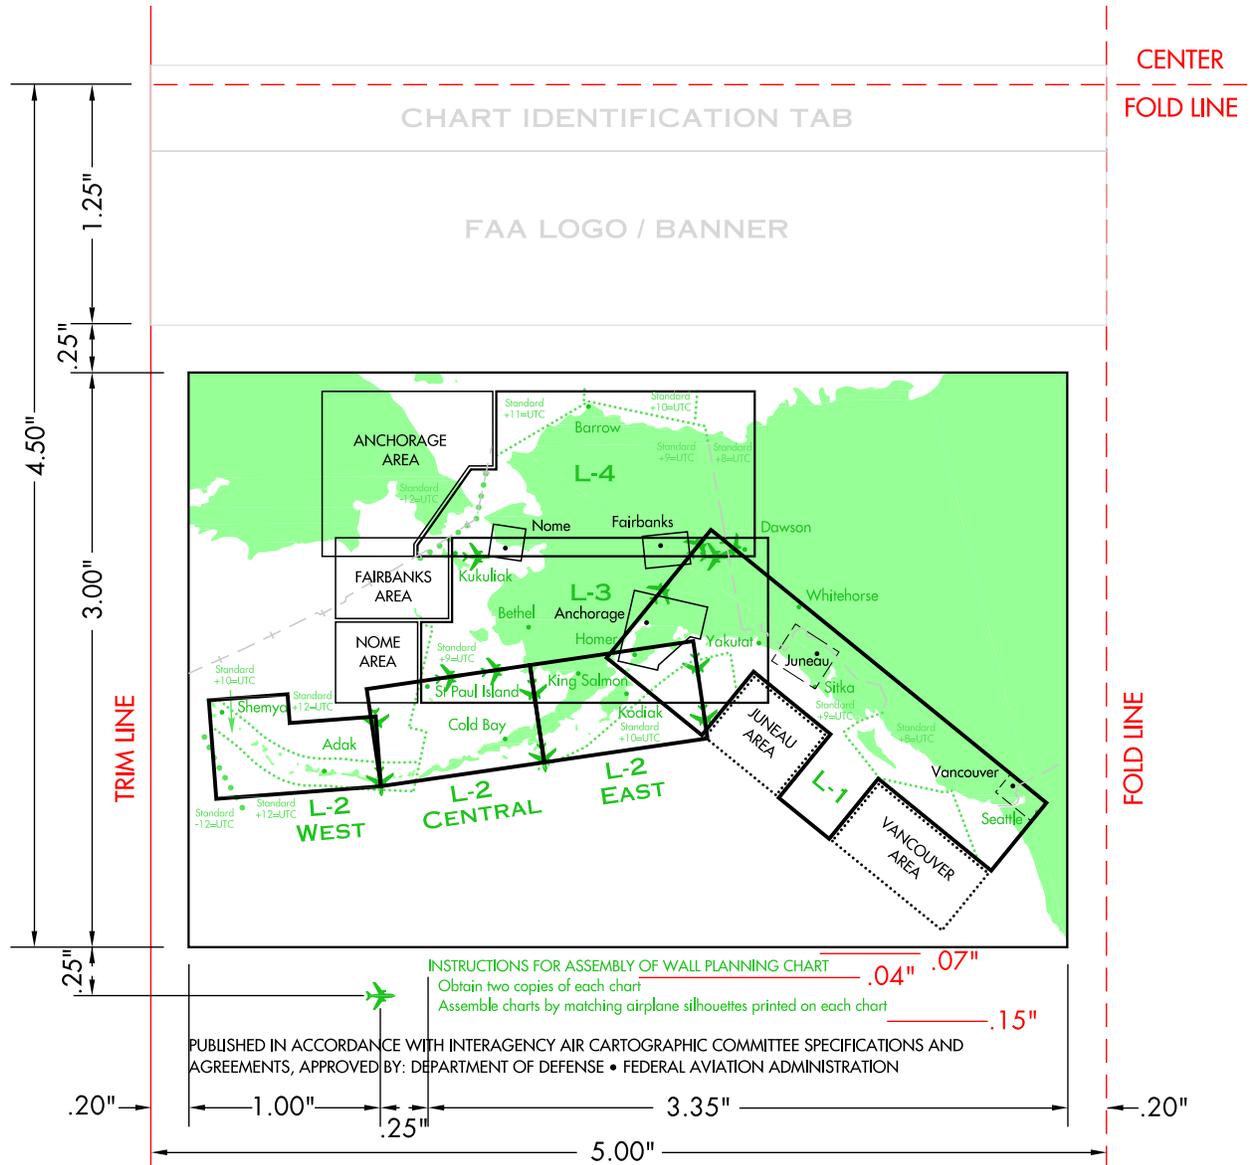

APPROXIMATE LINE SPACINGS SHOWN IN RED


**APPENDIX 31
CHART INDEXES - U.S. AND ALASKA**

CHART INDEXES - U.S. & ALASKA - COMMON ITEMS			
Cities			
Prominent Cities			
Symbol		.025" Diameter/Green	
Name	C/L	.06" Futura Medium/Green	Cold Bay
Area Chart Cities			
Symbol		.025" Diameter/Black	
Name	C/L	.06" Futura Medium/Black	Anchorage
Borders & Outlines			
Chart Index Border		.015"/Black	
Selected Charts			
Enroute Chart Coverage Border		.020"/Black	
Inset Chart Coverage Border		.015"/Black	
Time Zone Boundary			
Name	C/L	.04" Futura Medium/45% Green	Eastern Standard
Boundary		.015" Diameter/45% Green	
International Boundary		.008"/45% Black	
Land Areas		10% Green	
IACC Credit Note	CAPS	.065" Futura Medium/Black	PUBLISHED IN ACCORDANCE WITH...
CHART INDEXES - U.S. - UNIQUE ITEMS			
Chart Identificaton	CAPS	.08" Futura Medium/Black	L-21
Borders & Outlines			
Selected Charts			
Inset Chart Coverage Border		.020"/Black	
Non-Selected Charts			
Enroute Chart Coverage Border		.010"/Black	
Area Chart List Border		.012"/Black	
Area Chart List			
Title	CAPS	.05" Futura Medium/Black	AREA CHARTS
City Names	C/L	.04" Futura Medium/Black	Chicago/Milwaukee A-2
Inset Chart Title	CAPS	.05" Futura Medium/Black	WILMINGTON-BIMINI INSET L-23
Leader Line		.007"/Black	
Offshore Navigation Note	C/L	.065" Futura Medium/Black	* Offshore Navigation Only
Area Chart Cities Note	Lowercase	.04" Futura Medium/Black	Cities appearing in black indicate...

**APPENDIX 31
CHART INDEXES - U.S. AND ALASKA**

CHART INDEXES - ALASKA - UNIQUE ITEMS			
Chart Identificaton Title	C/L	.09" Copperplate Gothic 31/Green	L-2 CENTRAL
Borders & Outlines Selected Charts Inset Chart Coverage Border		.005"/Black	
Non-Selected Charts Enroute Chart Outlines		.015"/Black	
Inset Chart Coverage Border		.008"/Black	
Inset Chart Title	CAPS	.05" Futura Medium/Black	NOME AREA
International Date Line US/Russia Maritime Boundary		.030" Diameter/45% Green .008"/45% Black	 
Wall Planning Chart Registration Mark		Green	
Title	CAPS	.06" Futura Medium/45% Green	INSTRUCTIONS FOR ASSEMBLY...
Text	Lowercase	.06" Futura Medium/45% Green	Obtain two copies of each chart...


**APPENDIX 32
BAR CODES**

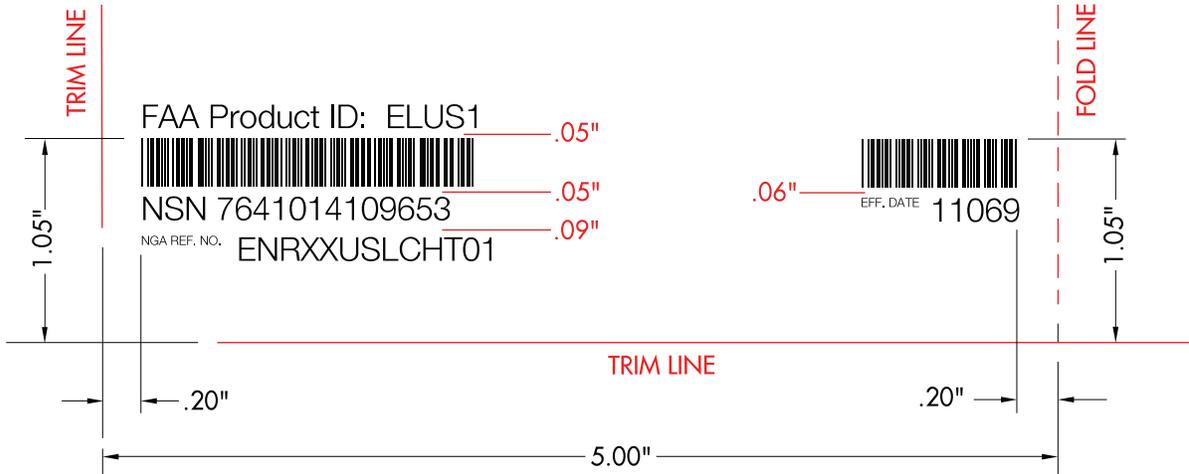

APPROXIMATE LINE SPACINGS SHOWN IN RED

CHART BAR CODES			
FAA Product ID	C/L	.13" Helvetica Light 45/Black	FAA Product ID· ELUS1
NSN Number	CAPS	.13" Helvetica Light 45/Black	NSN 7641014109653
"NGA Ref. No." Text	CAPS	.05" Helvetica Light 45/Black	NGA REF. NO.
NGA Reference Number	CAPS	.13" Helvetica Light 45/Black	ENRXXUSLCHT01
"Eff. Date" Text	CAPS	.05" Helvetica Light 45/Black	EFF. DATE
Julian Date		.13" Helvetica Light 45/Black	11069
Bar Code		.15" w39m/Black	

APPENDIX 34 LEGEND PANEL - DIMENSIONS - U.S. AND ALASKA CHARTS

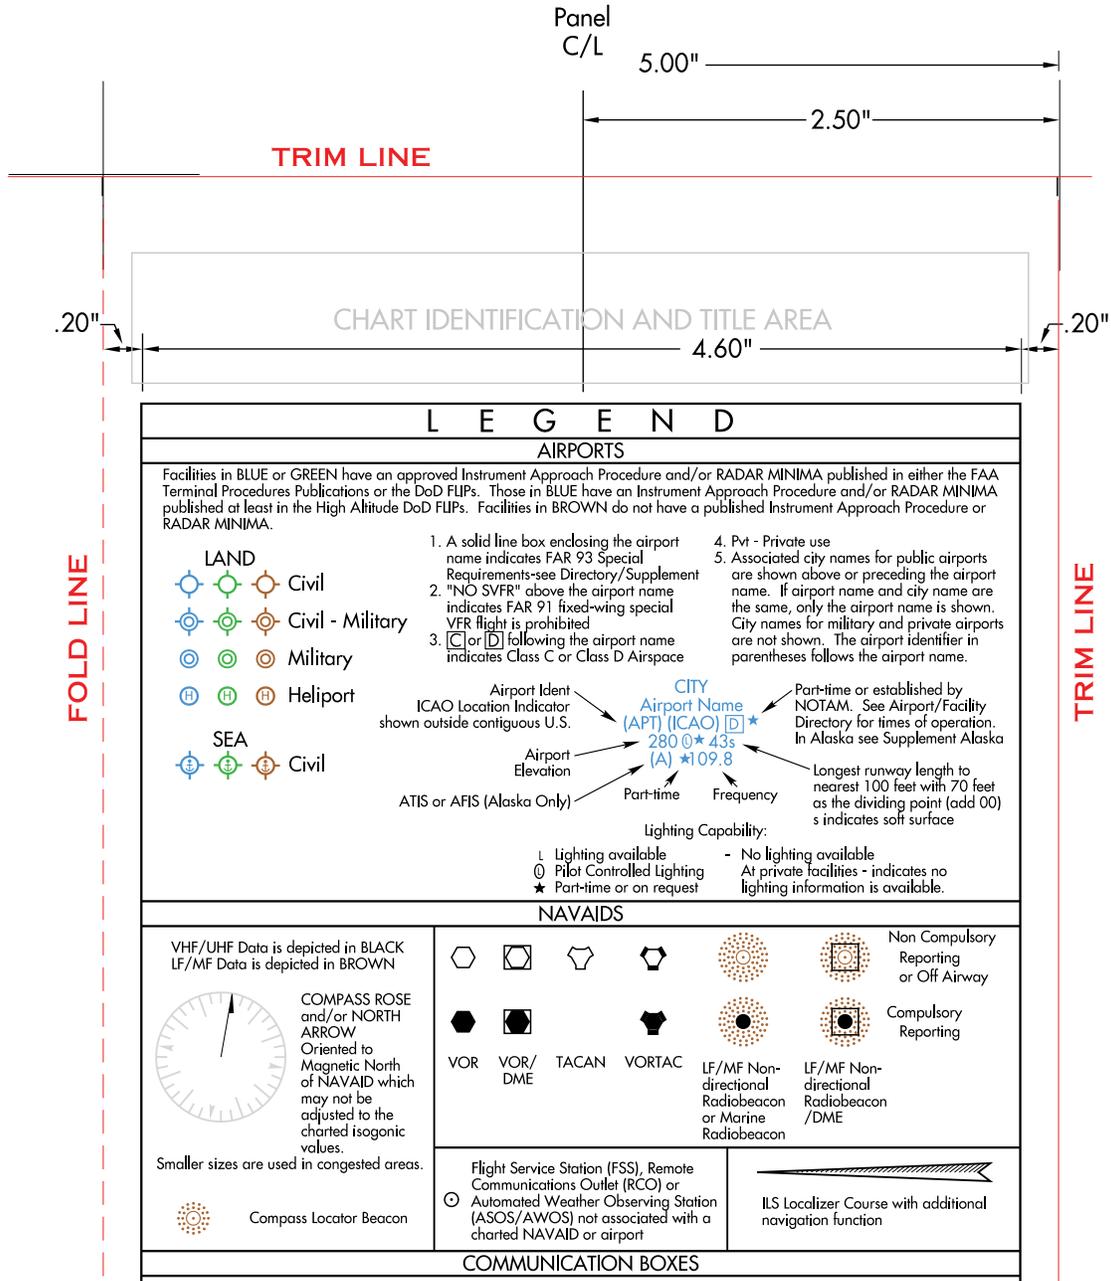

APPENDIX 35 LEGEND PANEL INFORMATION - U.S.

TRIM LINE

FOLD LINE

TRIM LINE

CHART IDENTIFICATION AND TITLE AREA

L E G E N D																
AIRPORTS																
<p>Facilities in BLUE or GREEN have an approved Instrument Approach Procedure and/or RADAR MINIMA published in either the FAA Terminal Procedures Publications or the DoD FLIPs. Those in BLUE have an Instrument Approach Procedure and/or RADAR MINIMA published at least in the High Altitude DoD FLIPs. Facilities in BROWN do not have a published Instrument Approach Procedure or RADAR MINIMA.</p>																
<p>LAND</p> <ul style="list-style-type: none"> Civil Civil - Military Military Heliport <p>SEA</p> <ul style="list-style-type: none"> Civil 	<ol style="list-style-type: none"> 1. A solid line box enclosing the airport name indicates FAR 93 Special Requirements-see Directory/Supplement 2. "NO SVFR" above the airport name indicates FAR 91 fixed-wing special VFR flight is prohibited 3. [C] or [D] following the airport name indicates Class C or Class D Airspace 4. Pvt - Private use 5. Associated city names for public airports are shown above or preceding the airport name. If airport name and city name are the same, only the airport name is shown. City names for military and private airports are not shown. The airport identifier in parentheses follows the airport name. 	<p>Part-time or established by NOTAM. See Airport/Facility Directory for times of operation. In Alaska see Supplement Alaska</p> <p>Longest runway length to nearest 100 feet with 70 feet as the dividing point (add 00) s indicates soft surface</p> <p>Lighting Capability: † Lighting available † Pilot Controlled Lighting ★ Part-time or on request - No lighting available At private facilities - indicates no lighting information is available.</p>														
NAVAIDS																
<p>VHF/UHF Data is depicted in BLACK LF/MF Data is depicted in BROWN</p> <p>COMPASS ROSE and/or NORTH ARROW Oriented to Magnetic North of NAVAID which may not be adjusted to the charted isogonic values. Smaller sizes are used in congested areas.</p> <p> Compass Locator Beacon</p>	<table border="0" style="width: 100%;"> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>Non Compulsory Reporting or Off Airway</td> </tr> <tr> <td>VOR</td> <td>VOR/DME</td> <td>TACAN</td> <td>VORTAC</td> <td>LF/MF Non-directional Radiobeacon or Marine Radiobeacon</td> <td>LF/MF Non-directional Radiobeacon/DME</td> <td>Compulsory Reporting</td> </tr> </table>							Non Compulsory Reporting or Off Airway	VOR	VOR/DME	TACAN	VORTAC	LF/MF Non-directional Radiobeacon or Marine Radiobeacon	LF/MF Non-directional Radiobeacon/DME	Compulsory Reporting	<p>Flight Service Station (FSS), Remote Communications Outlet (RCO) or Automated Weather Observing Station (ASOS/AWOS) not associated with a charted NAVAID or airport</p> <p> ILS Localizer Course with additional navigation function</p>
						Non Compulsory Reporting or Off Airway										
VOR	VOR/DME	TACAN	VORTAC	LF/MF Non-directional Radiobeacon or Marine Radiobeacon	LF/MF Non-directional Radiobeacon/DME	Compulsory Reporting										
COMMUNICATION BOXES																
<p> NAME (T) 000.0 IDT 000(Y) ±:·</p> <p>VOR with TACAN compatible DME</p> <p>Underline indicates No Voice transmitted on this frequency. TACAN Channels are without voice but not underlined.</p> <p> Crosshatch indicates Shutdown status</p> <p>(T) Frequency protection usable range at 12,000' AGL - 25NM</p> <p>(Y) TACAN must be placed in "Y" mode to receive distance information</p> <p> NAME 000 IDT ±:· (000.0) N00°00.00' W000°00.00'</p> <p>TACAN Channel paired with VHF Frequency in parenthesis.</p> <p>Automated Weather Broadcast Systems: † ASOS/AWOS † HIWAS</p> <p>Automated weather, when available, is broadcast on the associated NAVAID frequency.</p> <p> NAME ASOS 000.0 Stand Alone ASOS/AWOS</p>	<p>000.0</p> <p> NAME 000.0 IDT 000 ±:· N00°00.00' W000°00.00'</p> <p>[NAME] ← FSS name</p> <p>Freq(s) positioned above thin line NAVAID box is removed to the NAVAID site. Other freq(s) at the named FSS radio are available, however, altitude and terrain may determine their reception.</p> <p>Thin line NAVAID boxes without freq(s) and FSS radio name indicates no freq(s) available.</p> <p>000.0 000.0</p> <p> NAME 000.0 IDT 000 ±:· N00°00.00' W000°00.00'</p> <p>Shadow NAVAID box indicates NAVAID and Flight Service Station (FSS) have same name</p> <p>000.0 000.0 FSS name and identifier not associated with NAVAID</p> <p> NAME 000.0 Remote Communications Outlet (RCO). FSS radio name and remotd freq(s) are shown.</p>	<p>Part-Time or On-Request ★ 000 IDT 00(000.0) ±:·</p> <p>NAME</p> <p>LF/MF Non-directional Radiobeacon/DME VHF Freq paired with TACAN Channel</p> <p>SHADOW BOXES indicate Flight Service Stations (FSS). Frequencies 122.2, 255.4 and emergency 121.5 and 243.0 (Canada-121.5, 126.7 and 243.0) are available at many FSSs and are not shown. All other frequencies are shown. Certain FSSs provide Airport Advisory Service, see A/FD. Frequencies transmit and receive except those followed by R or T: R - Receive only T - Transmit only</p> <p>In Canada, a "D" after the frequency indicates a Dial-up Remote Communications Outlet.</p>														

Continued on Legend Panel Information - U.S. (2)

**APPENDIX 35
LEGEND PANEL INFORMATION - U.S. (CONTINUED)**

Continued from Legend Panel Information - U.S. (1)

FOLD LINE

AIR TRAFFIC SERVICES AND AIRSPACE INFORMATION		
<p>ROUTE DATA</p> <p>VHF/UHF Data is depicted in BLACK LF/MF Data is depicted in BROWN RNAV Data is depicted in BLUE</p> <p>VO VOR Airway</p> <p>A0 LF/MF Airway</p> <p>A0 Uncontrolled LF/MF Airway</p> <p>A0 Oceanic Route</p> <p>A0 ATS Route</p> <p>T000 RNAV 2 Route GNSS required</p> <p>TK000 RNAV 2 Helicopter Route GNSS required</p> <p>Substitute Route Via/bypassing temporarily shutdown NAVAIDS. See NOTAMs or appropriate publications for specific information.</p> <p>Unusable Route Segment</p> <p>VO Preferred Single Direction Route</p> <p>← EVEN Direction of Flight Indicator (Canada only)</p> <p>000.0 IDT 000 Facility Locators used in formation of Reporting Points</p> <p>000 ID Radial outbound from a VHF/UHF NAVAID</p> <p>000 Bearing inbound to an LF/MF NAVAID</p> <p>000 Magnetic Reference Bearing, outbound from a NAVAID or Fix</p> <p>000 Total Mileage between Compulsory Fixes and/or NAVAIDS</p>	<p>00 00 00 Mileage between other Fixes, NAVAIDS and/or Mileage Breakdown</p> <p>00 00 Changeover Point giving mileage to NAVAIDS (Not shown at midpoint locations)</p> <p>*0000 *0000 Minimum Obstruction Clearance Altitude (MOCA)</p> <p>0000 0000 Minimum Enroute Altitude (MEA)</p> <p>0000G GNSS RNAV MEA</p> <p>MAA-00000 Maximum Authorized Altitude (MAA)</p> <p>ME, MOCA and/or MAA Change at other than NAVAIDS</p> <p>R R R Minimum Reception Altitude (MRA)</p> <p>X X X Minimum Crossing Altitude (MCA) or Minimum Turning Altitude (MTA)</p> <p>Holding Pattern with max restricted airspeed 210K applies to altitudes above 6000' to and including 14000' 175K applies to all altitudes</p>	<p>BOUNDARIES</p> <p>ARTCC Air Route Traffic Control Center (ARTCC)</p> <p>ARTCC Remoted Sites with discrete VHF and UHF frequencies</p> <p>FIR Flight Information Region (FIR)</p> <p>CTA/FIR Type of Area Traffic Service</p> <p>OAKLAND OCEANIC KZAK UNLTD FL 55 ACC Ceiling Floor</p> <p>ADIZ Air Defense Identification Zone (ADIZ)</p> <p>125 Off Route Obstruction Clearance Altitudes (OROCA) Example: 12,500 feet</p> <p>International Boundary (Not shown when coincident with ARTCC or FIR)</p> <p>US/Russia Maritime Boundary</p> <p>Area of Enlargement (contains only data for through flights) See Area Charts for complete data</p> <p>Official Time Zone</p> <p>International Date Line</p>
	<p>FIXES/ATC REPORTING REQUIREMENTS</p> <p>▲ ▲ Fix Compulsory and Non-Compulsory Position Report</p> <p>△ △ RNAV Waypoint Compulsory and Non-Compulsory Position Report</p> <p>← Denotes DME Fix (Distance same as route mileage)</p> <p>← 00 Denotes DME Fix and Mileage</p> <p>△ ← Offset arrows indicate facility forming a fix (away from VHF/UHF, toward LF/MF NAVAID)</p> <p>X X Mileage Breakdown or Computer Navigational Fix (CNF) (no ATC functions)</p>	<p>AIRSPACE INFORMATION</p> <p>Open area (white) indicates controlled airspace (Class E) unless otherwise indicated All airspace 14,500' and above is controlled (Class E)</p> <p>Shaded area (brown) indicates uncontrolled airspace below 14,500' (Class G)</p> <p>In Canada - Indicates Class B Airspace above 12,500'</p> <p>Oceanic Control Area (CTA)</p> <p>Additional Control Area limit</p> <p>Class B Airspace Class C Airspace Mode C Area See FAR 91.215</p>

TRIM LINE

Continued on Legend Panel Information - U.S. (3)

APPENDIX 36 LEGEND PANEL INFORMATION - ALASKA

TRIM LINE

FOLD LINE

TRIM LINE

CHART IDENTIFICATION AND TITLE AREA

L E G E N D																		
AIRPORTS																		
<p>Facilities in BLUE or GREEN have an approved Instrument Approach Procedure and/or RADAR MINIMA published in either the FAA Terminal Procedures Publications or the DoD FLIPs. Those in BLUE have an Instrument Approach Procedure and/or RADAR MINIMA published or least in the High Altitude DoD FLIPs. Facilities in BROWN do not have a published Instrument Approach Procedure or RADAR MINIMA.</p>																		
<p>LAND</p> <ul style="list-style-type: none"> Civil Civil - Military Military Heliport <p>SEA</p> <ul style="list-style-type: none"> Civil 	<ol style="list-style-type: none"> 1. A solid line box enclosing the airport name indicates FAR 93 Special Requirements-see Directory/Supplement 2. "NO SVFR" above the airport name indicates FAR 91 fixed-wing special VFR flight is prohibited 3. [C] or [D] following the airport name indicates Class C or Class D Airspace 	<ol style="list-style-type: none"> 4. Pvt - Private use 5. Associated city names for public airports are shown above or preceding the airport name. If airport name and city name are the same, only the airport name is shown. City names for military and private airports are not shown. The airport identifier in parentheses follows the airport name. 																
<p>Lighting Capability:</p> <ul style="list-style-type: none"> L Lighting available ⓪ Pilot Controlled Lighting ★ Part-time or on request - No lighting available At private facilities - indicates no lighting information is available. 																		
NAVAIDS																		
<p>VHF/UHF Data is depicted in BLACK LF/MF Data is depicted in BROWN</p> <p>COMPASS ROSE and/or NORTH ARROW Oriented to Magnetic North of NAVAID which may not be adjusted to the charted isogonic values.</p> <p>Smaller sizes are used in congested areas.</p> <p> Compass Locator Beacon</p>	<table border="0" style="width: 100%;"> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>VOR</td> <td>VOR/DME</td> <td>TACAN</td> <td>VORTAC</td> <td>LF/MF Non-directional Radiobeacon or Marine Radiobeacon</td> <td>LF/MF Non-directional Radiobeacon /DME</td> <td>Non Compulsory Reporting or Off Airway</td> <td>Compulsory Reporting</td> </tr> </table>									VOR	VOR/DME	TACAN	VORTAC	LF/MF Non-directional Radiobeacon or Marine Radiobeacon	LF/MF Non-directional Radiobeacon /DME	Non Compulsory Reporting or Off Airway	Compulsory Reporting	<p>Flight Service Station (FSS), Remote Communications Outlet (RCO) or Automated Weather Observing Station (ASOS/AWOS) not associated with a charted NAVAID or airport</p> <p> ILS Localizer Course with additional navigation function</p>
VOR	VOR/DME	TACAN	VORTAC	LF/MF Non-directional Radiobeacon or Marine Radiobeacon	LF/MF Non-directional Radiobeacon /DME	Non Compulsory Reporting or Off Airway	Compulsory Reporting											
COMMUNICATION BOXES																		
<p></p> <p>VOR with TACAN compatible DME</p> <p>Underline indicates No Voice transmitted on this frequency. TACAN Channels are without voice but not underlined.</p> <p> Crosshatch indicates Shutdown status</p> <p>(T) Frequency protection usable range at 12,000' AGL - 25NM</p> <p>(Y) TACAN must be placed in "Y" mode to receive distance information</p> <p></p> <p>TACAN Channel paired with VHF Frequency in parenthesis.</p> <p>Automated Weather Broadcast Systems:</p> <p> ASOS/AWOS HIWAS TWB</p> <p>Automated weather, when available, is broadcast on the associated NAVAID frequency.</p> <p> Stand Alone ASOS/AWOS</p>	<p></p> <p>Freq(s) positioned above thin line NAVAID box is remoted to the NAVAID site. Other freq(s) at the named FSS radio are available, however, altitude and terrain may determine their reception.</p> <p>Thin line NAVAID boxes without freq(s) and FSS radio name indicates no freq(s) available.</p> <p></p> <p>Shadow NAVAID box indicates NAVAID and Flight Service Station (FSS) have same name</p> <p></p> <p>FSS name and identifier not associated with NAVAID</p> <p></p> <p>Remote Communications Outlet (RCO). FSS radio name and remoted freq(s) are shown.</p>	<p>Part-Time or On-Request </p> <p>LF/MF Non-directional Radiobeacon/DME VHF Freq paired with TACAN Channel</p> <p>SHADOW BOXES indicate Flight Service Stations (FSS). Frequencies 122.2, 255.4 and emergency 121.5 and 243.0 (Canada-121.5, 126.7 and 243.0) are available at many FSSs and are not shown. All other frequencies are shown. Certain FSSs provide Airport Advisory Service, see A/FD. Frequencies transmit and receive except those followed by R or T:</p> <p>R - Receive only T - Transmit only</p> <p>In Canada, a "D" after the frequency indicates a Dial-up Remote Communications Outlet.</p>																

Continued on Legend Panel Information - AK (2)

APPENDIX 36
LEGEND PANEL INFORMATION - ALASKA (CONTINUED)

Continued from Legend Panel Information - AK (1)

FOLD LINE

TRIM LINE

AIR TRAFFIC SERVICES AND AIRSPACE INFORMATION			
ROUTE DATA			
<p>VHF/UHF Data is depicted in BLACK LF/MF Data is depicted in BROWN RNAV Data is depicted in BLUE</p> <p>VO VOR Airway</p> <p>A0 LF/MF Airway</p> <p>A0 Uncontrolled LF/MF Airway</p> <p>A0 Oceanic Route</p> <p>A0 ATS Route</p> <p>TOOO Low Altitude RNAV 2 Route TSO-C145 or C146 required</p> <p>Substitute Route Via/bypassing temporarily shutdown NAVAIDS. See NOTAMs or appropriate publications for specific information.</p> <p>Unusable Route Segment</p> <p>VO Preferred Single Direction Route</p> <p>EVEN Direction of Flight Indicator (Canada only)</p> <p>000.0 IDT 000 Facility Locators used in formation of Reporting Points</p> <p>000 ID</p> <p>000 Radial outbound from a VHF/UHF NAVAID</p> <p>000 Bearing inbound to an LF/MF NAVAID</p> <p>000 Magnetic Reference Bearing, outbound from a NAVAID or Fix</p> <p>000 000 Total Mileage between Compulsory Fixes and/or NAVAIDS</p> <p>00 00 00 Mileage between other Fixes, NAVAIDS and/or Mileage Breakdown</p>	<p>00 00 Changeover Point giving mileage to NAVAIDS (Not shown at midpoint locations)</p> <p>*0000 *0000 Minimum Obstruction Clearance Altitude (MOCA)</p> <p>0000 0000 Minimum Enroute Altitude (MEA)</p> <p>0000G GPS/WAAS MEA</p> <p>MAA-00000 Maximum Authorized Altitude (MAA)</p> <p>MEA, MOCA and/or MAA Change at other than NAVAIDS</p> <p>R R R Minimum Reception Altitude (MRA)</p> <p>X X X Minimum Crossing Altitude (MCA) or Minimum Turning Altitude (MTA)</p> <p>Holding Pattern with max restricted airspeed 210K applies to altitudes above 6000' to and including 14000' 175K applies to all altitudes</p>	<td> <p>BOUNDARIES</p> <p>ARTCC Air Route Traffic Control Center (ARTCC)</p> <p>ARTCC Remoted Sites with discrete VHF and UHF frequencies</p> <p>Flight Information Region (FIR)</p> <p>CTA/FIR Type of Area Traffic Service OAKLAND OCEANIC KZAK UNLTD FL 55 ACC</p> <p>Ceiling Floor</p> <p>Air Defense Identification Zone (ADIZ)</p> <p>125 Off Route Obstruction Clearance Altitudes (OROCA) Example: 12,500 feet</p> <p>International Boundary (Not shown when coincident with ARTCC or FIR)</p> <p>US/Russia Maritime Boundary</p> <p>Area of Enlargement (contains only data for through flights) See Area Charts for complete data</p> <p>Official Time Zone</p> <p>International Date Line</p> </td>	<p>BOUNDARIES</p> <p>ARTCC Air Route Traffic Control Center (ARTCC)</p> <p>ARTCC Remoted Sites with discrete VHF and UHF frequencies</p> <p>Flight Information Region (FIR)</p> <p>CTA/FIR Type of Area Traffic Service OAKLAND OCEANIC KZAK UNLTD FL 55 ACC</p> <p>Ceiling Floor</p> <p>Air Defense Identification Zone (ADIZ)</p> <p>125 Off Route Obstruction Clearance Altitudes (OROCA) Example: 12,500 feet</p> <p>International Boundary (Not shown when coincident with ARTCC or FIR)</p> <p>US/Russia Maritime Boundary</p> <p>Area of Enlargement (contains only data for through flights) See Area Charts for complete data</p> <p>Official Time Zone</p> <p>International Date Line</p>
FIXES/ATC REPORTING REQUIREMENTS			
	<p>▲ ▲ Fix Compulsory and Non-Compulsory Position Report</p> <p>△ △ RNAV Waypoint Compulsory and Non-Compulsory Position Report</p> <p>← Denotes DME Fix (Distance same as route mileage)</p> <p>← 00 Denotes DME Fix and Mileage</p> <p>△ Offset arrows indicate facility forming a fix (away from VHF/UHF, toward LF/MF NAVAID)</p> <p>△ Mileage Breakdown or Computer Navigational Fix (CNF) (no ATC functions)</p>		
AIRSPACE INFORMATION			
		<p>Open area (white) indicates controlled airspace (Class E) unless otherwise indicated All airspace 14,500' and above is controlled (Class E)</p> <p>Shaded area (brown) indicates uncontrolled airspace below 14,500' (Class G)</p> <p>In Canada - Indicates Class B Airspace above 12,500'</p> <p>Oceanic Control Area (CTA)</p> <p>Additional Control Area limit</p> <p>Class B Airspace Class C Airspace Mode C Area See FAR 91.215</p>	


Continued on Legend Panel Information - AK (3)

APPENDIX 37

LEGEND PANEL - CHART IDENTIFICATION LABELS U.S. & ALASKA


LEGEND PANEL - LOW ENROUTE CHARTS				
Chart Identification Area Chart Idents Text Arrowheads Panel Identifications Text Chart Scales Text	CAPS	.23" Copperplate Gothic 31	45% Black	Black
				
	CAPS	.07" Copperplate Gothic 31		
				
CAPS	.07" Copperplate Gothic 31			
Chart Identification Color Chart Idents, Text, Arrowheads, Panel idents and Chart Scales	45% Black	U.S. Charts: L-1, L-4, L-6, L-7, L-10, L-12, L-14, L-16, L-18, L-20, L-22, L-24, L-25, L-28, L-29, L-32, L-34, and L-36 AK Charts: L-1 and L-3		
	Black	U.S. Charts: L-2, L-3, L-5, L-8, L-9, L-11, L-13, L-15, L-17, L-19, L-21, L-23, L-26, L-27, L-30, L-31, L-33, and L-35 AK Charts: L-2 and L-4		
Chart Title First and Second Lines Third Line Altitude Note Horizontal Datum Note	CAPS CAPS	.11" Futura Medium/Black .17" Futura Medium/Black	UNITED STATES... IFR ENROUTE... For use up to but not... HORIZONTAL DATUM: NORTH...	

**APPENDIX 38
MILITARY TRAINING ROUTES TABULATION - U.S. & ALASKA**

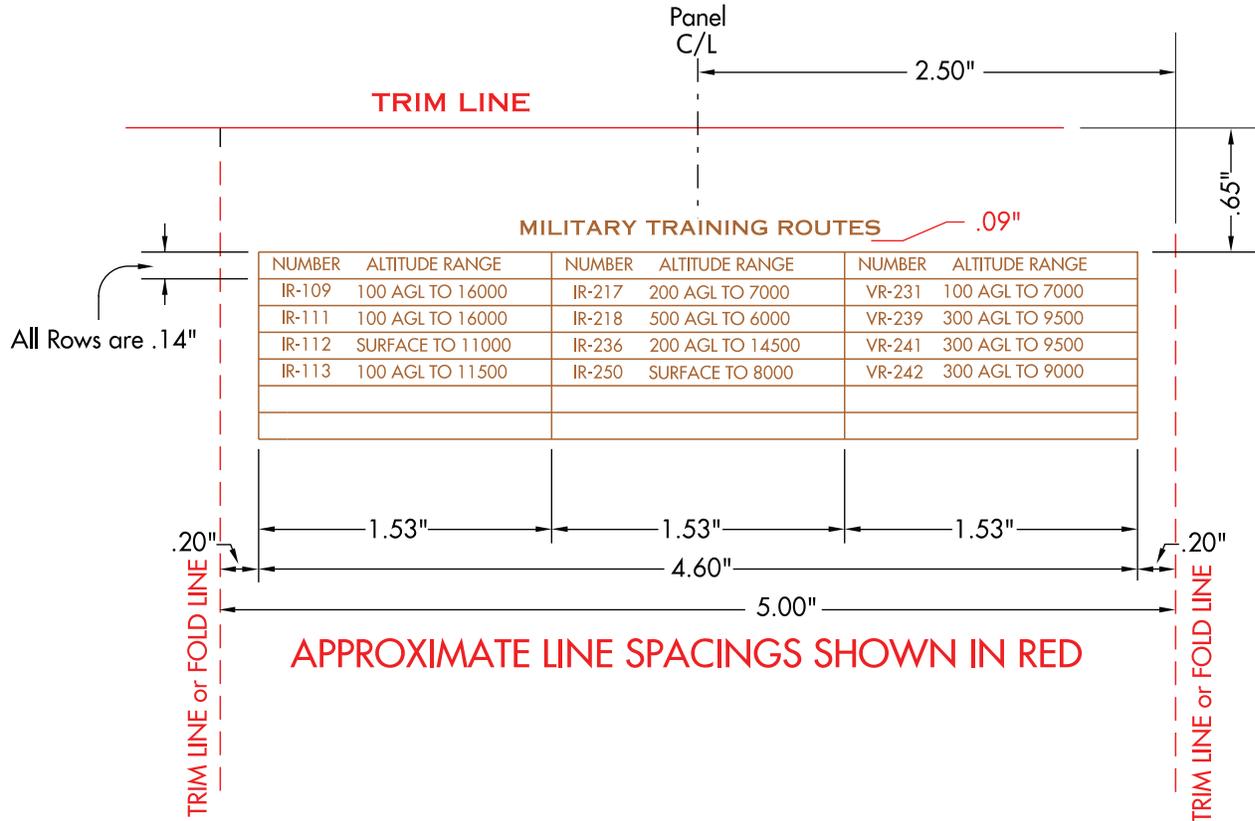


MILITARY TRAINING ROUTES - ENROUTE CHARTS			
Table Title	CAPS	.08" Copperplate Gothic 31/Brown	MILITARY TRAINING ROUTES
Column Headings	CAPS	.07" Futura Medium/Brown	NUMBER ALTITUDE RANGE
Tabulated Information Number & Altitude Range	CAPS	.07" Futura Medium/Brown	VR-231 100 AGL TO 7000
Table Lineweight		.008" Brown	<input type="text"/>

APPENDIX 39 SUA & MOA TABULATION - U.S. & ALASKA

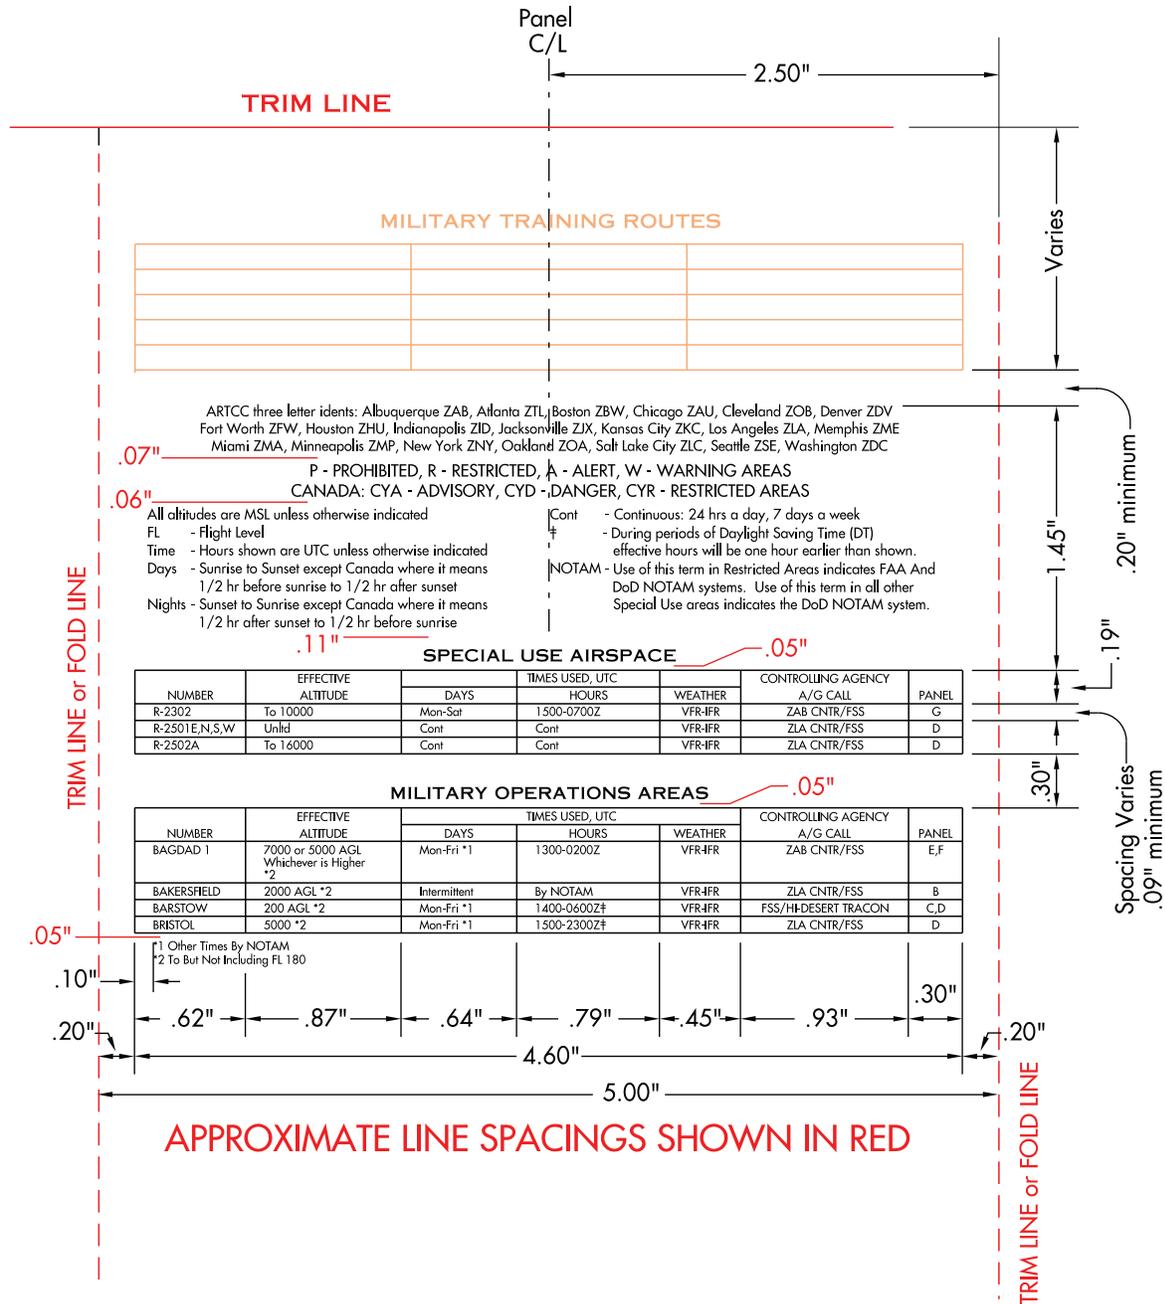

SUAs & MOAs TABULATION			
Table Title	CAPS	6.5pt Copperplate Gothic 31/Black	SPECIAL USE AIRSPACE
Legend	C/L	4.5pt Futura Medium/Black	P - PROHIBITED, R - RESTRICTED,
Tabulated Information			
Column Headings	CAPS	4.5pt Futura Medium/Black	NUMBER
Tabulated Information	CAPS	4.5pt Futura Medium/Black	BAKERSFIELD
Footnotes	C/L	4.5pt Futura Medium/Black	*1 Other Times By NOTAM
Table Lineweight		.008"/Black	<div style="border: 1px solid black; width: 20px; height: 10px; margin: 0 auto;"></div>


**APPENDIX 40
AIRPORT LOCATIONS TABULATION - U.S. & ALASKA**

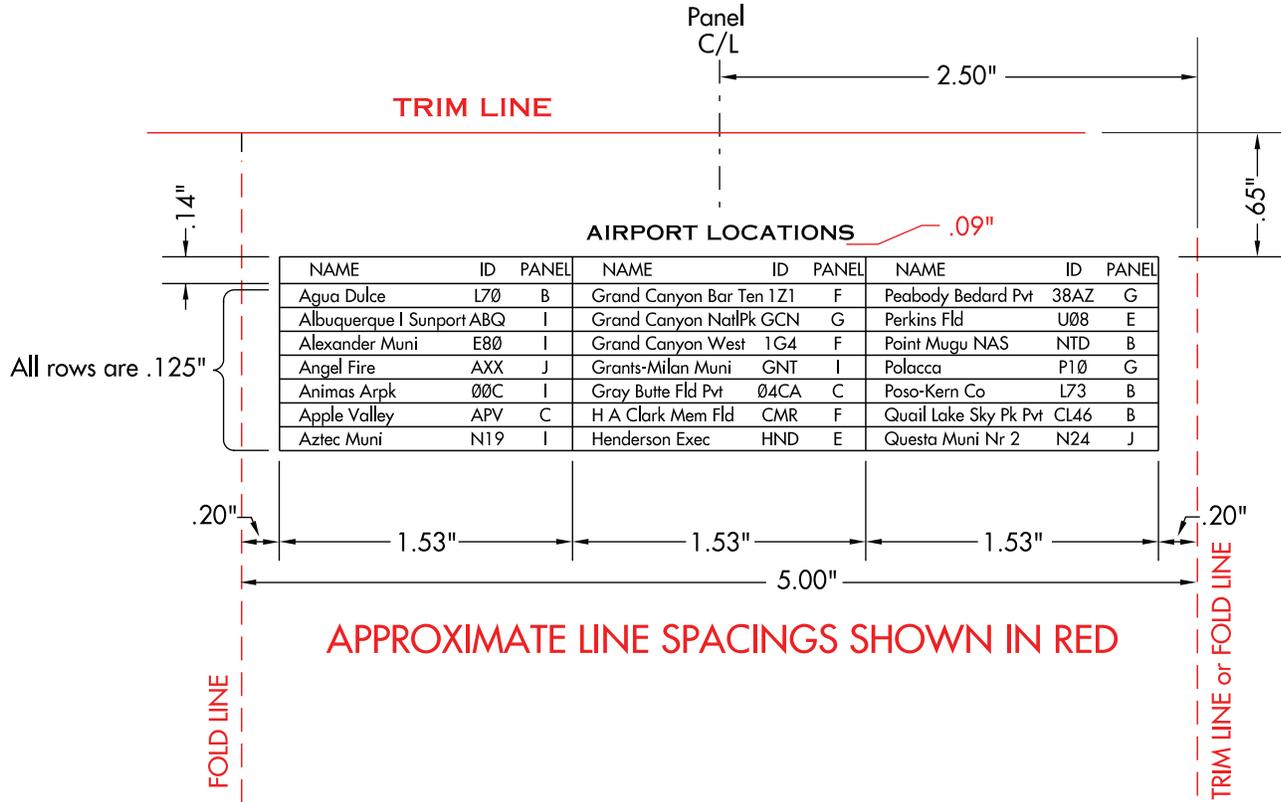


AIRPORT LOCATIONS TABULATION			
Table Title	CAPS	.09" Copperplate Gothic 31/Black	AIRPORT LOCATIONS
Tabulated Information			
Column Headings	CAPS	.07" Futura Medium/Black	NAME
Tabulated Information	C/L	.07" Futura Medium/Black	Agua Dulce L70 B
Table Lineweight		.008"/Black	<input type="text"/>

APPENDIX 41
MARGIN INFORMATION - U.S. & ALASKA

Bar Scales - One Panel - U.S. & Alaska

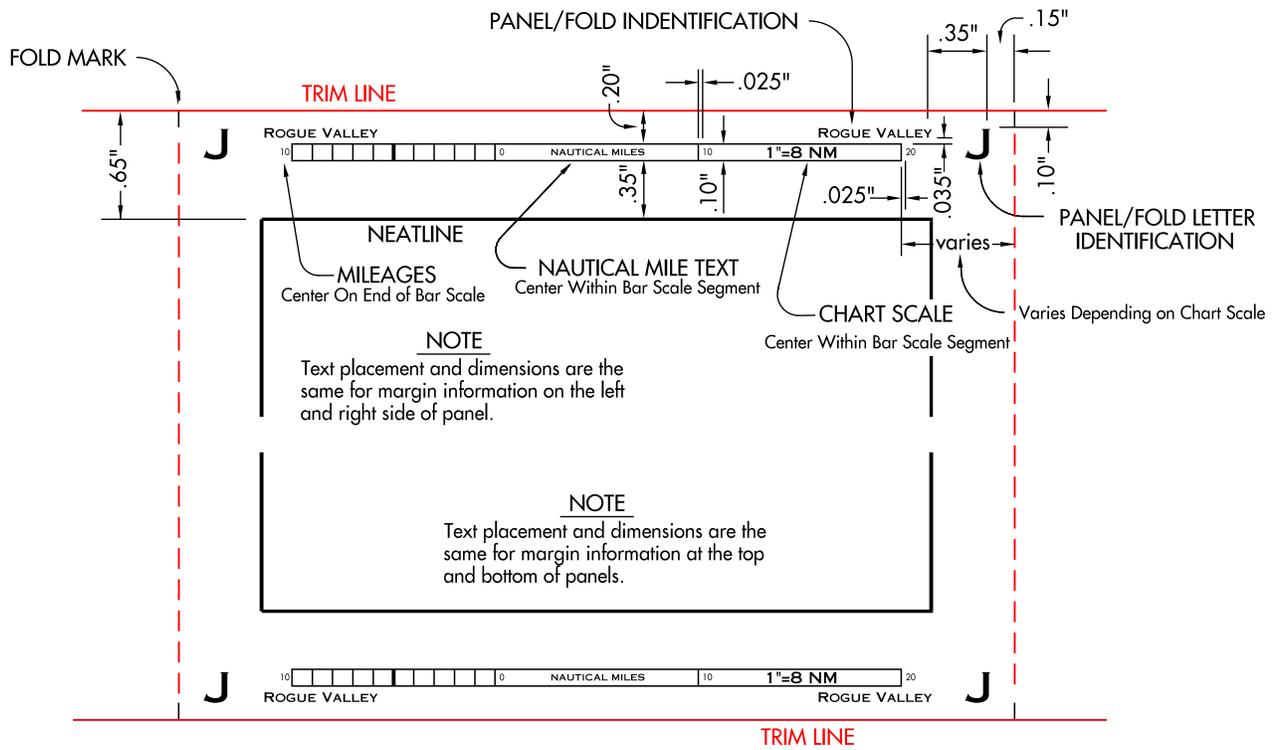


Differences for Chart Scale 1:7

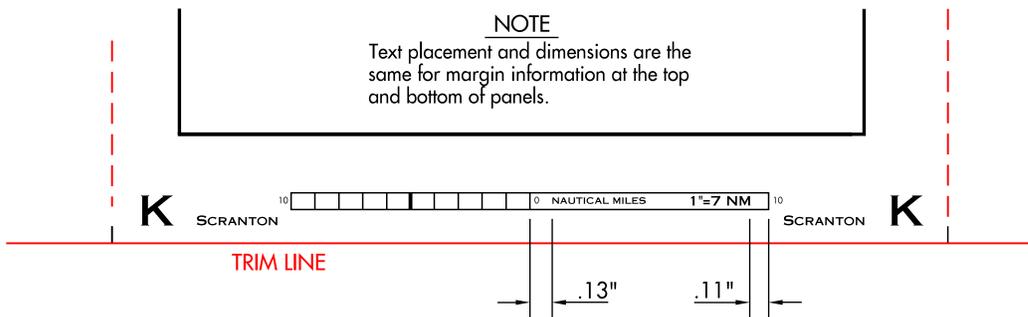


APPENDIX 41
MARGIN INFORMATION - U.S. & ALASKA (CONTINUED)

Spacing - All Charts

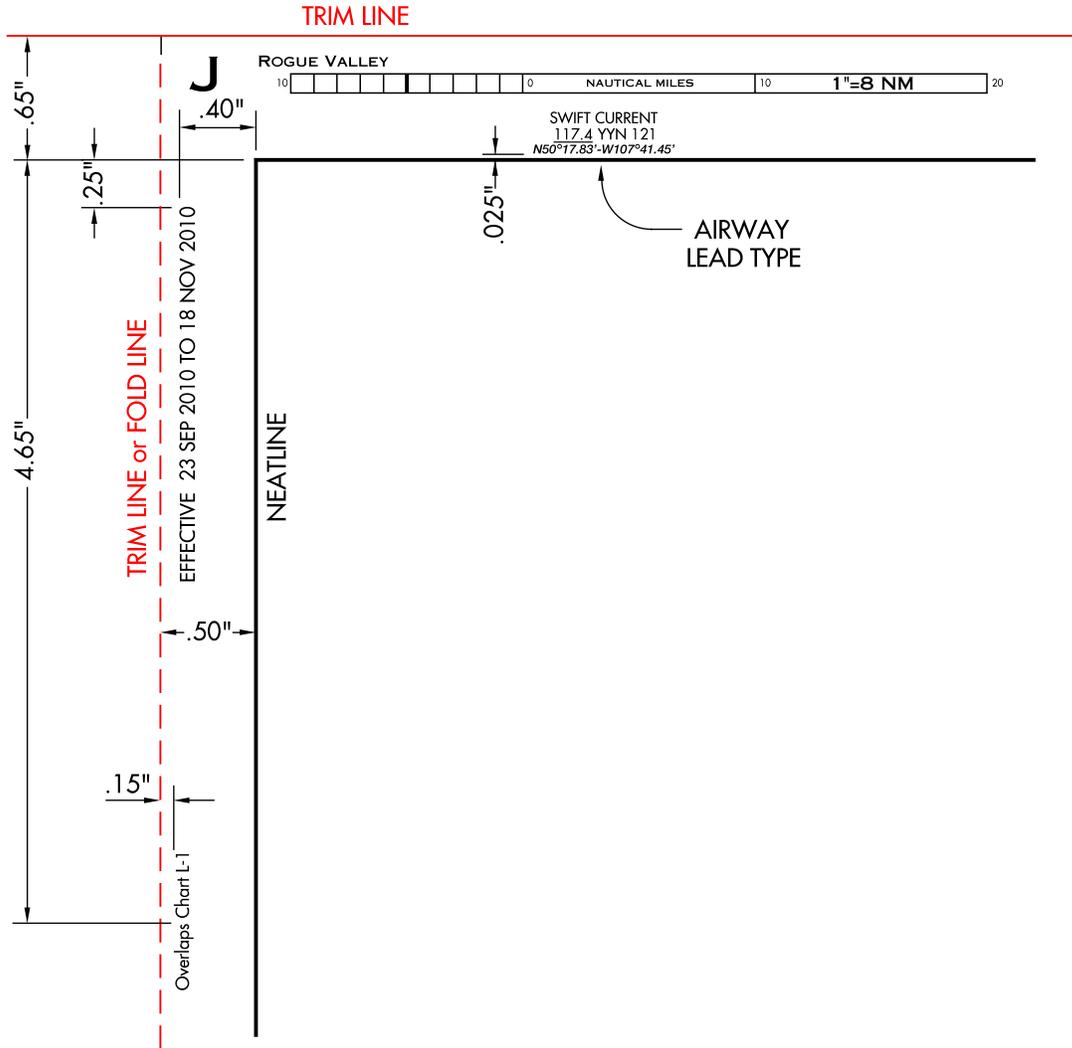

**APPENDIX 41
MARGIN INFORMATION - U.S. & ALASKA (CONTINUED)**

MARGIN INFORMATION - U.S. & ALASKA					
Panel Fold					
Letter	CAPS	.19" Copperplate Gothic 31/Black			
City or NAVAID Identification	CAPS	.06" Copperplate Gothic 31/Black			
Fold Mark Weight & Length		.008"/0.1"/Black			
Chart Identification	CAPS	.29" Copperplate Gothic 31/Color?			
Chart Scale					
Units Text	CAPS	.04" Copperplate Gothic 31/Black			
Mileage Numbers		.04" Futura Medium/Black			
Scale Text	CAPS	.06" Copperplate Gothic 31/Black			
Scale Bar Lineweight		.008"/Black			
Effective Date (Even Side of Charts)	CAPS	.07" Futura Medium/Black		EFFECTIVE 18 NOV 2010 TO...	
Adjoin Chart Text	C/L	.07" Futura Medium/Black		Overlaps Chart L-3	
MARGIN INFORMATION - U.S. & ALASKA - AIRWAY/ROUTE INFORMATION					
Airway Route Text & Color					
VHF/UHF	CAPS	.06" Futura Medium/Black		MACON 112.9 MCM 76	
LF/MF	CAPS	.06" Futura Medium/Brown		OSCARVILLE 251 OSE	
LF/MF with DME					
LF/MF Data	CAPS	.06" Futura Medium/Brown		371 PDN 32 (109.5)	
DME Data	CAPS	.06" Futura Medium/Black			
RNAV Waypoint	CAPS	.06" Futura Medium/Blue		DIBWO	
Geographic Coordinates		VHF/UHF	LF/MF	RNAV	
Color		Black	Brown	Blue	
Text		.05" Helvetica 66 Medium Italic			N60°37.13'-W135°08.33' N60°26.37'-W134°51.68' N60°37.13'-W135°08.33'
Shutdown Status		VHF/UHF	LF/MF		
Color		45% Black	45% Brown		
Lineweight		.006"			


**APPENDIX 42
CHART DETAIL - PROJECTION LINES - U.S. & ALASKA**

PROJECTION LINES - ALL CHARTS			
Projection Lines Lineweight Text	CAPS	.007"/45% Blue .05" Futura Medium/45% Blue	
PROJECTION LINES - U.S. CHARTS			
Latitude Tick Line Length Ten-minute Thirty-minute		.05"/45% Blue .1"/45% Blue	
Longitude Tick Line Length Ten-minute Thirty-minute		.05"/45% Blue .1"/45% Blue	
PROJECTION LINES - ALASKA CHARTS			
Latitude Tick Line Length Ten-minute Thirty-minute Full-degree		.05"/45% Blue .1"/45% Blue .2"/45% Blue	
Longitude Tick Line Length Ten-minute Thirty-minute Full-degree		.05"/45% Blue .1"/45% Blue .2"/45% Blue	

**APPENDIX 43
BASE DETAIL - U.S. & ALASKA**





BASE DETAIL - U.S. & ALASKA			
Shoreline		Green Vignette/Approx .15" wide	
International Boundary Lineweight Long Dash Length Short Dash Length Space between Dashes Text	CAPS	.020"/45% Blue .2"/45% Blue .1"/45% Blue .05" Gap .06" Futura Medium/45% Blue	
U.S./Russia Maritime Boundary Lineweight Horizontal Dash Length Vertical Dash Length Space between Dashes Text	CAPS	.020"/45% Blue .2"/45% Blue .1"/45% Blue .05" Gap .06" Futura Medium/45% Blue	
Time Zones - U.S. Text Dotted Border	C/L	.05" Futura Medium/45% Green .0075" Diameter/45% Green	
International Date Line Text Dotted Border	CAPS	.05" Futura Medium/45% Green .03" Diameter/45% Green	
Lines of Equal Magnetic Variation (Isogonic Lines) Text Lineweight	CAPS	.06" Techno Medium Italic/45% Green .005"/45% Green	
OROCA Values Thousands of feet value Hundreds of feet value		.36" Futura Medium/25% Brown .16" Futura Medium/25% Brown	12⁵

APPENDIX 44 AIRPORTS - U.S. & ALASKA

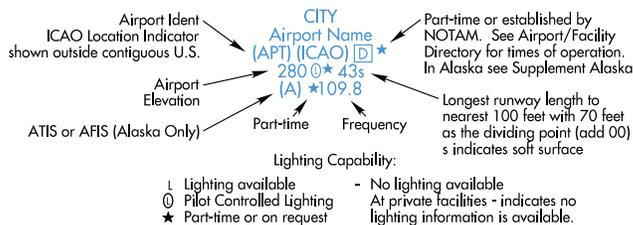

AIRPORT DATA			
First Line Associated City Name(s) Airport Name	CAPS C/L	<u>ALL AIRPORT DATA</u> .06" Futura Medium (.05" for Congested Areas)	CITY Airport Name
Second Line FAA Airport Identifier ICAO Identifier Airspace	CAPS CAPS CAPS	Color: Same as Airport Name Airspace Box: Lineweight .010"	(APT) (ICAO) <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Third Line Airport Elevation Runway Lighting Runway Length Runway Surface	Lowercase		280 @★ 43 s
Fourth Line ATIS (AK Only) AFIS	CAPS		(A) *109.8
Airports under SFAR Airport Name Box		SFAR Box lineweight: .007" Color: Same as Airport Name	<input style="width: 100px; height: 15px;" type="text"/>
Airports with no SVFR Text	CAPS	.005" Futura Medium Color: Same as Airport Name	NO SVFR
AIRPORT COLOR			
Airports with... Approved IAP Approved IAP & in High Altitude DoD FLIPs Airports without Approved IAP		Green Blue Brown	Los Alamitos AAF (SLI) NASA Shuttle Landing Facility Pvt (TTS) Big Mountain Pvt (37AK)(PABM)
HELIPORT DATA			
First Line Heliport Name	C/L	<u>ALL HELIPORT DATA</u> .06" Futura Medium (.05" for Congested Areas)	Southampton
Second Line FAA Identifier ICAO Airport Identifier	CAPS CAPS	Color: Same as Heliport Name	(87N) (ICAO)
SEAPLANE BASE DATA			
First Line Seaplane Base Name	C/L	<u>ALL SEAPLANE BASE DATA</u> .06" Futura Medium (.05" for Congested Areas)	Greenville SPB
Second Line FAA Identifier ICAO Airport Identifier	CAPS CAPS	Color: Same as Seaplane Base Name	(52B) (ICAO)



**APPENDIX 45
NAVAID NORTH ARROWS & COMPASS ROSES**

NAVAIDs - NORTH ARROWS & COMPASS ROSE						
		VHF/UHF	LF/MF	VHF/UHF	LF/MF	
NAVAID North Arrows	Lineweight	.010"				
	Color	Black	Brown			
NAVAID Compass Rose	Lineweight	.010"				
	Color	25% Black	Brown			
Size		Small 0.75"	Medium 1"	Large 1.25"		
VHF/UHF						
LF/MF						

**APPENDIX 46
NAVAID IDENTIFICATION BOXES**

NAVAID IDENTIFICATION BOXES					
		VHF/UHF	LF/MF	VHF/UHF	LF/MF
NAVAID Identification Box Lineweight & Color		.007"/Black	.007"/Brown		
NAVAID Data Color - All Charts Font - All Charts Font Size Geographic Coordinates Color Font & Size	CAPS CAPS	Black Black .05" Helvetica 66 Medium Italic	Brown Futura Medium .07" Brown Futura Medium .07"	MYSTIC 108.2 MYS <small>N62°57.06' W155°36.69'</small>	GALBRAITH LAKE 41Z GBH <small>N64°22.58' W173°14.44'</small>
Pointer (LF/MF Only)		.007"/Brown			
Leaderline (VHF/UHF Only)		.007"/Black			
SSV (VHF/UHF Only) Font & Color Font Size	CAPS	Futura Medium/Black .07"		(M)	
No Voice Color Lineweight		Black .007"	Brown .007"	VHF/UHF —	LF/MF —
Part Time Color		Black	Brown	★	★
Y Mode Font & Color - All Charts Font Size	CAPS	Futura Medium/Black .07"		18(Y)	
Abnormal Status Color Lineweight		45% Black .007"	45% Brown .007"	VHF/UHF 	LF/MF
Private NAVAIDs Color - All Charts Font - All Charts Font Size	CAPS	Black Futura Medium .07"	Brown Futura Medium .07"	PRIVATE	PRIVATE
ILS Components Localizer Course Front Bearing Text Back Course Text	CAPS CAPS	.07" Futura Medium/Black .05" Futura Medium/Black		 225 BACK COURSE	





**APPENDIX 47
FLIGHT SERVICE STATIONS & REMOTE COMMUNICATIONS OUTLETS**

FSSs & RCOs					
Associated with NAVAID		VHF/UHF	LF/MF	VHF/UHF	LF/MF
		FSS Frequency(s) Shadow Box		.06" Futura Medium/Black Black	Brown
RCO Frequency(s) Name Name "L" Brackets Lineweight	CAPS	.06" Futura Medium/Black .07" Futura Medium/Black .012" /Black		255.4 122.2  [SEATTLE]	126.7 122.5  [PACIFIC]
Not Associated with NAVAID					
FSS Frequency(s) Name Shadow Box	CAPS	.06" Futura Medium/Black .07" Futura Medium/Black Black		122.2  VICTORIA HARBOUR FSS AVAILABLE 1345-0530Z†	
RCO Frequency(s) Name Box Lineweight	CAPS	.06" Futura Medium/Black .06" Futura Medium/Black .007" /Black			 PACIFIC 125.85
Operational Hours and Notes	CAPS	.05" Futura Medium/Black			FSS VOICE AVAILABLE 1615-0745Z† OTHER TIMES CONTACT FAIRBANKS FSS
FSS & RCO Location Indicator					
Circle Diameter & Color Lineweight Dot		.072" Diameter/Black .008" /Black .015" Diameter/Black			○
International FSS Frequency(s) & Name Box Lineweight	CAPS	.05" Futura Medium/Black .015" /Black			 MIAMI IFSS MIA 127.9 126.9 126.7


**APPENDIX 48
AUTOMATED WEATHER BROADCASTING SYSTEMS**

AUTOMATED WEATHER BROADCASTING SYSTEM (AWBS)					
		VHF/UHF	LF/MF	VHF/UHF	LF/MF
Associated with NAVAID					
Symbol Color		Black	Brown		
Symbol					
ASOS/AWOS					
HIWAS					
TWEB					
Not Associated with NAVAID					
Name, AWBS & Frequency	CAPS	.06" Futura Medium/Black			
Box Lineweight		.007" /Black			
AWBS Location Indicator					
Circle					
Diameter & Color		.072" Diameter/Black			
Lineweight		.008" /Black			
Dot		.015" Diameter/Black			

APPENDIX 49 AIRSPACE INFORMATION

GENERAL ATS AREA INFORMATION			
ATS Area Data Service Type, Name & ICAO Identifier Vertical & Horizontal Limits Text Separator Line Call Sign & Frequencies	CAPS	.06" Futura Medium/45% Blue	<p style="text-align: center;">CTA HOUSTON OCEANIC KZHU</p> <p style="text-align: center;">UNLTD 2500 AMSL</p> <p style="text-align: center;">NEW YORK RADIO 129.4 2887</p> 
Box Lineweight		.015"/45% Blue	
Pointer		.007"/45% Blue	
Explanatory Notes		.06" Futura Medium/45% Blue	
AIRSPACE NOTES			
U.S. Airspace Note	CAPS	.05" Futura Medium/45% Blue	FAA AIR TRAFFIC SERVICE OUTSIDE U.S. AIRSPACE IS PROVIDED IN ACCORDANCE WITH...
FOREIGN AIRSPACE NOTES			
Canadian Airspace Current Source Note	CAPS	.06" Futura Medium/Black	NOTE: REFER TO CURRENT CANADIAN CHARTS AND FLIGHT...
Airspace Classification Note	CAPS	.05" Futura Medium/Black	AIRSPACE CLASSIFICATION (SEE CANADA FLIGHT SUPPLEMENT) AND OPERATIONAL...
VFR Airspace Restriction Note	CAPS	.05" Futura Medium/Black	VFR AIRSPACE RESTRICTION NO VFR FLIGHT WITHIN CANADIAN CLASS B AIRSPACE PERMITTED ABOVE 12,500' WITHOUT...
Fix Note (Associated with Canadian Cruising Alt Diagram)	CAPS	.05" Futura Medium/Black	IN CANADA CROSS EACH FIX AT OR ABOVE THE HIGHER...
Box Lineweight		.015"/Black	
Mexican Airspace Notes Low Altitude Note	CAPS	.06" Futura Medium/Black	MEXICAN LOW ALTITUDE AIRSPACE IS EFFECTIVE
Altimeter Note	CAPS C/L	.05" Futura Medium/Black .05" Futura Medium/Black	ALTIMETER Use Altimeter setting within Mazatlan CTA...
Box Lineweight		.015"/Black	
Report To FAA Note	CAPS	.05" Futura Medium/Black	REPORT TO FAA RADIO PRIOR TO ENTERING ADIZ
Foreign Airspace Note (All Excluding Canada) DoD User Note Title Text	CAPS	.07" Futura Medium/Black	DOD USERS
Body Text	CAPS	.06" Futura Medium/Black	REFER TO CURRENT DOD (NGA) CHARTS AND FLIGHT INFORMATION...
Box Lineweight		.015"/Black	
FOREIGN AIRSPACE NOTES			
Havana FIR Airspace Note	CAPS	.05" Futura Medium/Black	CAUTION: ACCURACY OF AIR TRAFFIC SERVICES RELATIVE TO HAVANA FIR
OTHER AIRSPACE NOTES			
Miscellaneous Airspace Notes	CAPS	.05" Futura Medium/Black	REPORT TO FAA RADIO PRIOR TO ENTERING ADIZ

**APPENDIX 50
AIRSPACE**

AIRSPACE TYPES			
Class B Airspace			
Lateral Limits		5% Blue	
Outer Limit/Boundary		.005"/Blue	
Airspace Box Lineweight		.015"/Black	
Airspace Name	CAPS	.05" Futura Medium/Black	CLASS B AIRSPACE
Class C Airspace			
Lateral Limits		5% Blue	
Outer Limit/Boundary		.005"/Blue	
Dashed Line Composition		.20" dash, .05" space, .10" dash, .05" space	
Class G Airspace, Uncontrolled Airspace, Unclassified Airspace		10% Brown	
Mode C Text	CAPS	.06" Futura Medium/Blue	30 NM
Border Lineweight		.005"/Blue	
Canadian Class B Airspace		10% Brown	


**APPENDIX 50
AIRSPACE (CONTINUED)**

AIRSPACE - BOUNDARIES						
Control Areas (CTA), Upper Control Areas (UTA), Oceanic Control Areas						
Boundary Limit		.010"/10% Brown				
First Line						
ID Text	CAPS	.06" Futura Medium/45% Blue		CONTROL 1316L		
Second Line						
Altitudes & Associated Notes	CAPS	.05" Futura Medium/45% Blue (Caps)		5500 FT AND ABOVE		
Special Use Airspace (SUA) & Military Operation Areas (MOA) Boundaries		SUA	MOA	SUA	MOA	
	Boundary Limit					
	Lineweight	.010"	.010"			
	Band Width (Line Length)	.075"	.075"			
	Color	45% Blue	45% Brown			
	Identification					
	Font & Size	CAPS	.07" Futura Medium	.07" Futura Medium	R-2904A	EVERS MOA
	Color		45% Blue	45% Brown		
	Exclusion Area Notes	CAPS	.05" Futura Medium (Caps)		ABEL NORTH, SOUTH, AND BRAVO MOAS EXCLUDE	THE AIRSPACE WITHIN R-2507 N-S-E AND R-2512
	Overlap/Adjoin Line		.015"/45% Blue	.015"/45% Brown		
Pointer w/Arrowhead		.007"/45% Blue	.007"/45% Brown			
Small Areas - Boundaries		.070" Diameter/ 45% Blue				
Exclusion Area Text	CAPS	.05" Futura Medium	.05" Futura Medium	W-122 EXCLUDES THE AIRSPACE ABOVE FL 240		
Pointer w/Arrowhead		.007"/Black	.007"/Black			
Special Air Traffic Rules (SFAR 50-2 and SFRAs) Airspace Note Box		.015"/Black				
Airspace Note	CAPS	.05" Futura Medium/Black		SPECIAL FLIGHT RULES AREA		
Boundary Limit Line		.015"/45% Blue				
Squares - Dimension		.05"/45% Blue				
Squares - Spacing		.50"				
SFRA Name	CAPS	.06" Futura Medium/45% Blue		WASHINGTON D.C. METROPOLITAN SFRA		

**APPENDIX 50
AIRSPACE (CONTINUED)**

AIRSPACE - BOUNDARIES			
ADIZ , CADIZ & Defense Areas Text Boundary Limit Lineweight	CAPS	.06" Futura Medium/45% Blue .010"/45% Blue	ALASKA ADIZ 
FIRS Text Boundary Limit Lineweight Tick Height Tick Lineweight Spacing between Tick Lines	CAPS	.06" Futura Medium/45% Blue .015"/45% Blue .10"/45% Blue .015"/45% Blue .060"/45% Blue	MIAMI OCEANIC CTA/FIR KZMA 
ARTCCs & ACCs Text Boundary Limit Lineweight	CAPS	.06" Futura Medium/45% Blue .005"/45% Blue	MIAMI 
ARTCC RCAG ARTCC Name Remoted Site Frequency(s) Boundary Limit Lineweight	CAPS C/L	.06" Futura Medium/45% Blue .06" Futura Medium/45% Blue .06" Futura Medium/45% Blue .005"/45% Blue	MIAMI Miami 132.4 281.5 
Continental Control Boundary (U.S.) Boundary Limit Lineweight		.010"/Brown	
Altimeter Setting Text & Altimeter Setting	CAPS	.06" Futura Medium/Black	QNH ALTIMETER

**APPENDIX 51
AIRWAY/ROUTE TYPES**

AIRWAY/ROUTE TYPES					
Victor Airways		VHF/UHF	LF/MF	VHF/UHF	LF/MF
Lineweight & Color		.02"/Black	.02"/Brown		
LF/MF Airways (Colored Airways)		.06"/25% Brown			
Oceanic, Atlantic, Gulf, Puerto Rico & Bahama Routes		VHF/UHF	LF/MF	VHF/UHF	LF/MF
Lineweight & Color		.02"/Black	.02"/Brown		
Air Traffic Services (ATS) Routes		VHF/UHF	LF/MF	VHF/UHF	LF/MF
Lineweight & Color		.060"/25% Black	.060"/25% Brown		
RNAV T & TK Routes		.02"/Blue			
RNAV Q Routes (Gulf of Mexico)		.02"/Black			
Unusable Airway/Route Segments		.020"/45% Black			
Substitute Airways/Routes		Brown			
Symbol & Color		.05" Futura Medium/Black		UNUSABLE	
Military Training Routes					
Route					
Lineweight & Color					
Route width < 5 NM		.020"/15% Brown			
Route width > 5 NM		.035"/15% Brown			
Route Designator		.07" Futura Medium/45% Brown		IR-18	VR-708
Direction Arrow		45% Brown			
Color					
Uncontrolled Airways (Class G Airways)		VHF/UHF	LF/MF	VHF/UHF	LF/MF
Route					
Lineweight & Color		.020"/Black	.020"/Brown		
Repeating Dashed Line Pattern		dash .15", space .09", dash .03" and space .09"			

**APPENDIX 52
AIRWAY/ROUTE DATA**

AIRWAY/ROUTE DATA										
Identification Victor Airways Identifier Text Colored Airways Identifier Text Box Lineweight RNAV T and TK Routes Identifier Text Oceanic, Atlantic, Gulf, Puerto Rico & Bahama Routes Identifier Text Color Box Lineweight Air Traffic Service (ATS) Routes Identifier Text Color RNAV Q Routes (Gulf of Mexico) Identifier Text Box Lineweight Uncontrolled Airways (Class G Airways) Identifier Text Color Box Lineweight	CAPS	.10" Reverse Negative/ Futura Medium/Black <small>(May be reduced to .09" in congested areas)</small>								
			CAPS	.07" Futura Medium/Brown .01"/ Brown						
					CAPS	.10" Reverse Negative/ Futura Medium/Blue <small>(May be reduced to .09" in congested areas)</small>				
							VHF/UHF	LF/MF	VHF/UHF	LF/MF
							CAPS	.07" Futura Medium Black Brown .01"/Black .01"/Brown	A0	A0
										
									CAPS	.07" Futura Medium Black Brown
							CAPS	.07" Futura Medium/Black .01"/Black		
									VHF/UHF	LF/MF
							CAPS	.07" Futura Medium Black Brown .01"/ Black .01"/ Brown	BR44	AR8
										
Single Direction Arrows Arrowhead & Color Box Lineweight (ATS, Oceanic & RNAV Q Routes) Hours of Operation Text Color	CAPS	As appropriate for airway/route type .01"/Black .05" Futura Medium As appropriate for airway/route type	  							
										
			1100-0300Z	1100-0300Z	1100-0300Z					
Radials & Bearings VHF/UHF Text Arrow LF/MF Text Arrow Unusable Airway/Route Radials or Bearings Lineweight & Color Radial/Bearing Information		.07" Futura Medium/Black <small>(May be reduced to .06" in congested areas)</small> Black	090°							
			.07" Futura Medium/Brown <small>(May be reduced to .06" in congested areas)</small> Brown	270						
		VHF/UHF		LF/MF	VHF/UHF	LF/MF				
		.006"/45% Black .006"/45% Black								
.05" Futura Medium/Black		R-233 UNUSABLE								
Magnetic Bearings Text Color Arrow Color		T & TK Routes	Q Routes	T & TK Routes	Q Routes					
		.07" Futura Medium <small>(May be reduced to .06" in congested areas)</small>		270	311					
		Blue	Black							


**APPENDIX 53
NAVIGATIONAL & PROCEDURAL INFORMATION**

OPERATIONAL NOTES							
		VHF/UHF	LF/MF	RNAV	VHF/UHF	LF/MF	RNAV
Color	CAPS	Black	Brown	Blue	<small>COMPULSORY FL 240 AND ABOVE</small>	<small>COMPULSORY A647 ONLY</small>	<small>COMPULSORY FL 240 AND ABOVE</small>
Text		.05" Futura Medium					
FLYOVER SYMBOLOGY							
		VHF/UHF	LF/MF	RNAV	VHF/UHF	LF/MF	RNAV
Symbol & Color		Black	Brown	Blue			
RADIO INTERSECTIONS & DME FIXES							
		VHF/UHF	LF/MF	VHF/UHF	LF/MF		
Symbol & Color	CAPS	Black	Brown				
Fix Name			Black	Brown	AMZIE	CRABB	
Color		Black	Brown				
Text		.06" Futura Medium (May be reduced to .05" in congested areas)					
Fix Geographic Coordinates	CAPS	Black	Brown	<small>N43°06.37' W67°17.17'</small>	<small>N42°12.80' W65°45.20'</small>		
Color			Black	Brown			
Text		.05" Helvetica 66 Medium Italic					
Radio Fix Arrows		Black	Brown				
Non-DME							
DME			Black				
DME BOATS							
Symbol & Color		Black					
Text		.07" Futura Medium/Black			15		
RADIAL & BEARINGS USED FOR FIX MAKEUP							
		VHF/UHF	LF/MF	VHF/UHF	LF/MF		
Arrow Lineweight & Color		.007"/Black	.007"/Brown				
Text Color		Black	Brown				
Text Color		.07" Futura Medium (May be reduced to .06" in congested areas)		090°	090°		
FACILITY LOCATOR BOATS							
		VHF/UHF	LF/MF	VHF/UHF	LF/MF		
Symbol & Color	CAPS	Black	Brown				
NAVAID Data			Black	Brown			
Color		Black	Brown				
Text		.06" Futura Medium (May be reduced to .05" in congested areas)		112.1 MLF 58	257 SQT		
RNAV WAYPOINTS							
Symbol & Color	CAPS	Blue					
Waypoint			.06" Futura Medium/Blue (May be reduced to .05" in congested areas)			PHYLS	
Text & Color		.05" Helvetica 66 Medium Italic/Blue			<small>N39°33.03' W72°41.53'</small>		

**APPENDIX 53
NAVIGATIONAL & PROCEDURAL INFORMATION (CONTINUED)**


MRAs								
		VHF/UHF	LF/MF	RNAV	VHF/UHF	LF/MF	RNAV	
Symbol & Color		Black	Brown	Blue				
MRA Information		Black	Brown	Blue				
Color		Black	Brown	Blue				
Text	CAPS	.06" Futura Medium (May be reduced to .05" in congested areas)			MRA 1800	MRA 1800	MRA 1800	
NAVAID HOLDING PATTERNS								
Holding Pattern		45% Black						
Symbol & Color		.05" Futura Medium/45% Black			210K			
Text & Color	CAPS							
Radial/Bearing		VHF/UHF	LF/MF	VHF/UHF	LF/MF			
Arrow Lineweight & Color		.007"/Black	.007"/Brown					
Text Color		Black	Brown	210	337			
Text		.07" Futura Medium (May be reduced to .06" in congested areas)						
Geographic Coordinates		Black						
Color		Brown						
Text	CAPS	.05" Helvetica 66 Medium Italic			N47°04.47' W121°30.97'	N39°17.12' W69°18.07'		
RNAV HOLDING PATTERNS								
Holding Pattern		Blue						
Symbol & Color					290			
Magnetic Reference Bearing		.007"/Blue						
Lineweight & Color		.07" Futura Medium/Blue (May be reduced to .06" in congested areas)			290			
Text & Color	CAPS							
Geographic Coordinates		Blue						
Color		.05" Helvetica 66 Medium Italic			N27°50.00' W75°25.41'			
Text	CAPS							
COMPUTER NAVIGATION FIXES (CNF)								
		VHF/UHF	LF/MF	VHF/UHF	LF/MF			
Symbol & Color		Black	Brown	x	x			
Text & Color	CAPS	.07" Futura Medium (May be reduced to .06" in congested areas)			(JBBDT)	(JBBDT)		
AREA/OVERLAPPING CHART BOUNDARY								
Text	CAPS	.09" Futura Medium/Green			AREA CHART A-2 FOR DETAIL			
Dash Line		.04"/35% Green						
Weight & Color		.13"						
Length		.06"						
Spacing								
REGISTRATION GUIDE MARKS (Alaska Only)								
Silhouette Outline		.006"/Green						
Silhouette		10% Green						
Total Length of Silhouette		1"						

APPENDIX 54
CHART AREA OF COVERAGE - AREA CHARTS

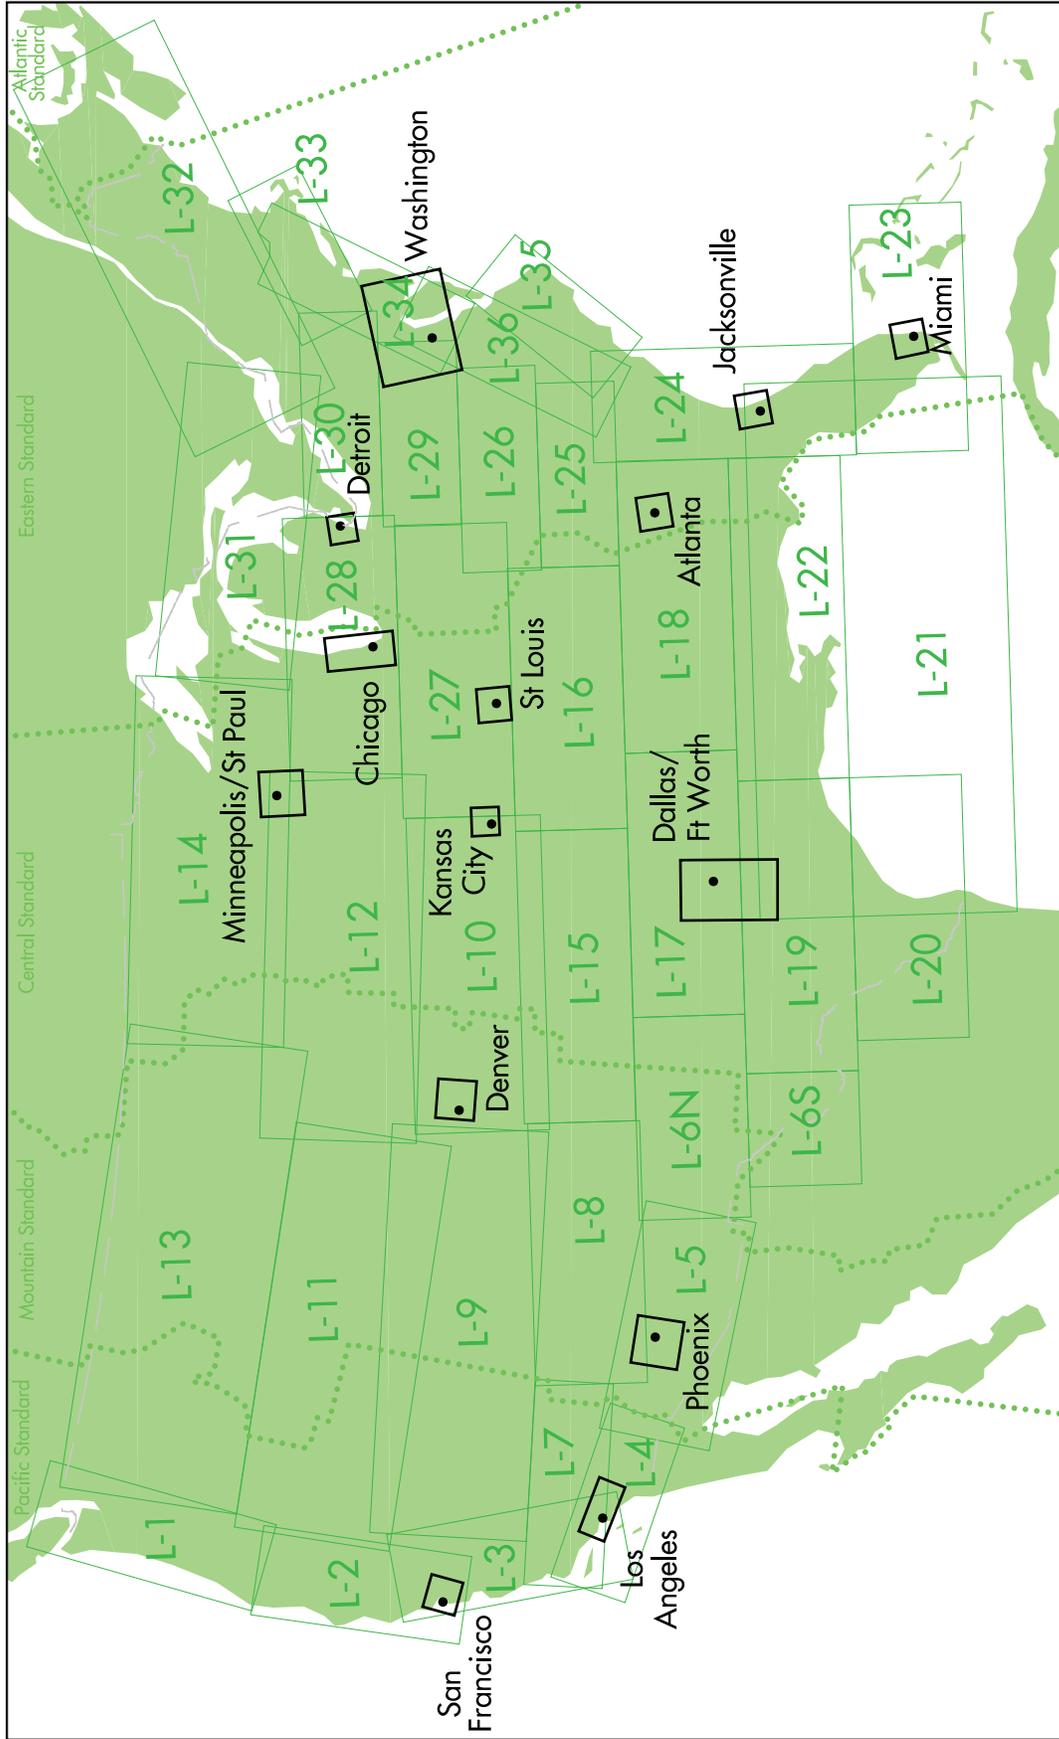

APPENDIX 55
 CHART LAYOUT - AREA CHART A-1

IFR ENROUTE LOW ALTITUDE CHARTS
 CHART LAYOUT
 AREA A-1

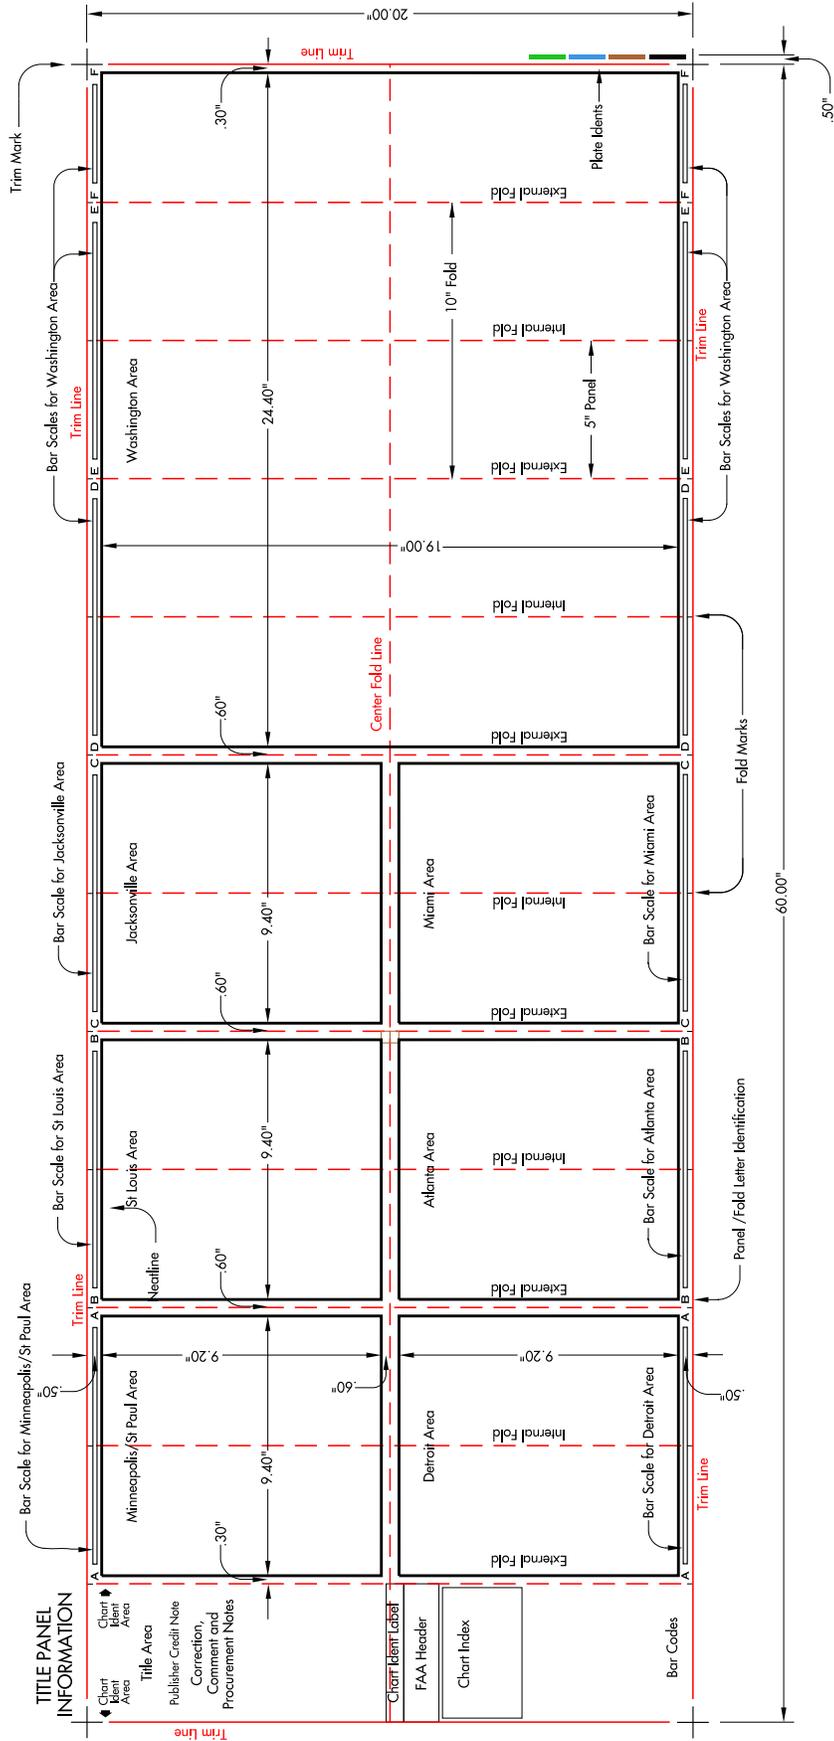

APPENDIX 57 TITLE PANEL INFORMATION - AREA CHARTS

TRIM LINE

A A A A A A A A A A A A A A A A

TRIM LINE

A-2

Warning: Refer to current foreign charts and flight information publications for information within foreign airspace

**UNITED STATES GOVERNMENT
FLIGHT INFORMATION PUBLICATION
IFR AREA CHARTS - U.S.**

For use up to but not including 18,000' MSL

**EFFECTIVE 0901Z 10 MAR 2011
TO 0901Z 5 MAY 2011**

Consult NOTAMS for latest information
Consult ENROUTE CHARTS for LEGEND information

Published by the
U.S. Department of Transportation
Federal Aviation Administration

Current ID: _____

CORRECTIONS, COMMENTS, AND/OR PROCUREMENT

FOR CHARTING ERRORS, OR RECOMMENDATIONS REGARDING FORMAT AND CONTENT CONTACT:

Current Charting Office or Recommendation Address

Current Procurement Address

FOR PROCUREMENT CONTACT:

MILITARY
For Corrections Information, See Chapter 11 of General Rerunning (GR). For Procurement refer to DOD Catalog of Aeronautical Charts and Flight Information Publications.

Frequently asked questions (FAQ) are answered on our web site at <http://astmanov.faa.gov>
See the FAQ's prior to contact via toll free number or email.

A-1

FOLD LINE

ATTENTION

THIS CHART CONTAINS OFF ROUTE OBSTRUCTION CLEARANCE ALTITUDES (OROCA). The off route obstruction clearance altitudes shown in quadrangles bounded by ticked lines of latitude and longitude are represented in THOUSANDS and HUNDREDS of feet above mean sea level. The OROCA is based on information available concerning the highest known features in each quadrangle, including terrain and obstructions. OROCA provides obstruction clearance with a 1000 foot buffer in designated continuous areas and a 2000 foot buffer in designated noncontinuous areas within the United States. For areas in Mexico and the Caribbean which are located outside of the U.S. ADIZ, OROCA provides obstruction clearance with a 3000 foot buffer. This altitude is provided for obstruction clearance only. It does not provide for NAVRAD signal coverage or communication coverage, and would not be consistent with altitudes assigned by Air Traffic Control.

Example: 12,500 feet

12⁵


A-1
A-2

**10 MAR 2011
UNITED STATES**



Federal Aviation Administration

CENTER FOLD LINE

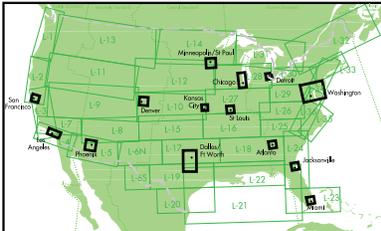

PUBLISHED IN ACCORDANCE WITH INTERAGENCY AIR CARTOGRAPHIC COMMITTEE SPECIFICATIONS AND AGREEMENTS, APPROVED BY: DEPARTMENT OF DEFENSE • FEDERAL AVIATION ADMINISTRATION

FAA Product ID: AREA1



NSN 7641014109648



NSA REF. NO. ENRXXUSLCHTAA1



EFF. DATE 11069

TRIM LINE

**APPENDIX 58
CHART IDENTIFICATION & TITLE AREA - AREA CHARTS**

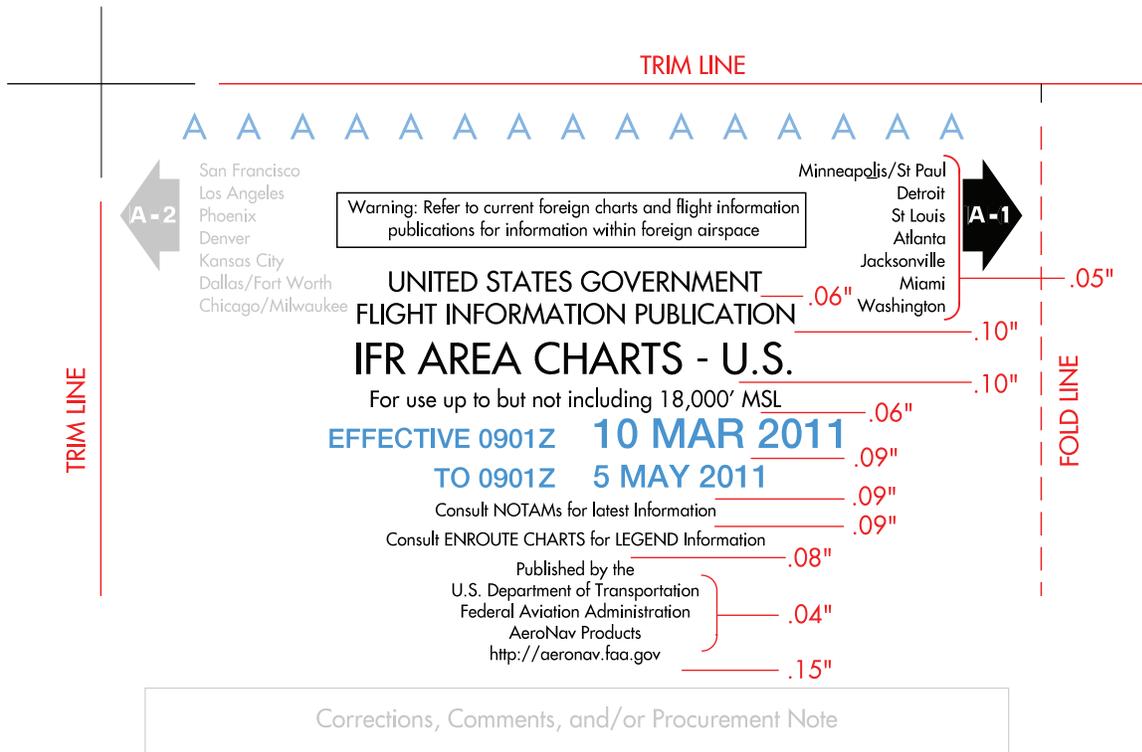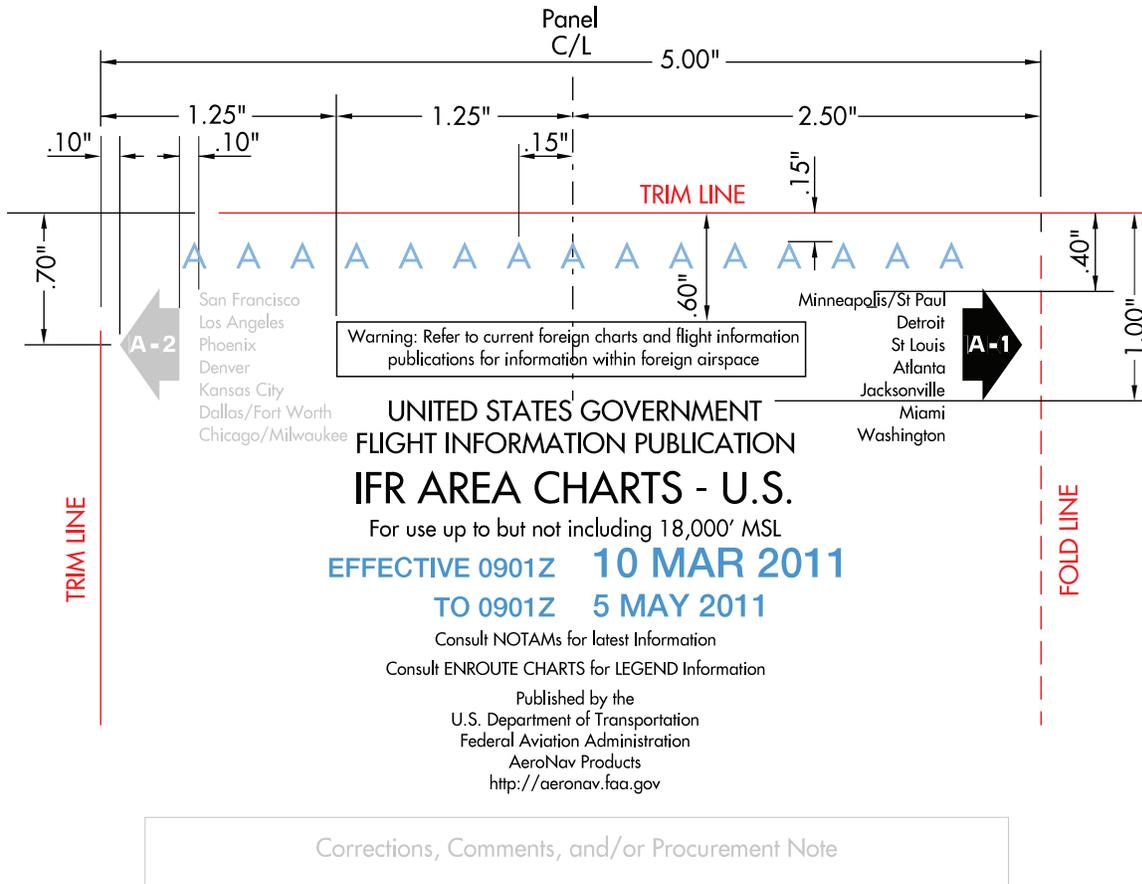


APPROXIMATE LINE SPACINGS SHOWN IN RED

**APPENDIX 58
CHART IDENTIFICATION & TITLE AREA - AREA CHARTS (CONTINUED)**

TITLE PANEL - AREA CHARTS			
Area Chart Distinctive Header	CAPS	.14" Futura Medium/45% Blue	A A A A A
Foreign Airspace Warning Text Box Lineweight & Color	C/L	.07" Futura Medium/Black .008"/Black	Warning: Refer to current foreign... 
Chart Identification Area List of Cities Text Color Arrowheads Chart Identification Text Color	C/L CAPS	.07" Futura Medium 45% Black or Solid Black .11" Reverse 45% Black or Solid Black	<div style="display: flex; justify-content: space-between;"> <div style="font-size: small;"> San Francisco Los Angeles Phoenix Denver Kansas City Dallas/Fort Worth Chicago/Milwaukee </div> <div style="font-size: small;"> Minneapolis/St Paul Detroit St Louis Atlanta Jacksonville Miami Washington </div> </div> 
Chart Title First and Second Lines Third Line Altitude Note Effectivity & Expiration Note Effective Time Effective Date Expiration Time Expiration Date NOTAM Note Legend Note Publishers Credit Note	CAPS CAPS C/L CAPS CAPS CAPS CAPS C/L C/L C/L	.11" Futura Medium/Black .17" Futura Medium/Black .09" Futura Medium/Black .11" Helvetica 65 Medium/Solid Blue .17" Helvetica 65 Medium/Solid Blue .11" Helvetica 65 Medium/Solid Blue .13" Helvetica 65 Medium/Solid Blue .07" Futura Medium/Black .07" Futura Medium/Black .07" Futura Medium/Black	<p align="center">UNITED STATES... IFR AREA... For use up to but not...</p> <p align="center">EFFECTIVE 0901Z 10 MAR 2011 TO 0901Z 5 MAY 2011</p> <p align="center">Consult NOTAMs for latest Information Consult ENROUTE CHARTS for LEGEND...</p> <p align="center">Published by the U.S. Department of Transportation</p>

APPENDIX 59 CHART INDEX - AREA CHARTS

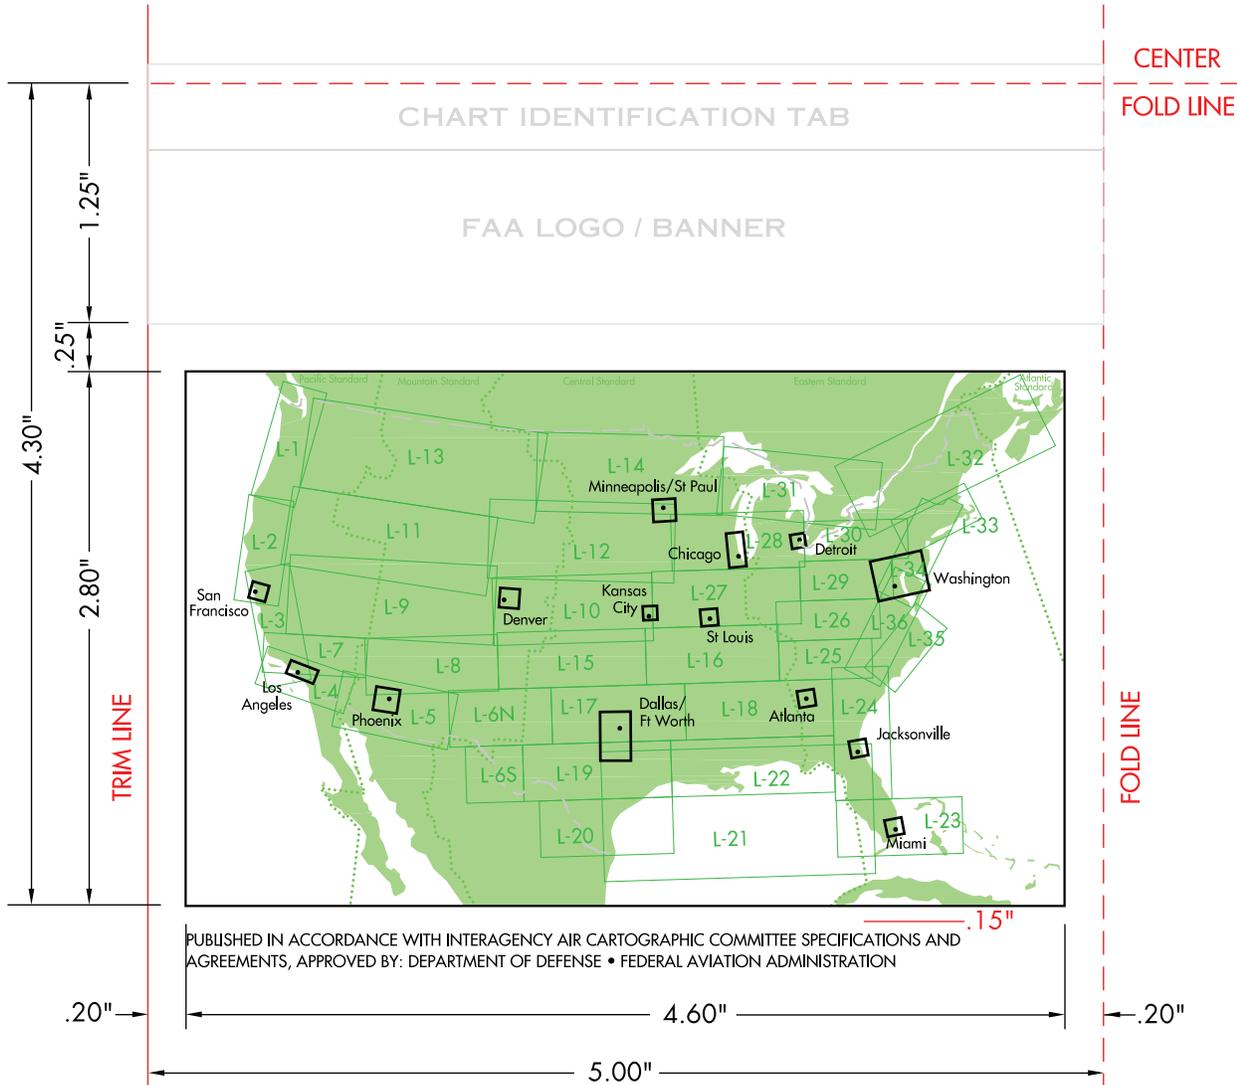


APPROXIMATE LINE SPACINGS SHOWN IN RED


AREA CHARTS			
Chart Identificaton	CAPS	.08" Futura Medium/Green	L-21
Area Chart Cities			
Symbol		.025" Diameter/Black	•
Name	C/L	.06" Futura Medium/Black	Washington
Borders & Outlines			
Chart Index Border		.012"/Black	
Area Chart Coverage Border		.014"/Black	
Enroute Chart Outlines		.005"/Green	
Time Zones & Boundaries			
Time Zone Name	C/L	.04" Futura Medium/45% Green	Eastern Standard
Time Zone Boundary		.015" Diameter/45% Green	
Land Areas		10% Green	
IACC Credit Note	CAPS	.065" Futura Medium/Black	PUBLISHED IN ACCORDANCE WITH...

APPENDIX 60
MARGIN INFORMATION - BAR SCALES - AREA CHARTS

Bar Scales - One Panel - Area Charts

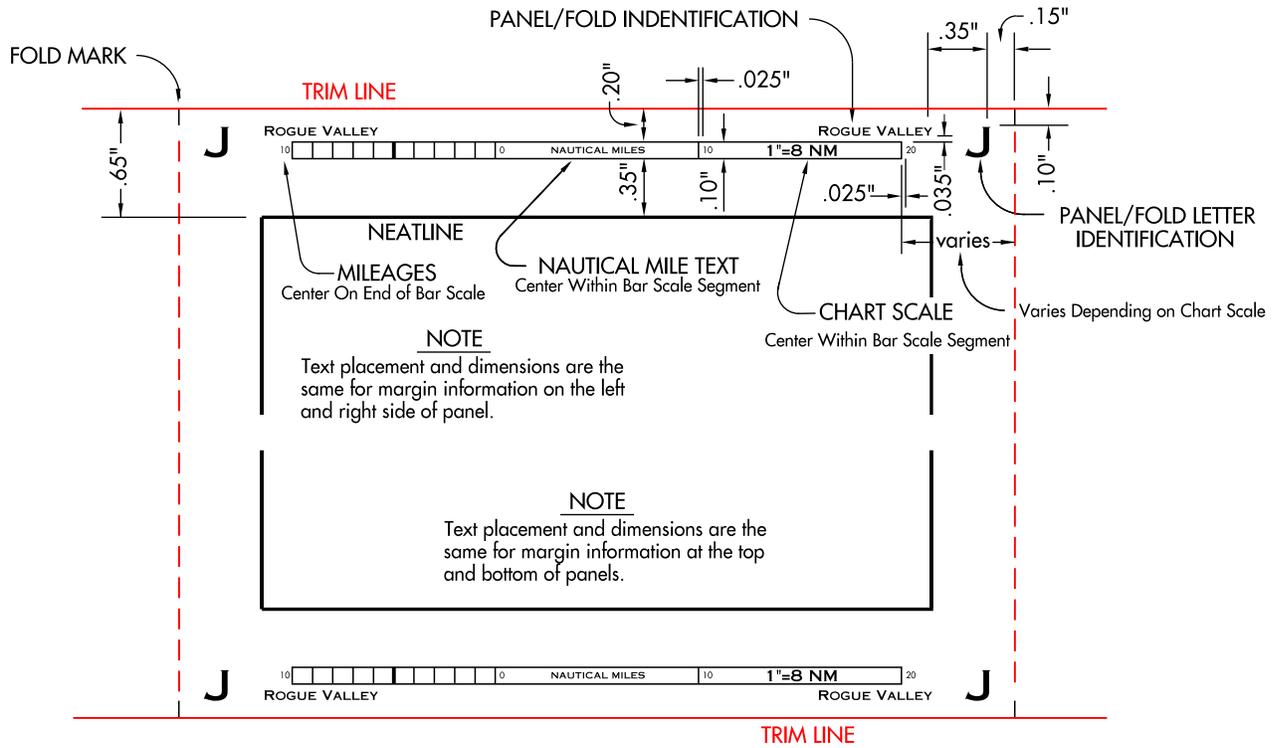


Differences for Chart Scale 1:7

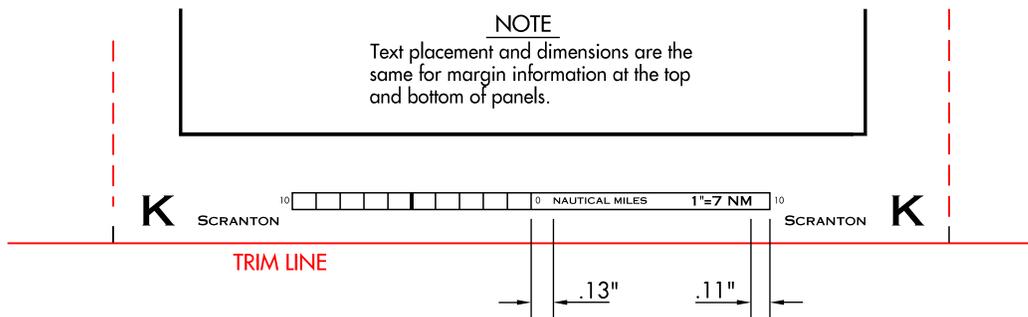


APPENDIX 60
MARGIN INFORMATION - BAR SCALES - AREA CHARTS (CONTINUED)


Bar Scales - Two Panel - Area Charts

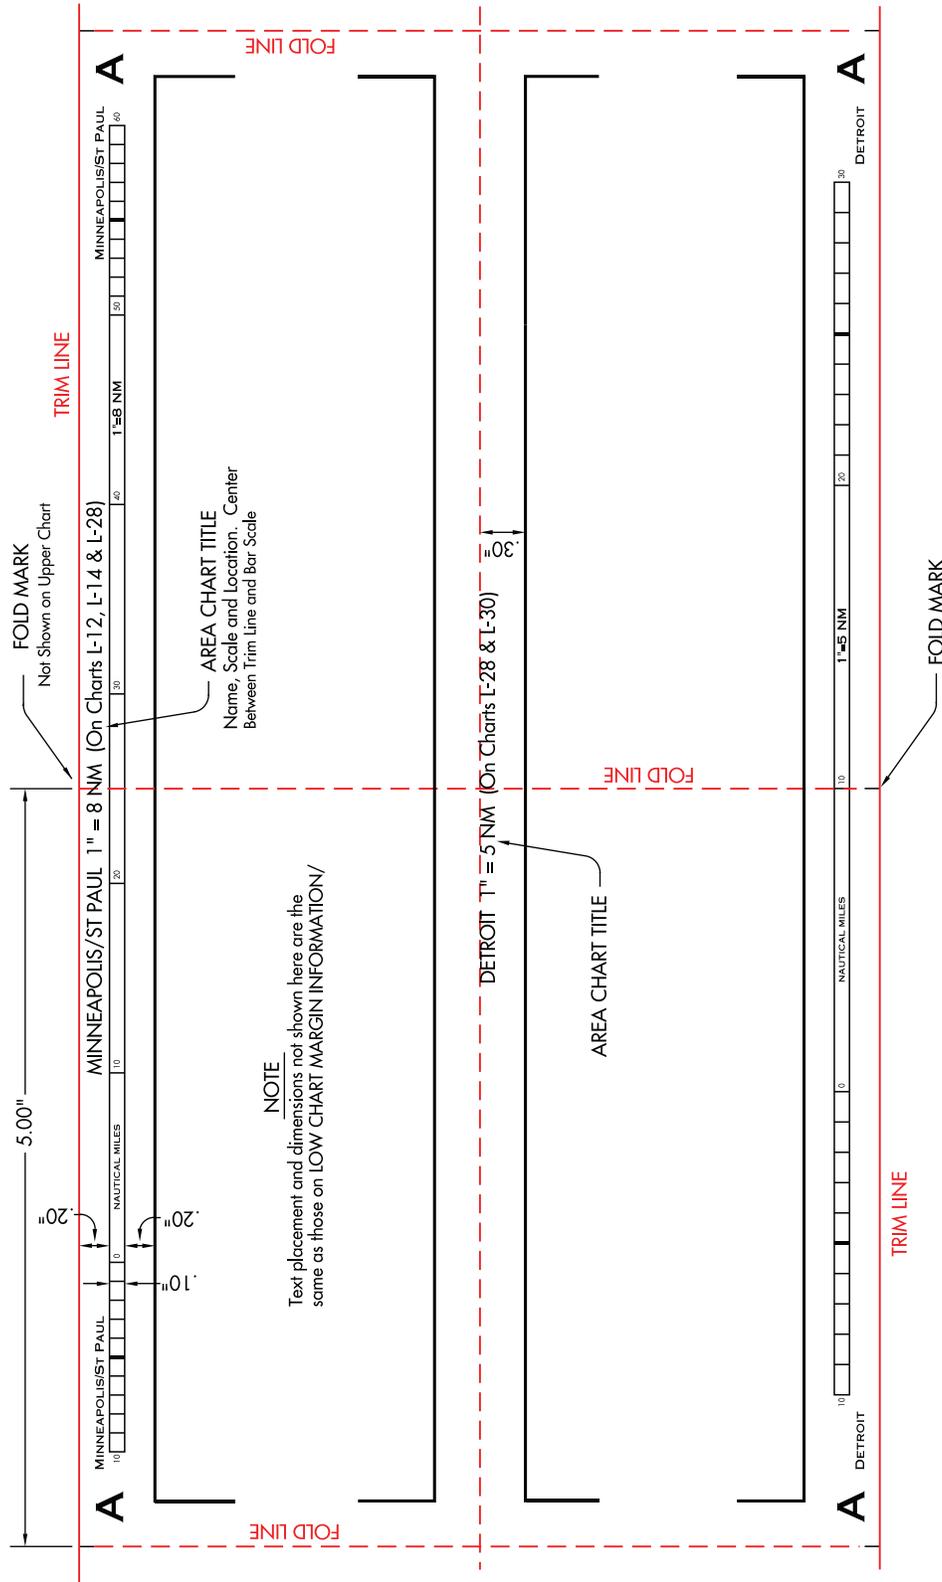

APPENDIX 60
MARGIN INFORMATION - BAR SCALES - AREA CHARTS (CONTINUED)


MARGIN INFORMATION - AREA CHART			
Chart Title			
Name & Scale	CAPS	.10" Futura Medium/Black	DENVER 1" = 7 NM (On Chart L-10)
Chart References	C/L	.10" Futura Medium/Black	
Panel Fold			
Letter	CAPS	.19" Copperplate Gothic 31/Black	
City or NAVAID Identification	CAPS	.06" Copperplate Gothic 31/Black	
Fold Mark Weight & Length		.008"/.10"/Black	
Chart Scale			 1"=8 NM
Units Text	CAPS	.04" Copperplate Gothic 31/Black	
Mileage Numbers		.04" Futura Medium/Black	
Scale Text	CAPS	.06" Copperplate Gothic 31/Black	
Scale Bar Lineweight		.008"/Black	
Effective Date (Back side of Chart)	CAPS	.08" Futura Medium/Black	EFFECTIVE 18 NOV 2010 TO...
MARGIN INFORMATION - AIRWAY/ROUTE INFORMATION			
Airway Route Text & Color			
VHF/UHF	CAPS	.06" Futura Medium/Black	
LF/MF	CAPS	.06" Futura Medium/Brown	
LF/MF with DME			
LF/MF Data	CAPS	.06" Futura Medium/Brown	
DME Data	CAPS	.06" Futura Medium/Black	
RNAV Waypoint	CAPS	.06" Futura Medium/Blue	
Geographic Coordinates		VHF/UHF	
	Color		
	Text		
Shutdown Status		VHF/UHF	
	Color		
	Lineweight		

**APPENDIX 61
MILITARY TRAINING ROUTES TABULATION - AREA CHARTS**

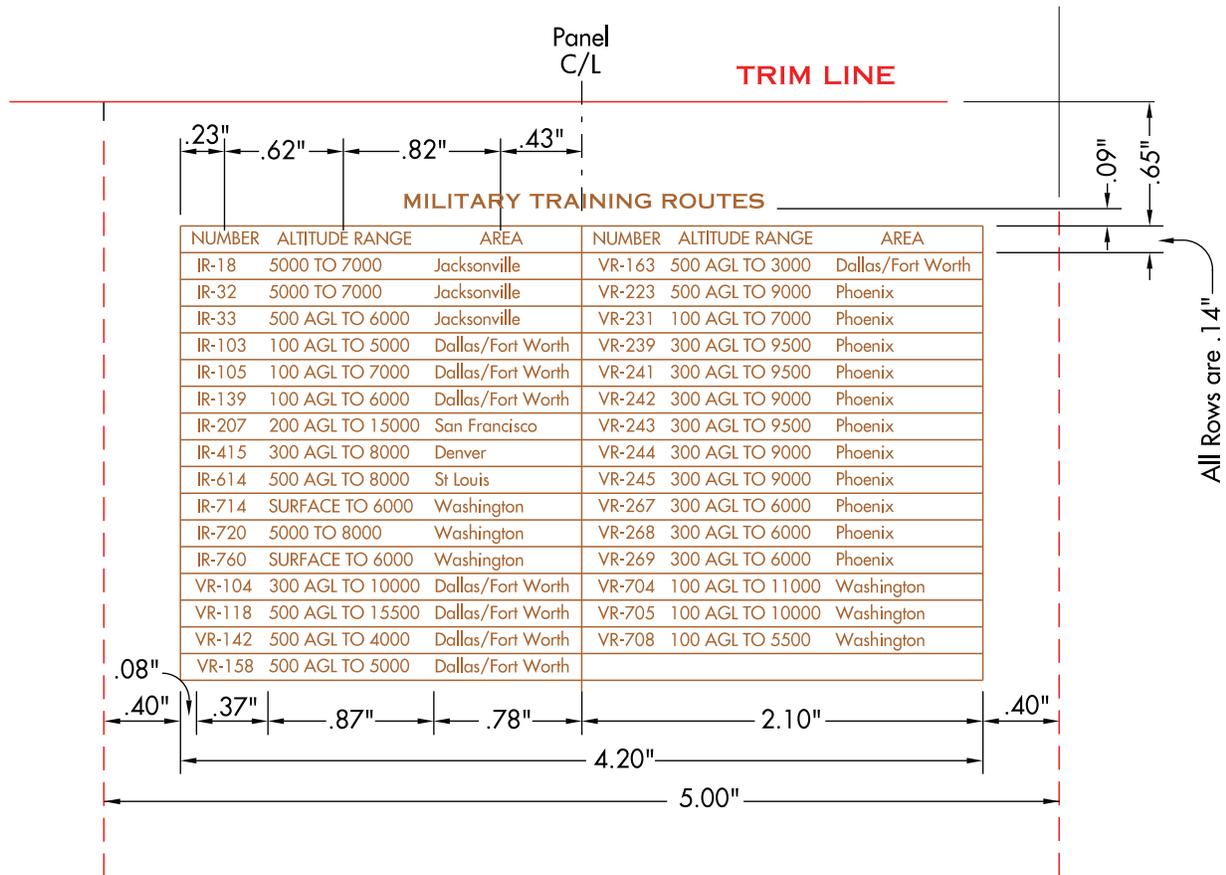

MILITARY TRAINING ROUTES - AREA CHART			
Table Title	CAPS	.08" Copperplate Gothic 31/Brown	MILITARY TRAINING ROUTES
Column Headings	CAPS	.07" Futura Medium/Brown	NUMBER ALTITUDE RANGE AREA
Tabulated Information			
Number & Altitude Range	CAPS	.07" Futura Medium/Brown	VR-223 500 AGL TO 9000 Phoenix
Area	C/L	.07" Futura Medium/Brown	
Table Lineweight		.008" Brown	<input type="checkbox"/>

APPENDIX 62 SUA & MOA TABULATION - AREA CHARTS

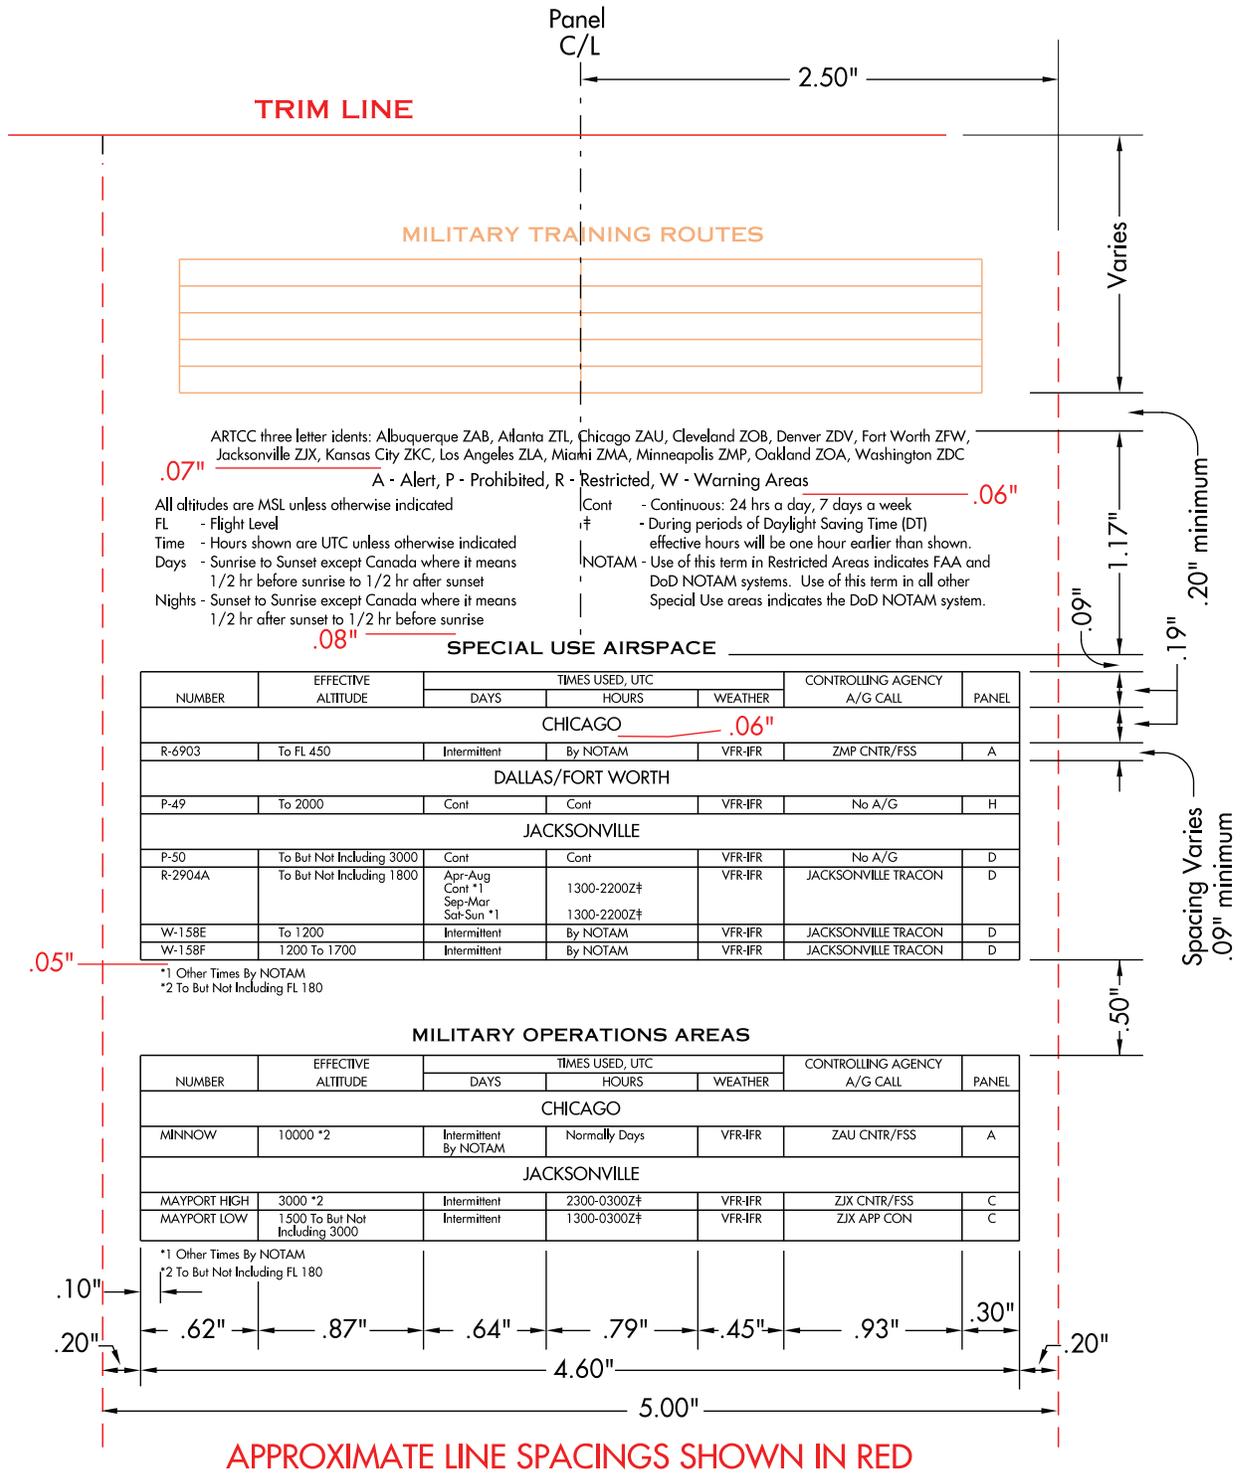

ARTCC three letter idents: Albuquerque ZAB, Atlanta ZTL, Chicago ZAU, Cleveland ZOB, Denver ZDV, Fort Worth ZFW, Jacksonville ZJX, Kansas City ZKC, Los Angeles ZLA, Miami ZMA, Minneapolis ZMP, Oakland ZOA, Washington ZDC

A - Alert, P - Prohibited, R - Restricted, W - Warning Areas

All altitudes are MSL unless otherwise indicated

FL - Flight Level

Time - Hours shown are UTC unless otherwise indicated

Days - Sunrise to Sunset except Canada where it means 1/2 hr before sunrise to 1/2 hr after sunset

Nights - Sunset to Sunrise except Canada where it means 1/2 hr after sunset to 1/2 hr before sunrise

Cont - Continuous: 24 hrs a day, 7 days a week

‡ - During periods of Daylight Saving Time (DT) effective hours will be one hour earlier than shown.


NOTAM - Use of this term in Restricted Areas indicates FAA and DoD NOTAM systems. Use of this term in all other Special Use areas indicates the DoD NOTAM system.

*1 Other Times By NOTAM
*2 To But Not Including FL 180

APPENDIX 62
SUA & MOA TABULATION - AREA CHARTS (CONTINUED)

SUAs & MOAs TABULATION - AREA CHART			
ARTCC Listing	C/L	.06" Futura Medium/Black	ARTCC three letter idents: P - PROHIBITED, R - RESTRICTED, All altitudes are MSL unless otherwise indicated SPECIAL USE AIRSPACE CHICAGO NUMBER R-6903 MINNOW *1 Other Times By NOTAM <div style="border: 1px solid black; width: 50px; height: 15px; margin: 0 auto;"></div>
Legend	C/L	.07" Futura Medium/Black	
Additional Text	C/L	.06" Futura Medium/Black	
Table Title	CAPS	.07" Copperplate Gothic 31/Black	
City Name	CAPS	.07" Futura Medium/Black	
Tabulated Information			
Column Headings	CAPS	.05" Futura Medium/Black	
Tabulated Information	C/L	.05" Futura Medium/Black	
Footnotes	C/L	.05" Futura Medium/Black	
Table Lineweight		.008"/Black	

**APPENDIX 63
TERRAIN CONTOURS - AREA CHARTS**

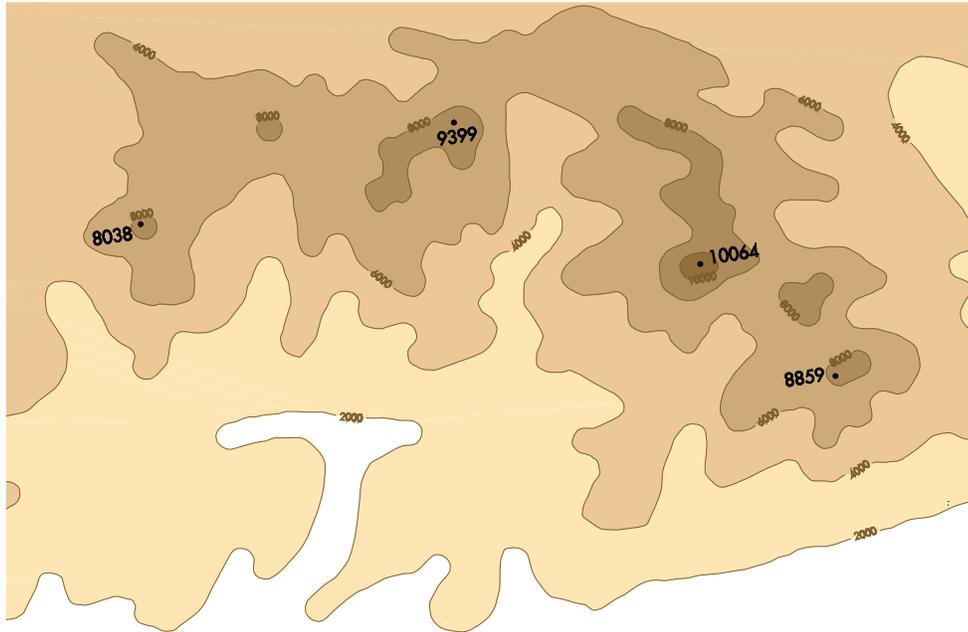

TERRAIN CONTOURS - AREA CHARTS			
Countours Values Lineweight Colors		.04" Futura Medium/45% Brown .001"/45% Brown Screened Brown	
Spot Elevations Spot Elevations Symbol Value Highest Spot Elevations Symbol Value		.035" Diameter/Black .05" Futura Medium/Black .050" Diameter/Black .06" Futura Medium/Black	
Terrain Countours Note Text Lineweight	CAPS	.05" Futura Medium/Black .015"/Black	<div style="border: 1px solid black; padding: 5px;"> NOTE: TERRAIN CONTOURS HAVE BEEN ADDED TO THOSE AREA CHARTS WHERE THE TERRAIN ON THE CHART IS 1000 FOOT OR GREATER THAN THE ELEVATION OF THE PRIMARY AIRPORT </div>

APPENDIX 64
TITLE PANEL LAYOUT - U.S. L-21



Warning: Refer to current foreign charts and flight information publications for information within foreign airspace



UNITED STATES GOVERNMENT
FLIGHT INFORMATION PUBLICATION
IFR ENROUTE LOW ALTITUDE - U.S.

For use up to but not including 18,000' MSL

EFFECTIVE 0901Z 20 OCT 2011
TO 0901Z 15 DEC 2011

Consult NOTAMs for latest information

Published by the
U.S. Department of Transportation
Federal Aviation Administration
AeroNav Products
<http://aeronav.faa.gov>

CORRECTIONS, COMMENTS, AND/OR PROCUREMENT

FOR CHARTING ERRORS, OR RECOMMENDATIONS
REGARDING FORMAT AND CONTENT CONTACT:

FAA, AeroNav Products
SSMC-4, Sta. # 4445
1305 East West Highway
Silver Spring, MD 20910-3281
Telephone 1-800-626-3677
Email 9-AMC-Aerochart@faa.gov

FOR PROCUREMENT CONTACT:

FAA, AeroNav Products Logistics Group
10201 Good Luck Road
Glenn Dale, MD 20769-9700
Online at <http://aeronav.faa.gov>
Telephone 1-800-638-8972
Fax 301-436-6829
or any authorized chart agent
Email Questions to: 9-AMC-Chartsales@faa.gov

MILITARY

For Corrections Information, See Chapter 11 of General
Planning (GP). For Procurement refer to DOD Catalog of
Aeronautical Charts and Flight Information Publications.

Frequently asked questions (FAQ) are answered on our web site at <http://aeronav.faa.gov>
See the FAQs prior to contact via toll free number or email.

L-21 is intended for offshore navigation only.
Detailed onshore information has been intentionally omitted.
Refer to charts L-19/20, L-22, L-23/24 for detailed onshore information.

ATTENTION

THIS CHART CONTAINS OFF ROUTE OBSTRUCTION CLEARANCE ALTITUDES (OROCA).
The off route obstruction clearance altitudes shown in quadrangles bounded by ticked lines of latitude and longitude are represented in THOUSANDS and HUNDREDS of feet above mean sea level. The OROCA is based on information available concerning the highest known features in each quadrangle, including terrain and obstructions. OROCA provides obstruction clearance with a 1000 foot buffer in designated non-mountainous areas and a 2000 foot buffer in designated mountainous areas within the United States. For areas in Mexico and the Caribbean which are located outside of the U.S. ADIZ, OROCA provides obstruction clearance with a 3000 foot buffer. This altitude is provided for obstruction clearance only. It does not provide for NAVAID signal coverage or communication coverage, and would not be consistent with altitudes assigned by Air Traffic Control.

Example: 12,500 feet

12⁵

APPENDIX 64
TITLE PANEL LAYOUT - U.S. L-21 (CONTINUED)

TITLE PANEL - LOW ENROUTE CHART - L-21			
Offshore Navigation Note Main Heading Box Lineweight	C/L	.09" Futura Medium/Black .007"/Black	L-21 is intended for offshore.. <input type="checkbox"/>

Page Intentionally Left Blank