

“DRAFT”



**U.S. Department
of Transportation**

Federal Aviation
Administration

Advisory Circular

Subject: Aircraft Landing Performance and
Runway Excursion Mitigation

Date: DRAFT

AC No: 91-79B

Initiated by: AFS-200/800 **Change:**

This advisory circular (AC) provides ways for pilots and airplane operators to identify, understand, and manage the risks associated with the landing phase of flight. It also provides information that both certificated and noncertificated operators may use to develop personal or standard operating procedures (SOP) to mitigate a runway excursion meant to bind the public in any way, and the document is intended only to provide information to the public regarding existing requirements under the law or agency policies.

Lawrence Fields
Acting Executive Director, Flight Standards Service

CONTENTS

Paragraph	Page
Chapter 1. Introduction	1-1
1.1 Purpose of This Advisory Circular (AC)	1-1
1.2 Audience	1-1
1.3 Where You Can Find This AC	1-1
1.4 What This AC Cancels	1-1
1.5 Background	1-1
1.6 Content of This AC	1-2
1.7 Related Documents (current editions)	1-3
1.8 Definitions	1-4
1.9 Training Considerations	1-5
1.10 AC Feedback Form	1-5
Chapter 2. Braking Action Reports	2-1
2.1 General	2-1
2.2 Understanding Aircraft Deceleration	2-1
2.3 Quantifying Wheel Braking Action	2-1
2.4 Braking Action Reports	2-1
2.5 “Braking Action Advisories Are in Effect.”	2-2
2.6 How to Use the RCAM	2-2
Table 2-1. Pilot/Operator Runway Condition Assessment Matrix (RCAM)	2-4
2.7 Criteria for Making Observations	2-5
2.8 Recommended Method for Quantifying Pilot Observations	2-5
Figure 2-1. An Illustration of Good, Medium, and Poor Braking	2-7
2.9 Reporting Conventions	2-7
2.10 Comparison of Braking Action Reports: PBAR vs ABAR	2-8
Figure 2-2. Precision and Accuracy	2-8
Figure 2-3. Comparison of Various Braking Action Reports	2-9
2.11 Recommended Action	2-9
Chapter 3. Runway Overrun Hazards	3-1
3.1 Background	3-1
3.2 Overrun Hazards	3-1

Figure 3-1. Effects of Compound Factors—The End is Closer Than You Think	3-4
3.3 Risk Mitigation	3-4
Chapter 4. Predeparture Flight Planning.....	4-1
4.1 Background	4-1
Table 4-1. Regulatory Planned Dispatch Landing Distance Requirements.....	4-3
4.2 AFM Landing Distance Data	4-3
Chapter 5. Time Of Arrival (TOA) Landing Distance Assessment.....	5-1
5.1 Background	5-1
5.2 General	5-1
5.3 Conducting the Assessment	5-1
Table 5-1. Landing Distance Factors	5-3
5.4 Runway Conditions Considerations.....	5-3
5.5 Risks Associated With Moderate or Heavy Rain	5-4
5.6 Risk Associated With Standing Water.....	5-4
5.7 Aircraft Performance Considerations	5-5
5.8 Autobrake and Manual Brake Usage	5-5
5.9 Touchdown Point	5-6
5.10 Crosswind Considerations	5-6
5.11 Assessment Based on Preflight (Dispatch) Criteria	5-6
5.12 Risk Management Considerations.....	5-6
Appendix A. Aircraft Braking Action Report (ABAR) Systems	A-1

CHAPTER 1. INTRODUCTION

- 1.1 Purpose of This Advisory Circular (AC).** This AC provides ways to identify, understand, and manage the risks associated with the landing phase of flight. It describes braking action reports and the Runway Condition Assessment Matrix (RCAM), discusses the hazards associated with runway overruns and excursions, reviews the requirements for predeparture flight planning, and provides procedures for completing a time of arrival (TOA) landing distance assessment. It also provides operators with information they may use to develop standard operating procedures (SOP), training programs, policies, and briefing guides in order to mitigate landing risks. The contents of this document do not have the force and effect of law and are not meant to bind the public in any way, and the document is intended only to provide information to the public regarding existing requirements under the law or agency policies.
- 1.2 Audience.** This AC is intended for pilots, check airmen, dispatch examiners, flightcrews, airplane operators, certificate holders, program managers, training providers, pilot examiners, and other support personnel.
- 1.3 Where You Can Find This AC.** You can find this AC on the Federal Aviation Administration’s (FAA) website at https://www.faa.gov/regulations_policies/advisory_circulars/ and the Dynamic Regulatory System (DRS) at <https://drs.faa.gov>.
- 1.4 What This AC Cancels.** AC 91-79A, Mitigating the Risks of a Runway Overrun Upon Landing, dated September 17, 2014, is canceled. Safety Alert for Operators (SAFO) 19001, Landing Performance Assessments at Time of Arrival, dated March 11, 2019, and SAFO 19003, Turbojet Braking Performance on Wet Runways, dated July 2, 2019, are canceled.
- 1.5 Background.** Heavy snow was falling on a frigid day in December 2005 when a Boeing 737 ran off the runway at Chicago’s Midway Airport. The crew had elected to land on Runway 31C despite a tailwind, because the Runway Visual Range (RVR) was below minimums for Runway 13C. Although the aircraft touched down normally, the pilots did not activate the thrust reversers until 18 seconds later with only 1,000 feet (ft) of runway remaining. The aircraft was not able to stop on the runway, ran through the airport fence onto Central Avenue, and struck two cars. A dozen people were injured and a child inside one of the cars was killed.

 - 1.5.1** In response to that accident, the FAA convened the Takeoff and Landing Performance Assessment (TALPA) Aviation Rulemaking Committee (ARC). Because regulations do not include dispatch requirements for landing on runways other than wet or dry, exposure to the risks associated with other runway conditions had not been formally addressed. The FAA adopted several committee recommendations and implemented them on October 1, 2016.
 - 1.5.2** TALPA standardized runway condition reporting and set the conditions within a matrix, the RCAM, which relates those conditions to engineering-based landing performance calculation methods, braking action, and runway friction measuring ranges. This

guidance is now set out in three separate ACs for airports (AC [150/5200-30](#), Airport Field Condition Assessments and Winter Operations Safety), aircraft certification (AC [25-32](#), Landing Performance Data for Time-of-Arrival Landing Performance Assessments), and aircraft operators (this AC).

- 1.5.3** TALPA recommendations served as the basis for the International Civil Aviation Organization (ICAO) standards. Known collectively as the Global Reporting Format (GRF), this series of publications became applicable in 2021. A complete list of publications can be found on the ICAO website at <https://www.icao.int/publications/Pages/default.aspx>. International operators should be familiar with the ICAO GRF to ensure proper understanding of terms, procedures, and policies.
- 1.5.4** The RCAM forms the basis of the FAA’s TALPA initiative as well as the ICAO GRF. While the levels of predicted aircraft wheel brake performance were set in these documents, there was no guidance for how actual aircraft performance could be used to provide standard reports. In 2017, the Society of Aircraft Performance and Operations Engineers (SAPOE) convened a special task group to address this issue. The result was published as two ASTM standards (ASTM [E3188](#), Standard Terminology for Aircraft Braking Performance, and [E3266](#), Standard Guide for Friction-Limited Aircraft Braking Measurements and Reporting) that set formalized definitions and minimum standards for braking action reports derived directly from aircraft data. These documents described how braking action reports should be structured, how precision should be measured, and how accuracy should be applied to the RCAM scale.
- 1.5.5** According to FAA and National Transportation Safety Board (NTSB) information, runway overruns during the landing phase of flight account for approximately ten incidents or accidents every year with varying degrees of severity, including fatalities. The NTSB concluded that due to the increased risk associated with performing a tailwind approach and landing on a wet or contaminated runway, comprehensive guidance about the reduced safety margins during tailwind landings should be provided. A revision of this AC was recommended to address this issue, as well as other factors that may increase the risk of runway overruns.
- 1.6 Content of This AC.** This guidance incorporates the recommendations from the TALPA ARC and the material from SAFOs 19001 and 19003, and references guidance from ASTM E3188 and E3266.
- 1.6.1 Braking Action and Braking Action Reports.** To effectively manage landing risk, it is critical that the effect of wheel braking is understood, as it plays a vital role in both dispatch and TOA landing distance assessments. While these risks are commonly associated with transport category aircraft and operations, this AC provides the knowledge, skills, and techniques that may be used by other aircraft with similar designs.
- 1.6.2 Runway Overrun Hazards.** In addition to wheel braking, proper airmanship based on a foundation of knowledge regarding other overrun risk factors is essential. These risks, which are generic to all aircraft, are discussed as well as their consequences.

- 1.6.3** Predeparture Flight Planning. This AC provides a brief introduction to the regulations and recommended practices concerning preflight runway requirements for large transport aircraft.
- 1.6.4** TOA Landing Distance Assessments. Upon arriving at the destination airport, prior to top of descent, the flightcrew obtains the runway’s reported condition, assesses if the aircraft can safely land, and complies with the wet/contaminated runway landing data in the pilot’s operating handbook (POH)/Aircraft Flight Manual (AFM).
- 1.6.5** Aircraft Braking Action Reports (ABAR). Appendix [A](#) provides detailed background information on ABAR systems and their use.

1.7 Related Documents (current editions).

1.7.1 ASTM International Standards.

- [E3188](#), Standard Terminology for Aircraft Braking Performance.
- [E3266](#), Standard Guide for Friction-Limited Aircraft Braking Measurements and Reporting.

1.7.2 Advisory Circulars (AC).

- AC [23-8](#), Flight Test Guide for Certification of Part 23 Airplanes.
- AC [25-7](#), Flight Test Guide for Certification of Transport Category Airplanes.
- AC [25-31](#), Takeoff Performance Data for Operations on Contaminated Runways.
- AC [25-32](#), Landing Performance Data for Time-of-Arrival Landing Performance Assessments.
- AC [60-22](#), Aeronautical Decision Making.
- AC [120-71](#), Standard Operating Procedures and Pilot Monitoring Duties for Flight Deck Crewmembers.
- AC [121.195-1](#), Operational Landing Distances for Wet Runways; Transport Category Airplanes.

1.7.3 FAA Handbooks.

- [FAA-H-8083-3](#), Airplane Flying Handbook.
- [FAA-H-8083-25](#), Pilot’s Handbook of Aeronautical Knowledge.

1.7.4 Safety Alerts for Operators (SAFO). SAFO [10005](#), Go-Around Callout and Immediate Response.

1.7.5 Additional References.

- Approach and Landing Accident Reduction (ALAR)/Runway Excursion Risk Reduction (RERR) Toolkits.
- Flight Safety Foundation (FSF) ALAR Tool Kit.
- FSF’s [Reducing the Risk of Runway Excursions](#) Report.
- Safety Targeted Awareness Report (STAR) [007](#), Overruns on Landing, from the European Regions Airline Association (ERA) Air Safety Work Group.

1.8 **Definitions.** The following definitions are used in this AC:

- 1.8.1 Aircraft Braking Action Report (ABAR).** A braking action report generated by an automated system designed to provide a standardized indication of the aircraft’s braking performance.
- 1.8.2 Approved Data.** Aircraft performance data that is approved for use by the FAA.
- 1.8.3 Autobrakes.** An automated aircraft control system that normally allows the pilot to select a targeted deceleration rate for the landing rollout.
- 1.8.4 Braking Action.** The method for describing the maximum capability of a vehicle’s braking system on a wet or contaminated surface that references a standardized scale (the RCAM).
- 1.8.5 Factored Landing Distance.** The AFM landing distance adjusted by the applicable preflight (dispatch limitation) factors.
- 1.8.6 Friction-Limited Braking.** A condition of aircraft braking performance where the amount of deceleration force that can be applied by the aircraft brakes is limited by the friction level of the runway surface. For aircraft so equipped, any increase in command to the brake system will be limited by the anti-skid system.
- 1.8.7 Global Reporting Format (GRF).** The format used by ICAO to denote standard runway condition reporting and aircraft braking performance. This format is based on and largely similar to current FAA guidance.
- 1.8.8 Operator.** For the purpose of this AC, any air operator, foreign air operator, or private operator.
- 1.8.9 Pilot Braking Action Report (PBAR).** A braking action report based on observations from the pilot. In some countries, PBARs may be referred to as a Pilot Report (PIREP) or an Air Report (AIREP).
- 1.8.10 Porous Friction Course (PFC).** A thin layer of porous asphalt that allows water to drain vertically away from the surface of the runway.

- 1.8.11** Runway Condition Code (RwyCC). A number from 0 to 6 that represents the slipperiness of a designated portion of a runway (i.e., a specific one-third of the runway); a rating of 0 indicates extremely slippery and a rating of 6 indicates a dry runway. (See Table [2-1](#), Pilot/Operator Runway Condition Assessment Matrix (RCAM).)
- 1.8.12** Takeoff and Landing Performance Assessment (TALPA) Aviation Rulemaking Committee (ARC). The FAA body formed to reduce the risk of runway overruns by developing a series of guidance material for runway conditions and aircraft performance. These procedures have since formed the basis of the ICAO GRF.
- 1.8.13** Unfactored Aircraft Flight Manual (AFM) Landing Distance. The landing distance provided by the AFM without any factors applied.
- Note:** These landing distances are determined in a way that represents the maximum performance capability of the airplane, which may not be representative of normal operations. (See Chapter [4](#), Predeparture Flight Planning.)
- 1.8.14** Wheel Braking Coefficient. The ratio of the deceleration force from the braked wheels/tires relative to the sum of the vertical (normal) forces acting on the braked wheels/tires. The wheel braking coefficient is the result of the combination of all functioning braked wheels.
- 1.9 Training Considerations.** We recommend operators include the information in this AC in their SOPs for landing on wet or contaminated runways and in their pilot training programs.
- 1.10 AC Feedback Form.** For your convenience, the AC Feedback Form is the last page of this AC. Note any deficiencies found, clarifications needed, or suggested improvements regarding the contents of this AC on the Feedback Form.

CHAPTER 2. BRAKING ACTION REPORTS

- 2.1 General.** Standardizing braking action reports by using braking action codes in the RCAM will ensure that pilots are provided objective, useful information so they can accurately assess the runway condition prior to landing. A runway is assumed to be dry unless reported otherwise (usually through the Automatic Terminal Information Service (ATIS), Notice to Air Missions (NOTAM), or PIREP). Runway conditions other than dry are described as being either wet or contaminated. Since aircraft-braking ability varies greatly due to runway conditions, it is important that if you notice a decrease in the braking ability of your aircraft due to a wet or contaminated runway, you make a braking action report to air traffic control (ATC).
- 2.2 Understanding Aircraft Deceleration.** The braking performance of a landing aircraft is a combination of aerodynamic and mechanical wheel braking forces. The relative impact of these forces changes during the landing rollout. Aerodynamic forces are dominant immediately after touchdown when the aircraft is at higher speeds. As the aircraft decelerates, mechanical forces play a more important role.
- 2.3 Quantifying Wheel Braking Action.** The reported braking action describes the degree to which the weight on the braked wheels can be transferred into a decelerating force by the aircraft's brakes. This system is comprised of the tire, wheel brakes, and anti-skid system (if available). Usually, as brakes are applied, the wheels slow and the friction between the tires and the runway surface causes the aircraft to decelerate. If contaminants such as water, snow, slush, or ice are present on the runway, even if the wheels start to slow down as brakes are applied, the tires may slip along the surface of the runway due to the lack of friction caused by the presence of the contaminant(s). The relationship between the decelerating force from the braked wheels and the vertical force acting on them is known as the wheel braking coefficient. As the runway becomes more slippery, the wheel braking coefficient decreases. The standardized scale used in the RCAM is based on wheel braking performance and has three distinct characteristics:
1. The scale only represents values when the aircraft's braking system is performing at its maximum capability (i.e., the point of friction-limited deceleration is reached due to the slipperiness of the runway);
 2. Each division of the scale represents a range of values with the defining value for that division being the lowest wheel braking coefficient value for that range; and
 3. The scale assumes the braking coefficient value (reported braking action) is valid for the entire length of the landing roll, unless otherwise specified. (See paragraph [2.10](#) below.)
- 2.4 Braking Action Reports.** A braking action report communicates the maximum capability of wheel brakes observed during landing. The report provides time critical and operationally relevant information to pilots when a runway may be more slippery than previously reported. In addition to pilots, braking action reports can be used by airport operators to confirm or downgrade a RwyCC.

2.4.1 Braking Action. “Braking action” is the term used to describe the maximum capability of a vehicle’s braking system on a wet or contaminated surface with reference to the standardized scale in the RCAM under the column labeled “Control, Braking Assessment Criteria.” Braking action is classified according to the primary source of information used to generate the report:

1. Pilot Braking Action Report (PBAR): A braking action report resulting from the observations of a pilot.
2. Aircraft Braking Action Report (ABAR): A braking action report generated by an automated system designed to provide a standardized indication of the aircraft’s braking performance.

2.4.2 Reliable PBAR. To determine if a braking action report is reliable, consider the type of aircraft making the report and the timeliness of the report. A report recently made by an aircraft similar to the one you are flying is more likely to provide information you can use to accurately predict your aircraft’s braking performance.

2.5 “Braking Action Advisories Are in Effect.” If runway braking action is reported as less than good, or if weather conditions are conducive to deteriorating braking action, ATIS will include the statement, “Braking action advisories are in effect.” When this happens, ATC is required to provide each arriving and departing aircraft with the most recent braking action report for the runway in use. As a pilot, when braking action advisories are in effect, if ATC fails to provide you with the most recent braking action report, you should request the current runway condition information. You should also be prepared to provide ATC with a report after landing describing the runway conditions you observed and your aircraft’s braking ability.

2.5.1 Braking Action Degraded. When stopping an aircraft, the pilot expects the deceleration of the aircraft to be proportional to the amount of braking applied. When the actual deceleration is less than expected, braking action is degraded. Usually, as brakes are applied, the wheels slow and the friction between the tires and the runway surface causes the aircraft to decelerate. If contaminants such as water, snow, slush, or ice are present on the runway, even if the wheels start to slow down as brakes are applied, the tires may slip along the surface of the runway due to the lack of friction caused by the presence of the contaminant(s). If you notice a deterioration of braking effectiveness, it is important that you report it to ATC to alert other pilots to the condition.

2.5.2 RCAM. The RCAM is the tool that enables airport operators and aircraft pilots to accurately communicate runway conditions. The RCAM ties runway contaminant types and depths to aircraft performance. Pilots need to be familiar with the RCAM in order to make objective braking action reports that are useable to other pilots.

2.6 How to Use the RCAM.

2.6.1 Format. The RCAM braking action codes and definitions are shown in Table [2-1](#), Pilot/Operator Runway Condition Assessment Matrix (RCAM). Note that the left side of the table, labeled “Assessment Criteria,” is for use by airport operators that conduct and

report the runway condition of paved runways. Airport operators report RwyCCs as numbers (e.g., 5, 3, 2, etc.). RwyCCs are not reported by pilots. Pilots should use the right side of the table, labeled “Control/Braking Assessment Criteria,” to make braking action reports and should use words such as “good,” “medium,” or “poor.” Dry conditions are not normally reported unless other parts of the runway are wet or contaminated.

2.6.2 Aircraft Braking Performance Levels. The matrix is divided into six categories, each representing a range of maximum wheel braking ability. Operator guidance should contain landing performance data for each category that represents the lowest inclusive value of wheel braking for that category. Multiple reports may be provided for each runway, as described below.

2.6.2.1 **Reporting Runway Sections.** RwyCCs are provided for each third of the runway. This is primarily done to provide pilots with situational awareness. Airport operators are tasked with maintaining consistent runway conditions throughout their entire length; however, weather and operational conditions may result in variations.

2.6.2.2 **Control/Braking Assessment Criteria.** The RCAM lists the basic metrics for how vehicle control can be related to braking assessments. This information can be applied to any vehicle used to observe wheel braking.

Table 2-1. Pilot/Operator Runway Condition Assessment Matrix (RCAM)

Assessment Criteria		Control/Braking Assessment Criteria	
Runway Condition Description	RwyCC	Deceleration or Directional Control Observation	Reported Braking Action
Dry	6	---	---
- Frost - Wet (includes damp and 1/8 inch depth or less of water) <i>1/8 Inch (3 mm) Depth or Less of:</i> - Slush - Dry Snow - Wet Snow	5	Braking deceleration is normal for the wheel braking effort applied AND directional control is normal.	Good
<i>-15 °C and Colder Outside Air Temperature:</i> Compacted Snow	4	Braking deceleration OR directional control is between Good and Medium.	Good to Medium
- Slippery When Wet (wet runway) - Dry Snow or Wet Snow (any depth) over Compacted Snow <i>Greater Than 1/8 Inch (3 mm) Depth of:</i> - Dry Snow - Wet Snow <i>Warmer Than -15 °C Outside Air Temperature:</i> - Compacted Snow	3	Braking deceleration is noticeably reduced for the wheel braking effort applied OR directional control is noticeably reduced.	Medium
<i>Greater Than 1/8 Inch (3 mm) Depth of:</i> - Water - Slush	2	Braking deceleration OR directional control is between Medium and Poor.	Medium to Poor
Ice	1	Braking deceleration is significantly reduced for the wheel braking effort applied OR directional control is significantly reduced.	Poor
- Wet Ice - Slush over Ice - Water over Compacted Snow - Dry Snow or Wet Snow over Ice	0	Braking deceleration is minimal to nonexistent for the wheel braking effort applied OR directional control is uncertain.	Nil

Note 1: The unshaded portion of the RCAM (“Assessment Criteria” columns) is used by airport operators conducting a runway condition assessment.

Note 2: The shaded portion of the RCAM (“Control/Braking Assessment Criteria” columns) is for pilots making braking action reports.

Note 3: The pilot/aircraft operator RCAM is different from the RCAM used by airport operators, which is provided in AC 150/5200-30. The airport operator RCAM is not intended for use by pilots.

Note 4: Runway condition codes (RwyCC), one for each third of the landing surface (e.g., 4/3/3), represent the runway condition description as reported by the airport operator.

2.7 Criteria for Making Observations. Braking action reports should be based solely on the wheel braking component of the aircraft’s deceleration. Pilots need to understand that stopping results do not necessarily correlate to braking action. The effects of aerodynamic forces, while beneficial to stopping performance, should not be considered when making a braking action report. For turbojets, the effect of reverse thrust should not be considered. Likewise, for propeller driven airplanes, the effect of reverse pitch should not be considered.

2.7.1 Considerations. To make an accurate assessment of the airplane’s braking performance, whether the braking action report is based on pilot’s observations (PBAR) or aircraft data (ABAR), you need to consider the following questions:

1. Was it possible to detect wheel braking during the aircraft’s deceleration on the runway? Confirm that wheel braking can be readily distinguished by applying brakes to the point where a change in deceleration can be identified. This change in deceleration should be easily discernable during manual braking by noting the effect of increasing brake application on deceleration. It may also be discernable while using autobrakes if the aircraft manufacturer or operator has developed appropriate procedures for this purpose.
2. Did the aircraft’s braking system reach the point where it was friction limited? Identify when friction-limited braking occurs by observing the point where an increase in brake activation yields no increase in deceleration.
3. What was the level of braking performance in relation to the scale in the RCAM? For aircraft with little or no direct instrumentation on wheel braking forces, pilots should determine the level of braking through observation. (See paragraph [2.9](#) below.) For aircraft with ABAR systems installed, the system will automatically identify if braking is friction limited and will determine the RCAM level of braking.
4. Was the runway condition such that the observed braking action could reasonably be expected throughout the entire landing rollout? If you determine that runway conditions are not consistent throughout the entire runway, that information should be indicated in the braking action report.

2.8 Recommended Method for Quantifying Pilot Observations. The following information is applicable to PBARs based on the observations made by a pilot without

any reference to aircraft data. It utilizes industry best practices to provide observational references for the braking levels listed.

2.8.1 Terminology. To maximize the usefulness of PBARs, pilots should use the terms “good,” “medium,” “poor,” and “nil.” (See Figure 2-1, An Illustration of Good, Medium, and Poor Braking, below.) These terms allow a pilot with little or no flight deck instrumentation on braking to report significant ranges of braking performance. The criteria for these reporting terms are described below:

1. Good. Describes the level of braking typically seen on a wet runway when aggressive braking can still be achieved, and directional control is not significantly compromised. For this level of performance, the initiating of friction-limited braking may not be required as aggressive braking can be reasonably inferred.
2. Medium. Describes the level of braking typically seen on snow-covered runways. Wheel braking forces can still be differentiated, and their effectiveness controlled, but at a noticeably reduced level. Friction-limited braking is readily identified as the point where brake pedal commands cease to increase deceleration or when anti-skid braking becomes active. Directional control is noticeably reduced.
3. Poor. Describes the level of braking typically seen on icecovered runways or when hydroplaning during heavy rain. Braking and directional control is minimal and an increase in brake application fails to produce any increase in deceleration. Poor braking is considered a hazardous condition, as small errors in aircraft configuration and technique can result in excessive deviations in landing performance.
4. Nil. Braking deceleration is minimal to non-existent or directional control is uncertain. A report of nil braking action on a runway requires the closure of that runway for safety reasons. Although closing the runway may be an inconvenience to other pilots, pilots that experience nil braking action should be encouraged to make such reports.

Note: During landing, if you do not observe an indication of friction-limited wheel braking (the point where an increase in force on the brake pedals fails to produce an increase in deceleration), the appropriate response to a braking action query is “braking action not observed.” (See paragraph 2.8.1.2 above.)

2.8.2 Example. With proper training, the criteria listed above can be readily observed by pilots. Consider an airplane that weighs 120,000 lbs. When 100,000 lbs. of that weight is supported by the main landing gear, which is equipped with wheel brakes, and the remaining 20,000 lbs. is supported by the nose landing gear, which does not have wheel brakes:

1. Good: A 120,000 lbs. airplane could experience a wheel braking force on the order of 30,000 lbs. or approximately 0.3 Gs.
2. Medium: A 120,000 lbs. airplane would only experience a braking force on the order of 16,000 lbs., approximately a 47 percent decrease from GOOD braking.

3. Poor: A 120,000 lbs. airplane would experience a wheel braking force on the order of 7,000 lbs.; this is approximately a 57 percent decrease from MEDIUM and approximately 77 percent from GOOD.

Figure 2-1. An Illustration of Good, Medium, and Poor Braking

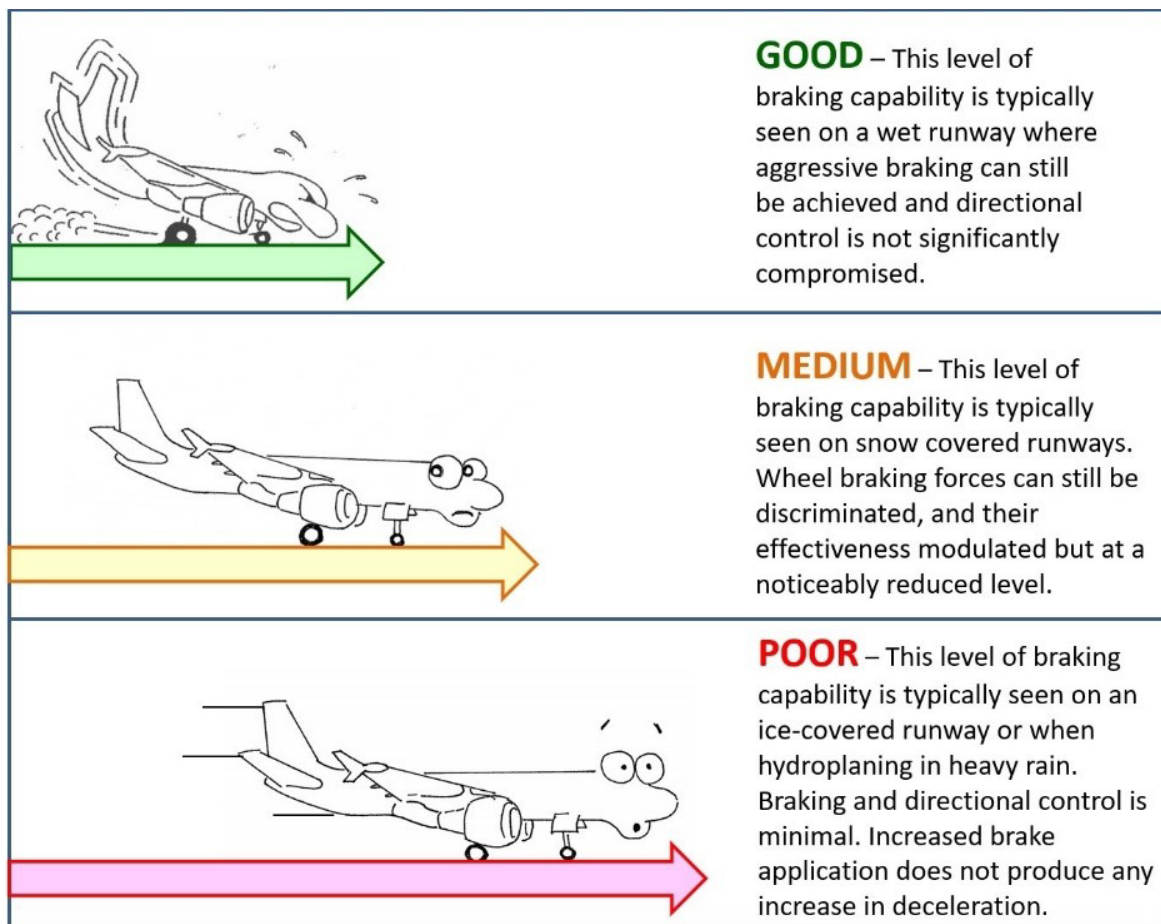


Figure courtesy of Robert Kostecka

- 2.8.3 Usage.** It is recommended that pilots refrain from making reports using the phrases “good to medium” and “medium to poor” unless they have been specifically trained on how to recognize those conditions. In the absence of that training, we encourage pilots to be conservative and report the lowest braking action level observed.

2.9 Reporting Conventions. Both PBAR and ABAR are normally considered valid for the entire runway unless otherwise specified by the flightcrew. Braking action reports may be reported with reference to the applicable third, although this is not a requirement. Airport operators may also report runway surface conditions by runway thirds.

- 2.9.1 Examples.** The following examples illustrate:

1. Braking action reports applicable to the full runway length:

- PBAR: “Tower, flight XXX experienced POOR braking.”
 - ABAR: “Ground, flight XXX would like to report an ABAR of MEDIUM.”
2. Braking action reports applicable to a specific portion of the runway:
- PBAR: “Tower, flight XXX experienced POOR braking due to standing water at the intersection of runways 33 and 10.”
 - ABAR: “Ground, flight XXX would like to report an ABAR of MEDIUM on the last third of the runway just before the turnoff at Juliet.”

2.10 Comparison of Braking Action Reports: PBAR vs ABAR.


2.10.1 Accuracy and Precision. Braking action reports are of the greatest value when accuracy and precision are maximized.

2.10.1.1 A clear understanding of accuracy and precision is important when comparing the relative advantages and limitations of braking action reports which are based on pilot observations (PBARs) and reports automatically generated by systems using aircraft data (ABARs).

2.10.1.2 With respect to braking action reports, accuracy refers to the degree to which the braking action report correctly correlates to the braking levels in the RCAM. Precision refers to the ability of a braking action report to consistently represent a given value for a given observation.

2.10.1.3 The concepts of precision and accuracy are illustrated in Figure 2-2. Accuracy is represented by how close we are to the bullseye; precision is represented by the closeness of the grouping.

Figure 2-2. Precision and Accuracy

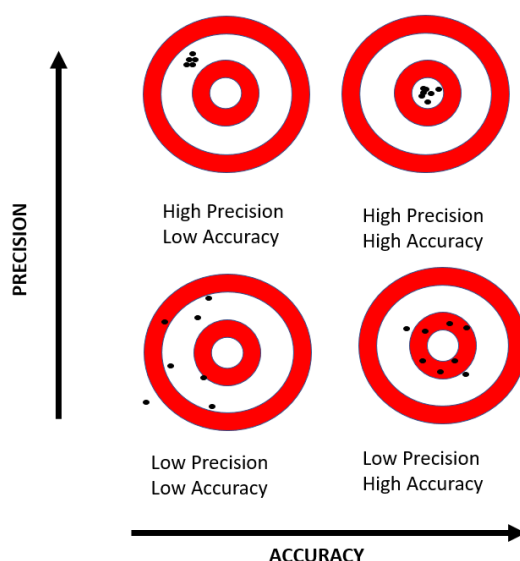

- 2.10.2** Limitations and Advantages of Braking Action Reporting Methods. Figure 2-3 illustrates how precision and accuracy are affected when braking action reports are made under the described conditions.

Figure 2-3. Comparison of Various Braking Action Reports

 Five Braking Categories Minimum Training	Pilot Braking Action Report (PBAR) • With little or no guidance and training, PBARs can be subject to large variations in accuracy and precision.
 Three Braking Categories Expanded Training	Pilot Braking Action Report (PBAR) • By explicitly defining the levels of braking for pilot observations and reporting, accuracy and precision are improved. • Harmonizes engineering analysis methods with the braking levels that can be discerned by the pilot.
 ABAR System	Aircraft Braking Action Report (ABAR) • ABAR systems provide the highest level of accuracy and precision. • ABAR systems most effectively serve as the basis for continuous improvement in the safety assurance process.

- 2.10.3** Validate. By providing timely information relevant to all aircraft with similar braking systems, braking action reports can be used by pilots to make assessments that affirm or counter the RCAM’s predicted level of performance and by airport operators to confirm or downgrade a RwyCC. To achieve these purposes, it is important that reliable PBARs (i.e., braking action reports that are accurate and precise) be provided.

- 2.11 Recommended Action.** Operators should use the information provided in this AC to review and assess the risks associated with operations on wet and contaminated runways and update or modify their procedures, as appropriate, to mitigate these risks. We recommend the information be included in operations manuals, SOPs, training programs, and any other established means of conveying safety and operational information within the organization.

CHAPTER 3. RUNWAY OVERRUN HAZARDS

- 3.1 Background.** In addition to being able to predict and assess aircraft performance on a runway, pilots need to understand and account for other hazards that can significantly affect the landing distance required.
- 3.2 Overrun Hazards.** The following hazards have been shown to increase the risk of a runway overrun.
- 3.2.1 Unstabilized Approach.** Deviations in airspeed, altitude, decent rate, glideslope, runway aim point, and localizer control place pilots in a position where recovery to the desired flight path is unlikely. An unstablized approach can result from ATC instructions, tailwinds, and/or crew error. Unstabilized approaches are a leading cause of excessive airspeed and threshold crossing height (TCH), long touchdowns, and runway overruns.
- 3.2.2 Excess Airspeed.** It is critical that the pilot be aware of airspeed during the approach. The recommended approach reference landing airspeed (V_{ref}), plus wind gust adjustments, should be maintained until 50 ft over the runway threshold. An excessive approach speed may result in extra speed over the runway threshold and landing beyond the intended touchdown point. In addition to using more runway to touchdown, once the aircraft is on the runway, the aircraft will use more runway to stop, which could lead to a runway overrun. As a rule of thumb, a 10 percent increase in final approach speed results in a 20 percent increase in landing distance. For example, published V_{ref} is 120 knots (kt) with a landing distance of 3,000 ft. If the approach is flown at 132 kts, the aircraft will require 3,600 ft to stop.
- 3.2.3 Excessive Height Over the Runway Threshold.** The landing distances provided in the AFM are based on the aircraft being at 50 ft over the runway threshold. For every 10 ft above the standard 50 ft TCH, landing distance will increase 200 ft. For example, if the aircraft crosses the threshold at 100 ft, the required landing distance will increase by 1,000 ft.) (Refer to FSF ALAR Briefing Note [8.3](#), Landing Distances.
- 3.2.4 Landing Beyond the Intended Touchdown Point.** AFM/POH distances are based on a touchdown point determined through flight testing procedures outlined in AC [23-8](#), AC [25-7](#), and AC [25-32](#). If the airplane does not touch down within the air distance included in the AFM/POH landing distance, it will not be possible to achieve the calculated landing distance.
- 3.2.5 High Airport Elevation.** High airport elevation or high-density altitude results in a higher true airspeed, groundspeed, and a corresponding longer landing distance, compared to a lower airport elevation. Pilots should be aware that the performance penalty for high airport elevation can be significant. The AFM/POH usually includes an adjustment for this factor.
- 3.2.6 Airplane Landing Weight.** Any item that affects the landing speed or deceleration rate during landing affects the landing distance, so the gross weight of the aircraft has a significant effect on landing distance. In other words, the required landing distance varies in direct proportion to the gross weight. For example, a 10 percent increase in landing

weight results in a 5 percent increase in landing speed and a 10 percent increase in landing distance. (Refer to the Pilot’s Handbook of Aeronautical Knowledge (PHAK) for more information.)

- 3.2.7** Downhill Runway Slope. Runway slope has a direct effect on landing distance. A 1-percent downhill slope increases landing distance by 10 percent (factor of 1.1). This effect is usually only accounted for in performance computations if the downhill runway slope exceeds 2 percent. (Refer to FSF ALAR Briefing Note 8.3.)

3.2.8 Delayed Use of Deceleration/Maximum Braking.

3.2.8.1 For those airplanes so equipped, deceleration devices consist of spoilers, thrust reversers, and brakes. Since wheel brakes are much more effective in slowing the airplane than air drag during the airborne part of the landing, pilots should not touchdown longer than necessary. The sooner the airplane touches down and starts braking, the shorter the total distance will be. Delayed braking action by the flightcrew during the landing rollout has been the causal factor in several accidents and serious incidents. Similarly, improper use of speed brakes, wheel brakes, and reverse thrust have been significant factors in a number of runway excursion landing accidents.

3.2.8.2 Prompt and proper operation of all means of deceleration has a major effect on landing distances. Spoilers greatly decrease lift, dump the weight on the wheels, and make the brakes effective. It should be noted that manual spoilers operated by the pilot involve a delay. A 2-second delay at speeds of 200 ft/second (118 kts) increases the airplane stopping distance by almost 400 ft. Landing distance data in the AFM is typically based on a 1-second delay between successive actions to manually deploy/engage the deceleration devices. A conservative approach is to add 200 ft to the landing distance for every second in excess of 2 seconds to deploy the airplane’s deceleration devices. A prudent pilot will make a reasonable adjustment to the airplane’s landing distance for any delay in employing the airplane’s deceleration devices.

- 3.2.9** Effect of a Tailwind on Landing Distance. The effect of a tailwind on landing distance is significant. Given that the airplane will land at a particular airspeed independent of the wind, the principal effect of a tailwind on landing distance is the change in the groundspeed at which the airplane touches down. The effect of a tailwind increases the landing distance by 21 percent for the first 10 kts of tailwind. (Refer to the PHAK and the aircraft’s AFM/POH data to determine if tailwind-landing data is available for your airplane.)

3.2.9.1 Tailwind landings affect all types of airplanes. For transport category airplanes, the effect of tailwind is shown in the AFM landing distance information. For small airplanes, tailwind-landing data may not be provided. The Aircraft Certification Service (AIR) provided the following tailwind performance information for a few small airplanes:

1. Cessna 150 and 152: Note on the landing distance chart, “For operation with tailwinds up to 10 knots, increase distances by 10 percent for each 2 knots.”
2. TMB 850: Note under landing distance table to “increase total distances of 30 percent for every 10 knots of tailwind.”
3. The Cirrus and Columbia are two very popular piston airplanes. The Cirrus uses the same note in the chart as the Cessna. The Columbia is like the Diamond airplane and offers factors for grass, but not tailwinds.

3.2.9.2 Tailwind example: Available runway of 5,000 ft, AFM landing distance of 3,000 ft, 50 ft TCH, and at the correct airspeed with a 10 kts tailwind results in an increase in the operational landing distance of 21 percent. This increase equates to an additional 630 ft, which increases the operational landing distance to 3,630 ft.

3.2.10 Cumulative Effect. The landing distance available can be exceeded when a cumulative effect of the above conditions exists. Pilots need to be aware of this cumulative effect. An example of the compound effects is in Figure [3-1](#), Effects of Compound Factors—The End is Closer Than You Think, below.

Figure 3-1. Effects of Compound Factors—The End is Closer Than You Think

1. Base line: At target landing speed, 50 ft at the threshold crossing height, dry runway, zero wind = 0% increase in AFM/POH landing distance.

2. With a 10%-ft increase in threshold crossing height = 200-ft increase in landing distance.


3. With a 10% increase in landing speed = 20% increase in landing distance.

4. Plus a 10 kts tailwind, 21% increase in landing distance.

5. Add 20% for less-than-maximum braking and 220 ft for each second greater than 2 seconds to use deceleration devices.

6. Delay to employ deceleration devices. For each second beyond 2 seconds, add 200 ft to the landing distance

7. Add 15% safety margin to the resultant required runway length.

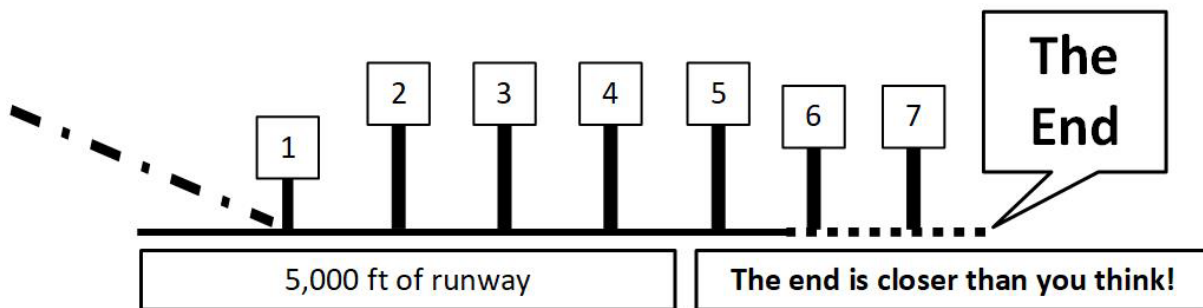

3.3 Risk Mitigation.

3.3.1 SOPs. Specific SOPs to prevent a runway overrun are a primary risk mitigation tool. Once SOPs are developed, it is imperative that the pilot/flightcrew execute them faithfully to mitigate a runway overrun. At a minimum, the SOPs should contain the factors presented in this AC.

3.3.2 Runway Overrun Mitigation Training Curriculum. An effective training program provides the knowledge and skill to increase the pilot's awareness of the factors that can cause a runway overrun. At a minimum, the operator's training program should include the same elements contained in their SOPs. Also, the go-around maneuver and the reasons to initiate a go-around should be part of the training program. (Refer to SAFO [10005](#).)

- 3.3.3** Flight Checking and Recurrent Training. Checking, testing, and recurrent training that emphasize airplane-landing performance are essential tools to mitigate runway overruns. Pilot examiners, flight and ground instructors, check airmen, and dispatch examiners should specifically stress aeronautical decision-making (ADM), runway overrun risk management, and the elements within this AC as they qualify and train pilots and dispatchers. Instructors and examiners should include runway overrun mitigation strategies during training and checking to ensure the pilot/applicant can apply the principles in a real-world environment.

CHAPTER 4. PREDEPARTURE FLIGHT PLANNING

4.1 Background.

- 4.1.1 Dispatch Requirements.** Large transport category airplanes are subject to specific regulations with the intent of ensuring that a flight does not begin that cannot be safely concluded. Title 14 of the Code of Federal Regulations (14 CFR) parts [91](#) subpart [K](#) (part 91K), [121](#), and [135](#) operators must not plan to arrive at either the destination or the alternate airport at a weight that would require them to use more runway than is available (and 14 CFR part [125](#), § [125.49\(a\)](#) requires part 125 operators to only use an airport if it is adequate for the proposed operation). These predeparture planning procedures are also recommended, although not required, for part 91 operators.

Note: During a discussion of predeparture flight planning requirements, it is important to keep in mind that the regulations specify flight-planning requirements, not landing requirements. In other words, upon arrival, all (100 percent) of the runway available may be used for landing.

- 4.1.2 Title 14 CFR Compliance.** It is not the intent of this AC to provide all the predeparture landing distance regulatory requirements. However, pilots must be knowledgeable of the regulations applicable to their type of operation, so they can both comply with such regulations and fully understand regulatory shortcomings. Parts 91K, 121, and 135 require operators of large transport category airplanes to comply with certain landing distance requirements at the time of takeoff. These requirements are sometimes referred to as “dispatch requirements.” The requirements limit the allowable takeoff weight to that which would allow the airplane to land within a specified percentage of the landing distance available on: (1) the most favorable runway at the destination airport under still air conditions; and (2) the most suitable runway in the expected wind conditions. Part 91, § [91.1037\(e\)](#); part 121, § [121.195\(e\)](#); and part 135, § [135.385\(d\)](#) further require an additional 15 percent be added to the landing distance required when the runway is wet or slippery, unless a shorter distance can be shown using operational landing techniques on wet runways.

- 4.1.2.1 Sections 91.1037(b), 121.195(b), and 135.385(b).** Regulations require that during preflight planning, if current conditions indicate the runway will be dry at the TOA, the flightcrew may not depart on the flight unless it has been determined that the aircraft will be able to perform a full stop landing within 60 percent of the effective length of the runway. To determine the landing distance required, multiply the AFM approved landing distance by 1.667 or divide the AFM approved landing distance by 0.60.

Example: AFM approved landing distance = 3000 ft ($3000' \times 1.667 = 5000'$ or $3000' \div 0.60 = 5000'$.) In this example, to comply with the 60 percent rule, the runway at the planned destination would need to be at least 5000 ft long.

- 4.1.2.2 Sections 91.1037(e), 121.195(e), and 135.385(d).** If weather reports or forecasts indicate that the runways at the destination airport may be wet or slippery, unless a shorter distance can be shown using operational landing techniques, the regulations require that the aircraft not depart unless the operator can show that the effective runway length at the destination airport is at least 115 percent of the runway length required for a dry runway (as calculated above).

Example: If it was determined that the runway at the planned destination would need to be 5000 ft to comply with the 60 percent rule in dry conditions (as in the first example, above), then in forecast wet conditions, the runway would need to be at least 5750 ft long ($5000' \times 1.15 = 5750'$).

Note 1: The additional 15 percent increase is based only on the previously calculated distances used for a dry runway. The increase is not based on demonstrated wet runway stopping performance; therefore, wet runway factored landing distance may not provide enough runway for the aircraft to stop.

Note 2: There exists a common misconception that grooved runways or runways covered in PFC are considered dry for predeparture-planning calculations. Pilots must remember that the 15 percent increase is still required if the runway will be wet on landing, even if it is grooved or PFC.

- 4.1.2.3 Sections 91.1037(c) and 135.385(f).** Parts 91 and 135 operators that are authorized via operations specifications (OpSpecs) or management specifications (MSpecs) to use a Destination Airport Analysis program (such as a part 135 eligible-on-demand operator) may depart on a flight if preflight planning indicates that the aircraft will be able to perform a full stop landing within 80 percent of the effective runway length available. In this case, the landing distance required is determined by multiplying the AFM approved landing distance by 1.25 or dividing it by 0.80.

Example: AFM approved landing distance = 3000 ft. ($3000' \times 1.25 = 3750'$ or $3000' \div 0.80 = 3750'$.) In this example, to comply with the 80 percent rule, the appropriately authorized operator would need to confirm that the runway at the planned destination is at least 3750 ft long.

Note: The 80 percent factored distance in most cases will not provide a safe landing margin if the runway is either wet or contaminated. Operators must exercise extreme caution when preflight planning if the destination airport runway is either wet or contaminated.

4.1.3 Overview. Table 4-1 below provides an overview of predeparture landing distance requirements.

Table 4-1. Regulatory Planned Dispatch Landing Distance Requirements

Regulation	Type of Airplane	Runway Condition	Percentage of Effective Runway Length
§ 121.195(b) § 135.375 § 135.385(b) § 91.1037(b)	Large turbine/Large reciprocating engine powered	Dry	60%
§ 121.195(c) § 135.375(b) § 135.385(c)	Turboprop, Large turbine/Large reciprocating engine powered	Dry	70%
§ 121.195(d) § 135.385(d) § 91.1037(e)	Turbojet without an approved AFM wet runway landing technique	Wet/Slippery	115% of § 121.195(b) or § 135.385(b), or § 91.1037(e) AFM factored dry landing distance
§ 135.385(f) § 91.1037(c)(2)	Large turbine powered, eligible on demand	OpSpecs/MSpecs Authorized	80%
§ 121.197 § 135.387(a) § 135.375(b)	Large turbine/Large reciprocating engine powered, alternate airport	Dry	60%
§ 121.197 § 135.387(a) § 135.375(b)	Large turboprop/Large reciprocating engine, alternate airport	Dry	70%
§ 135.387(b) § 91.1037(d)	Large turbine powered, eligible on demand, alternate airport	OpSpecs/MSpecs Authorized	80%

4.1.4 Part 91 Recommendations. Preflight planning requirements for part 91 operators are governed by §§ [91.103](#) and [91.605](#). (Section 91.1037 is only applicable to part 91K operators.) Although not required by regulation, we recommend that part 91 operators and pilots calculate predeparture landing distance performance requirements based on the guidance contained in their AFM.

4.2 AFM Landing Distance Data. Operators and pilots should flight plan using the best available information concerning expected destination runway conditions. The regulatory requirements referenced in this chapter are intended to represent a minimum level of compliance. Compliance with preflight planning regulations is accomplished by using approved data from the AFM.

- 4.2.1** It is important for pilots and operators to keep in mind that AFM landing performance data is determined during certification flight tests using analysis criteria that are not representative of everyday operational practices. Landing distances determined in compliance with 14 CFR part [25](#) and published in the AFM do not reflect normal operational landing distances. The goal of distances determined during certification tests are to demonstrate the shortest landing distances for a given airplane weight with a test pilot at the controls. Flight test and data analysis techniques for determining landing distances can result in the use of high touchdown sink rates (as high as 480 ft per minute) and approach angles of negative 3.5 degrees to minimize the airborne portion of the landing distance. Maximum manual braking, initiated as soon as possible after landing, is used to minimize the braking portion of the landing distance. Therefore, the landing distances determined under part 25, § [25.125](#) and published in an aircraft’s AFM are shorter than the landing distances you should expect in normal operations.
- 4.2.2** With respect to landing performance data for wet or contaminated runways, the landing distances provided in the AFM may not represent performance that is operationally achievable. This is because the wet or contaminated runway data is usually the result of applying an algorithm to the dry, smooth, hard surface runway data, not on demonstrated aircraft ability. In other words, wet and contaminated runway data also may not represent performance that you should expect to achieve in normal operations. The fact that the short distances achieved during flight testing are not usually repeatable during normal operations, along with many other variables affecting landing distance, is taken into consideration in the preflight landing performance calculations by requiring a significant safety margin in excess of the unfactored AFM landing distance that would be required under those conditions.
- 4.2.3** To summarize, landing distance information provided by the AFM, determined in compliance with part 25 during aircraft flight testing is aimed at achieving and recording the shortest landing distance possible and is not representative of everyday operational practices. The distances reported have been demonstrated in flight tests with a test pilot at the controls using techniques not typically used by pilots in normal operations. Both NTSB and FAA data identify the failure of pilots and operators to assess actual required landing distances to account for slippery or contaminated conditions or any other changed condition existing at the time of landing as a significant causal factor in landing overruns. Even when predeparture flight planning requirements have been satisfied, we strongly recommend that pilots perform a TOA landing distance assessment prior to landing.

CHAPTER 5. TIME OF ARRIVAL (TOA) LANDING DISTANCE ASSESSMENT

- 5.1 Background.** A TOA assessment is particularly important when the landing runway is not the same runway analyzed for dispatch or when runway conditions and level of contamination have changed. In addition, current weather, airplane weight, and braking systems to be used should be considered. Once the actual landing distance is determined, an additional safety margin of at least 15 percent should be added to that distance. Except under emergency conditions, flightcrews should not attempt to land on runways that do not meet the TOA assessment criteria and safety margin.

Note: The FAA acknowledges that there are situations when pilots need to know the absolute performance capability of the airplane. These situations include emergencies or abnormal and irregular configurations of the airplane such as engine failure or flight control malfunctions. In these circumstances, the pilot must consider whether it is safer to remain in the air or to land immediately and must know the actual landing performance capability, without an added safety margin, when making these evaluations. This guidance is not intended to curtail such evaluations from being made for these situations.

- 5.2 General.** Per Title 49 of the United States Code (49 U.S.C.) § [44702\(b\)](#), operators engaged in air transportation have a statutory obligation to operate with the highest possible degree of safety in the public interest. Although current regulations do not require a landing distance assessment be performed at the TOA, operators are required to restrict or suspend operations when conditions are hazardous. Sections [91.3](#), [91.1011](#), [121.533](#), [121.535](#), [121.537](#), [125.371](#), and [135.69](#) place the responsibility for the safe operation of the flight jointly with the operator, pilot in command (PIC), and dispatcher, as appropriate to the type of operation being conducted.
- 5.2.1** As explained in Chapter [4](#), compliance with regulations applicable at the time of dispatch or takeoff does not guarantee that the airplane can land safely within the distance available on the runway used for landing at the TOA, particularly if the runway, runway surface condition, meteorological conditions, airplane configuration, airplane weight, or the intended use of airplane ground deceleration devices is different than that used in the preflight calculation.
- 5.2.2** Additionally, §§ [121.195\(e\)](#), [135.375\(b\)](#), and [135.385\(c\)](#) and (e) allow use of an alternate airport to meet the requirements if forecast conditions at the destination airport are inadequate. These provisions imply, but do not mandate, that a landing distance assessment is accomplished prior to conducting an approach to determine if it is safe to land at the destination, or if it is necessary to divert to an alternate airport.
- 5.3 Conducting the Assessment.** Operators and pilots should use the most adverse reliable braking action report, if available, or the most adverse expected conditions for the runway, or portion of the runway that will be used for landing, when making a TOA landing distance assessment. Operators and pilots should consider the following factors in determining the actual landing distance: the age of the report, meteorological conditions present since the report was issued, type of airplane or device used to obtain the report,

whether the runway surface was treated since the report, and the methods used for that treatment. Pilots are expected to use sound judgment in determining the applicability of this information to their airplane’s landing performance.

5.3.1 When to Conduct the Assessment. A TOA landing distance assessment is initially performed when landing weather and field conditions are obtained, usually prior to beginning the descent from cruise altitude (top of descent). The assessment includes a consideration of how much deterioration in field conditions can be tolerated so that a quick decision can be made just prior to landing if new information is obtained that indicates that field conditions are worse than expected (e.g., the preceding aircraft provides a worse-than-expected braking action report).

5.3.2 Source of Data.

5.3.2.1 When possible, the operational landing distance data used is advisory data based on the recommendations of AC [25-32](#). This data may be provided by the manufacturer or developed by a performance data provider.

5.3.2.2 If advisory data for a landing distance assessment at TOA is not available from the manufacturer or from a performance data provider, the Landing Distance Factors (LDF) from Table [5-1](#), Landing Distance Factors, may be used. To find the landing distance required, multiply the AFM dry, unfactored landing distance by the applicable LDF in Table 5-1 for the runway conditions existing at the TOA. If the AFM landing distances are presented as factored landing distances, then that data must be adjusted to remove the applicable preflight factors that were applied. The LDFs given in Table 5-1 include a 15 percent safety margin; an air distance representative of normal operational practices; a reasonable accounting for temperature; the effect of increased approach speed, reduced wheel braking, and thrust usage (reverse or not); and the additional effect of reduced wheel braking capability on altitude and wind distance adjustment.

5.3.2.3 Currently, there are no plans to provide aircraft manufacturers of normal, utility, aerobatic, and commuter category airplanes (14 CFR part [23](#) airplanes) with advisory information similar to AC 25-32 (which is applicable to transport category airplanes). In the absence of guidance to manufacturers of part 23 aircraft, operational landing distance data may be based on the recommendations of AC 25-32. In the absence of guidance to part 23 aircraft manufacturers, the manufacturer or data provider should consider the recommendations in AC 25-32 when creating data for a TOA assessment.

5.3.3 Using the LDF Table. As stated above, when manufacturer-produced or third-party provider data is not available, the LDFs from Table 5-1 may be used for the TOA landing distance assessment.

1. To find the landing distance required, multiply the unfactored AFM landing distance by the applicable LDF in Table 5-1 for the runway conditions existing at the TOA.
2. If the AFM landing distances are presented as factored landing distances, first adjust the data to remove the preflight factors that were applied prior to multiplying the distance by the LDF.
3. The LDFs given in Table 5-1 include a 15 percent safety margin.

Table 5-1. Landing Distance Factors

The following factors are multipliers to the unfactored AFM demonstrated landing distances:

Runway Condition Code	6	5 Grooved/PF C	5 Smooth	4	3	2	1
Braking Action	Dry	Good	Good	Good to Medium	Medium	Medium to Poor	Poor
Turbojet, No Reverse	1.67	2.3	2.6	2.8	3.2	4.0	5.1
Turbojet, With Reverse	1.67	1.92	2.2	2.3	2.5	2.9	3.4
Turboprop (see Note)	1.67	1.92	2.0	2.2	2.4	2.7	2.9
Reciprocating	1.67	2.3	2.6	2.8	3.2	4.0	5.1

Note: These LDFs apply only to turboprops when the AFM provides for a landing distance credit for the use of ground idle power level position. Turboprops without this credit should use the “Turbojet, No Reverse” LDFs.

5.4 Runway Conditions Considerations. Airport assessments should be based on information that most accurately represents the conditions anticipated. When available for the portion of the runway that will be used for landing, the following are considered:

- RwyCCs,
- Expected runway conditions (contaminate type and depth), and
- PBARs.

5.4.1 Timeliness. It is important to note the time of the latest RwyCC and any associated reliable braking action reports. A number of overruns have occurred when pilots were provided with a runway condition that was no longer reliable given changes in meteorological conditions.

ATTENTION: Pilots are strongly advised to review the weather conditions and compare that to the time of the latest braking action report.

- 5.4.2 Situational Awareness.** Throughout the descent and approach, pilots should remain vigilant for any deterioration in conditions. You should use all available resources to determine what condition you may expect upon landing to include ATC reports, field condition reports, flight visibility, and onboard weather radar.
- 5.5 Risks Associated With Moderate or Heavy Rain.** Several runway excursions and overruns have raised concerns with wet runway stopping performance assumptions. Analysis of the stopping data from these incidents and accidents indicates the braking coefficient in each case was significantly lower than expected for a wet runway than would be predicted by § [25.109](#) and AC [25-7](#). These incidents and accidents occurred on both grooved and ungrooved runways. The data indicates that applying a 15 percent safety margin to wet runway advisory data, as recommended, may be inadequate in certain wet runway conditions.
- 5.5.1 Rainfall Amount.** In a rainfall event, such as an active thunderstorm, the amount of water or moisture on a runway can change rapidly. The dynamic nature of rainfall can present challenges for the timely and accurate reporting of water or moisture on a runway.
- 5.5.2 Risk Mitigation.** We recommend that if it is anticipated that more than 1/8 inch of water will be on the runway, the LDF associated with medium to poor braking, or a RwyCC of 2, be used during the TOA assessment. In addition, when planning to land on a smooth runway under conditions of moderate or heavy rain, or when landing on a grooved or PFC runway under heavy rain, pilots should consider that the surface may be contaminated with water at depth greater than 1/8 inch and adjust their landing distance assessment accordingly.
- Note:** A Special Weather Observation (SPECI) will only be generated if a thunderstorm begins. A SPECI is not generated when rainfall rates simply change. In addition, ATC radar is not optimized for the detection of rainfall and during an active or fast-moving weather event, PIREPs can rapidly become obsolete.
- 5.6 Risk Associated With Standing Water.** When standing water is present, aircraft braking can rapidly degrade as the contact area of the tire is lifted away from the pavement by the effects of hydroplaning. When this occurs, pilots have reported that the aircraft feels like it accelerates. This change in sensation is because braking performance can degrade in a matter of seconds, resulting in up to a 77-percent decrease in braking force. This rapid decrease in friction also affects cornering ability, making lateral drift more difficult to control, if not impossible. Unexpected handling characteristics due to standing water have been shown to lead to pilot confusion and a possible delay in the use of thrust reversers or ground spoilers. The result can often be a runway overrun or lateral excursion.
- 5.6.1 RwyCC Limitations.** Note on the RCAM (see Table [2-1](#)) that only 1/8 inch of water separates a wet runway (with a RwyCC of 5 and “good” braking action) from a runway contaminated with standing water (and a RwyCC of 2 and “medium to poor” braking action). This dramatic difference is due to the possibility of dynamic hydroplaning that may occur any time water depth exceeds 1/8 inch.

5.6.2 Operations at Foreign (Non-U.S.) Airports.

5.6.2.1 Pilots should be aware that the design and maintenance standards referenced in this AC might not be met in other countries. Standards for design, construction, and maintenance of runways are based on ICAO Annex [14](#), Aerodromes, standards; however, they may lack oversight in implementation of those standards.

5.6.2.2 Outside of the United States, there is often less usage of grooving or PFC overlay which, when present, will normally aid in drainage, mitigate the risk of hydroplaning during active precipitation, and improve braking action. Unless the pilot is knowledgeable of an international airport’s runway maintenance program, and sure that the runway has improved drainage capabilities with grooved or PFC surfaces, they should consider basing their TOA assessment on the recommendations in paragraph [5.6.1](#).

5.7 Aircraft Performance Considerations. In addition to runway surface conditions, the following considerations may also impact operational landing distance calculations:

- Runway slope,
- Airport elevation,
- Wind,
- Temperature,
- Airplane weight and configuration,
- Approach speed at threshold,
- Adjustment to landing distance (such as autoland), and
- Planned use of airplane ground deceleration devices.

5.8 Autobrake and Manual Brake Usage. When autobrakes are a part of the aircraft’s landing configuration, the landing distance assessment is not intended to force a higher than necessary autobrake selection. Autobrakes normally target a deceleration rate and may not require the employment of the full braking capabilities of the aircraft. Conversely, landing calculations using manual brakes assume that the full capability of the aircraft’s wheel brake system is employed during the rollout phase.

5.8.1 Safety Margin. To accommodate for real-world operational variations, the manual wheel braking landing distance used for a TOA assessment includes a safety margin of at least 15 percent. For operations when the runway is dry, or when the runway is wet, grooved, or PFC, if the manual braking distance provides a 15 percent safety margin, then the braking technique may include a combination of autobrakes and manual brakes even if the selected autobrake landing data does not provide a 15 percent safety margin. The operator will need to ensure that proper procedures and crew training are in place when the selected autobrake landing data does not provide a 15 percent safety margin.

5.8.2 Contaminated Runways. For contaminated runways, the minimum 15 percent safety margin should always be based on the method of braking to be used (i.e., should correspond to the selected level of autobrake, if used).

5.9 Touchdown Point. The touchdown point used in the landing distance assessment reflects the assumed air distance. Operational landing data usually includes an allowance for 1,500 ft or 7 seconds of air distance from the threshold to touchdown. An air distance as short as 1,000 ft may be used provided an operator’s landing assessment procedures include enhancements to minimize the risk of overruns or undershoots, including:

1. Training in touchdown control and short field landing techniques.
2. Identification of required touchdown point and training to assure go-around procedures are initiated if unable to achieve a suitable touchdown point.
3. Approach guidance and runway markings on the specific runway are consistent with a shorter air distance.
4. Operational data provided to the crew for the specific runway, conditions, and aircraft-landing configuration without the need for interpolation.
5. The flight techniques assumed in the creation of the performance data used for shorter air distances are appropriately trained and documented. For example, the assumed speed bleed-off used in the performance data needs to be consistent with the trained flight techniques for flaring the aircraft.

5.10 Crosswind Considerations. During operations when standing water may be present, operators should follow guidance from the aircraft manufacturer regarding maximum crosswinds. Tire cornering limitations can reduce wheel braking capability. As a result, crosswind limits can become a dominant factor in TOA landing distance assessments. Pilots should always be vigilant of these limits, especially when braking action is less than good.

5.11 Assessment Based on Preflight (Dispatch) Criteria. When the runway is dry, the assessment may be as simple as confirming that the runway meets the criteria used for dispatch. To use an assessment based on preflight (dispatch) criteria, pilots need to:

1. Ensure that the runway used for landing is the same runway that was assessed during preflight or for dispatch;
2. Confirm that the wind velocity and other factors that could affect landing distance are the same as those considered during preflight or the dispatch assessment; and
3. When applicable, consider the possibility of a late runway change such as a side step to a parallel runway.

5.12 Risk Management Considerations. Landing on a contaminated runway can involve multiple hazards, including cognitive bias, changing weather conditions, and high task loading. Because these hazards occur at a time with pressing time constraints, they can create an environment where errors are likely to occur. Managing such risks requires

mitigation in the form of organizational policies, effective training, and well-designed procedures.

- 5.12.1** Policy Considerations. The overall strategy for managing risk should involve structured briefings during times of low task loading to address contingencies should new information be received. Once in the terminal area, the pilots should focus on the execution of the briefed plan, not analysis of the risk. While flightcrews always need a decision space for unexpected events, primary decision points concerning acceptable risk should be clearly communicated by the operator.
- 5.12.2** Flightcrew Training Considerations. Ensure that briefings are complete, checklists are run correctly, and that plan continuation bias does not drive actions counter to established rules and SOPs. This should be the primary goals of the pilot monitoring.
- 5.12.3** Procedure Considerations. Decisions regarding TOA landing distance assessments should be made using the best available information considering timeliness, reliability, and data precision. SOPs should require that when runway conditions are likely to change, crews brief the worst braking levels acceptable and the indications that would accompany them. This briefing needs to take place prior to descent. Once the descent begins, pilots actively monitor conditions and when faced with a pre-briefed scenario, respond with the previously briefed set of actions.

APPENDIX A. AIRCRAFT BRAKING ACTION REPORT (ABAR) SYSTEMS

A.1 Overview. The information in this appendix is intended for consideration by flight operations management personnel responsible for creating policies and procedures regarding the use of automated systems that generate ABAR. As such, it provides background information for management purposes and is not intended as an operational guide for pilots.

A.2 Design Philosophy. In general, an ABAR system will reflect to what degree the weight of an aircraft can be transferred to a deceleration force via the wheel brakes when the anti-skid activates during a friction-limited event. An ABAR system can be located either remotely or onboard an aircraft and uses the aircraft's data to produce a standardized indication of wheel braking performance.

A.2.1 ABAR systems are the most accurate and objective means of observing and reporting aircraft braking action. The use of aircraft data to generate an ABAR can mitigate the human errors resulting from inadequate training, inexperience, or cognitive bias that may occur with a Pilot Braking Action Report (PBAR).

A.2.2 The data recorded by the ABAR system during the landing roll is used to:

1. Isolate the mechanical wheel braking forces from all other forces contributing to deceleration, as well as identify when wheel braking is friction limited; and
2. Map those forces to the scale used to make braking action reports.

A.2.3 ABAR systems may come from different vendors and apply to different aircraft. A means of assuring that all systems operate within minimum, industry-based engineering standards, is through demonstrated compliance with ASTM [E3266](#), Standard Guide for Friction-Limited Aircraft Braking Measurements and Reporting. Compliance ensures a minimum degree of confidence in all ABAR systems and facilitates a harmonized communication of wheel braking capability between aircraft with similar performance characteristics. (Refer to Advisory Circular (AC) [25-32](#), Landing Performance Data for Time-of-Arrival Landing Performance Assessments.)

A.2.4 Aircraft systems may also transmit data that is not visible to the flightcrew. Data not visible to the pilot is not considered part of the ABAR, and may be utilized for other data analysis purposes.

A.3 Aircraft Considerations.

A.3.1 ABAR generating systems are considered applicable to a wide range of aircraft types and manufacturers whose design allows for such an analysis.

A.3.2 ABAR systems installed on aircraft may require appropriate supplemental type certification approval.

A.3.3 ABAR generating systems are designed to be used on aircraft that utilize landing performance data derived in compliance with AC 25-32; International Civil Aviation Organization (ICAO) Doc [10064](#), Airplane Performance Manual; or other equivalent standards.

A.4 Acceptance Criteria for ABAR Systems.

A.4.1 ABAR systems are not required for certification of transport category aircraft and their intended function is not a regulatory requirement.

A.4.2 Operators who utilize ABAR related technology to transmit information with the label “ABAR,” should only do so if it can be determined that the system meets its intended function and complies with a minimum engineering standard published for such a system. Entities seeking such a determination for an ABAR producing system should contact their designated FAA representative for guidance.

A.4.3 ASTM E3266 provides a suitable acceptance criterion for operators wishing to transmit information from an ABAR system.

A.5 Confidence of Reports.

A.5.1 ABAR generating systems may rely on aircraft data that is inferred from other sources to calculate the required values. Because these systems may not rely on sensors taking direct measurements of certain values, these systems cannot be calibrated in a manner similar to other flight deck indicators. Therefore, while the ASTM standard sets minimum levels of accuracy and precision for these systems, it should be recognized that there exists a statistical difference between what a system calculates and what a theoretical “real” value could be. For that reason, these systems are described as having a “confidence factor.”

A.5.2 ABAR generating system standards require the systems to demonstrate a confidence factor of 95 percent that the system will fall within one level of braking on the Runway Condition Assessment Matrix (RCAM) five level scale (i.e., good, good to medium, medium, medium to poor, and poor.)

A.6 Development of Operational Guidelines. Operators who utilize an ABAR system should develop operational guidelines and training for flightcrews regarding their use to include submitting Pilot Reports (PIREP) based on ABAR information after landing. ABAR systems whose intended function entails timely recognition from the flightcrew should comply with AC [25.1322-1](#), Flightcrew Alerting.

Note: Pilots and operators need to understand that an ABAR is a decision support tool rather than a decision-making tool. Pilots should use an ABAR as one piece of information along with the current weather, runway surface conditions, and other factors to make the decision as to whether or not it is safe to land.

A.6.1 The following guidelines are considered acceptable for the operational use of information provided by ABAR systems:

1. When an ABAR confirms the accuracy of the Runway Condition Code (RwyCC) (i.e., both values are the same), the time of arrival (TOA) landing distance assessment should be based on this confirmed value; and
2. When an ABAR and the reported RwyCC disagree (i.e., one value indicates worse runway conditions than the other), the TOA landing distance assessment should be based on the worse (most conservative) report.