

FAA
AM

UNCLASSIFIED

Doc
FAA
AM
79
22

DTIC



Technical Report

distributed by



**Defense Technical Information Center
DEFENSE LOGISTICS AGENCY**

Cameron Station • Alexandria, Virginia 22314

UNCLASSIFIED

NOTICE


We are pleased to supply this document in response to your request.

The acquisition of technical reports, notes, memorandums, etc., is an active, ongoing program at the Defense Technical Information Center (DTIC) that depends, in part, on the efforts and interests of users and contributors.

Therefore, if you know of the existence of any significant reports, etc., that are not in the DTIC collection, we would appreciate receiving copies or information related to their sources and availability.

The appropriate regulations are Department of Defense Instruction 5100.38, Defense Technical Information Center for Scientific and Technical Information (DTIC); Department of Defense Instruction 5129.43, Assignment of Functions for the Defense Scientific and Technical Information Program; Department of Defense Directive 5200.20, Distribution Statements on Technical Documents; Military Standard (MIL-STD) 847-A, Format Requirements for Scientific and Technical Reports Prepared by or for the Department of Defense; Department of Defense Regulation 5200.1-R, Information Security Program Regulation.

Our Acquisition Section, DTIC-DDA-1, will assist in resolving any questions you may have. Telephone numbers of that office are: (202) 274-6847, 274-6874 or Autovon 284-6847, 284-6874.



JACK R. HUNT MEMORIAL LIBRARY
DAYTONA BEACH, FLORIDA 904-226-6595

FAA-AM-79-22
FAA-ARD-79-108


I LEVEL

(10)

READABILITY OF SELF-ILLUMINATED SIGNS IN A
SMOKE-OBSCURED ENVIRONMENT

P. G. Rasmussen
J. D. Garner
J. G. Blethrow
and
D. L. Lowrey
Civil Aeromedical Institute
Federal Aviation Administration
Oklahoma City, Oklahoma

ADA 081 260



SDTIC
ELECTE
MAR 3 1980
D
C

November 1979

Document is available to the public through the
National Technical Information Service,
Springfield, Virginia 22161

Prepared for
U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
Office of Aviation Medicine
Washington, D.C. 20591

DDC FILE COPY

80 2 28 000

NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

(14) FAA-AM-79-22

(19) ~~79-34~~ 79-108

Technical Report Documentation Page

1. Report No. 79-22 FAA-ARD-79-108	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle READABILITY OF SELF-ILLUMINATED SIGNS IN A SMOKE-OBSCURED ENVIRONMENT		5. Performing Organization Code Nov September 1979	6. Performing Organization Report No. 13) 221
7. Author(s) P. G. Rasmussen, J. D. Garner / J. G. Blethrow D. L. Lowrey		8. Performing Organization Name and Address	
9. Performing Organization Name and Address FAA Civil Aeromedical Institute P. O. Box 25082 Oklahoma City, OK 73125		10. Work Unit No. (TRAIS)	
12. Sponsoring Agency Name and Address Office of Aviation Medicine Federal Aviation Administration 800 Independence Avenue, S.W. Washington, D.C. 20591		11. Contract or Grant No.	
15. Supplementary Notes Research reported was conducted under Task AM-B-78/79-PRS-39 and Request for R, D & E Effort (FAA Form 9550-1) No. ARD-500-76-2.		13. Type of Report and Period Covered	
16. Abstract This study investigates the ability of people with normal distant visual acuity to identify self-illuminated emergency signs in a smoke-obscured environment. The results indicate that signs whose background luminance meets or exceeds the requirements of Federal Aviation Regulation (FAR) 25.812 are readable under favorable conditions when the total optical density of the smoke between the observer and the signs ranges between 3.00 and 3.55. Substantial increases in character sizes in the signs produce only moderate improvement in readability. Some limitations on the practical application of these data to predicting sign visibility in adverse conditions are discussed.		14. Sponsoring Agency Code	
17. Key Words Visual performance Aviation safety Postcrash fire Emergency evacuation	18. Distribution Statement Document is available to the U.S. public through the National Technical Information Service, Springfield, Virginia 22161.		
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 8	22. Price

264220

READABILITY OF SELF-ILLUMINATED SIGNS IN A
SMOKE-OBSCURED ENVIRONMENT

Introduction.

Minimal design requirements for emergency exit signs used in civil air transports are specified in Federal Aviation Regulations (FAR) 25.812. These requirements insure adequate visibility and readability under normal viewing conditions. However, some emergency conditions, such as postcrash fires, may introduce smoke into the cabin area and obscure the signs at a time when their prominent visibility is most critical.

The two major purposes of the present study were to: (i) determine at what optical densities of smoke internally illuminated signs of various sizes and background luminance levels are readable, and (ii) establish baseline data for the use of an inert white screening fog as a research tool to predict the readability of emergency signs in the presence of black fuel-fire smoke.

Methods.

Subjects. Subjects consisted of 10 male and 9 female adult volunteers and paid participants. Nine subjects required spectacle or contact lens corrections to achieve 20/20 distant visual acuity.

Equipment. The equipment arrangement is schematically illustrated in Figure 1. The viewing windows of the smoke chamber were 3.2-mm-thick (0.125-in) plate glass separated by 1.83 m (6 ft). The light source for the display consisted of six fluorescent bulbs (Westinghouse Cool White F40T 10CW/99) wired to ballasts regulated by a dimmer control. The fixtures were mounted as a parallel array in a light box with a flat white interior. With the light box mounted in place the bulbs were parallel to, and 26 cm (10.2 in) behind, a white translucent diffusing screen composed of a double layer of 3.2-mm-thick (0.125-in) acrylic panes (Plexiglas Type W2447). A retaining slot immediately in front of the diffusing screen held the experimental signs. The plane of the viewing area was 5 cm (2 in) behind the rear viewing window of the smoke chamber when the signs were in the display position.

The National Bureau of Standards (NBS) Photometric Smoke Measurement System was mounted near floor level beneath the subject's line of sight but was physically obscured from view. The system was modified and calibrated for operation with a 50-cm (19.7-in) separation between the reference light source and the phototube detector.

An inert white screen fog (Pepper Fog, Smith & Wesson/General Ordnance Equipment Co.) was used as the obscuring agent and was dispersed evenly throughout the chamber by an agitating fan.

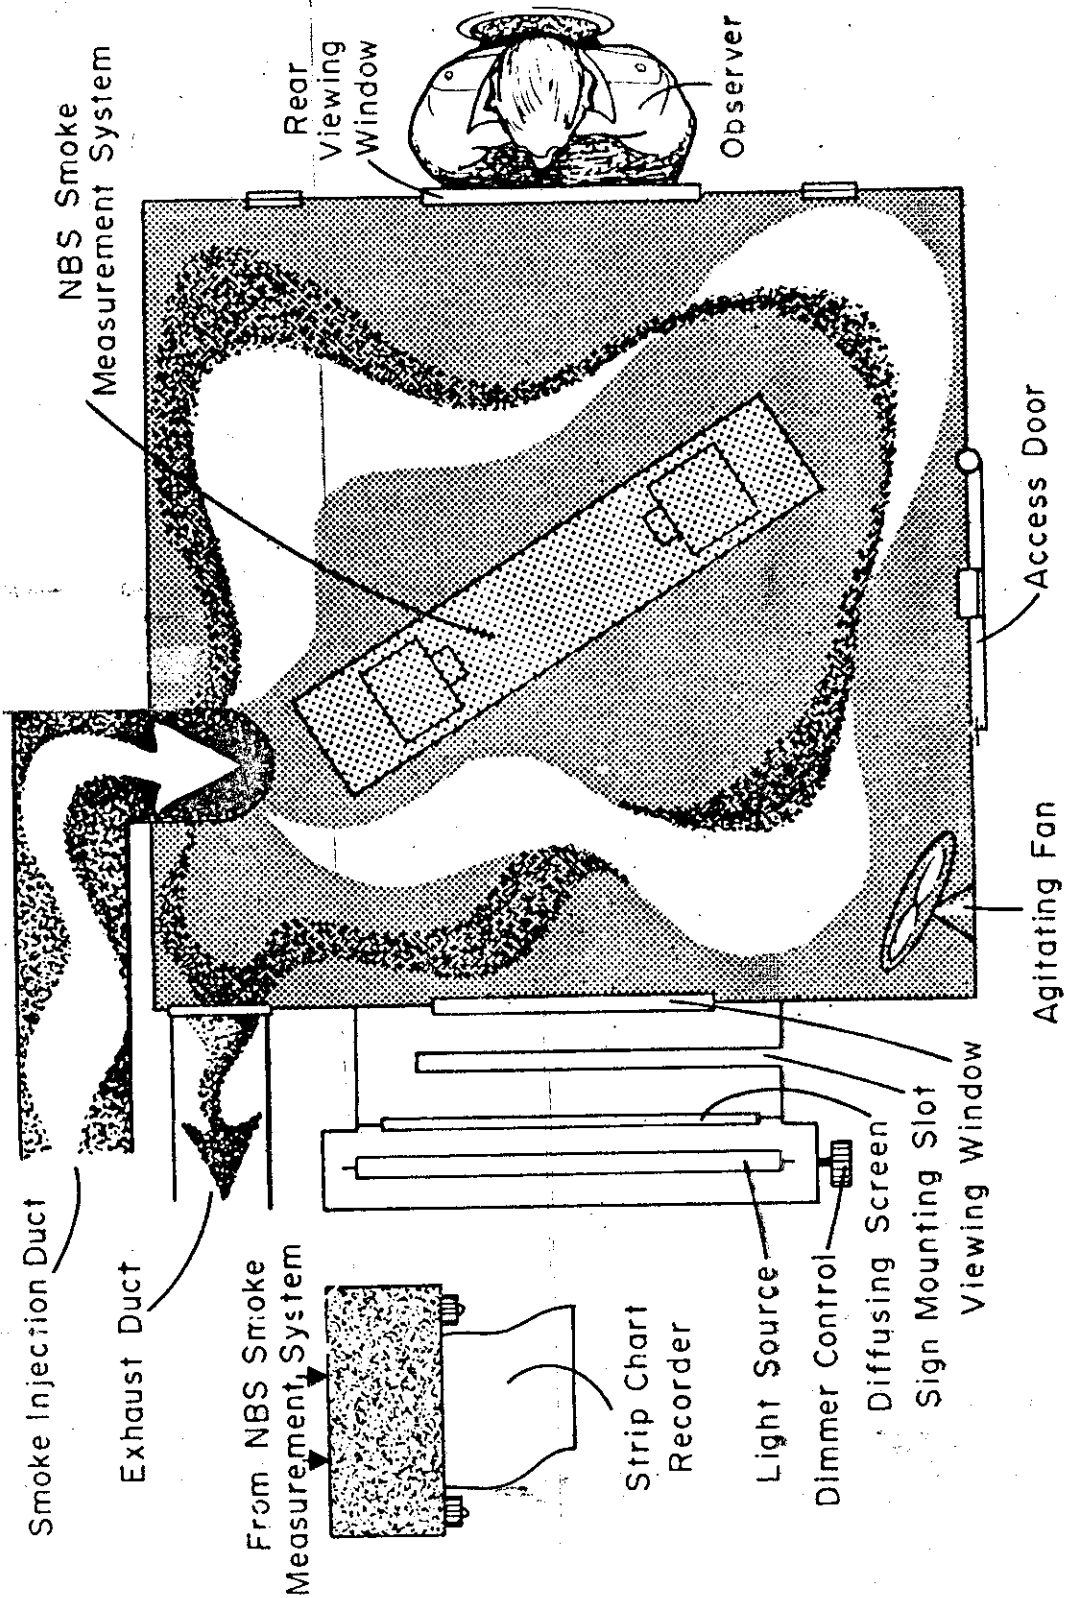


Figure 1. Diagram of experimental equipment configuration, viewed from above.

Displays. The character format for the experimental signs was based on the Grimes* exit sign commonly found on commercial aircraft. Table 1 gives the height and stroke width of the characters together with the corresponding visual angles for the 197-cm (77-in) viewing distance. The dimensions for Sign No. 4 also approximate those of the characters in the Grimes sign.

The characters were hand drawn and reproduced on film negatives and photographically enlarged or reduced to the desired sizes. The signs were affixed in mounting boards to provide a lighted margin 2.5 cm (1 in) above and below the characters and 5 cm (2 in) to the left of the first character and to the right of the last character in the sign. The signs were composed of the characters "E,X,I,T" except that the largest sign was limited to two characters. Character sequence was varied for some signs to minimize anticipatory identification before the subject could actually read the sign.

The four luminance levels were the average of 24 equally spaced grid points on the observer's side of the available 44- by 32-cm (17.3- by 12.5-in) viewing area of the diffusing screen before a sign was mounted for viewing. The 89 cd/m² (26-fL) luminance level was established as an approximation of the background luminance required by FAR 25.812. The 31-, 140-, and 158-cd/m² (9-, 41-, and 46-fL) values resulted from 1-V increments and decrements measured at the dimmer control that gave a usable range of luminance levels. The candela (cd) is the International System of Units (SI) unit of luminous intensity. The metric expression cd/m² is approximately equivalent to 0.29 fL.

TABLE 1. Character Sizes and Visual Angles of Experimental Signs

Sign No.	Character Height		Visual Angle (min)	Stroke Width		Visual Angle (min)
	(mm)	(in)		(mm)	(in)	
1	211.5	(8.33)	371.4	25.40	(1.00)	44.8
2	108.2	(4.26)	190.1	13.10	(0.52)	23.0
3	52.7	(2.07)	92.6	6.35	(0.25)	11.1
4	46.2	(1.84)	81.2	5.45	(0.21)	9.6
5	26.3	(1.04)	46.2	3.20	(0.13)	5.7
6	13.4	(0.53)	23.6	1.60	(0.06)	2.8
7	6.4	(0.25)	11.3	0.77	(0.03)	1.4
8	3.2	(0.13)	5.7	0.38	(0.01)	0.7

Procedure. At the beginning of each experimental session, the screening fog was introduced into the chamber until it reached a density at which the measuring system no longer yielded a measurable output. The subject was seated behind the rear viewing window with eye height adjusted to give normal line-of-sight viewing of the signs. After the subject had spent several minutes adapting to the ambient lighting conditions the largest sign was inserted in the mounting slot and the light source adjusted to the luminance level for that session. The fog was drawn out of the chamber at a controlled rate until the subject could distinguish the sign light and then was allowed

*Grimes Mfg. Co., Urbana, Ohio, Emergency Exit Light 10-0067-9.

to dissipate at a slower rate until the subject correctly identified the sign. On identification of a sign, the next smaller sign was immediately presented until all eight signs had been identified. All glass surfaces within the chamber (panes, lenses, etc.) were cleaned before beginning each of the sessions for the three remaining luminance levels.

The output of the photometric smoke measurement system was recorded on a strip chart recorder. As the output rose from zero in dense fog toward 1-V full-scale deflection in clear air, the chart was indexed to indicate the values at which the subjects responded to each size of sign. The millivolt (mV) values recorded from the measurement system were converted to optical density values by the formula:

$$\text{Optical Density} = 1/d \log T_c/T_s$$

where: d is the unit distance between the reference light and the phototube (0.5 m),

T_c is the clear air value (1,000 mV),

and

T_s is the value at which the signs were identified.

Results.

The means, standard deviations, and ranges of the optical densities of screening fog at which the subjects could read the eight sizes of signs at four background luminance levels are listed in Table 2, and Figure 2 plots the means for the total density values. Figure 3 depicts the values two standard deviations below the means which are the values at which approximately 98 percent of the general population with 20/20 distant visual acuity can be expected to be able to read similar signs under similar conditions. The density values for the 89-, 140-, and 158-cd/m² (26-, 41-, and 46-fL) luminance levels were essentially identical and have been combined to give representative density values for those luminance levels.

Increasing background luminance levels resulted in some improvement in readability as measured by the mean optical density values at which the signs could be read but differences between the three highest luminance levels were minor. The higher luminance levels also resulted in a greater variability in subject responses that effectively eliminated any true differences when consideration is limited to the values two standard deviations below the means.

Increasing character size made it possible to read the signs at somewhat higher density values but the differences in readability between adjacent sign sizes are, at least in part, an artifact of the experimental procedure. The true differences between adjacent sizes are probably somewhat less than those shown by the data.

TABLE 2. Means, Standard Deviations, and Ranges of the Optical Densities of Screening Fog at Which Eight Sizes of Signs Were Identified When Presented at Four Background Luminance Levels

Sign No.	Screening Fog Density (total)			Screening Fog Density (per meter)		
	Mean	S.D.	Range	Mean	S.D.	Range
<u>31 cd/m² (9 fL)</u>						
1	3.79	0.24	3.31 - 4.32	2.07	0.13	1.81 - 2.36
2	3.69	0.24	3.20 - 4.08	2.02	0.13	1.75 - 2.23
3	3.62	0.27	2.89 - 3.99	1.98	0.15	1.58 - 2.18
4	3.57	0.29	2.71 - 3.95	1.95	0.16	1.48 - 2.16
5	3.51	0.29	2.60 - 3.90	1.92	0.16	1.42 - 2.13
6	3.42	0.31	2.43 - 3.82	1.87	0.17	1.33 - 2.09
7	2.96	0.29	2.34 - 3.55	1.62	0.16	1.28 - 1.94
8	2.01	0.49	0.88 - 2.91	1.10	0.27	0.48 - 1.59
<u>89 cd/m² (26 fL)</u>						
1	3.91	0.22	3.51 - 4.33	2.14	0.12	1.92 - 2.37
2	3.80	0.18	3.51 - 4.15	2.08	0.10	1.92 - 2.27
3	3.75	0.16	3.47 - 4.01	2.05	0.09	1.90 - 2.19
4	3.69	0.16	3.44 - 3.91	2.02	0.09	1.88 - 2.14
5	3.62	0.18	3.27 - 3.86	1.98	0.10	1.79 - 2.11
6	3.57	0.18	3.24 - 3.84	1.95	0.10	1.77 - 2.10
7	3.29	0.22	2.87 - 3.77	1.80	0.12	1.57 - 2.06
8	2.25	0.38	1.54 - 3.22	1.23	0.21	0.84 - 1.76
<u>140 cd/m² (41 fL)</u>						
1	3.95	0.18	3.62 - 4.37	2.16	0.10	1.98 - 2.39
2	3.82	0.18	3.51 - 4.37	2.09	0.10	1.92 - 2.39
3	3.77	0.18	3.49 - 4.10	2.06	0.10	1.91 - 2.24
4	3.71	0.20	3.42 - 4.02	2.00	0.11	1.87 - 2.20
5	3.66	0.20	3.31 - 3.93	2.00	0.11	1.81 - 2.15
6	3.60	0.20	3.24 - 3.90	1.97	0.11	1.77 - 2.13
7	3.33	0.20	3.02 - 3.66	1.82	0.11	1.65 - 2.00
8	2.40	0.40	2.03 - 3.27	1.31	0.22	1.11 - 1.79
<u>158 cd/m² (46 fL)</u>						
1	3.99	0.22	3.62 - 4.37	2.18	0.12	1.98 - 2.39
2	3.90	0.22	3.51 - 4.37	2.13	0.12	1.92 - 2.39
3	3.86	0.24	3.47 - 4.37	2.11	0.13	1.90 - 2.39
4	3.80	0.26	3.42 - 4.33	2.08	0.14	1.87 - 2.37
5	3.75	0.27	3.33 - 4.30	2.05	0.15	1.82 - 2.35
6	3.68	0.29	3.18 - 4.21	2.01	0.16	1.74 - 2.30
7	3.36	0.18	3.02 - 3.66	1.84	0.10	1.65 - 2.00
8	2.60	0.29	2.03 - 3.27	1.42	0.16	1.11 - 1.77

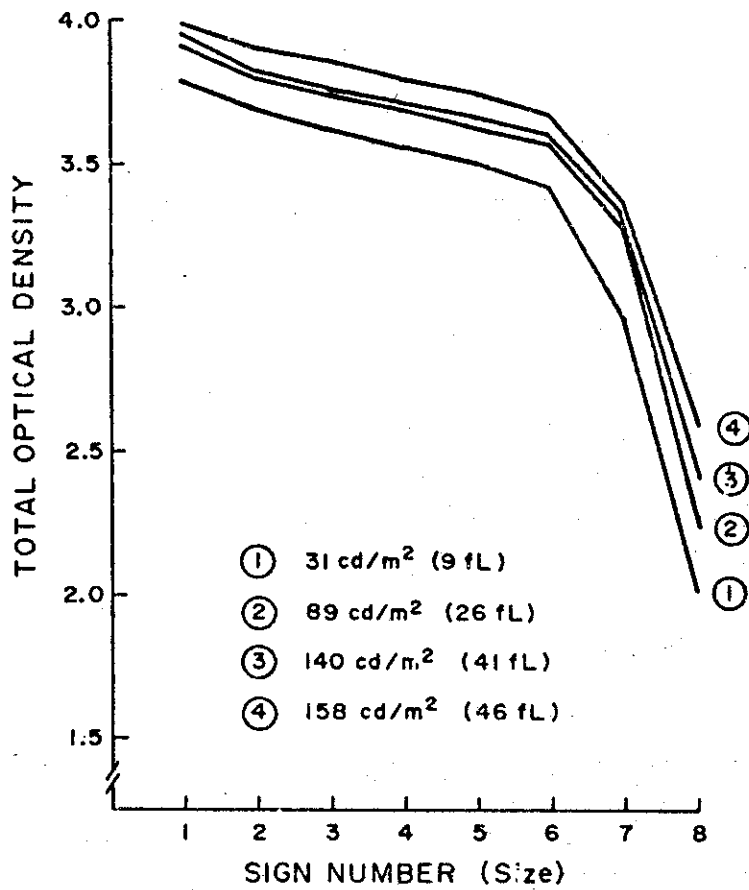


Figure 2. Means of the optical densities of screening fog at which eight sizes of signs were identified when presented at four background luminance levels (data from Table 2).

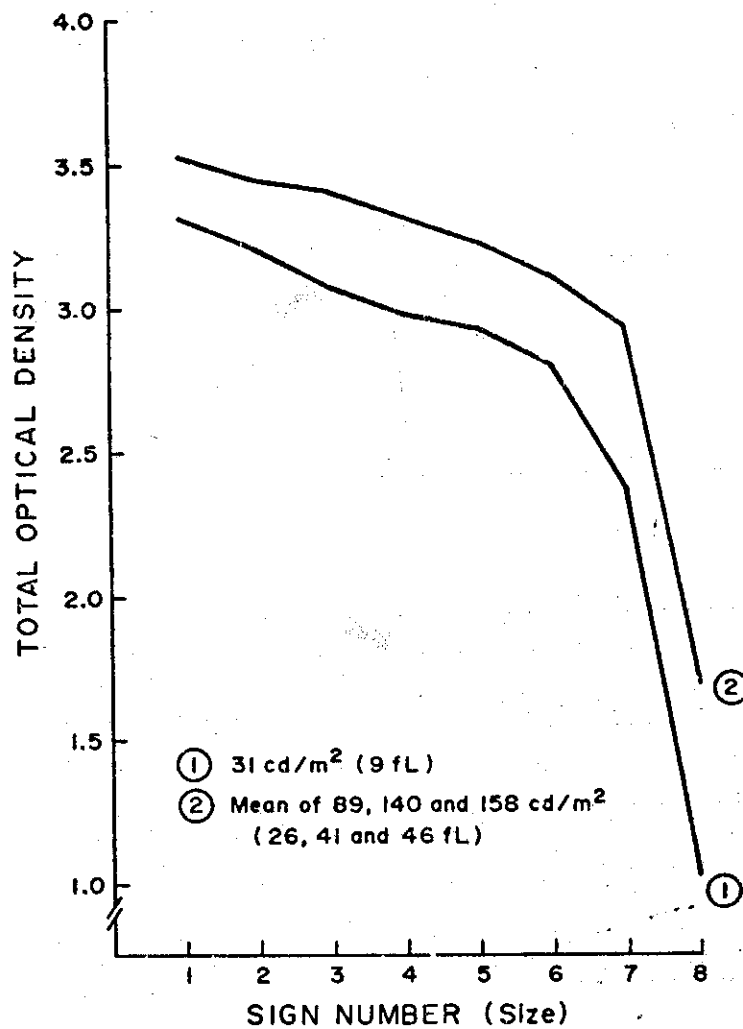


Figure 3. Optical densities two standard deviations below the means at which signs were identified. Values for the three highest background luminance levels have been combined.

The range of density values for the seven largest signs at the three highest luminance values as shown in Figure 3 effectively reduce the effective luminance values, and therefore the apparent brightness when viewed by the subject, to between 0.03 and 0.11 percent of the clear air values.

Discussion.

Several precautions must be observed in any attempt to use the present data to predict sign readability in an actual emergency situation. The results are based on the density values of a white screening fog over a relatively short, fixed viewing distance and a single condition of ambient illumination. Readability at other density and distance combinations and for other colors and compositions of obscuring agents cannot be accurately predicted by neutral density filter models or the haze equivalents of the "frosted plate" models where the visual interference is introduced in a fixed plane rather than distributed along the line of sight. The optical density of smoke is partly determined by the interactive effects of particle size and shape and its general refractive index. The same characteristics may also introduce factors that lower the correlation between its transmissivity of light and the ability to distinguish visual details through obscuring smoke.

In the present study there was no direct contact of the eyes with any possible irritating or injurious components of smoke. Such exposure can result in an adverse effect on the visual system that can range from increased lacrimation to transitory superficial keratitis, depending on the composition and concentration of toxic substances in the smoke (1). The reduction of visual efficiency resulting from these effects is highly variable and not satisfactorily documented in the literature but can be extensive. In these more extreme circumstances the question of readability of emergency signs may well be a moot question unless protective devices such as goggles, face masks, or smoke hoods are available.

Reference.

1. Grant, W. Morton: Toxicology of the Eye, Springfield, Illinois, Charles C. Thomas, 1974, p. 922.

Spec For	
NTIS GR&I	
DOC TAB	
Unannounced	
Justification	
By	
Distribution	
Availability	
Dist	

A