



U.S. Department
of Transportation
**Federal Aviation
Administration**

Advisory Circular

Subject: Design of Aircraft Deicing
Facilities

Date: 8/7/2013

AC No: 150/5300-14C


Initiated by: AAS-100

Change:

- 1. Purpose.** This advisory circular (AC) provides standards, specifications, and guidance for designing aircraft deicing facilities.
- 2. Application.** The FAA recommends the standards and recommendations in this AC for use in the design of aircraft deicing facilities. In general, use of this AC is not mandatory. The standards and recommendations contained in this AC may be used by certificated airports to satisfy specific requirements of Title 14 Code of Federal Regulations (CFR) Part 139, Certification of Airports, subparts C (Airport Certification Manual) and D (Operations). Use of this AC is mandatory for all projects funded with federal grant monies through the Airport Improvement Program (AIP) and/or with revenue from the Passenger Facility Charges (PFC) Program. See Grant Assurance No. 34, Policies, Standards, and Specifications, and PFC Assurance No. 9, Standards and Specifications.
- 3. Cancellation.** This AC cancels AC 150/5300-14B, Design of Aircraft Deicing Facilities, dated February 5, 2008.
- 4. Principal changes.**
 - a.** The term “centralized aircraft deicing facility” now includes “remote aircraft deicing facilities.” The term “remote deicing facility” was dropped from the definitions (paragraphs 1.1 and 1.2).
 - b.** This edition clarifies that the airport operator’s FAA-approved Snow and Ice Control Plan must be updated to include non-gate centralized aircraft deicing facilities are a Priority 1 facility under AC 150/5200-30, Airport Winter Safety and Operations. This action enables those facilities deemed necessary for the given storm conditions to remain fully operational during inclement weather; thereby icing conditions that affect the safety of flight are better managed (paragraph 1.1(a)). For 14 CFR Part 139 certificated airports having centralized aircraft deicing facilities, the Snow and Ice Control Plan must be revised to reflect that the facility is classified as a Priority 1 area. Compliance with this requirement is 1 year from the issue date of this AC.
 - c.** This edition acknowledges the practice by the aviation industry that a control center (snow desk) building is a basic component of a centralized aircraft deicing facility (paragraph 2.1(c)).

d. This edition adds new criteria explaining that the centered aircraft deicing pad of a composite grouping of three pads requires three Vehicle Safety Zones (VSZ) instead of two VSZs. The new VSZ for the centered taxiway centerline will have a 1-foot gap between the red painted VSZ and the yellow taxiway centerline (paragraph 3.4(c)).

e. This edition elevates the need for ice detection cameras for infra-red aircraft deicing structures from optional to recommended. These cameras allow facility operators to scan airplane surfaces for the presence of frozen contamination before and after airplanes are exposed to infra-red energy (paragraph 5.9).

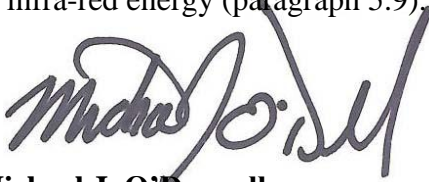A handwritten signature in dark ink, appearing to read "Michael J. O'Donnell", with a stylized flourish extending from the end.

Michael J. O'Donnell
Director of Airport Safety and Standards

Table of Contents

Chapter 1. Introduction.....	1
1.1 Overview.....	1
1.2 Definitions.....	2
1.3 Project input.....	3
1.4 Related Reading Material.....	4
1.5 Safety Risk Management.....	4
 Chapter 2. Sizing and Siting Deicing Facilities	 5
2.1 General.....	5
2.2 FAA Clearance and Separation Standards Affecting Deicing Facilities.....	6
2.3 Capacity of Aircraft Deicing Facilities.....	7
2.4 Factors Affecting the Number of Aircraft Deicing Pads at Centralized Aircraft Deicing Facilities.....	7
2.5 Factors Affecting Centralized Aircraft Deicing Facility Location and Size.....	9
2.6 Fluid Handling Requirements at Centralized Aircraft Deicing Facilities.....	10
2.7 Nighttime Lighting.....	10
2.8 Bypass Taxiing Capability.....	11
2.9 Multiple Deicing Queues.....	11
2.10 Topography.....	11
2.11 Utilities.....	11
2.12 The Airport Layout Plan (ALP) and Siting and Sizing Facilities.....	11
 Chapter 3. Design of Aircraft Deicing Pads.....	 13
3.1 Aircraft Deicing Pads.....	13
3.2 Separation Standards for Centralized Aircraft Deicing Pads.....	13
3.3 Fixed-Fluid Applicators.....	13
3.4 Pavement Surface Markings for Off-Gate Deicing Facilities.....	14
3.5 Deicing Pad Layouts.....	15
3.6 Electronic Message Boards (EMBs) for Off-Gate Deicing Facilities.....	22
3.7 Apron Designs for Off-Gate Deicing Facilities.....	22
 Chapter 4. Aircraft Access and Vehicle Service Roads	 25
4.1 Aircraft Access Routes.....	25
4.2 Vehicle Service Roads.....	25
 Chapter 5. Design of Infra-Red Aircraft Deicing Facilities	 27

5.1	Overview.....	27
5.2	Design Airplane.	27
5.3	Infra-Red Aircraft Deicing Facilities.	28
5.4	Siting of Infra-Red Aircraft Deicing Facilities.	28
5.5	Entrance Taxiway.	29
5.6	Infra-Red Aircraft Deicing Structure.	29
5.7	Nighttime Lighting.....	30
5.8	Sizing Infra-Red Aircraft Deicing Structures.	30
5.9	Ice Detection Cameras.	32
5.10	Facility Operations Shelter.	32
5.11	Computer-Controlled Gas-Powered Infra-Red Energy Unit Systems.	33
5.12	Installation of Infra-Red Energy Unit Systems.....	36
5.13	Infra-Red Energy Unit System Configuration.	37
5.14	Computer Hardware/Performance.	37
5.15	Anti-Icing Capability.	37
5.16	Exit Taxiway.....	38
5.17	Bypass Taxiing Capability.....	38
5.18	Runoff Mitigation.	38

Chapter 6. Water Quality Mitigation.....39

6.1	Runoff Mitigation Structures.	39
6.2	Mitigation Alternatives.	39
6.3	Publicly Owned Treatment Works (POTWs).	40
6.4	Detention Basins.	40
6.5	Underground Storage Tanks (USTs).	41
6.6	Recycling Glycol Fluids.	41
6.7	Anaerobic Bioremediation Systems.....	42

List of Figures

Figure 1-1.	Centralized aircraft deicing facility at Cleveland Hopkins International Airport.....	1
Figure 2-1.	Example of a centralized aircraft deicing facility Snow Desk.....	6
Figure 2-2.	Separate taxiing entrance to a centralized aircraft deicing facility (non-movement area).....	12
Figure 3-1(a).	Deicing pad identification (“B5”) surface marking at entrance point	17
Figure 3-1(b).	Vehicle safety zone surface marking standards.....	18
Figure 3-2.	Example of a common deicing pad layout (not under ATCT control)	19
Figure 3-3.	Example of a composite deicing pad layout (not under ATCT control).....	20
Figure 3-4.	Deicing pad centerlines oriented 60 degrees to the connecting taxiway	21
Figure 3-5(a).	Electronic message board instructing the pilot to continue forward to the stop point of the deicing pad.....	23
Figure 3-5(b).	Electronic message board indicating the aircraft has reached the stop point of the deicing pad	24

Figure 3-5(c). An electronic message board alternating information to the aircraft receiving deicing/anti-icing treatment	24
Figure 5-1. Infra-red deicing facility at John F. Kennedy International Airports with the Boeing 747-200.	27
Figure 5-2. FAA Boeing 727-100 taxiing into an infra-red deicing structure test site	29

List of Tables

Table 3-1. Separation criteria for centralized aircraft deicing pads having parallel taxiways	16
Table 5-1. Protective cover lengths	32
Table 5-2. Horizontal clearances	32
Table 5-3. Acceptance criteria for contamination removal by infra-red EU systems	36

This page intentionally blank.

Chapter 1. Introduction

1.1 Overview. Safe and efficient aircraft operations are of primary importance in the development of any off-gate aircraft ground deicing facility, referred to as a centralized aircraft deicing facility as shown in figure 1-1. First, this advisory circular discusses the subjects of sizing, siting, environmental runoff mitigation, and airfield operational requirements to maximize deicing capacity while maintaining safety and efficiency. Airport operators can construct, within FAA standards, use terminal gates as an aircraft deicing facility or move this safety function off the gates to a centralized aircraft deicing facility located along taxiways serving the departure runway. Second, this advisory circular provides design recommendations and stresses the subject that centralized aircraft deicing facilities have unique deicing/anti-icing operational issues associated with deicing/anti-icing aircraft that must be addressed. On this latter subject, related material to assist designers is made available by the Society of Automotive Engineers (SAE) Aerospace Division publication Aerospace Recommended Practice (ARP) 4902, Design and Operation of Aircraft Deicing Facilities, and ARP 5660, Deicing Facility Operational Procedures, latest editions. For example, it is preferable that a centralized aircraft deicing facility be operated by a single service provider. Furthermore, it is recommended that the service provider follow, if possible, agreed-upon deicing/anti-icing procedures for all users of the facility. The safety benefit of employing common procedures is that it minimizes confusion of treatment among several air carriers that prescribe different deicing/anti-icing requirements for their aircraft fleet. This advisory circular recommends that the airport operator address these two subjects prior to the design of the centralized aircraft deicing facility to ensure the facility's safety benefits can be achieved in an operationally efficient and cost-effective manner.



Figure 1-1. Centralized aircraft deicing facility at Cleveland Hopkins International Airport

a. Role of a centralized aircraft deicing facility. The primary goal of a centralized aircraft deicing facility is meeting, to the extent practicable, the needs of the air carriers as prescribed in their FAA-approved aircraft ground deicing/anti-icing program. Achieving this primary goal offers greater operational flexibility among the facility users. To support this primary goal, the airport operator's FAA-approved Snow and Ice Control Plan must classify centralized aircraft deicing facilities as a Priority 1 facility for snow clearance time under Advisory Circular 150/5200-30, Airport Winter Safety and Operations. This action enables those facilities deemed necessary for the given storm conditions to remain fully operational during inclement weather; thereby icing conditions that affect the safety of flight are better managed.

b. Siting aircraft deicing facilities. This advisory circular identifies an aircraft deicing facility as the use of terminal gates as an aircraft deicing facility and use of a location away from the terminal gates as a centralized aircraft deicing facility. As a consequence, centralized aircraft deicing facilities are located along taxi routes (aprons in some cases) leading to the departure runways.

(1) Terminal gates as aircraft deicing facilities. The use of terminal gates to deice/anti-ice aircraft is the most common option in use today. As a consequence, terminal gates that cannot meet storm water discharge permitting regulations should be upgraded environmentally when they can under varying weather conditions adequately handle the demand for aircraft deicing/anti-icing treatments and allow acceptable taxiing times to reach the departure runway.

(2) Centralized aircraft deicing facilities. Centralized aircraft deicing facilities are facilities where aircraft receive deicing/anti-icing treatment away from the gate, along taxi routes leading to the departure runway(s). Larger airports have constructed such facilities along numerous taxi routes thereby allowing aircraft to receive deicing/anti-icing treatment closer to the runway. Two known benefits of facilities built closer to the departure runway are minimizing the taxiing time between start of treatment and takeoff and avoiding changing weather conditions encountered when aircraft have extra-long taxi routes.

1.2 Definitions.

a. Aircraft deicing facility. An aircraft deicing facility is a facility where:

(1) frost, ice, slush, or snow is removed (deicing) from the aircraft in order to provide clean surfaces, and/or

(2) clean surfaces of the aircraft receive protection (anti-icing) against the formation of frost or ice and accumulation of snow or slush for a limited period of time (referred to as the "holdover time").

b. Centralized aircraft deicing facility. A centralized aircraft deicing facility is an aircraft deicing facility located along taxiways leading to the departure runway or on an apron away from the terminal gates where aircraft receive deicing/anti-icing treatment.

c. Aircraft deicing pad. An aircraft deicing pad, where aircraft receive treatment, consists of two areas (see figure 1-2):

- (1) inner area for the parking of aircraft to receive deicing/anti-icing treatment, and
- (2) outer area for maneuvering two or more mobile deicing vehicles.

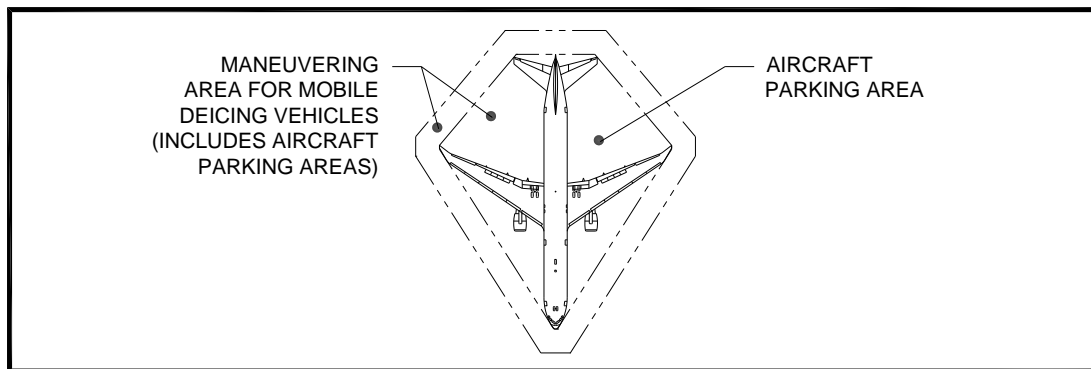


Figure 1-2. Aircraft deicing pad with vehicle maneuvering area

d. Holdover time. Holdover time is the estimated time the application of anti-icing fluid will prevent the formation of frozen contamination on the protected surfaces of an aircraft. With a one-step deicing/anti-icing operation, the holdover begins at the start of the operation; with a two-step operation, at the start of the final anti-icing application. Holdover time will have effectively run out when frozen deposits start to form/accumulate on the treated aircraft surfaces. For departure planning purposes, holdover time guidelines for various anti-icers, such as Types I, II, and IV, are published. Guidelines for using holdover times are found in the latest edition of SAE ARP 4737, Aircraft Deicing/Anti-icing Methods. FAA publishes Holdover Tables at http://www.faa.gov/other_visit/aviation_industry/airline_operators/airline_safety/deicing/. As described in the various holdover tables, there are many variables that can influence holdover times (actual time of protection) depending upon particular conditions existing at the time.

1.3 Project input. Because each airport is unique, deicing/anti-icing needs of users are better addressed when affected parties help identify the requirements for deicing facilities.

a. Affected parties. Airport management should solicit input from the following parties:

- (1) Station/operations managers of tenant air carriers, regional, and commuter air carriers,
- (2) Ground deicing managers of air carrier, regional, and commuter air carriers, and the service provider contracted with treatment responsibility

- (3) FAA Air Traffic Control, Airports Division, Technical Operations, and Flight Standards Offices,
- (4) Airport operations chief, environmental manager, and the aircraft rescue and firefighting chief,
- (5) Pilot organizations or representatives, air taxis, and general aviation users,
- (6) Engineering design contractor, and
- (7) Other parties at the discretion of airport operator.

b. Other. The FAA recommends that airports involve or inform Federal, state, and local environmental authorities having jurisdiction early in the facility development process to ensure compliance with storm water permitting requirements. The addition of a centralized deicing operation will result in the need to update permits and plans. Review of aircraft deicing facility plans by environmental authorities is a significant step toward compliance with U.S. Environmental Protection Agency National Pollutant Discharge Elimination System (NPDES) storm water permitting requirements per 40 CFR 122.26 and 40 CFR Part 449.

1.4 Related Reading Material. Publications referenced in this AC are available from the following organizations:

- a. **FAA ACs**, www.faa.gov.
- b. **Society of Automotive Engineers (SAE)**, 400 Commonwealth Drive, Warrendale, PA 15096-0001, or www.sae.org.
- c. **The International Organization for Standardization**, Case Postal 56, Rue de Varembe, CH-1211 Geneva 20, Switzerland, or www.iso.org.
- d. Airport Cooperative Research Program (ACRP), Guidebook for Selecting Methods to Monitor Airport and Aircraft Deicing Materials by the Transportation Research Board (TRB), <http://www.trb.org/main/blurbs/167504.aspx>
- e. **National Fire Protection Association (NFPA)**, 1 Batterymarch Park, Quincy, MA 02169-7471, or www.nfpa.org.
- f. **American Society for Testing and Materials (ASTM) International**, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA, 19428-2959, or www.astm.org.
- g. **Association of European Airlines**, www.aea.be.

1.5 Safety Risk Management. Safety Risk Management analysis must be performed before a deicing pad/facility construction project is initiated.

Chapter 2. Sizing and Siting Deicing Facilities

2.1 General. Aircraft deicing facilities are recommended at airports where icing conditions are expected. This includes airports that serve aircraft that can develop frost or ice on critical surfaces even though the airport itself does not experience ground icing conditions. Aircraft deicing facilities are located either at the gates or away from the gate areas. The latter location is referred to a centralized aircraft deicing facility.

a. Terminal gates as aircraft deicing facilities. The use of gates as aircraft deicing facilities have demonstrated that under varying weather conditions they can adequately meet the deicing/anti-icing demands of users and allow acceptable taxiing times to the departure runways. The phrase “acceptable taxiing times” implies that the taxiing time and the weather conditions encountered from the gates to the departure runway do not exceed the holdover time (effectiveness) of applied fluids. To comply with Federal, state, and local environmental discharge permits of aircraft de/anti-icing fluids, improvements to or expansion of such gate facilities should, if practicable, include apron drainage areas, systems that collect aircraft glycol runoff for proper disposal or recycling.

b. Centralized aircraft deicing facility. Centralized aircraft deicing facilities are recommended for airports when (1) gate facilities experience excessive gate delays or lack of gates for treatment or (2) the holdover time of applied glycols are exceeded frequently because of the taxiing times to arrive at the departure runway or because the taxi route encounters a variety of weather conditions. Reported benefits of such facilities is that they have improved airfield flow and permit retreatment of aircraft nearer the departure runway instead of returning the aircraft back to the gates. Some airports have built such facilities because the construction cost to improve runoff mitigation is not cost-effective at the terminal.

c. Basic components of centralized aircraft deicing facilities. Centralized aircraft deicing facilities have the following basic components:

- (1) aircraft deicing pad(s) for maneuvering aircraft and mobile deicing vehicles,
- (2) bypass taxiing capability for aircraft not needing treatment,
- (3) environmental runoff mitigation measure,
- (4) control center (snow desk) building (see figure 2-1),
- (5) permanent or portable nighttime lighting system, and, but not necessarily,
- (6) deicing crew shelter with kitchen and toilet facilities,
- (7) co-located support facilities that may include one or more of the following:
 - (a) storage tank(s), transfer system(s) for approved aircraft deicing/anti-icing fluid(s),

- (b) fixed-fluid applicator (turret applicators instead of mobile deicing vehicle).

2.2 FAA Clearance and Separation Standards Affecting Deicing Facilities. To ensure aircraft safety, the location and operation of centralized aircraft deicing facilities must follow the clearance and separation standards specified in the latest edition of AC 150/5300-13, Airport Design. These standards involve airspace and aircraft separations, NAVAID critical areas for FAA technical operations facilities, and line-of-sight criteria for the airport traffic control tower.

a. Object clearance criteria. Centralized aircraft deicing facilities must be sited in accordance with object clearing criteria described in AC 150/5300-13 which include facilities located in the movement area (under ATCT control) or non-movement area (not under ATCT control). If the airport is land constrained or sufficient physical space to proposed site is limited, the airport operator can site the facility in a non-movement area, i.e., an area not under direct ATCT control. The benefit of this decision is that smaller wing tip clearance criteria is permissible, i.e., taxilane centerline criteria versus taxiway centerline criteria. Depending on the site conditions, the airport operator could negotiate with the ATCT manager to redefine a portion of the movement area as a non-movement area to site the facility.



Figure 2-1. Example of a centralized aircraft deicing facility Snow Desk

b. FAA technical operations. Centralized aircraft deicing facilities must be located so as not to cause signal interference or signal degradation to existing FAA radar, navigational aids (NAVAIDs), airport lighting, weather facilities, communications, etc. This includes interference or degradation caused by such facilities having aircraft deicing fluid storage tanks, crew shelters, and permanent nighttime lighting structures. If any FAA radar, navigational aid improvements are planned, sufficient obstacle clearances, as required by new facilities, must be protected. Some airports may require additional FAA communications equipment to meet the operational needs of the centralized aircraft deicing facility. Additional communications equipment installations may result from increased ground control frequencies necessary for the ATCT to provide safe flow of airport ground traffic and to enable ground deicing personnel to conduct safe deicing operations. In all cases, the installation of communications equipment and assignment of frequencies need to

be coordinated with FAA Technical Operations prior to the construction of centralized deicing facilities. To further protect FAA installations, proposed sites must be evaluated to assess the impact of jet blast velocities and exhaust deposits on such installations. This coordination must also take place through coordination with the respective Airport Regional and District/Development Offices.

c. ATCT line-of-sight. The centralized aircraft deicing facility and its supporting structures must minimize reductions to ATCT's visual view of the entire movement area. To maintain ATCT's visual view, aircraft receiving treatment should not obstruct ATCT's line-of-sight to active runway ends and their supporting taxiways. To minimize "shadows" created by aircraft awaiting treatment, aircraft with the largest surfaces and tail sections to be treated should be evaluated. Visual view of the entire movement area by planned ATCT cab position(s) should always be evaluated.

2.3 Capacity of Aircraft Deicing Facilities. Airports that need aircraft deicing facilities (either at the gates or centralized off the gates) should balance the required treatment capacity of the users with the airport's peak hour departure rate during snow/icing conditions. This balance may be achieved by using only gates, a combination of gates and a centralized aircraft deicing facility, or just a centralized aircraft deicing facility. Paragraph 2.4 discusses the factors that determine the number of aircraft deicing pads within a centralized aircraft deicing facility.

2.4 Factors Affecting the Number of Aircraft Deicing Pads at Centralized Aircraft Deicing Facilities. If a centralized aircraft deicing facility is used, the designer needs to determine the number of aircraft to be treated for a set time away from the gates, the individual times to treat aircraft for various weather conditions (wet snow, pellets, freezing drizzle, cold rain, etc.), and the types of aircraft to be treated since some aircraft configurations require longer treatment than other aircraft. These evaluations lead to a proposed number of deicing pads at the facility. The final number of deicing pads should relate back to the airport's peak hour departure rate during snow/icing conditions. Another factor worth evaluation is the number of aircraft requiring re-treatment (exceeded holdover time.) Because the type and size of aircraft configurations bear on the number of deicing pads, it is recommended that the designer take into account future aircraft fleets for a planning period of at least 10 years. This type of information is available from the air carriers (e.g., anticipated airline service and aircraft on order) and airframe manufacturers.

a. Number of deicing pads. Evaluating the impact of the following factors provides a better estimate of the number of deicing pads needed at a facility.

(1) Procedures and methods of users. Facility users will receive either one-step or two-step deicing/anti-icing treatment. The latter procedure routinely used during periods of active precipitation, results in longer occupancy times at deicing pads. It is recommended that to provide users with procedural flexibility, the number of deicing pads be based on the two-step approach. Furthermore, increases to this occupancy time may be needed to reflect differences in the methods used to treat aircraft and perform preflight inspections. It is not unusual for users to supplement preflight inspection items recommended by aircraft manufacturers with additional items for aircraft having special operational conditions.

(2) **Variations in meteorological conditions.** Variations in meteorological conditions, e.g., type of precipitation, increase the extent (and frequency) of the deicing/anti-icing treatment. Airports that commonly experience heavy wet snows or freezing rain should increase the number of deicing pads to maintain departure flow rates at levels that avoid unacceptable delays for subsequent aircraft awaiting treatment. If revised flow control procedures fail to prevent meteorological conditions from frequently degrading the holdover time used for the initial treatment, the airport should consider a facility closer to the active runway. To the extent practicable, there should be a balance between the number of aircraft deicing facilities (at gates and off gates) and their location to offset severe meteorological conditions so holdover times are in effect at takeoff.

(3) **Type of aircraft receiving treatment.** The processing time to deice/anti-ice aircraft for the same weather conditions and fluids varies by aircraft types. Narrow-body aircraft are processed quicker than wide-body aircraft, and aircraft with center fuselage mounted engines, such as DC-10s and Boeing 727s, require additional processing time. Airports with a high percentage of narrow-body aircraft and a low percentage of wide-body aircraft may need additional deicing pads to adequately maintain this particular fleet's departure demand. A balanced fleet mix may provide a means of increasing a facility's deicing capacity by relating flow rates of common-sized aircraft to specific deicing pads.

(4) **Heating performance and volume capacity of mobile deicing vehicles.** Additional deicing pads may be needed if users operate mobile deicing vehicles with small tank capacities or vehicles that require extended periods of time to heat fluids after refilling (that is, times approaching 20 minutes). Nearby refilling points can help offset such increases.

(5) **Centralized aircraft deicing facilities.** Depending on the airport, construction of a centralized aircraft deicing facility may counter some or all of the above factors.

b. Number of deicing facilities. The estimated number of deicing pads plus other structural and operational needs of a centralized aircraft deicing facility determine the approximate physical space requirement for siting the facility. Once the facility's overall physical size requirement is known, the search for suitable sites follows within the framework of safety and operational siting factors cited in this AC, plus latest edition of AC 150/5300-13.

(1) **Multiple deicing facilities.** When the estimated number of deicing pads cannot be physically sited or operationally managed (such as under usual poor weather conditions) at a single site, the airport operator should consider additional centralized facilities.

(2) **Type of facility user.** Airports serving a wide variety of scheduled service by main line, regional, or commuter air carriers and nonscheduled service by air taxi, general aviation aircraft, and charters may better meet their deicing/anti-icing needs by constructing a separate deicing facility for a group. If a single facility is identified for all airport users, additional physical space may be necessary to meet the specific needs for one of the groups, e.g., facilities that store appropriate, approved deicing/anti-icing fluids for smaller aircraft.

2.5 Factors Affecting Centralized Aircraft Deicing Facility Location and Size. The primary factor for siting centralized aircraft deicing facilities is the taxiing time that begins with the start of the last step of the deicing/anti-icing treatment and ends with takeoff clearance, such that the holdover times of applied fluids are still in effect. The analysis should use slower taxiing speeds experienced under winter-contaminated conditions as well as other time-contributing factors specific to the airport. SAE ARP 4737 and ISO 11076, Aircraft – Ground-based Deicing/Anti-Icing Methods with Fluids, provide departure planning holdover procedures for various anti-icers, such as Type I and Type IV, which assist in balancing holdover times and winter taxiing times from the facility to takeoff point. Other factors involved in locating facilities follow.

a. Restrictions on deicing/anti-icing fluids. Restrictions on deicing fluid usage can impact the siting of centralized aircraft deicing facilities. Though used for the same weather conditions, non-Newtonian fluids, such as Type II and Type IV, provide longer holdover times than Type I, a Newtonian fluid, but they are restricted to aircraft with higher takeoff rotational speeds (e.g., 100 knots or as approved by airframe manufacturers). This restriction may necessitate siting a facility closer to the departure runway in order to serve restricted aircraft or to have separate facilities for the two groups. Also, facility siting may have to take into account airports that are located in very cold climates since Type II fluids have a lower temperature application limit, i.e., -13°F (-25°C).

b. Effects of fluid applicators.

(1) Mobile deicing vehicles. Normally, the use of mobile deicing vehicles as compared to fixed-fluid applicators increases the number of suitable sites for facilities by permitting closer construction to active runways. However, for certain airports, a close site may require construction of new service roads and/or staging areas to allow such vehicles to serve the facility.

(2) Fixed-fluid applicators. Use of fixed-fluid applicators, such as a gantry, telescopic booms, etc., will limit the number of suitable sites due to height restrictions (see AC 150/5300-13). However, this type of applicator may allow airports to reduce vehicle traffic and escorting demands or compensate for the lack of service roads and staging areas. If fixed-fluid applicators are installed, each deicing pad still must have sufficient outer maneuvering area for two mobile deicing vehicles.

c. Fleet mix. The physical space required by deicing facilities depends to some degree on the fleet mix being served. For instance, airports serving a large variety of aircraft types and sizes may require facilities more flexible and complex than those airports serving predominantly one class of aircraft.

d. Existing taxiing routes. Before siting deicing facilities away from the terminal areas, an airport should first evaluate the use of existing taxiways that minimize the taxiing time to the facility and, more important, the subsequent taxiing time remaining between treatment and takeoff.

e. Environmental runoff alternative. The cost-effective environmental alternatives available to the airport to control deicer runoff may reduce the number of sites suitable for a

deicing facility. For example, land-locked airports near large bodies of water may have to site a facility closer to existing sanitary sewers than to departure runways. It is noted that acceptable alternatives to mitigate deicer runoff will vary according to city, county, and state environmental runoff regulations imposed on each airport site.

f. Integrating airport safety programs. When identifying deicing/anti-icing requirements, the airport should look for ways of integrating current airport safety programs with the operation of the deicing facility, thereby continuing airport safety initiatives. For instance, the runway incursion program at busy airports may be maintained by widening service roads for bi-directional traffic or by designating additional staging areas instead of constructing separate roads. Other potentially affected safety programs include the airport's Surface Movement Guidance and Control System (SMGCS), Emergency Plan and the Snow and Ice Control Plan. More than likely, there will be changes to the last plan. For instance, the airport may need to reclassify previously non-cleared service roads to departure runways to Priority 1 snow clearing status that will be needed by deicing vehicles or authorized personnel to conduct post-treatment exterior checks of the aircraft surface.

2.6 Fluid Handling Requirements at Centralized Aircraft Deicing Facilities.

a. Storage tank and fluid transfer system designs. Overheating, excessive mechanical shearing, or contamination, e.g., from corroded tanks, may degrade the holdover characteristics of non-Newtonian fluids. Non-Newtonian fluids are Type II, Type III, and Type IV. Newtonian fluids are Type I (see SAE ARP 4737, for fluid classifications). To protect the performance characteristics of these fluids from degradation, storage tanks and fluid transfer systems installed at deicing facilities must be designed in accordance with the fluid manufacturer's recommendations. Fluid transfer systems must be dedicated to the specific fluid being handled to prevent the inadvertent mixing of fluids of different types or different manufactures. Fluid manufacturers should provide the airport manager recommendations about compatible pumps, control valves, piping, and compatible storage tanks. Additionally, SAE ARP 4737 provides industry recommended practices for storage tank and transfer systems.

b. Separate storage tank capacity. Deicing facilities using various types of deicing/anti-icing fluids will require more physical space to permit separate storage of fluids. Fluid manufacturers should always be consulted for storage tank requirements, maintenance, and precautions for currently used fluids and new products entering the market.

c. Tanks, fill ports, and discharge points labeling. To avoid cross-contamination of deicing fluids at a deicing facility, all tanks, fill ports, and discharge points must be conspicuously labeled for the type of fluid handled, e.g., SAE Type I Aircraft Deicing Fluid, ISO Type II Aircraft Deicing Fluid.

2.7 Nighttime Lighting. All facilities (gate and centralized locations) will provide permanent nighttime lighting structures or have portable nighttime lighting systems available so ground crews that have the necessary illumination for deicing/anti-icing operations and pre-takeoff inspections during night or low-visibility conditions. One portable alternative is mobile deicing vehicles with modified lights that provide sufficient illumination for deicing/anti-icing treatments and pre-takeoff

inspections during night or low visibility. AC 150/5360-13, Planning and Design Guidelines for Airport Terminal Facilities, provides general lighting requirements for gate-related functions. The height of lighting poles must be in accordance with latest edition of AC 150/5300-13. Permanent nighttime lights should be aimed and shielded to avoid glare to pilots and the ATCT's line-of-sight without reducing the illumination of critical areas.

2.8 Bypass Taxiing Capability. To further maximize departure flows for all departing aircraft, potential sites should have enough physical space to allow bypass taxiing capability for aircraft not needing de/anti-icing treatment. This feature permits the centralized aircraft deicing facility to receive aircraft that require treatment, while allowing other aircraft to continue unimpeded for departure. Figure 2-2 provides an example.

2.9 Multiple Deicing Queues. Gains in deicing capacity at off-gate facilities are possible when deicing pads have individual entrance and exit queuing capabilities (for example, see figures 3-2, 3-3, and 3-4). These features give the ATCT greater flexibility to receive aircraft from the service provider and issue departure clearances without subjecting aircraft to a "first-in/first-out" queuing situation. Such design features are recommended, if practicable, for centralized aircraft deicing facilities that experience extended periods of operation under continuous poor weather conditions.

2.10 Topography. Topography is a key cost factor in constructing a deicing facility.

a. Final grades. To reduce construction costs, facilities should be sited on relatively flat land where the natural terrain features conform to the final grades for the ultimate design of the deicing facility.

b. Drainage areas. Sites with high water tables that require costly subdrainage and a runoff mitigation alternative should be avoided. The final site should readily lend itself to facility runoff mitigation at reasonable cost. AC 150/5320-5, Surface Drainage Design, provides design standards for airfield drainage systems.

2.11 Utilities. Although utility considerations are subordinate to other siting factors, the airport manager should evaluate whether to extend water supply, electric power, telephone service and sanitary or storm sewers to support an off-gate facility. For some situations, independent service installations or a separate runoff mitigation alternative at the site may be more cost-effective.

2.12 The Airport Layout Plan (ALP) and Siting and Sizing Facilities. Review of the airport's ALP provides information that should simplify the siting and sizing process. Some ALPs delineate planned land acquisition areas adjacent to airport property for airport development. Consequently, a revision can show areas identified for a deicing facility. Any changes to the ALP should be considered carefully and all changes documented and submitted to the FAA for approval.

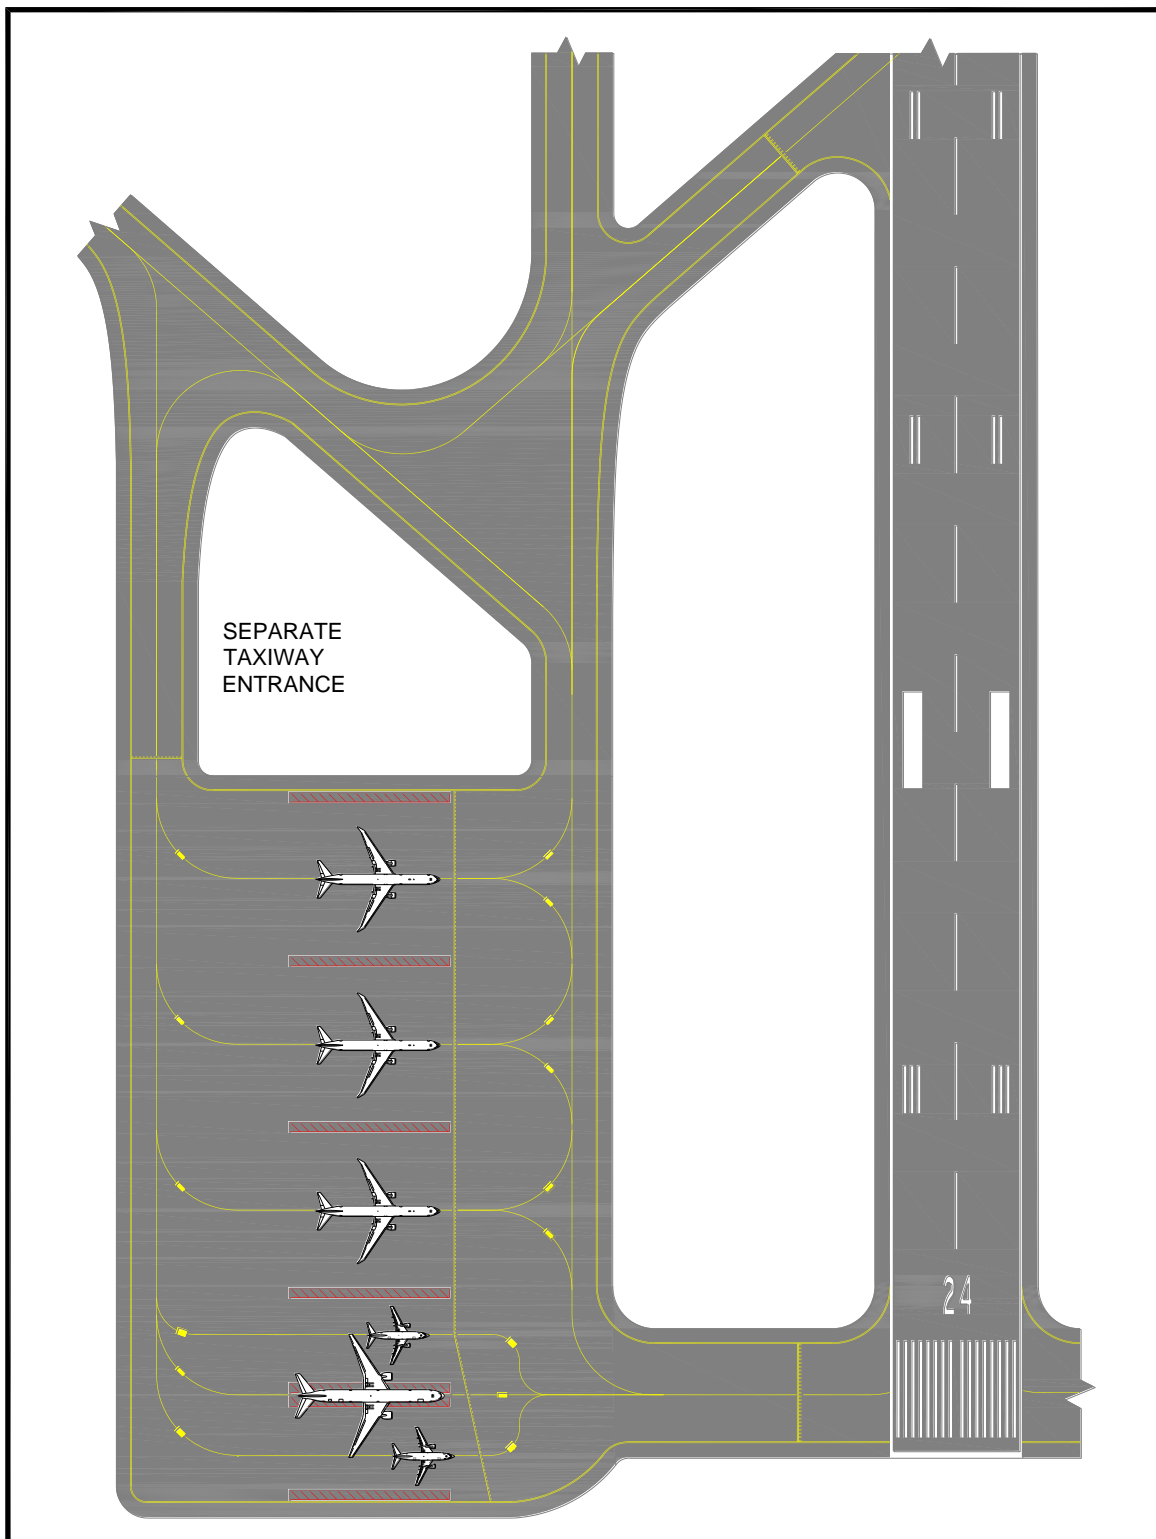


Figure 2-2. Separate taxiing entrance to a centralized aircraft deicing facility (non-movement area)

Chapter 3. Design of Aircraft Deicing Pads

3.1 Aircraft Deicing Pads. The size of an aircraft deicing pad is determined by the aircraft parking area and the maneuvering area for mobile deicing vehicles as shown in figure 1-2.

a. Aircraft parking area. This area is the inner area used for parking aircraft to receive deicing/anti-icing treatment.

(1) **Width.** The width of the parking area equals the upper wingspan of the most demanding airplane design group (ADG) using the deicing pad.

(2) **Length.** The length of the parking area equals the fuselage length of the most demanding aircraft using the deicing pad.

b. Maneuvering area for mobile deicing vehicles. This outer area provides the “vehicle lane width” necessary for two or more mobile deicing vehicles to satisfactorily perform simultaneous and complete left- and right-side uniform fluid distribution techniques for removing deposits of frost, ice, slush, and snow from aircraft surfaces and for anti-icing operations. The vehicle lane width must be 12.5 feet (3.8 m) and be mutually exclusive of any adjacent deicing pad. As previously noted by SAE ARP 4737, “Dual vehicle fluid applications help in eliminating potential aerodynamic problems resulting from fluid applications by a single mobile deicing vehicle.”

3.2 Separation Standards for Centralized Aircraft Deicing Pads. Aircraft deicing pads for centralized aircraft deicing facilities will have parallel taxiway centerlines. Separation criteria provided in table 3-1 takes into account the need for individual deicing pads to provide sufficient maneuvering area around the aircraft to allow simultaneous treatment by two or more mobile deicing vehicles (see paragraph 1.2(c)(2) and figure 1-2) and, with the exception of column #5 of table 3-1, sufficient non-overlapping space for a vehicle safety zone (VSZ) between adjacent deicing pads (see paragraph 3.4(c)) and for the outer deicing pads. For example, a centralized aircraft deicing facility with three deicing pads will have three vehicles maneuvering areas (VMAs) and four VSZs. Table 3-1 observes taxiway centerline to fixed or movable object criteria because VSZs house fixed and movable objects. Furthermore, table 3-1 entries and footnotes ensure that sufficient separation exists between taxi centerlines and VSZs and VMAs. Table 3-1 offers airport operators the option to locate centralized aircraft deicing facilities in the movement area or non-movement areas. Column #5, off-gate deicing facilities without vehicle safety zones, reflects the practice by airport operators to designate on a temporary basis the use of suitable apron areas, near a departure runway or adjacent to terminal gates, for deicing/anti-icing airplanes. Temporary off-gate facilities may have vehicle safety zones, but they generally lack the infrastructure that is associated with permanent centralized aircraft deicing facilities, such as a snow control center with a crew shelter, overhead lighting, and possibly electronic message boards.

3.3 Fixed-Fluid Applicators. Fixed-fluid applicators should satisfactorily perform simultaneous and complete left- and right-side uniform fluid distribution techniques for removing deposits of frost, ice, slush, and snow from aircraft surfaces and for anti-icing

operations. Fixed-fluid applicators, such as gantries or telescopic booms, have the advantage of reducing vehicle traffic and may lower the quantities of fluid used. Though fixed-fluid applicators may be the primary deicing applicators for a deicing pad, the pad must have enough maneuvering area for mobile deicing vehicles to provide secondary backup capabilities in case of primary equipment failure.

3.4 Pavement Surface Markings for Off-Gate Deicing Facilities.

a. Taxiway centerline surface marking. Centralized aircraft deicing facilities will have only yellow taxiway centerline surface markings for entering the facility, moving through the deicing pad, and exiting the facility. The surface marking must be in accordance with AC 150/5340-1, Standards for Airport Markings. At airports operating below 1,200 feet runway visual range (RVR), centralized aircraft deicing facilities located on a designated SMGCS low-visibility taxi route (see AC 120-57, Surface Movement Guidance and Control System (SMGCS)) may require additional taxiing route surface marking, lighting, and sign systems necessary to support SMGCS operations.

b. Facility boundary surface markings. Centralized aircraft deicing facilities shall have either the taxiway/taxiway intermediate holding position surface marking for facilities under direct ATCT control or the non-movement boundary surface marking for facilities not under ATCT control but by a service provider - Snow Desk (figures 2-2, 3-2, 3-3). Both markings indicate the entrance and exit boundary points of the facility and must be painted in accordance with paragraph 3.4(b)(1) and (b)(2) of this advisory circular. The intent of both markings is to reduce intrusions by deicing crews and aircraft into the object free area of nearby and connecting taxiways during daytime or low-visibility conditions. The importance of the second marking is that it identifies the ground control transfer points between the ATCT and Snow Desk control center. Lighted signage may be used instead of surface markings only at the facility entrance. If lighted signs are used, they must be in accordance with AC 150/5340-18, Standards for Airport Sign Systems, latest edition.

(1) Surface marking. The taxiway/taxiway holding position surface marking (perimeter of the facility under ATCT control) and the non-movement boundary surface marking (facility not under ATCT control) must be in accordance with latest edition of AC 150/5340-1 (see example figure 3-2 and 3-3).

(2) Composite deicing pad surface markings. If a single deicing pad will serve as a composite deicing pad (or “grouping”) such as pad #5 in figure 3-3, which incorporates pads #4 and #6, then a single entrance taxiway centerline surface marking will be used for the grouping. After a given distance, the single entrance centerline will separate into individual taxiway centerlines for the incorporated deicing pads. Each individual taxiway centerline entrance within the grouping will be marked with its own deicing pad identifier. Since these pads are used as a grouping, the deicing pad identifiers will use the same alpha character followed by a different numeric character. For example, the pad grouping #4, #5, and #6 would be identified as D2, D1, and D3, respectively, with the main entrance taxiway centerline serving pad #5 designated as D1.

c. Vehicle Safety Zone (VSZ) surface markings. Each deicing pad at the facility must have a vehicle safety zone (VSZ) surface marking on each side of its taxiway centerline in accordance with figure 3-1(b). The VSZ functions as a safety zone for personnel and parked deicing vehicles and other equipment before and after deicing/anti-icing operations. For a composite deicing pad (grouping), such as pads #4, #5, #6 in figure 3-3, three VSZs are provided for the grouping, one VSZ to the left of pad #4 and the other VSZ to the right of pad #6 and one VSZ centered along the centered taxiway centerline. The “centered VSZ” however has a 1-foot gap between the red painted VSZ and the yellow taxiway centerline as shown in figure 3-3.

(1) Width of VSZs. The minimum width for the VSZ is 10 feet (3.0 m), which restricts vehicle parking to “face-to-face” instead of “side-by-side.” The minimum width of the “centered VSZ” is the same, even though figure 3-3 illustrates a wider VSZ to illustrate a gap between the taxiway centerline and the VSZ marking.

(2) Overall length of VSZs. The overall continuous length of the VSZ should offer “trouble-free” parking of the vehicle fleet required to perform the deicing/anti-icing operations. In all cases, the overall continuous length will be such that neither end of the VSZ violates the taxiway/taxilane object free area of taxiways or taxilanes located outside the boundary of the deicing facility. Depending on the jet blast profiles of certain aircraft, the length of the VSZ toward the exit side of the facility may need to be reduced to minimize severe jet blast impacts onto parked vehicles and personnel when the aircraft exits and turns onto the connecting taxiway.

(3) Location of VSZs. Case 1 – Placement of VSZs between adjacent deicing pads will be in accordance with paragraph 3.2 of this AC. **Case 2** – Placement of the VSZ on the outermost deicing pad will be in accordance with fixed/movable criteria specified in latest edition of AC 150/5300-13.

3.5 Deicing Pad Layouts. Layouts for deicing pads should maximize the flexibility of deicing operations and reduce ATCT workloads. The following layouts provide alternatives for varying weather conditions.

a. Layouts.

(1) Common deicing pad layout. A common deicing pad layout has a single centerline through the deicing pad to guide all sized aircraft. For facilities serving a fleet mix with numerous wide-body aircraft, separating deicing pads for wide-body aircraft from other aircraft may increase deicing capacity (see pad #1 in figure 3-2).

(2) Composite deicing pad layout. A composite deicing pad layout has more than one centerline through the deicing pad to guide different sized aircraft. For facilities serving a balanced mix of different sized aircraft, correlating the percentages of aircraft types to their departure rates may increase deicing capacity (see figure 3-3). When two aircraft use a common centerline, additional parking space between aircraft may be needed to account for exiting jet blast degradation of Types II or IV protective coatings and velocities on personnel/equipment (see paragraph 3.5c(1)).

Table 3-1. Separation criteria for centralized aircraft deicing pads having parallel taxiways

Airplane Design Group ² (ADG)	Off-Gate Aircraft Deicing Facilities				
	Non-Movement Area ¹		Movement Area ¹		
	Column #1 ³	Column #2 ³	Column #3 ³	Column #4 ³	Column #5 ⁴
	Outer Deicing Pad	Interior Deicing Pads	Outer Deicing Pad	Interior Deicing Pads	Temporary Deicing Pads
	Taxi Centerline (CL) to Edge of Vehicle Safety Zone (VSZ)	Taxi CL to Taxi CL	Taxi CL to Edge of VSZ	Taxi CL to Taxi CL	Taxi CL to Taxi CL
	Includes 1 Vehicle Maneuvering Area (VMA)	Includes 2 VMAs + 1 VSZ	Includes 1 VMA	Includes 2 VMAs + 1 VSZ	Includes VMAs and no VSZ
ADG VI	167 ft (51 m)	344 ft (105 m)	193 ft (59 m)	396 ft (120.5 m)	324 ft (99 m)
ADG V	138 ft (42 m)	286 ft (87 m)	160 ft (48.5 m)	330 ft (100.5)	267 ft (81 m)
ADG IV	112.5 ft (34 m)	235 ft (71.5 m)	129.5 ft (39.5 m)	269 ft (82 m)	215 ft (65.5 m)
ADG III	81 ft (24.5 m)	172 ft (52.5 m)	93 ft (28.5 m)	196 ft (59.5 m)	152 ft (46.5 m)
ADG II	57.5 ft (17.5 m)	125 ft (38 m)	65.5 ft (20 m)	141 ft (43 m)	105 ft (32 m)
ADG I	39.5 ft (12 m)	89 ft (27 m)	44.5 ft (13.5 m)	99 ft (30 m)	74 ft (22.5 m)
<p>The values obtained from the following equations may be used to show that a modification of standard will provide an acceptable level of safety. Refer to AC 150/5300-13 for guidance on modification of standard requirements.</p> <p>Column No. 1: Taxilane CL to fixed or movable object equals 0.6 times airplane wingspan (WS) plus 10 feet - $[(0.6)(WS) + 10]$ for all ADGs.</p> <p>Column No. 2: Taxilane CL to parallel taxilane CL with fixed or movable object equals $[(1.2)(WS) + 30]$ for all ADGs, plus with ADG I, wingspans less than 25 feet require sufficient separation for two VMAs and one VSZ.</p> <p>Column No. 3: Taxiway CL to fixed or movable object equals $[(0.7)(WS) + 10]$ for all ADGs.</p> <p>Column No. 4: Taxiway CL to parallel taxiway CL with fixed or movable object equals $[(1.4)(WS) + 30]$ for all ADGs, plus with ADG I, wingspans less than 15 feet require sufficient separation for two VMAs and one VSZ.</p> <p>Column No. 5: Taxiway CL to parallel taxiway CL equals $[(1.2)(WS) + 10]$ for ADGs III – VI. Apply the same equation for ADGs I and II, but wingspans less than 75 feet require sufficient separation for two VMAs and no VSZ.</p>					
<p>Note 1: Facilities built in non-movement areas are not under direct ATCT control. Facilities built in movement areas are under direct ATCT control.</p> <p>Note 2: ADGs are defined in AC 150/5300-13. Values assume largest airplane wingspan within each ADG.</p> <p>Note 3: Columns #1 – 4 have a 12.5-foot (3.8-m) wide VMAs and a 10-foot (3-m) wide VSZ.</p> <p>Note 4: Column #5 has 12.5-foot (3.8-m) wide VMA and no VSZ.</p>					

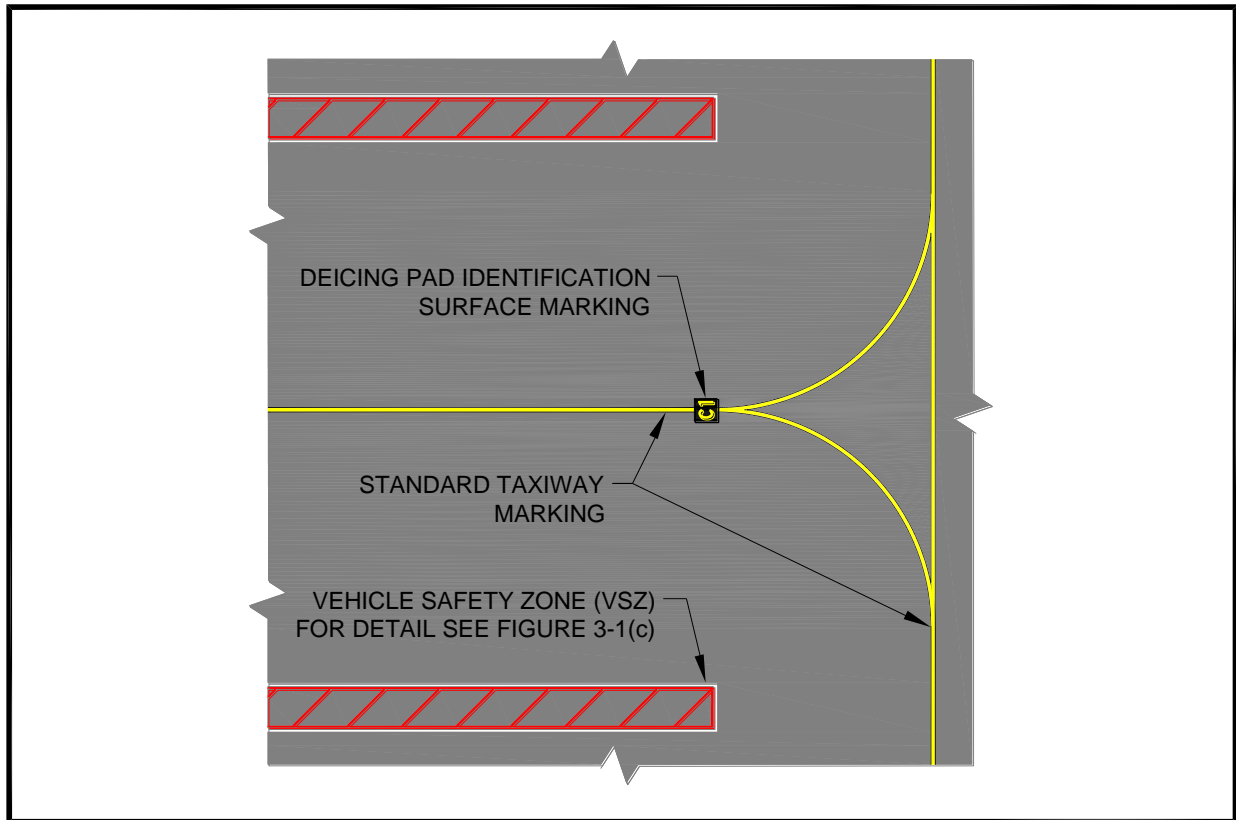


Figure 3-1(a). Deicing pad identification (“B5”) surface marking at entrance point

b. Centerline orientation.

(1) **Frequent high wind velocities.** Airports that experience frequent high wind velocities should, to the extent practicable, orient the centerlines of deicing pads with the prevailing wind. This allows heated fluids to be applied closer to the surface of the aircraft skin, thereby minimizing heat loss and fluid usage, and takes advantage of the full hydraulic force of the fluid spray. The AEA notes under deicing application procedures, “For maximum effect, fluids shall be applied close to the aircraft surfaces to minimize heat loss.”

(2) **Low visibility.** From a winter operational standpoint, low visibility, etc., maintaining the cockpit over centerline reduces the possibility of excursions from the facility’s taxiways compared to judgmental oversteering. AC 150/5300-13 provides the criteria for ample curve and fillet radii necessary for cockpit-over-centerline taxiing.

(3) **Minimizing facility depths.** Additional suitable sites for airports may be possible by orienting the centerlines of deicing pads so they are non-perpendicular to the connecting taxiway. Figure 3-4 illustrates centerlines oriented 60 degrees to the connecting taxiway. In this case, the facility’s depths serving MD-80s (L=147.8 ft (45.0 m)) and Boeing 737-400s (L=119.6 ft (36.5 m)) would be reduced approximately 19 feet (5.8 m) and 16 feet (4.9 m), respectively a 14 percent depth reduction. (L is the fuselage length.)

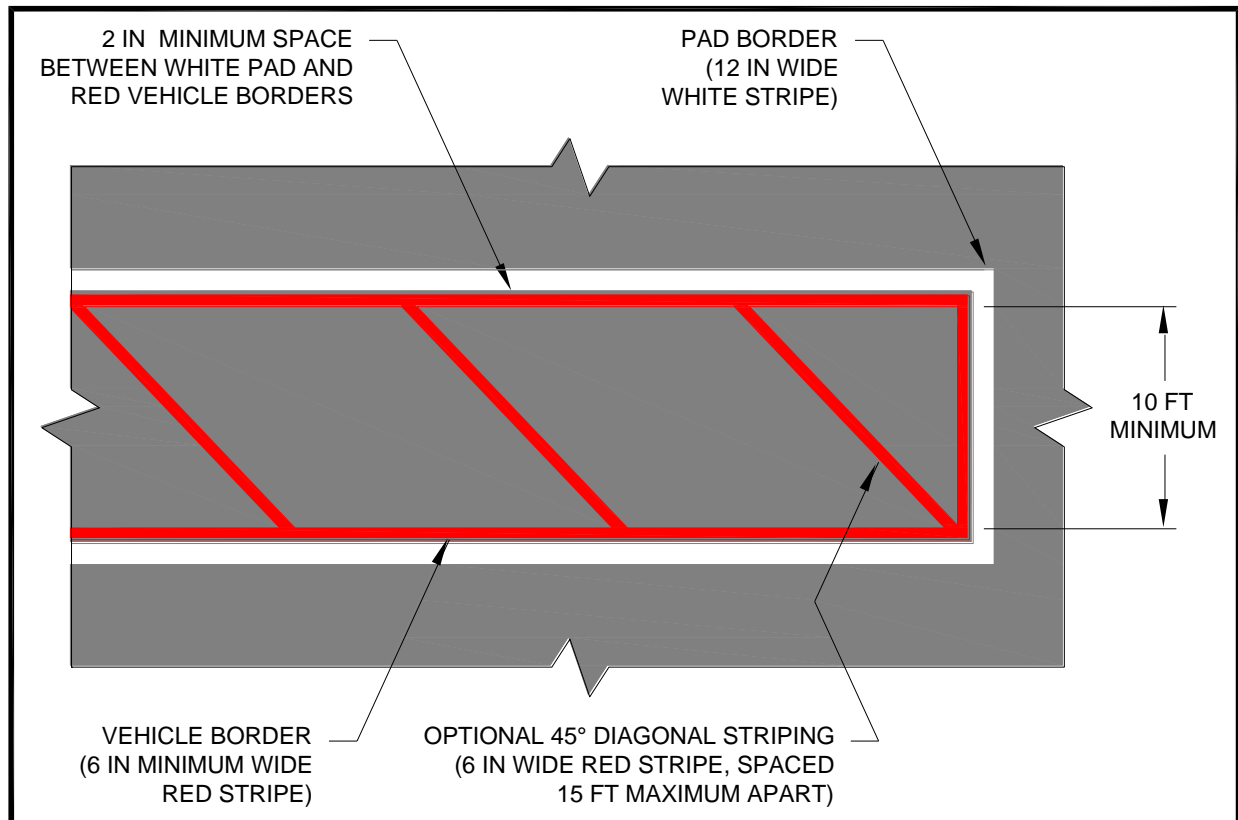


Figure 3-1(b). Vehicle safety zone surface marking standards

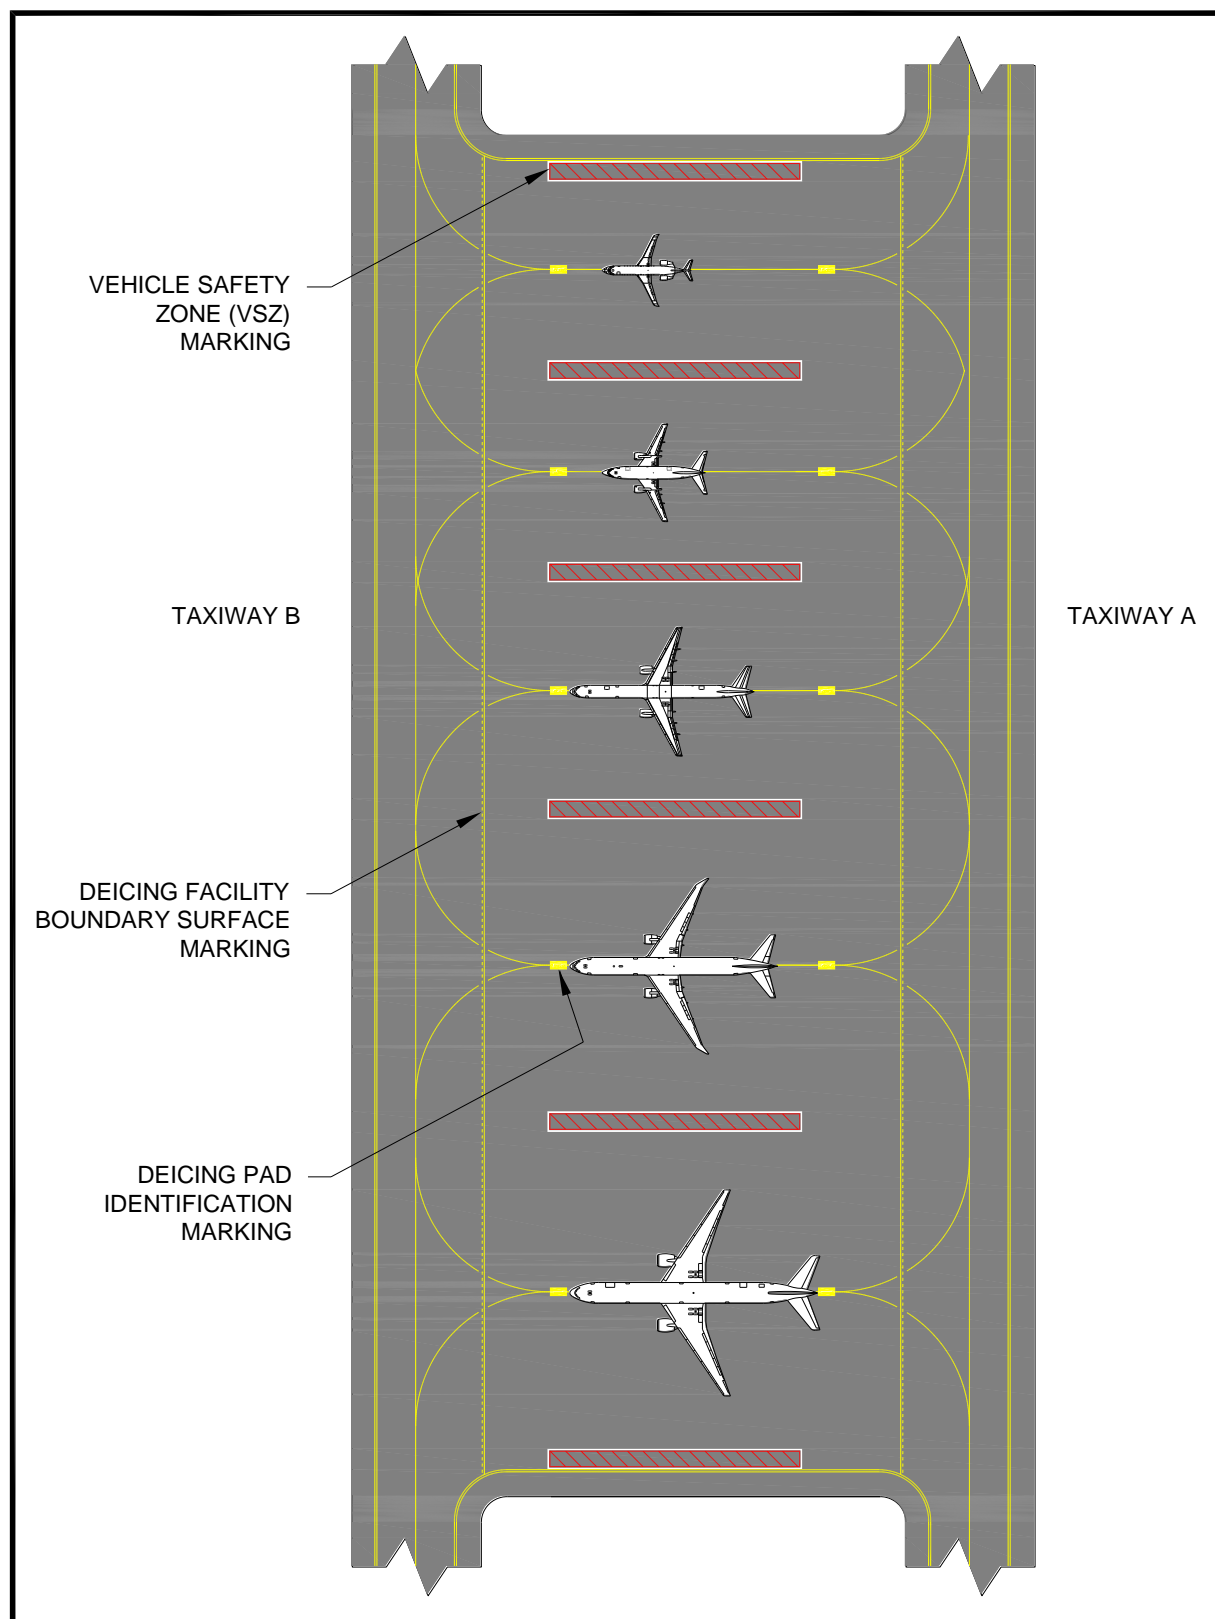


Figure 3-2. Example of a common deicing pad layout (not under ATCT control)

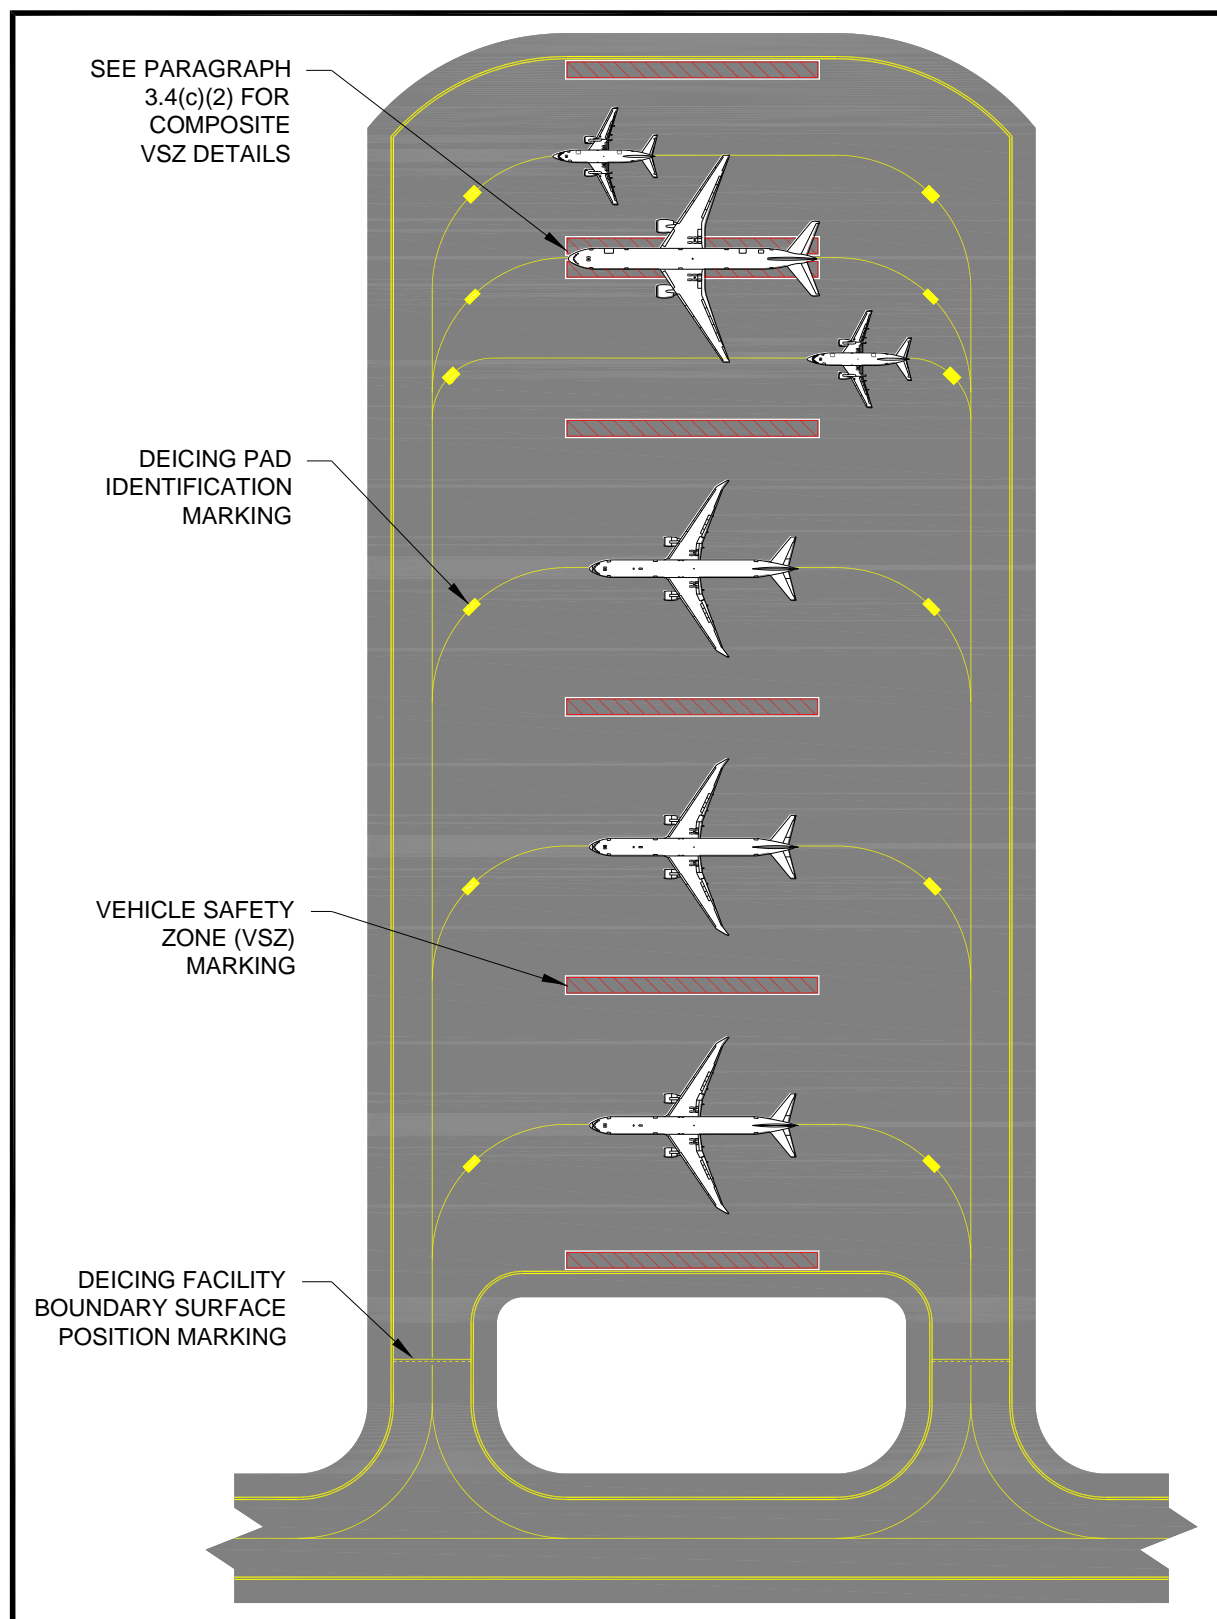


Figure 3-3. Example of a composite deicing pad layout (not under ATCT control)

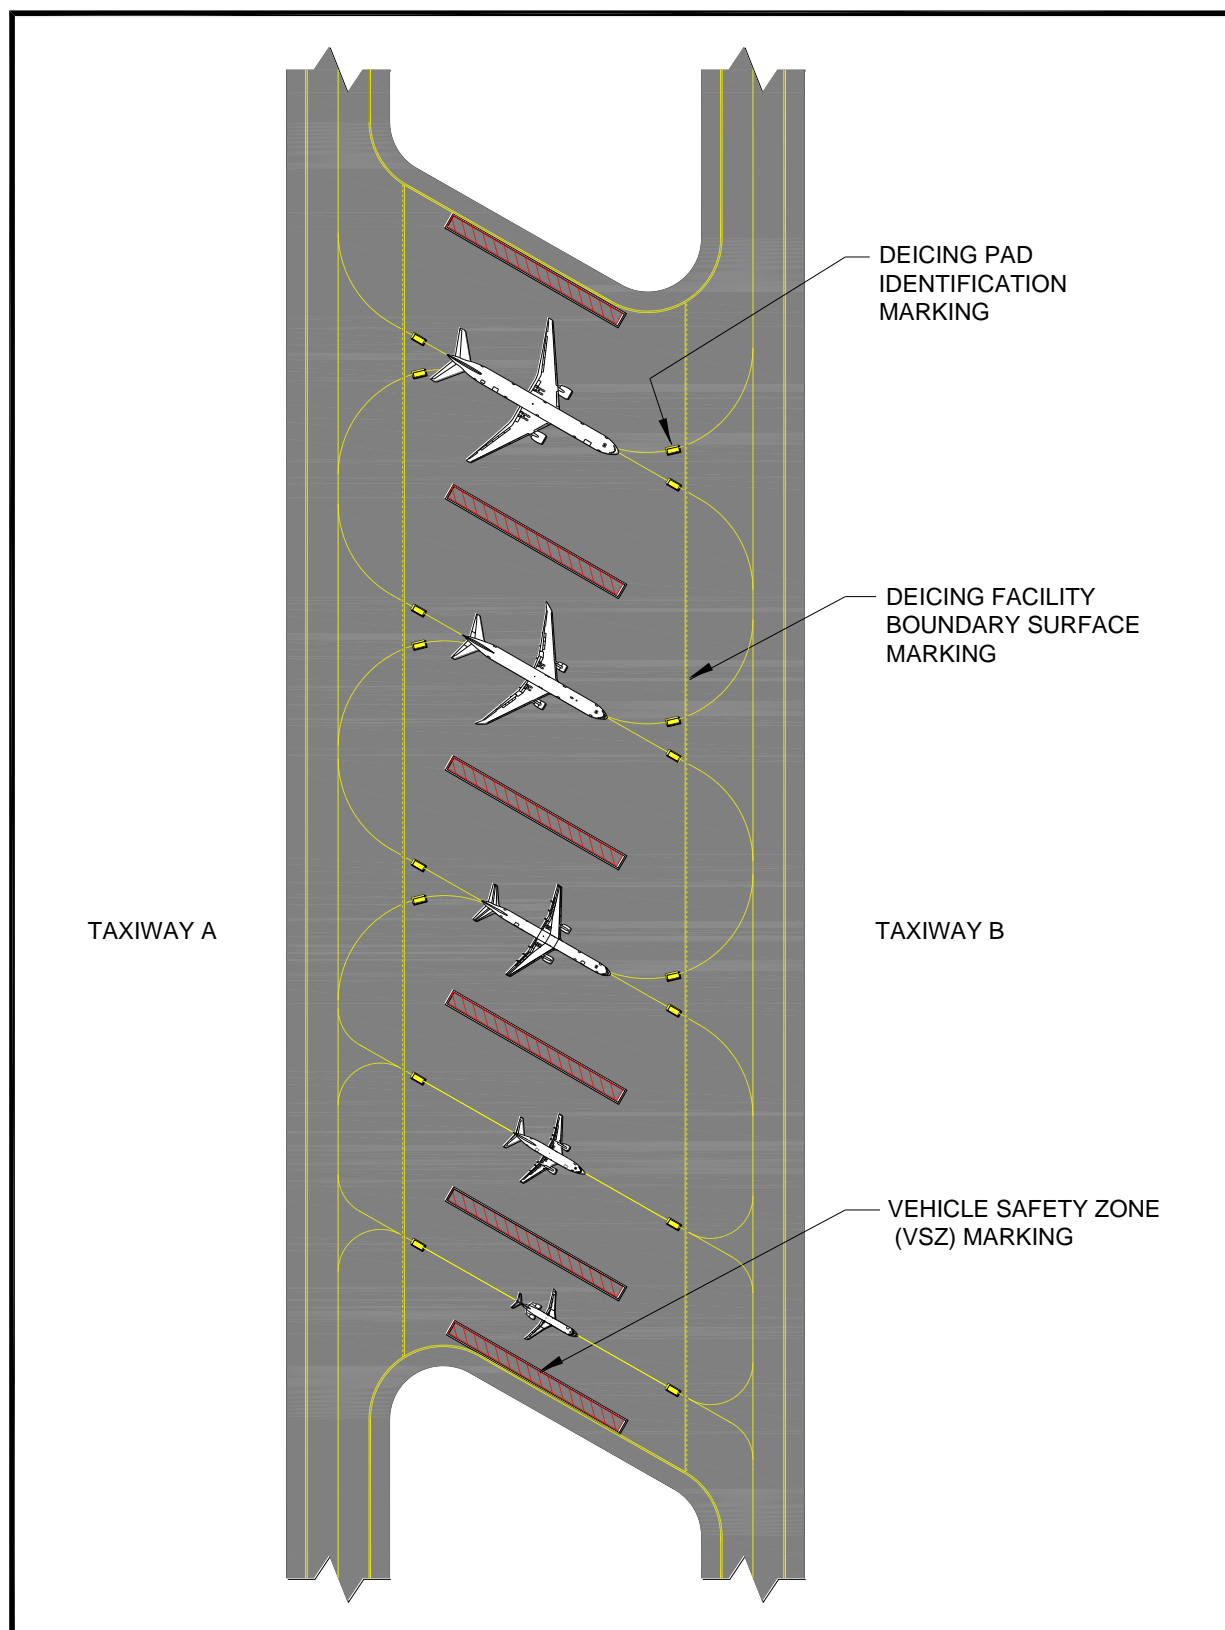


Figure 3-4. Deicing pad centerlines oriented 60 degrees to the connecting taxiway

c. Exiting jet blast.

(1) **Exiting aircraft.** The deicing pad layout should account for jet blast effects caused by exiting aircraft on other aircraft that are receiving or have completed deicing/anti-icing treatment and on personnel and equipment performing duties. Jet blast velocities on neighboring aircraft can cause a degradation of the protective film coating of Type II fluids, leading to reduced holdover times. Reduced holdover protection also results when taxiing aircraft recirculate snow onto following aircraft when trailing separations are short. As AEA states, “Sufficient distance from the preceding aircraft must be maintained as blowing snow or jet blasts can degrade the anti-icing protection of the aircraft.” AC 20-117, Hazards Following Ground Deicing and Ground Operations in Conditions Conducive to Aircraft Icing, further warns that in addition to the degradation effects of anti-icing protection, “Be aware that operations in close proximity to other aircraft can induce snow, other ice particles, or moisture to be blown onto critical aircraft components, or allow dry snow to melt and refreeze.” Aircraft manufacturers are the primary source for jet blast pressures and velocity curves.

(2) **Mitigation measures.** Mitigation measures may be necessary at deicing facilities to ensure jet blast does not damage parked ground service equipment required at the facility, personnel shelter, and FAA navigational facilities. AC 150/5300-13 describes means of minimizing the effects of jet blast.

3.6 Electronic Message Boards (EMBs) for Off-Gate Deicing Facilities. The use of electronic message boards (EMBs) at off-gate deicing facilities by the service provider (not ATCT) have increased the overall efficiency of deicing/anti-icing aircraft and, additionally, improved the transfer of information between flight crews and service providers. In general, the primary purpose for installing EMBs is to (1) reduce verbal communication between all involved parties; [caution – radio communication is still necessary to inform flight crews when to exit the deicing pad]; (2) provide flight crews with clear, concise information; (3) improve deicing pad operational safety and efficiency; and (4) reduce ground congestion by removing personnel and equipment from the deicing pad area after completing deicing/anti-icing operations. If EMBs are installed, they should be installed in accordance with the latest edition of SAE Aerospace Standard 5635, Message Boards (Deicing Facilities), along with a written operational plan that covers procedures when EMBs become inoperative. The SAE aerospace standard defines the minimum content and appearance of the electronic display, functional capabilities, design requirements, and inspection and testing requirements for EMBs. One acceptable location for EMBs is within the vehicle safety zones discussed in paragraph 3.4(c). Figures 3-5(a) through (c) illustrate the types of information exhibited by EMBs at Toronto Pearson International Airport, Toronto, Canada, and Montreal Pierre Elliot Trudeau International Airport, Montreal, Canada.

3.7 Apron Designs for Off-Gate Deicing Facilities. Aprons for deicing facilities must have a pavement design that supports the anticipated aircraft loads and directs deicing fluid for collection.

a. Pavement designs. The pavement must be either a rigid (concrete) or flexible (asphalt) pavement and designed in accordance with AC 150/5320-6, Airport Pavement Design and Evaluation, and AC 150/5320-12, Measurement, Construction, and Maintenance of Skid Resistant

Airport Pavement Surfaces. Deicing pads should be grooved to assist in channeling deicing fluids for collection and providing aircraft and personnel better traction.

b. Apron grades and surface gradients. Apron grades and adjacent surface gradients must be in accordance with AC 150/5300-13. Apron areas should direct flows away from deicing pad centerlines, fixed-fluid applicators, vehicle safety zones, and crew shelter. If interior covered drains are used, they must not create a hazard to aircraft and personnel. AC 150/5320-5 provides guidance on high-strength covers.

c. Limit of apron perimeter. The perimeter of the facility's apron must extend such that no aircraft surface being deiced/anti-iced extends beyond it, and it will have a means for collecting or redirecting deicing fluid runoff. One alternative is a trench drainage system. Regardless of the collection alternative, it must not in itself become a hazard to taxiing aircraft or personnel.



Figure 3-5(a). Electronic message board instructing the pilot to continue forward to the stop point of the deicing pad



Figure 3-5(b). Electronic message board indicating the aircraft has reached the stop point of the deicing pad



Left-side – Information Display (both images): Red ‘Stop’, Pad Identification

Right-side – Information Display: Fluid Type, Time (Start of Deicing) (top image); repeat for Anti-icing, if required; **alternating** with Outside Ambient Temperature (bottom image)

Figure 3-5(c). An electronic message board alternating information to the aircraft receiving deicing/anti-icing treatment

Chapter 4. Aircraft Access and Vehicle Service Roads

4.1 Aircraft Access Routes. Centralized aircraft deicing facilities must have some form of bypass taxiing capability so that aircraft requiring treatment within the facility do not restrict the access by other aircraft to the active runways. Besides supporting departure demand for the anticipated weather conditions, this standard component may offer an aircraft a return route for re-deicing when it exceeds its holdover time. The merging of taxiing routes serving the facility with other taxiing routes should allow the ATCT easy directional control to direct aircraft for deicing treatment or for departure.

a. Holding bays. Some airports do not have enough physical space for facilities to have a separate taxiway for bypass taxiing capability. One alternative for reducing potential bottlenecks is to expand or construct a holding bay. The size of the holding bay should allow aircraft the maneuverability to be deiced/anti-iced while permitting subsequent aircraft bypass taxiing capability. Adequate wingtip-to-wingtip clearances must be provided per table 3-1 of this advisory circular.

b. Design of taxiing access routes for centralized aircraft deicing facilities. Access taxiing routes for centralized aircraft deicing facilities will be designed in accordance with the latest editions of AC 150/5300-13, AC 150/5320-6, and AC 150/5320-12. Additionally, taxiing routes should:

- (1) have a minimum of turns, taxiway intersections, and runway crossings,
- (2) avoid areas that require repeated ATCT clearances, and
- (3) not create potential bottlenecks or operational problems for landing aircraft.

4.2 Vehicle Service Roads. Centralized aircraft deicing facilities may require vehicle service roads or vehicle staging areas to operate more efficiently, to reduce the likelihood of runway incursions by deicing equipment and ground service vehicles, or to operate the environmental alternative for managing deicing fluid runoff. So as not to compromise the emergency response times by aircraft rescue and firefighting (ARFF) vehicles using service roads during periods of heavy deicing vehicle traffic, pullover shoulders should be constructed or similar provisions made for non-emergency response traffic.

a. Operational dependency. Usually, centralized aircraft deicing facilities located in close proximity to the terminal apron(s) depend less on service roads than those facilities located near the departure runways. One possible means of lessening the need for service roads at a centralized facility is to install deicing fluid storage tanks and transfer systems or fixed-fluid applicators. All facilities are recommended to have a service road when no other means, such as a non-active taxiway, is available for mobile deicing vehicles and service vehicles to reach the site. This service road will provide authorized personnel the access necessary to conduct outside-the-aircraft and pre-takeoff contamination checks and to perform deicing/anti-icing treatment.

b. Safety dependency. Reducing potential runway incursions by deicing vehicles and ground service equipment is a safety objective. A service road is recommended when no other means is available to separate deicing vehicles and aircraft traffic from sharing a common taxiway route. For some airports, an extension to an existing service road or perimeter road is sufficient. Depending on the airport's safety programs, physical constraints, etc., service vehicles without the benefit of a vehicle service road may still need to be escorted on taxiways and runways.

c. Environmental dependency. The environmental mitigation alternative needed to manage deicing fluid runoff may require a service road. For instance, a deicing facility with a detention basin may require an extension of a perimeter road to allow airport vehicles to reach the basin for monitoring and metering out permitted discharges. A centralized deicing facility with an underground storage tank or a concrete vault that requires a hauling truck to siphon contaminants for proper disposal may also need a service road.

d. Service road design. Service roads should accommodate deicing vehicle widths and turning radii requirements. Vehicle dimensions and other characteristics related to service road design are described in SAE ARP 4806, Aircraft Deicing/Anti-icing Self Propelled Vehicle, Functional Requirements; SAE ARP 1971, Aircraft Deicing Vehicle – Self-Propelled Large and Small Capacity; and ISO 11077, Aerospace – Self-Propelled De-icing/Anti-icing Vehicles – Functional Requirements. If vehicles use remote staging areas, service roads should be located, to the extent practicable, to minimize runway crossings, repeated ATCT clearances, or airport escorting. Additionally, service roads should:

- (1) have the handling capacity to permit the necessary number of deicing vehicles to transport a quantity of fluid that equals the facility's peak deicing fluid demand.
- (2) have clearly defined circulation routes with the minimum of taxiway and runway crossings to reduce potential incursions. Service roads for airports operating under a SMGCS Plan may require vehicle stop signs, stop bars, and other signs and marking to be installed where they intersect an aircraft movement area operating under the plan.
- (3) be located so as not to create an aircraft hazard or impede emergency response times of ARFF vehicles.
- (4) be bidirectional where vehicle traffic is heavy.
- (5) avoid conflicts with future airport development.
- (6) not create additional congestion and inconveniences to other users.

Chapter 5. Design of Infra-Red Aircraft Deicing Facilities

5.1 Overview. The predominant method for deicing airplanes relies on the application of aqueous solutions of freezing point depressant (FPD) fluids. For **deicing** operations, other methods have been employed, such as the mechanical removal of certain types of contamination from airplane surfaces or the placement of airplanes within a heated hangar to melt or loosen contamination. For **anti-icing** airplanes, the only acceptable method continues to rely solely on the application of an appropriate anti-icing FPD. Today, all available FPDs are glycol-based products. Developments in the ability of infra-red energy to deliver sufficient, targeted energy to contaminated airplane surfaces, as prescribed in paragraph 5.11, makes infra-red technology, **in conjunction with an FAA-approved airplane ground deicing/anti-icing program**, an alternative method to deice airplanes. Figure 5-1 shows the infra-red aircraft deicing facility built at John F. Kennedy International Airport to serve aircraft up to the Boeing 747-200 wingspan. This alternative method offers airport authorities an environmental mitigation benefit because little or no FPD is used during the deicing process. However, since infra-red energy can support only the deicing process, airplanes requiring anti-icing protection must still require an application of appropriate anti-icing FPDs. This chapter provides design standards and recommendations for building infra-red aircraft deicing facility using specified infra-red energy units intended for deicing operations; these specialized energy units differ from other heating devices used in the heating industry. Figure 5-2 illustrates an infra-red aircraft deicing facility test site with an entrance taxiway and an infra-red deicing structure; an anti-icing pad is just out of view.



Figure 5-1. Infra-red deicing facility at John F. Kennedy International Airports with the Boeing 747-200.

5.2 Design Airplane. The design airplane used to design an infra-red deicing facility will in many applications be a composite of several airplanes. A composite airplane allows the designer to take into account the most demanding physical characteristics of airplanes in terms of their size and shape. For example, the composite approach takes into account maximum tail heights plus their shapes, such as the T-shaped tail section of De Havilland Dash-8s; vertical heights of wings fitted with winglets, such as the Airbus 320; and the variations in fuselage lengths within an airplane family, such as the Boeing 737 family.

5.3 Infra-Red Aircraft Deicing Facilities. The following are basic, standard components of an infra-red deicing facility:

- a. Entrance taxiway,
- b. Infra-red deicing structure,
- c. Nighttime lighting,
- d. Computerized gas-powered infra-red energy unit (EU) system,
- e. Facility operations shelter (control center/Snow desk),
- f. Anti-icing capability (area to perform fluid application),
- g. Exit taxiway,
- h. Bypass taxing capability, and
- i. Runoff mitigation measure for de/anti-icing fluids.

As optional equipment, infra-red deicing facility may have ice detection cameras, as described in paragraph 5.9.

5.4 Siting of Infra-Red Aircraft Deicing Facilities. The infra-red aircraft deicing facility must be sited in accordance with paragraph 2.2, FAA Clearance and Separation Standards Affecting Deicing Facilities, of this advisory circular. For air traffic control towers to initiate control and release of aircraft, the perimeter of the facility must be marked in accordance with paragraph 3.4, Pavement Surface Markings for Off-Gate Deicing Facilities, of this advisory circular. With the improved holdover times of current anti-icers, terminal or cargo ramp areas present promising locations for siting infra-red aircraft deicing facilities. For some airports, however, acceptable sites along a taxiway may better complement the type of operation in use during the winter season. Regardless of the chosen site, the ground surrounding an infra-red aircraft deicing facility needs to be properly graded and prepared to support ARFF vehicles. The requirement for grading provides responding ARFF crews with access to any section of the infra-red deicing facility.



Figure 5-2. FAA Boeing 727-100 taxiing into an infra-red deicing structure test site

5.5 Entrance Taxiway. As a design standard, infra-red aircraft deicing facilities must have an entrance taxiway designed, marked, and lighted in accordance with the latest editions of AC 150/5300-13, AC 150/5340-1, and AC 150/5345-46, Specification for Runway and Taxiway Light Fixtures. As a design standard, the section of the entrance taxiway leading into the infra-red deicing structure must be straight and long enough to permit the longest airplane to align its entire fuselage with the taxiway centerline prior to entering the structure.

5.6 Infra-Red Aircraft Deicing Structure. As a design standard, infra-red aircraft deicing facilities must have an infra-red deicing structure where airplanes are deiced by a computerized infra-red energy unit system.

a. Modular truss design. The structure must be designed in accordance with the building code requirements for the jurisdiction having authority. The structure must be of a modular truss design that offers the owner the flexibility to (1) accommodate changes in airplane physical characteristics and (2) relocate the above-ground portion of the structure on a seasonal basis. The structural components must be of an interchangeable type that offers a range of sizes from the same basic structural components in terms of expandable widths, lengths, and heights, each being independent of the other.

b. Modular truss construction and framing materials. Modular truss components used for framing must be made of an aluminum alloy or steel. Steel structures must be galvanized in accordance with ASTM A 123, Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products, to resist corrosion. Each supporting column must be designed and anchored—in accordance with the building code requirements for the jurisdiction having authority—to resist imposed static and dynamic forces, such as wind loads and snow loads. All components, including cross members, fasteners, and bolts, must be positively secured to protect against loosening and the possibility of foreign object damage to airplane turbine engines and propellers.

c. Fabric cover. IDFs must be covered by a fabric material (walls and roof) that is flame-resistant in accordance with the large-scale test in National Fire Protection Association (NFPA) 701, Standard Method of Fire Tests for Flame Propagation of Textiles and Films.

Furthermore, the fabric cover must be easy to repair when damaged and of a PVC-coated fabric, as opposed to laminated, to improve durability and to protect the base fabric from ultraviolet light degradation. Flame spread of all membrane materials exposed within the structure shall be Class A as defined in NFPA 101, Life Safety Code.

d. Lightning protection. As a design standard, the structure must be fitted with lightning protection in accordance with NFPA 780, Standards for the Installation of Lightning Protection Systems.

e. Structure and installation design codes. The structure must be designed in accordance with the building code requirements for the jurisdiction having authority.

f. Fire safety codes. The structure must be designed in accordance with fire code requirements for the jurisdiction having authority.

g. Electrical code. Electric service for the structure must be designed in accordance with the electric code requirements for the jurisdiction having authority. At a minimum, electrical service must be installed in accordance with the provisions for aircraft hangars contained in Article 513, Aircraft Hangars, of NFPA 70, National Electrical Code[®]. Furthermore, all wiring not enclosed in conduits/raceways must be adequately supported, laced, or banded to reduce wear and damage as the result of jet blast or prop wash.

5.7 Nighttime Lighting. As a design standard, infra-red aircraft deicing facilities must provide nighttime lighting within the infra-red deicing structure and, if constructed, exterior lighting for the exterior anti-icing pad. Nighttime lighting helps ground personnel perform deicing/anti-icing processes and airplane inspections more effectively. Interior lighting must be restricted to electric. Lighting for the exterior anti-icing pad must be in accordance with paragraph 2.7, Nighttime Lighting.

5.8 Sizing Infra-Red Aircraft Deicing Structures. The size of infra-red aircraft deicing structure must be determined by clearance requirements that separate the structure framing/infra-red EUs from the design airplane (composite airplane).

a. Length of structure. The length of the structure must equal the length of the design airplane fuselage plus a length for an overhead protective cover (PC). The PC, which is equally divided front and back of the fuselage, serves to reduce or eliminate the amount of falling precipitation onto airplane surfaces. The PC length will be in accordance with table 5-1. Sites customarily experiencing large horizontal dispersion of falling snow and/or frozen precipitation, as can result from strong winds, can minimize such dispersions by orienting the facility centerline perpendicular to such winds.

b. Height of structure. The height of the structure must be such that the closest point of the infra-red EUs and structural framing clears the most demanding airplane tail section by 10 feet (3.0 m). Care in selecting this dimension is necessary since the vertical heights of airplanes vary according to tire pressures and taxiing weights, e.g. operating design empty weight versus maximum design taxiing weight. Therefore, the designer must take into account

the maximum height of all tail sections and their shape as provided by the airplane manufacturer(s).

c. Roof size. The roof of the structure must be arched to maximize the delivered radiant energy by the infra-red EU system and thereby reduce deicing times. Furthermore, the arched-roof must be designed with open ends and be free of ceiling pockets to eliminate the accumulation of engine exhaust and other vapors. In accordance with NFPA 409, Standard on Aircraft Hangars, a 10-foot (3.0 m) clearance must be provided between the arched framing/infra-red EUs and the most demanding airplane wing configuration, i.e., height of wingtips and winglets. The designer needs to take into account height variations of wingtips, especially for airplanes with winglets, when airplanes are not fully loaded with fuel. For example, Boeing publication D6-58326-1, 747-400 Airplane Characteristics for Airport Planning, shows that winglets on the Boeing 747-400 range from approximately 22 feet (6.7 m) to almost 31 feet (9.3 m) above the ground. The designer must use the highest ground clearances provided by airplane manufacturers.

d. Width of structure. The width of the structure must provide the clearance measured horizontally between wingtips/winglets and the structural framing/infra-red EUs in accordance with table 5-2.

e. Wall egress. Each wall must have one egress between placed between two adjacent columns to provide an additional evacuation route for passengers during an emergency. The number of openings along a wall must be in accordance with the jurisdiction having authority, but each opening must not be less than 4 feet (1.2 m) wide by 8 feet (2.5m) in height. The egress must be located behind the wing section and prominently labeled and lighted. If the jurisdiction having authority requires the use of doors, then the doors must be of a non-locking type that opens outwards.

f. Floor design. The floor must be designed to carry the maximum anticipated taxiing weight of the design airplane in accordance with paragraph 3.7(a), Pavement Designs. The floor must be sloped to allow for drainage. If an infra-red deicing structure is placed over an existing taxiway, the taxiway width must be expanded up to the supporting structural columns of the structure. In this case, the transverse grade of the taxiway will be continued for the full-expanded width. The portions of floor that are wider than the existing taxiway must have a load-bearing capacity for the expected vehicle traffic within the structure. The edges of the floor in all cases must be free of any type of continuous curbing.

g. Drainage design. The floor must be designed to prohibit melt off and other runoff from ponding within the structure and to direct runoff in a direction for proper treatment. Any interior drains should be located near the perimeter of the floor to minimize their exposure to aircraft and vehicular traffic. When used, high-strength drainage boxes and covers must be designed in accordance with AC 150/5320-5. Additionally, the design of the drainage system must take into account the ability of the ARFF service to respond unimpeded to emergencies and passengers to evacuate the structure safely. For example, the drainage system leading away from the structure must not be of an open ditch design.

h. Floor markings. The floor must have two types of markings. First, the floor must be marked with a yellow taxiway centerline in accordance with AC 150/5340-1, latest edition. Second, the floor must be marked with a nose wheel stop mark(s) to indicate the proper placement of airplanes under the infra-red EU system. The facility operator should determine the shape and color of the stop mark. Since the infra-red EU system offers the operator the flexibility for zonal application of energies—that is, energizing only portions of the infra-red energy unit system—more than one stop mark may be needed to process smaller, medium sized airplanes.

5.9 Ice Detection Cameras. Infra-red aircraft deicing structures should have ice detection cameras that allow facility operators to scan airplane surfaces for the presence of frozen contamination before and after airplanes are exposed to infra-red energy. The cameras must meet the requirements of SAE AS 5116, Minimum Operational Performance Specification for Remote On-Ground Ice Detection System, latest edition. Cameras may be either a hand-held system or fixed system with color monitors that show degrees of frozen contamination. The color monitor for hand-held cameras are built into the camera itself, while for a fixed system, the color monitor is a separate piece of equipment. If a fixed system is used, the cameras should be placed in a manner that maximizes the surface viewing areas of airplanes.

Table 5-1. Protective cover lengths

Airplane Design Group (ADG)	Protective Cover Length¹
ADG II and Smaller	20 feet (6.1 m)
ADG III and Larger	30 feet (9.1 m)

Note: 1. PC is equally divided front and back of the fuselage.

Airplane Design Group (ADG)	Clearance Distance
ADG II and Smaller	10 feet (3.0 m)
ADG III	15 feet (4.6 m)
ADG IV and Larger	20 feet (6.1 m)

Table 5-2. Horizontal clearances

5.10 Facility Operations Shelter. As a design standard, the infra-red aircraft deicing structure must have an enclosed, temperature-controlled shelter (control center) for facility personnel, with a separate operations room to house the computer system that controls the infra-red EU system, a printer, color monitor(s) for the fixed infra-red ice detection camera(s),

telephones, and other equipment necessary to the operation. The separate operations room is intended to eliminate inadvertent distraction to system operator(s). The operations room must have a window(s) that allows personnel running the infra-red EU system a full view of the operation. The shelter must be located in accordance with the clearances specified in table 5-2. A suitable portable fire extinguisher(s) must be provided in accordance with NFPA 10, Standard for Portable Fire Extinguishers.

5.11 Computer-Controlled Gas-Powered Infra-Red Energy Unit Systems. Gas-powered infra-red EU systems must deliver sufficient radiant energy at appropriate wavelengths that target specific types of contamination without damaging airplanes. Furthermore, systems must be computer-controlled to ensure greater operational control and improved efficiency to remove contaminants. Computer control allows specific infra-red EU systems to vary their energy levels and exposure times independently for zonal applications. Thus, operators can tailor the deicing process to tackle differences in airplane types and sizes and variations in the types and thickness of contamination adhering to the airplane. Therefore, systems must deliver infra-red energy in accordance with the two-part test criteria from the following paragraphs.

An independent lab must evaluate the manufacturer's system to be installed at the airport and analyze the actual energy levels that airplanes will be subjected to. The testing parameters will allow the flexibility for conducting system evaluations either outdoors (preferable due to the separation requirements of the test and limit the size of infra-red EU systems) or in a very large cold chamber. The FAA reserves the right to retest all manufacturers' infra-red EU systems at its discretion.

a. Purpose of contamination removal and heated panel tests. Acceptable infra-red EU systems pass two interrelated tests. Test procedure (TP) #1, Contamination Removal, evaluates the system's capacity to deliver sufficient focused infra-red energy to remove artificially produced ice layers of specified thicknesses from test panels within specified time frames. Test procedure (TP) #2, Heated Panel, evaluates the system's performance settings used in TP #1 to evaluate the potential for the system to overheat uncontaminated (cleaned) test panels beyond a prescribed maximum surface temperature. System evaluations must be conducted in accordance with the test methods outlined in paragraph 5.11(d). Although the evaluation tests are based on a 10-foot (3.05 m) separation between the panels and infra-red EU system, the majority of the infra-red EUs within a system in field applications will operate at much greater distances. Infra-red EU systems are intended to work effectively at greater distances, such as 20 to 30 feet (6 to 9 m) or more from some aircraft sections. For example, some infra-red EUs aimed at the midwing sections and the upper fuselage will be placed much more than 10 feet away (3 m).

b. Test locations and conditions. Independent labs must conduct evaluations either in a large cold chamber or, preferably, outdoors under the following conditions: cold chamber or ambient outdoor temperature at or below 28°F ± 2°F (−2.5°C ± 1.0°C) with winds not exceeding 10 mph (16 km/hr.)

c. Independent testing lab report. The independent testing lab report must contain:

- (1) for TP #1, the actual observed times necessary to remove completely the contamination thicknesses for each tested panel,
- (2) for TP #2, a temperature rise over time profile graph that notes the highest recorded temperature for each tested panel,
- (3) photographs showing the system's setup over the inclined supporting structure that holds the test panels,
- (4) separation distances from the infra-red EUs to the test panels,
- (5) ambient outdoor or cold chamber temperature and wind conditions at the start and conclusion of the evaluations, and
- (6) statement of success or failure for the candidate system. Specific failure(s) of a testing requirement(s) will be noted.

For pass/fail determinations, complete ice removal is defined as the absence of ice, which has undergone a physical change to water or vapor, from the entire upper surface of a test panel, excluding water droplets from the drip edge. Also, since the testing panels are inclined, portions of ice sheets that disbond and slide off the testing panels due to the effect of gravity are considered to be "completely removed", i.e., meeting the intent of TP #1.

d. Testing methods and materials for contamination removal and heated panel tests.

Testing Materials:

(1) **Test panels**, six in all, will be 3-foot square by 1/8-inch thick flat sheets of aluminum alloy SAE Aerospace Material Specification (AMS) 4037 in accordance with AMS 1428, Fluid, Aircraft Deicing/Anti-icing, Non-Newtonian (Pseudo plastic), SAE Types II, II and IV, latest edition.

(2) **Artificial ice** will be produced by freezing ASTM D 1193, Standard Specification for Reagent Water, Type IV water.

(3) **Set up an Inclined Supporting Stand (ISS)** to secure and support three separated test panels simultaneously in an inclined position. The ISS must be able to secure test panels so the lower drip edge of the test panels are 3 feet \pm 1 inch (91.5 cm \pm 2.5 cm) above the floor and provide a +10 degree \pm 1.0 degree incline from the horizontal. The ISS must have a means to eliminate sagging of the test panel, which in turn may cause breakage of the artificial ice layer (for example, ISSs should have a center structural member to eliminate sagging). Furthermore, ISSs should be on wheels/casters to allow them, once test panels are secured, to be rolled into position beneath the candidate infra-red EU system.

5.11.1 Test Procedure: TP #1 Contamination Removal

Step 1: Setup of overhead infra-red EU system. Position the candidate infra-red EU system directly above the ISS with three clean test panels (see paragraph 5.11(d)(3) for height requirements) such that the lowest part of the system (EU housing) is at a distance of 10 feet \pm 1 inch (3.05 m \pm 2.5 cm) above the top of the three test panels. Regardless of the system's arrangement, all EUs must be at least 10 feet (3.05 m) away from the test panels. Mark the location of the ISS on the floor. Floor markings will later be used to reposition the ISS with secured test panels for actual test runs.

Step 2: Artificial ice. Prepare six test panels, individually numbered with an artificially produced ice layer. Test panels will have temporary walls attached to their edges to create a ½-inch (1.27 cm) high dam effect. (The dam effect can be obtained by using paraffin wax, silicon, or caulking compound to hold water.) Pour Type IV water into the six test panels to obtain three test panels with a depth of ⅛ inch \pm 1/16 inch (0.32 cm \pm 0.16 cm) and three test panels with a depth of ¼ inch \pm 1/16 inch (0.64 cm \pm 0.16 cm). To help measure the water depth, five small rubber washers having the prescribed depths can be used. The five rubber washers will be placed in a "T pattern" (not an "X pattern") one centered and four placed approximately 6 inches (15.25 cm) from the edges. Cold store test panels with washers at 25 to 28°F (-4.0 to -2.5°C) for at least 8 hours to allow the Type IV water to freeze completely. All temporary walls are to be removed carefully prior to exposing test panels with infra-red energy.

Step 3: Inclined test panels. Carefully place three test panels with ¼-inch ice thickness, separated horizontally by 1 foot (30.5 cm), onto the ISS. Make sure the lower edge of the test panels are slightly below the ISS, approximately ½ inch (1.25 cm), to allow ice melt to flow freely off the inclined test panels. **Precaution:** Panels need to be secured in a "flat as possible" manner to eliminate ice breakage due to sagging or bending of the test panels.

Step 4: Time recording. After the infra-red EU system achieves equilibrium (expected settings in actual field operations), roll the ISS with secured test panels underneath the system and reposition the ISS using the step #1 floor markings. Commence time recording immediately. The clock is stopped for each test panel once all observable ice contamination is removed from the entire upper surface. Record the time required for all three test panels. Test panels can have water droplets on the drip edges, and panels need not be completely dried. The longest time duration recorded for this ice thickness will be used to determine acceptance in accordance with table 5-3. Repeat steps #3 and #4 with the ⅛-inch contaminated test panels.

5.11.2 Test Procedure: TP #2 Heated Panel

Step 1: Setup of overhead infra-red EU system. Evaluate the identical infra-red EU system and ISS setup used for TP #1, step 1.

Step 2: Acclimated test panels. Cold store six clean, uncontaminated test panels at 25 to 28°F (-4.0 to -2.5°C) for 3 hours.

Step 3: Inclined test panels. Secure three clean, uncontaminated test panels in the same position as described in TP #1, step 3.

Step 4: Thermocouple placement. Attach two thermocouples down the middle of each test panel so they record the surface temperature of the test panel. Place the first thermocouple 1 foot (30.5 cm) from the top of the test panel. Place the second thermocouple 1 foot (30.5 cm) below the first thermocouple. Cover the housing of the thermocouple in such a manner as to minimize a temperature rise in the thermocouple itself as a result of infra-red energy exposure. Thermocouples used must have an operating temperature reading range from at least +10 to +250°F (-12 to +121°C) with a tolerance of 1°F (0.5°C).

Step 5: Time recording. Energize the infra-red EU system to the same power settings used to remove the 1/4-inch ice contamination in TP #1, step 4. Once the system is in equilibrium, reposition the ISS and commence time and temperature recording. Record the continuous surface temperature rise of each test panel for a total exposure time of 10 minutes. Repeat TP #2, steps 3, 4, and 5, for the 1/8-inch power settings. Acceptable systems are those where the maximum temperature rise as measured in step 5 of TP #2 for all six test panels remains below 150°F (65.5°C).

Table 5-3. Acceptance criteria for contamination removal by infra-red EU systems

Contamination Type and Thickness	Maximum Removal Time Permitted (minutes)
1/8-inch Ice	8
1/4-inch Ice	15

5.12 Installation of Infra-Red Energy Unit Systems. Installed infra-red EU systems must be gas-fueled. Individual infra-red EUs that comprise the system will be at least 10 feet (3.0 m) away from airplane surfaces for the airplanes expected to use the facility. Gas-fueled infra-red EU systems, which include the gas supply and, if present, storage vessels, must be installed in accordance with NFPA 54, National Fuel Gas Code. The main gas supply system(s) will be equipped with manually operated control valves and emergency safety shutoff valve(s). The manually operated valves must be located at strategic points inside and immediately outside the structure so the main gas supply can be shut down quickly in the event of an emergency. A placard must indicate the location of all red-coded control and emergency safety shutoff valve(s).

5.13 Infra-Red Energy Unit System Configuration.

a. Infra-red energy zones. The entire infra-red EU system must be placed in an overhead configuration that provides effective infra-red energy to the design airplane. Additionally, the configuration must consist of independently operated energy zones that allow the operator to use all energy zones in the system or pre-selected energy zones. For example, the operator could use only those energy zones that are better suited for small airplane applications.

b. Maintenance. Infra-red EU systems must be located in areas that do not subject them to damage by aircraft or ground equipment. Provisions must be made to ensure accessibility to individual infra-red EUs for scheduled maintenance purposes.

5.14 Computer Hardware/Performance.

a. Hardware. Infra-red EU systems must employ computer hardware consisting of a processing unit, color monitor, and printer. The computer must have the operating capability to perform software routines with sufficient speed and memory for data evaluation/records.

b. Software routines. Software routines may be initiated by keyboard and/or by a touch screen monitor. The software must have a routine that automatically self-imposes a system shutdown when the system itself acknowledges a problem. Furthermore, the software must have routines that allow the operator to:

- (1) pre-warm the structure,
- (2) regulate the amount of focused infra-red energy through variable power settings to remove the various types of contamination and various airplane configurations,
- (3) regulate the duration of infra-red energy application for each power setting,
- (4) energize specific infra-red EUs and at different infra-red energies for zonal applications,
- (5) shutdown the entire system with a single command button,
- (6) print records detailing airplane designation, time of entry to structure, energy settings used and their duration, and time of completion, and
- (7) receive warning(s) as required by the authority having jurisdiction to indicate a problem has occurred with the infra-red EU system.

5.15 Anti-Icing Capability. Infra-red aircraft deicing facilities will provide the facility operator with the capability to anti-ice airplanes in one of two ways.

a. Interior anti-icing operations. The clearance criteria for sizing infra-red deicing structures is such that sufficient clearance is afforded for deicing trucks to perform anti-icing operations within the structure. Depending on where the infra-red deicing structure is placed, a paved vehicle staging area may be necessary. That is, deicing trucks will have a staging area(s) that allows untreated and treated airplanes to enter and exit the structure safely.

b. Exterior anti-icing pad. If a determination is made to perform exterior anti-icing operations, then a dedicated uncovered anti-icing pad will be required. Generally, the anti-icing pad will be located directly in line with the infra-red deicing structure. It is recommended that the anti-icing pad, which consists of the aircraft parking area and the vehicle maneuvering area, be at least 20 feet (6 m) from the opening of the infra-red structure. The anti-icing pad must be marked with a yellow taxiway centerline and lighted in accordance with the latest editions of AC 150/5340-1 and AC 150/5345-46. The length of the anti-icing pad must be in accordance with paragraph 3.1, Aircraft Deicing Pads, of this advisory circular. The anti-icing pad must be 10 feet (3 m) wider than specified in paragraph 3.1. The 10-foot (3 m) increase is used to provide a 10-foot (3 m) vehicle safety zone for parking and staging mobile deicing trucks.

5.16 Exit Taxiway. As a design standard, infra-red aircraft deicing facilities must have an exit taxiway designed, marked, and lighted in accordance with AC 150/5300-13, AC 150/5340-1, and AC 150/5345-46, latest editions. The section of the exit taxiway leading out of the infra-red deicing structure must be straight and long enough to permit the longest exiting airplane to completely clear the structure before initiating a turn.

5.17 Bypass Taxiing Capability. As a design standard, infra-red aircraft deicing facilities will provide a taxiway route to by-pass the infra-red aircraft deicing facility in accordance with paragraph 2.8, Bypass Taxiing Capability.

5.18 Runoff Mitigation. As a design standard, infra-red aircraft deicing facilities must have a runoff mitigation structure(s) that permits proper disposal of glycol-based products in accordance with Chapter 6, Water Quality Mitigation.

Chapter 6. Water Quality Mitigation

6.1 Runoff Mitigation Structures. Since deicing/anti-icing fluids are chemical products that have environmental consequences that affect the water quality of receiving waters and the aquatic communities that use those waters, deicing facilities must have runoff mitigation structures. The recommended structures are those that compose a mitigating alternative that collects and retains runoff for proper disposal or recycling. In terms of structural best management practices, this approach to “control the source” offers airport managers an effective and economical means of complying with storm water permitting requirements. AC 150/5320-15, Management of Airport Industrial Waste, provides additional best management practices for mitigating various types of pollutants from entering storm water runoff conveyances. AC 150/5320-15 also includes basic information on the characteristics, management and regulations of industrial wastes generated at airports. Guidance for the development of a Storm Water Prevention Plan (SWPPP) that applies best management practices to eliminate, prevent, or reduce pollutants in storm water runoff associated with particular airport industrial activities is also provided.

a. Treatment advantages. The approach to “control the source” offers two treatment advantages. First, it lessens the difficulty of dealing with the facility’s deicer runoff by isolating it from airfield storm sewers or from terminal areas that do not divert seasonal flows of glycols. Second, deicing facilities enhance the feasibility and economic benefits of recycling glycols by collecting higher glycol concentrations, as compared to drainage systems where glycols are further diluted with other runoff and precipitation.

b. Treatment parameters. Biochemical oxygen demand (BOD) and toxicity are the primary runoff effects the alternative needs to mitigate. The additives in fluids may have an effect on the overall biodegradability. Depending on the type of discharge permit, the alternative would need to monitor specific items, generally based on BOD₅, chemical oxygen demand (COD), total organic carbon (TOC), total suspended solids (TSS), oil/grease, pH, and flow rate limits.

6.2 Mitigation Alternatives. The mitigation alternative should allow users of the deicing facility continued use of deicing fluids within the framework of Federal, state, and local storm water runoff regulations (discharge permits). The FAA strongly recommends the Federal, state, or local environmental authority having jurisdiction review the proposed alternative to verify its effectiveness in meeting water quality permit requirements (see paragraph 1.3, Project Input). Prior to final selection, all alternatives should be evaluated on a lifecycle cost basis to avoid an accepted long-term alternative with a short useful life; for an example, see paragraph 6.3, Publicly Owned Treatment Works (POTWs). Additionally, it should reflect the best alternative afforded by the facility’s site and integration with the airport master drainage plan. A few alternatives are an:

a. off-airport biochemical treatment of facility runoff at POTWs by way of a sanitary sewer. See paragraph 6.3 for additional guidance.

b. on-airport detention basin with a pump station for discharging metered runoff to receiving waters by an airport storm sewer. See paragraph 6.4, Detention Basins, for additional guidance.

c. on-airport anaerobic biochemical reactor for pre-treatment of runoff prior to discharge to POTWs or a detention basin. See paragraph 6.7, Anaerobic Bioremediation Systems.

d. on-airport underground storage tanks (USTs) or concrete vaults for detention of runoff that hauling tankers can pump out for proper disposal. Airports lacking the physical space for detention ponds can consider placing USTs near the deicing facility. See paragraph 6.5, Underground Storage Tanks (USTs), for additional guidance.

e. on-airport recycling system. See paragraph 6.6, Recycling Glycol Fluids, for additional guidance.

f. diversion boxes for diverting seasonal glycol runoff to a specific location, such as a detention basin. Depending on the site and storm water permitting requirements, one of the above alternatives and/or other technologies working in tandem should provide the airport manager with an effective alternative acceptable to Federal, state, and local environmental authorities.

6.3 Publicly Owned Treatment Works (POTWs). Off-airport biochemical treatment of facility runoff at POTWs is a proven mitigation alternative. This alternative normally requires the airport manager to monitor flow volumes and pretreat glycol-contaminated storm water to protect the receiving POTW facility; for an example, see paragraph 6.7, Anaerobic Bioremediation Systems. Areas of probable pretreatment are high BOD₅, COD, TOC, TSS, pH, and oil/grease. Of these, treatment of glycol BOD loads is of primary concern since some data show an impact load of approximately 3,000 times that of raw human sewage. To protect POTWs, the U.S. Environmental Protection Agency (USEPA) developed a national pretreatment strategy (1977) under the Clean Water Act. The regulations were published as Title 40 Code of Federal Regulations (CFR), Part 403, General Pretreatment Regulations for Existing and New Sources of Pollution. Regardless of the size of the surrounding community, airport authorities considering this alternative should not only evaluate the POTW's current capacity, but whether it can accept both future load demands from the airport and a growing community.

6.4 Detention Basins. For airports with available physical space, an economical alternative to treating "first flush" runoff from deicing facilities is with a single or series of detention basins. The state or local authority having jurisdiction generally sets construction and design standards. Impermeable liners to protect the groundwater and/or monitoring wells to detect breached liners will likely be required.

a. **Sizing.** The biodegradability rate, which varies by glycol types, is a primary factor for determining basin capacity. Basin capacity can be reduced by taking into account the slower microbial activity during the winter season and the greater concentration of available oxygen in colder water. Dissolved oxygen is normally expressed in parts per million or other concentrations. Detention of ethylene glycol, which degrades quicker than propylene glycol, permits earlier metered discharges and, thus, reduced basin capacity.

b. **Mechanical aeration.** The quick consumption of available oxygen levels within basins by glycol can lead to anaerobic conditions (lack of oxygen). This condition leads to undesirable odors due to the adverse impacts to bacterial generation necessary for glycol

degradation. A recommended corrective action is to install a mechanical aeration system to replenish oxygen levels. This supplemental acceleration of biodegradation, and earlier discharging of glycols, further reduces a basin's capacity. The installed system should maintain dissolved oxygen levels at the level that places the alternative in environmental compliance. For some basins, pump stations and force mains may be required if the discharge cannot reach the desired outfall locations.

c. Wildlife management. AC 150/5320-15 and AC 150/5200-33, Hazardous Wildlife Attractants On or Near Airports, provide recommended configurations and site location for detention basins to minimize potential wildlife issues. Non-enclosed detention basins must not be situated under or adjacent to runway approaches.

d. Other features. Additional design features may be necessary if runway deicers containing urea or other effluents are collected within a basin that contains nutrients for plant growth. For instance, the growth of algae blooms under the right conditions may be considered suspended solids by some environmental authorities. Their inclusion in the TSS discharge limit may cause this alternative to exceed permitted levels.

6.5 Underground Storage Tanks (USTs). UST systems that collect ethylene glycol deicing fluids are regulated under the USEPA UST regulations, i.e., 40 CFR, Part 280, Technical Standards and Corrective Action Requirements for Owners and Operators of Underground Storage Tanks (UST), and Part 281, Approval of State Underground Storage Tank Programs. Though other types of glycols are available that may not be regulated and thus not require USTs, UST systems have the potential to collect a regulated substance such as aviation fuel. Because of this potential and future use of ethylene glycol-based fluids by tenants, the FAA recommends this alternative be designed in accordance with applicable USEPA and state UST regulations. For facilities used on a yearly basis, this alternative may collect regulated substances when the deicing pads are used for washing the exterior of aircraft. If a UST is the final collection point, a rigid pad with catch basin may be required for hauling tankers.

6.6 Recycling Glycol Fluids. Depending on the nature of the runoff and economics, it may be possible to use improved technologies that recycle spent glycol fluids collected at concentrations of 5 percent and, under certain conditions, even lower percentages. The recycling of fluid types that offer longer holdover times compared to Type I fluids is normally more demanding because of special polymers. This problem, however, is resolved by adding an extra processing step, thus making recycling an economical alternative. Recycling provides airport management with two valued resources: recycled glycol and water. In addition to recouping some of the chemical cost for glycol and the utility cost for water, other recycling benefits may be reduced sludge disposal costs incurred by other mitigation alternatives and less physical space needed for equipment.

a. Recycled glycol fluids. Recycling glycol may lower disposal cost of effluent through the resale of recovered product to fluid manufacturers or to other secondary markets. Prior to using recycled glycols as the primary aircraft deicer/anti-icer fluid, recertification in accordance with established industry standards is necessary, e.g., SAE, ISO. Also, recycled glycol fluids may be reused on the airfield pavements if they meet the appropriate glycol-based runway fluid specifications in AC 150/5200-30.

b. Recycled water. The limited availability and high cost of water for some airports may make recycling a cost-effective runoff mitigation alternative. Airport management can commit recovered water, if permitted, to irrigate airport landscapes, wash airport/aircraft equipment, or use for other non-potable water purposes.

6.7 Anaerobic Bioremediation Systems. Anaerobic bioremediation systems in conjunction with POTWs or detention basins can be an effective means of disposing of glycol-contaminated storm water. The bioremediation system generally consists of a glycol contaminated storm water collection and storage system, a bioreactor treatment system, and a gas/heat recovery system. Today, many POTWs will only accept limited quantities of glycol-contaminated storm water. Anaerobic systems, depending on the airport's discharge permit, can reduce BOD₅ concentration levels sufficiently to permit unrestricted disposal to a POTW. For example, one airport-tested system reduced the oxygen demand of incoming glycol-contaminated runoff by over 98 percent. For those cases where POTWs continue to impose discharge restrictions, the lowered BOD₅ concentration level may allow an increase to the permitted discharge rate. Regarding detention basins, the presence of high glycol concentrations usually makes complete treatment more difficult. Treatment under such conditions normally requires considerably more energy for aeration systems and produce large amounts of excess biomass, which, in turn, needs proper disposal. Anaerobic systems not only reduce high BOD₅ concentration levels but produce significantly less biomass. When biomass is a problem, anaerobic systems can use activated carbon as the media for attaching the biomass. Furthermore, these systems have demonstrated an additional ability to remove or lower to non-detectable levels "additive packages" that are necessary in deicer products from collected runoff. An economic benefit of the anaerobic process is that it converts glycol in runoff to methane gas that can be used for heating.