

CHANGE**U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION****8260.46D
CHG 3**

National Policy

Effective Date:
12/31/2012**SUBJ: Departure Procedure (DP) Program**

1. Purpose. This order provides policy, guidance, and standardization for initiating, developing, processing, and managing the Departure Procedure program.

2. Who this change affects. The primary audience for this Order is AeroNav Products, who have the responsibility to develop instrument departure procedures and other instrument flight procedure (IFP) providers. The secondary audience includes other Air Traffic Organization (ATO) Service Area offices and Flight Standards headquarters and regional office Divisions/Branches.

3. Where You Can Find This Change. You can find this order on the Directives Management System (DMS) Website: http://www.faa.gov/regulations_policies/orders_notices

4. Effective Date. This Order and subsequent changes are effective on the dates shown in the upper left corner of each page. Implementation of changes must commence no later than 24 months from the published effective date. Previous editions may be used until implementation has commenced, not to exceed 24 months from the new effective date.

5. Explanation of changes.

a. Chapter 1. Added guidance on timeline for implementation of changes.

b. Chapter 2.

(1) Paragraph 2-1b(11). Revised guidance to require a note be established to inform the pilot to obtain approval from ATC with their IFR clearance when executing the VCOA.

(2) Paragraph 2-1b(13). Expanded guidance to better control opting-out of publishing a VCOA at locations where they are needed.

(3) Paragraph 2-1d(2). Added climb gradient limit for helicopter procedures.

(4) Paragraph 2-1d(6) (Added). Added statement that "Except for departures that use Radar vectors to join RNAV routes, RNAV departure procedures must only serve one airport" to match appendix E, paragraph 10.

(5) Paragraph 2-1d(7) (Added). Added statement to prohibit multiple departure courses initially on departure and different equipment requirements; separate procedure must be established when this would be required.

(6) Paragraph 2-1e(1). Expanded “Charting Altitudes” guidance to address limitations associated with publishing minimum, maximum, and mandatory altitudes. This guidance was previously addressed in Appendix D, Section 2, and Appendix E, Section 1, and has now been consolidated into this paragraph.

(7) Paragraph 2-1e(2). Clarified climb gradient application and requirements.

(8) Paragraph 2-1h (Added). Added reference to Diverse Vector Area (DVA).

(9) Paragraph 2-2a(3). Added guidance for when canceling a DVA.

(10) Paragraph 2-2c(11). Added responsibility for ATC to collaborate with AFS-470 when an Attention All Users Page (AAUP) is necessary for RNAV departure procedures.

(11) Paragraph 2-2d(2). Deleted reference to FPT OE/AAA responsibilities and made editorial changes for clarity. OE/AAA responsibilities are defined in Order 8260.19, Chapter 5, Section 1.

(12) Paragraph 2-2e. Inserted a new subparagraph 4 to indicate AeroNav Products responsibility for DVA development and renumbered paragraphs that followed.

(13) Paragraph 2-2g(10) Added. Added requirement for NFDC to process Form 8260-15E (AAUP) when provided.

(14) Paragraph 2-5a. Added “standard takeoff minimums.”

(15) Paragraph 2-5a(4). Added Form 8260-15D to document DVA.

(16) Paragraph 2-5a(5). Added Form 8260-15E to document AAUP.

(17) Paragraph 2-6 (added). Added guidance to define amendment process for departure procedures.

c. Appendix A.

(1) Paragraph 1k(2). Deleted references to “(ATC)” annotated altitudes.

(2) Paragraph 1l. Added standard climb gradient for helicopters and replaced “ATC” with “crossing” as these altitude requirements may not be solely ATC driven.

(3) Paragraph 2d. Added RNP references and editorial changes.

- (4) Paragraph 2e. Editorial changes.
- (5) Paragraph 2f. Editorial changes and added paragraph reference for amendment process.
- (6) Paragraph 5b. Added altitude limitations to VA leg type guidance and editorial changes.
- (7) Paragraph 5d. Removed guidance that pointed to the application of criteria levels specified in Order 8260.44. Paragraph e now becomes paragraph d, Chart Annotation.
- (8) Paragraph 5d. Editorial changes made within the paragraph and added RNP Departure guidance.

d. Appendix B.

- (1) Paragraph 5. Editorial change to clearly define when a specific frequency must be specified for charting.
- (2) Worksheet on page B-5, paragraph 5. Editorial change to clearly define when a specific frequency must be specified for charting.

e. Appendix D.

- (1) Section 1, paragraph 4. Last sentence changed to have Regional Flight Standards Division, NextGen Branch (RNGB) enter the effective date for Special procedures.
- (2) Section 1, paragraph 6c(2). Editorial clarification.
- (3) Section 1, paragraph 7a(7). Deleted. Moved VCOA information to a new paragraph 8 devoted to VCOA documentation.
- (4) Section 1, paragraph 8 (New). Created independent paragraph for VCOA.
- (5) Section 1, paragraph 9a. Added paragraph reference.
- (6) Section 1, paragraph 10a. Added guidance for documenting when there is more than one controlling obstacle and describe which entity each applies too.
- (7) Section 1, paragraph 10b. Changed “TERRAIN” to “ANTENNA.”
- (8) Section 1, paragraph 12. Editorial change and added “validation.”
- (9) Section 1, paragraph 13. Added guidance for other instrument flight procedure (IFP) providers.

(10) Section 1, paragraph 14. Added guidance for other instrument flight procedure (IFP) providers and added “the manager” to last sentence.

(11) Section 1, paragraph 18c. Added text for clarity.

(12) Section 2, paragraph 1f. Last sentence changed to have Regional Flight Standards Division, NextGen Branch (RNGB) enter the effective date for Special procedures.

(13) Section 2, Paragraph 3. Added guidance to describe when “thence” is used in a departure route description.

(14) Section 2, paragraph 3a. Removed “(ODP/SID)” and added an example for an “at or below” altitude.

(15) Section 2, paragraph 3b. Revised paragraph under the title of “Altitude restrictions requested by ATC (not authorized for ODPs)” and revised subparagraphs on this subject. These subparagraphs provide guidance on what to do when faced with ATC requests for crossing altitudes to meet local operational needs. Deleted requirement that mandated an “at or above” altitude whenever an “at or below” altitude was established for ATC operational needs. Moved remaining guidance to paragraph 2-1e(1).

(16) Section 2, paragraph 5a. Corrected paragraph reference.

(17) Section 2, paragraph 5d. Removed all references to ATC climb gradient.

(18) Section 2, paragraph 7a. Added guidance for documenting when there is more than one controlling obstacle and describe which entity each applies too.

(19) Section 2, paragraph 7b. Changed “TERRAIN” to “ANTENNA.”

(20) Section 2, paragraph 11. Editorial change to clearly define when a specific frequency must be specified for charting.

(21) Section 2, paragraph 12. Editorial changes.

(22) Section 2, paragraph 13. Inserted Remarks guidance to match what already appears in Remarks guidance for Form 8260-15A.

(23) Section 2, paragraph 14. Editorial change and added “validation.”

(24) Section 2, paragraph 15. Added guidance for other instrument flight procedure (IFP) providers.

(25) Section 2, paragraph 16. Added guidance for other instrument flight procedure (IFP) providers and added “the manager” to last sentence.

f. Appendix E.

(1) Section 1, paragraph 1f. Last sentence changed to have Regional Flight Standards Division, NextGen Branch (RNGB) enter the effective date for Special procedures.

(2) Section 1, Paragraph 3. Added guidance to describe when “thence” is used in a departure route description.

(3) Section 1, paragraph 3a. Removed “(ODP/SID)” and added an example for an “at or below” altitude.

(4) Section 1, paragraph 3b. Revised paragraph under the title of “Altitude restrictions requested by ATC (not authorized for ODPs)” and revised subparagraphs on this subject. These subparagraphs provide guidance on what to do when faced with ATC requests for crossing altitudes to meet local operational needs. Deleted requirement that mandated an “at or above” altitude whenever an “at or below” altitude was established for ATC operational needs. Moved remaining guidance to paragraph 2-1e(1).

(5) Section 1, paragraph 5d. Removed all references to ATC climb gradient.

(6) Section 1, paragraph 7a. Added guidance for documenting when there is more than one controlling obstacle and describe which entity each applies too.

(7) Section 1, paragraph 7b. Changed “TERRAIN” to “ANTENNA.”

(8) Section 1, paragraph 10. Editorial change to replace “RDVA” with proper terms and replaced “may” with “must.”

(9) Section 1, paragraph 11. Editorial change to clearly define when a specific frequency must be specified for charting.

(10) Section 1, paragraph 13. Inserted Remarks guidance to match what already appears in Remarks guidance for Form 8260-15A.

(11) Section 1, paragraph 14. Editorial change and added “validation.”

(12) Section 1, paragraph 15. Added guidance for other instrument flight procedure (IFP) providers.

(13) Section 1, paragraph 16. Added guidance for other instrument flight procedure (IFP) providers and added “the manager” to last sentence.

(14) Section 1, figure E-3. Added speed restriction to sample Form.

(15) Section 3 (Added). Added Instructions and sample Form for completing RNAV departure procedure Attention All Users Page (AAUP).

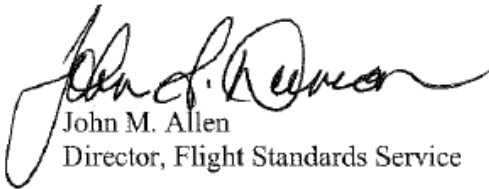
g. Appendix F. Appendix created to provide guidance for processing Helicopter RNAV departure procedures from VFR heliports and sample forms.

h. Appendix G. Appendix is now “Instructions for Completing Form 8260-15D.” This was moved from Order 8260.56, Diverse Vector Area (DVA) Evaluation, appendix B, without any changes made to content.

i. Appendix H.

(1) The former Appendix G has now become Appendix H.

(2) Revised VCOA definition to match definition in Pilot/Controller Glossary.



John M. Allen
Director, Flight Standards Service

PAGE CHANGE CONTROL CHART

Remove Pages	Dated	Insert Pages	Dated
i thru ii	04/14/11	i thru ii	12/31/12
1-1 thru 1-2	04/14/11	1-1 thru 1-2	12/31/12
2-1 thru 2-2	04/14/11	2-1 thru 2-2	12/31/12
2-3 thru 2-16	09/30/11	2-3 thru 2-18	12/31/12
A-1 thru A-6	04/14/11	A-1 thru A-6	12/31/12
A-7 thru A-10	09/30/11	A-7 thru A-10	12/31/12
B-1 thru B-2	04/14/11	B-1 thru B-2	12/31/12
B-5 thru B-6	08/20/09	B-5 thru B-6	12/31/12
D-1 thru D-16	04/14/11	D-1 thru D-16	12/31/12
D-17 thru D-22	09/30/11	D-17 thru D-22	12/31/12
D-23 thru D-24	04/14/11	D-23 thru D-24	12/31/12
D-25 thru D-26	09/30/11	D-25 thru D-28	12/31/12
E-1 thru E-2	09/30/11	E-1 thru E-2	12/31/12
E-5 thru E-8	09/30/11	E-5 thru E-8	12/31/12
E-9 thru E-10	04/14/11	E-9 thru E-10	12/31/12
E-11 thru E-14	09/30/11	E-11 thru E-14	12/31/12
E-17 thru E-18	08/20/09	E-17 thru E-18	12/31/12
E-19 thru E-20	04/14/11	E-19 thru E-20	12/31/12
E-27 thru E-28	09/30/11	E-27 thru E-28	12/31/12
NEW		E-33 thru E-36	12/31/12
F-1 thru F-2	08/20/09	F-1 thru F-10	12/31/12
G-1 thru G-6	04/14/11	G-1 thru G-6	12/31/12
NEW		H-1 thru H-6	12/31/12

THIS PAGE IS INTENTIONALLY LEFT BLANK

TABLE OF CONTENTS

Paragraph	Page
Chapter 1. General Information	
1-1. Purpose of This Order -----	1-1
1-2. Audience -----	1-1
1-3. Where You Can Find This Order -----	1-1
1-4. What This Order Cancels -----	1-1
1-5. Effective Date -----	1-1
1-6. Explanation of Changes -----	1-1
Chapter 2. Responsibilities	
2-1. Departure Procedure Guidelines -----	2-1
2-2. Responsibilities-----	2-10
2-3. Accuracy Verification and Responsibilities -----	2-14
2-4. Military Departure Procedures -----	2-14
2-5. FAA 8260-15 Series Forms-----	2-15
2-6. Procedure Amendments -----	2-17
Appendix A. Guidelines for the Design of Graphic Instrument Departure Procedures (DPs) (Pages 1-10)	
Appendix B. Instructions for Completing Graphic Departure Procedure (DP) Requirements Worksheet (Pages 1-8)	
Appendix C. Instructions for Completing FAA Form 8260-2, Data Worksheet (Pages 1-4)	
Appendix D. Instructions for Completing FAA Form 8260-15A, Takeoff Minimums and Obstacle Departure Procedures (ODP) and Sample Forms (Pages 1-16)	
Instructions for Completing FAA Form 8260-15B, Graphic Departure Procedure (DP) [Non-RNAV Departure Procedures] and Sample Forms (Pages 17-28)	
Appendix E. Instructions for Completing FAA Form 8260-15B, Graphic Departure Procedures (DPs) [RNAV and RNP Departure Procedures] and Sample Forms (Pages 1-20)	
Instructions for Completing FAA Form 8260-15C, Departure (Data Record) and Sample Forms (Pages 21-32)	
Instructions for Completing FAA Form 8260-15E, RNAV Departure Procedure Attention All Users Page (AAUP) [RNAV Departure Procedure] and Sample Forms (Pages 33-36)	

TABLE OF CONTENTS (Continued)

Paragraph		Page
Appendix F.	Helicopter RNAV Departure Procedures	
1.	General-----	F-1
2.	Departure Procedure -----	F-1
3.	Documentation-----	F-2
Appendix G.	Instructions for Completing FAA Form 8260-15D.	
1.	Documentation-----	G-1
Appendix H.	Administrative Information	
1.	Distribution-----	H-1
2.	Background-----	H-1
3.	Definitions-----	H-1
4.	Related Publications-----	H-4
5.	Forms and Reports -----	H-5
6.	Information Update-----	H-6

Chapter 1. General Information

1-1. Purpose of This Order. This order provides policy, guidance, and standardization for initiating, developing, processing, and managing the DP program.

1-2. Audience. The primary audience for this Order is AeroNav Products employees, who have the responsibility to develop instrument departure procedures. The secondary audience includes other Air Traffic Organization (ATO) Service Area offices and Flight Standards headquarters and regional office Divisions/Branches.

1-3. Where You Can Find This Order. This Order can be found on the Directives Management System (DMIS) Web site at https://employees.faa.gov/tools_resources/orders_notices. This Order is available to the public at http://www.faa.gov/regulations_policies/orders_notices.

1-4. What this Order Cancels. Order 8260.46C, Departure Procedure (DP) Program, dated August 5, 2005.

1-5. Effective Date. This Order and subsequent changes are effective on the dates shown in the upper left corner of each page. Implementation of changes must commence no later than 24 months from the published effective date. Previous editions may be used until implementation has commenced, not to exceed 24 months from the new effective date.

1-6. Explanation of Changes.

a. General. Formatting revised to meet current Federal Aviation Administration (FAA) standards. Paragraphs are re-aligned for better editorial flow.

b. Paragraph 2-1a(1). Text added to clarify Terminal Instrument Procedures (TERPS) application of diverse departure criteria analysis.

c. Paragraph 2-1b. Paragraph revised and expanded to include all items unique to obstacle departure procedures (ODPs).

d. Paragraph 2-1b(1). Emphasizes the primary goal in ODP development.

e. Paragraph 2-1b(12). Deletes the requirement for mandatory Visual Climb Over Airport (VCOA) development at high density airports where Air Traffic Control (ATC) will not allow the maneuver.

f. Table 2-1. VCOA note moved to paragraph 2-1b(11).

g. Paragraph 2-1c. Paragraph expanded to include all items unique to standard instrument departures (SIDs).

h. Paragraph 2-1c(2). Specifies that a Diverse Vector Area (DVA) must be established when ATC desires to use radar vectors to establish aircraft on published SIDs.

- i. Paragraph 2-1d(2)(a).** Adds requirement for supporting documentation when requesting Flight Standards approval for excessive climb gradients.
- j. Paragraphs 2-1d(2)(b) and (c).** Previously published notes now included as separate sub-paragraphs.
- k. Paragraph 2-1d(3).** Adds policy for DP speed restrictions.
- l. Paragraph 2-1e(1).** Provides guidance for charting minimum altitude restrictions (obstacle clearance and ATC) for both ODPs and SIDs.
- m. Paragraph 2-1e(2).** Provides guidance for charting required climb gradients (obstacle clearance and ATC) for both ODPs and SIDs.
- n. Paragraph 2-1e(3).** Provides guidance for charting speed restrictions (obstacle clearance and ATC) for both ODPs and SIDs.
- o. Paragraph 2-1f(3).** Adds DVA requirements for radar SIDs at runways that failed the TERPS diverse departure analysis.
- p. Paragraph 2-1g(6).** Adds guidance regarding use of the word “immediate/ immediately.”
- q. Paragraph 2-2c(9).** Requires the ATC facility providing departure control service to coordinate graphic DP name and computer code with the servicing ARTCC as specified in appendix A.
- r. Paragraph 2-2g.** National Aeronautical Charting Office (NACO) Responsibilities added.
- s. Paragraph 2-3c.** Requires notification of NACO for chart correction FDC NOTAMs.
- t. Paragraph 2-5a(1)(e).** Requires DVA information to be documented on Form 8260-15A.
- u. Paragraph 2-5c.** Requires supporting documentation when requesting Flight Standards approval.
- v. Appendix A, paragraph 1j.** Speed restriction policy re-located to paragraph.
- w. Appendix A, table A-1 and paragraph 5b footnote ¹.** Added VI leg type.
- x. Appendix A, paragraph 5e.** Replaced TYPE A/B designations with RNAV-1 and added RNP-1 DP guidance.
- y. Appendix B.** Changed “Block” to “Line” and minor editorial changes.
- z. Appendix C.** Changed “Block” to “Line” and minor editorial changes.
- aa. Appendix D.** Modifies Forms 8260-15A and 8260-15B and revises completion instructions accordingly. Also, deleted FAA Form 8260-15D, Departure Procedure (Continuation).

Chapter 2. Responsibilities

2-1. Departure Procedure (DP) Guidelines.

a. General. There are two types of DPs; those developed to assist pilots in obstruction avoidance, referred to as Obstacle Departure Procedure (ODP), and those developed to communicate air traffic control clearances, referred to as Standard Instrument Departure (SID).

(1) A diverse departure assessment must be conducted for those airports with approved instrument approach procedures. ODPs are developed by AeroNav Products at locations where they have instrument procedure development responsibility.

(2) ODPs may also be required at private airports where the FAA does not have instrument procedure development responsibility. It is the responsibility of non-FAA proponents to ensure a TERPS Diverse Departure obstacle assessment has been accomplished and an ODP developed, where applicable.

b. Obstacle Departure Procedures. An ODP and/or non-standard takeoff minimums must be developed when obstructions penetrate the 40:1 departure obstacle clearance surface (OCS) as described in Order 8260.3, Volume 4. Use table 2-1 as a guide to determine each situation and the required action. The following rules apply to ODPs:

(1) The primary goal in ODP development is to retain standard takeoff minimums with standard climb gradient to the extent possible. See table 2-1 for recommended ODP development combinations.

(2) Establish only one ODP for a Runway. This will be considered the default instrument flight rule (IFR) departure procedure for a given runway and is intended for pilot awareness and use in the absence of ATC radar vectors or SID assignment. **Do not** publish text that allows an option to use a SID or alternate maneuver assigned by ATC; e.g., “Climb runway heading to 1200 before turning or use Manchester Departure” or “Turn right, climb direct ABC VOR or as assigned by ATC.”

(3) When using table 2-1, apply “before rounding” values to each situation to determine required action.

(4) An ODP may be either textually or graphically depicted within the following guidelines.

(a) Textual ODP. A relatively simple ODP may be published textually unless a graphical depiction is required for clarity. Textual ODP instructions that exceed a maximum of one turn, one altitude change, and one climb gradient must be published graphically.

(b) Graphic ODP. Complex ODPs are those that require a visual presentation to clearly communicate the departure instructions and desired flight paths. If the ODP is depicted graphically, it must be clearly stated on FAA Form 8260-15A, Takeoff Minimums and Textual

Departure Procedures (DP), in the Departure Procedure section; e.g., “USE JONES DEPARTURE.” The decision to graphically publish ODPs rests within AeroNav Products. When determining the need for a graphic DP, AeroNav Products must, in addition to the textual DP restrictions noted in paragraph 2-1b(4)(a), consider:

1. The number of ground-based navigational aids (NAVAIDs) and fixes.
2. Whether graphical depiction will enhance pilot comprehension of the procedure.
3. The proximity and effect of precipitous or significant terrain.

(5) A graphic ODP may serve one or more runways at a single airport; e.g., a graphic departure may contain initial departure instructions for both Runways 9 and 27 on the same chart.

(6) ODPs must be developed with primary emphasis given to using the least onerous route (see appendix G) to the en route structure or at an altitude that will allow random (diverse) IFR flight, while accommodating commonly used routings out of each airport to the maximum extent practicable. Procedure designers must consider the impact on local ATC operations when using the phrases “before turning” or “before proceeding on course.” ODPs must be coordinated with ATC to ensure flight safety and compatibility with the local operating environment and the en route structure.

(7) ODPs may include a climb gradient when required for obstruction avoidance; however, ATC related climb gradients, speed and/or altitude restrictions must not be included in ODP development.

(8) Naming conventions and computer code assignments for graphic ODPs must follow the guidance specified for SIDs in appendix A to ensure controller awareness of route flown.

(9) Transition Routes are not permitted on graphic ODPs.

(10) ODPs must be developed using ground based NAVAIDs, area navigation (RNAV), or dead reckoning guidance wherever possible. Radar vectors must not be specified for navigation guidance in ODP development. At those locations served by RNAV approaches exclusively, every effort must first be made to develop an ODP that accommodates conventional (preferably VOR) navigation systems. If this effort fails, an RNAV ODP must be developed.

(11) When a Visual Climb Over Airport (VCOA) has been established, publish a note that requires the pilot to obtain approval from ATC with their IFR clearance when executing the VCOA. See appendix D, section 1, paragraph 8.

(12) A VCOA maneuver must not be used in conjunction with an RNAV ODP.

(13) The VCOA requirement in table 2-1 is mandatory. However, ATC may submit a justification request to Flight Procedure Implementation and Oversight Branch (AFS-460) for Flight Standards Service (AFS) approval to opt-out of publishing a VCOA. This “opt-out” option is intended for use at major metropolitan airports that experience a high volume of traffic (e.g., Los Angeles, San Francisco, New York, etc.) where permission to use a VCOA is impractical and/or impossible. ATC must consider user needs as well as the operational impact upon low performance aircraft that must depart IFR from mountainous/obstacle encumbered airports when deciding to submit a request to not establish a VCOA.

(14) Textual ODPs may be designed to terminate at a fix/NAVAID located within the IFR en route structure and/or at an altitude that will allow random (diverse) IFR flight.

(15) Graphic ODPs must be designed to terminate at a fix/NAVAID located within the IFR en route structure.

Table 2-1. ODP Development Combinations

SITUATION	ACTION
1) TERPS diverse departure obstacle assessment does not identify any obstacle penetrations.	Complete Form 8260-15A documenting standard takeoff minimums apply.
2) TERPS diverse departure obstacle assessment identifies obstacles within the initial climb area (ICA) that require a CG greater than 200 ft/NM to an altitude of 200 ft or less, above Departure End of Runway (DER) (commonly referred to as “low, close-in obstacles”).	Establish a DP that provides the pilot a NOTE identifying the obstacle(s) type, location relative to DER, height (AGL), and elevation (MSL). See appendix D for recommended publication text available.
3) TERPS diverse departure obstacle assessment identifies obstacles that require a CG greater than 200 ft/NM, to an altitude greater than 200 ft above DER.	<p>A) Obstacles located within the ICA [extended] 3 SM or less from DER: Establish a DP using one of the following options (listed in order of preference):</p> <ol style="list-style-type: none"> 1) Publish a textual or graphic route/sector to avoid the obstacle(s) with standard takeoff minimums and standard CG, OR 2) Publish a ceiling and visibility to see and avoid the obstacle(s) with the option of standard takeoff minimums with a minimum CG to a specified fix or altitude that provides obstacle clearance with a standard CG, AND: <ol style="list-style-type: none"> a) Provide a NOTE identifying the obstacle(s), which specifies the obstacle description, location relative to the DER, height (AGL), and elevation (MSL), AND b) For obstacles that penetrate the 40:1 OCS by 35 ft or less, provide an option to reduce takeoff runway length to accommodate the most penetrating obstacle based on a standard 200 ft/NM climb gradient, OR 3) A combination of options 1) and 2) above.

	<p>B) All Other Obstacles: Establish a DP using one of the following options (listed in order of preference):</p> <ol style="list-style-type: none"> 1) Publish a graphic or textual route/sector to avoid the obstacle with standard takeoff minimums and standard climb, <u>OR</u> 2) Publish standard takeoff minimums with a minimum CG to a specified fix or altitude that provides obstacle clearance with a standard CG, <u>AND</u> <ol style="list-style-type: none"> a) For obstacles that penetrate the 40:1 OCS by 35 ft or less, provide an option to reduce takeoff runway length to accommodate the most penetrating obstacle based on a standard 200 ft/NM CG, <u>AND/OR</u> b) Provide a ceiling and visibility sufficient to allow a visual climb over the airport (VCOA) to an altitude that will provide obstacle clearance [see paragraph 2-1b(11) and (12)], <u>OR</u> 3) A combination of options 1 and 2 above. <p>C) Both Action A) and B) Obstacles:</p> <ol style="list-style-type: none"> 1) If the DP highest CG is based on an obstacle ≤ 3 SM from DER (Action A), establish a DP using one of the following options (listed in order of preference): <ol style="list-style-type: none"> a) Publish a graphic or textual route/sector to avoid the obstacle with standard takeoff minimums and standard climb, <u>OR</u> b) Publish standard takeoff minimums and the minimum CG required to clear the ≤ 3 SM obstacle to a specified fix or altitude that will provide subsequent obstacle clearance above all DP obstacles based on a standard 200 ft/NM CG, <u>AND</u> <ol style="list-style-type: none"> 1 Provide a ceiling and visibility to see and avoid the ≤ 3 SM obstacle and the minimum CG required to clear all other obstacles outside the ICA (extended) to a specified fix or altitude that provides obstacle clearance, <u>AND</u> 2 For obstacles that penetrate the 40:1 OCS by 35 ft or less, provide an option to reduce takeoff runway length to accommodate the most penetrating obstacle based on a standard 200 ft/NM climb gradient, <u>AND/OR</u> 3 Provide a ceiling and visibility sufficient to allow a VCOA to an altitude that will provide obstacle clearance [see paragraphs 2-1b(11) and (12)], 2) If the DP highest CG is based on all other obstacles (Action B), then Action B above applies. <p>Note: Where a graphic route/sector is published, include on the chart: takeoff minimums, required CGs, and applicable obstacle data for each runway using the DP.</p> <p>D) If none of the above actions are feasible, an IFR departure must not be authorized.</p>
<p>4) TERPS diverse departure obstacle assessment identifies obstacles requiring a CG to 200 ft or less above DER and additional obstacles that require a CG to an altitude greater than 200 ft above DER.</p>	<p>Apply a combination of action items from situations 2) and 3).</p>

c. Standard Instrument Departures (SIDs). SIDs are developed to assist in meeting environmental, capacity, and air traffic control requirements. SIDs may be requested by specific ATC facilities, the military services, or other proponents to enhance operations. A SID also provides protection from obstacles and is depicted graphically; however, it will not contain the “(OBSTACLE)” designation following the procedure title on the chart, and may not be flown unless approved by ATC. The following rules apply to SIDs:

(1) SIDs must be designed to terminate at a fix/NAVAID depicted on an IFR en route chart, at an altitude that will allow random IFR flight, or at a position and altitude where ATC radar service is provided.

(2) When a SID is designed to incorporate radar vectors at the termination point, provide a heading for charting and incorporation into the avionics database in the event ATC instructions are not received prior to or at the termination fix.

d. Design Constraints. The following design constraints apply to all ODPs and SIDs:

(1) DPs must not require a turn prior to reaching 400 ft above the departure end of runway (DER) elevation. See Order 8260.3, Volume 4, and Order 8260.58 when a turn is required within 2 NM of DER.

(2) DPs requiring a climb gradient (CG) in excess of 500 ft/NM (600 ft/NM for helicopters), whether for obstacle clearance or air traffic control restrictions, must be approved by Flight Standards Service or appropriate DoD authority. Approval requests will be assessed by the FAA Flight Technologies and Procedures Division (AFS-400), Procedures Review Board (PRB).

Note: Consideration for approval will be based on, but not limited to, potential users/aircraft capability of meeting such a CG, and location of the obstruction along the projected flight track that is causing the CG.

(a) Requests for approval of climb gradients in excess of 500 ft/NM (600 ft/NM for helicopters) must include documentation showing the calculations used to derive the climb gradient values.

(b) When Flight Standards Service will not approve a climb gradient (CG) in excess of 500 ft/NM (600 ft/NM for helicopters) and all of the obstacles forcing such a CG are located inside the ICA (extended) 3 SM or less from DER, a ceiling and visibility may be applied to see and avoid the obstruction(s) as the only option available.

(c) When Flight Standards will not approve a climb gradient (CG) in excess of 500 ft/NM (600 ft/NM for helicopters) and any of the obstacles forcing such a CG are located outside the ICA (extended) greater than 3 SM from DER; a stand-alone VCOA procedure may be used as the only option available for obstacle avoidance.

(3) Speed restrictions may be specified only when absolutely necessary to ensure obstacle clearance, airspace efficiency during turns, or when necessary to achieve an operational advantage. Refer to applicable DP criteria directives.

(a) ATC required speed restrictions are only allowed in SID design and must not be included in ODPs.

(b) Speed restrictions [except as noted in paragraph 2-1d(3)(c)] must be limited to one restriction per fix/waypoint. In this instance, a minimum altitude based on the minimum required climb gradient must also be specified at the fix/waypoint.

(c) Avoid using multiple speed restrictions at the same fix for different aircraft types, insofar as possible; e.g., “Turbo-props do not exceed 160 KIAS until passing GARVY; Turbo-jets do not exceed 230 KIAS until passing GARVY.” When multiple restrictions must be applied to support ATC operations, apply only one restriction for each aircraft type.

(4) Fan markers must not be used as a fix to designate a turning point on a SID or ODP.

(5) Do not establish VCOA procedures in conjunction with a SID.

(6) Except for departures that use Radar vectors to join RNAV routes, RNAV departure procedures must only serve one airport.

(7) Do not establish DPs containing more than one initial departure route from the end of a runway to support different types of aircraft (i.e., jet, turbo-prop, etc.) or different equipment requirements (DME, non DME). Where this is necessary, separate procedures must be developed.

e. Charting Constraints. The following charting constraints apply:

(1) Charting Altitudes. Document altitudes for charting as follows:

(a) Graphic departure procedures may require depiction of a minimum altitude at a fix established along the departure route. SIDs may require altitudes to support ATC requirements; however, ATC required altitudes must not be depicted on ODPs.

(b) When a minimum “at or above” altitude restriction has been requested by ATC at a fix in an initial SID routing (prior to reaching the SID termination fix) that is higher than the required procedure design minimum altitude at the same fix, the higher requested ATC altitude then becomes the minimum altitude at that fix. This altitude must support all procedure design and criteria requirements (i.e., obstacle clearance/procedure design constraints/navigation solution and the ATC requirement(s)).

(c) When an “at or below” altitude restriction at a fix has been requested by ATC, ensure that the requested altitude meets all obstacle clearance (ROC) requirements as well as other criteria design standards. ATC may also have a need to establish an “at or above” altitude

in conjunction with the “at or below” altitude at the same fix making this either a “mandatory” or “block” fix crossing altitude.

(d) When an altitude restriction is requested by ATC for a fix located on a transition route, it must be at or above the specified minimum en route altitude (MEA) for the route.

(e) Enter altitudes to be charted on the appropriate 8260-15 series form (see appendix D or E). Government and civil charting organizations will chart/depict these altitudes according to their individual specifications.

(2) Charting a Minimum Climb Gradient. Establish a single minimum climb gradient exceeding 200 ft/NM (400 ft/NM for helicopters) whenever required for obstruction clearance, airspace, environmental, ATC, and/or RNAV or required navigation performance (RNP) operational limitations [i.e., lateral navigation (LNAV) engagement altitude and/or distance measuring equipment (DME)/DME reception]. When a climb gradient is required to support an LNAV engagement altitude (e.g., 500 ft/NM to 1300) before turning, a reduced, second climb gradient may be established in this situation only (i.e., a maximum of two climb gradients). See applicable 8260-series Orders for the appropriate criteria to use when establishing a climb gradient. Enter minimum climb gradient(s) for charting on the appropriate 8260-15 series form (see appendix D, E, or F).

(3) Charting Speed Restrictions. Required speed restrictions must be identified per Interagency Air Cartographic Committee (IACC) specifications.

(a) Speed restrictions for textual ODPs will follow the departure instructions; e.g., “...climbing right turn direct XXX VOR. Do not exceed 200 KIAS until XXX VOR.”

(b) Speed restrictions for graphic ODPs will be annotated on the chart at the restriction point.

(c) ATC SID speed restrictions will be identified by placing “(ATC)” at the end of the stated restriction; e.g., “Do not exceed 230 KIAS until passing BRAVO (ATC).” This will indicate to the pilot and the controller that this restriction is for ATC purposes and can be deleted by ATC. The absence of “(ATC)” at the end of a speed restriction indicates that it is there to support a TERPS criteria design constraint and **CANNOT** be modified or deleted by ATC.

(4) ODPs that are depicted graphically must have the term “(OBSTACLE)” printed on the graphic (see appendix D or E). This will be indicated by the word “OBSTACLE” adjacent to the “Type” line on Form 8260-15B, Graphic Departure Procedure. U.S. Government charts will include this immediately following the procedure title; e.g., TETON ONE DEPARTURE (OBSTACLE).

(5) ODPs developed for RNAV use must have the terms (OBSTACLE) and (RNAV) printed on the graphic. This will be indicated by the words “OBSTACLE” and “RNAV” adjacent

to the “Type” line on Form 8260-15B. U.S. Government charts will include this immediately following the procedure title; e.g., LASCH ONE DEPARTURE (OBSTACLE) (RNAV).

(6) All Graphic DPs must include applicable takeoff minimums, climb gradients, obstacle data (see table 2-1), on the graphic chart, even if redundant to information published textually.

(7) A Radar Vector Area (RVA) used in conjunction with an RNAV SID may be published on the same chart with an RNAV route departure from a different runway; however, both must contain the same common segment prior to reaching the end of the departure (see appendix E, section 2 for unique database coding requirements).

f. Equipment Requirements. DPs are also categorized by equipment requirements as follows:

(1) Non-RNAV DP. A DP established for aircraft equipped with conventional avionics using ground-based NAVAIDs; e.g., nondirectional beacon (NDB), very high frequency omni-directional range (VOR), very high frequency omni-directional range/tactical air navigation (VORTAC), localizer (LOC), etc. These DPs may also be designed using dead reckoning navigation.

(2) RNAV DP. A DP established for aircraft equipped with RNAV avionics; e.g., global positioning system (GPS), flight management system (FMS), etc. Automated vertical navigation must not be required.

(3) Radar SID. A SID established when ATC has a need to vector aircraft on departure to a particular ATS Route, NAVAID, or fix. Radar vectors may also be used to join conventional or RNAV navigation SIDs. SIDs requiring radar vectors must be annotated “RADAR REQUIRED.”

g. Terminology. The following terminology applies for initial climb instructions:

(1) When required, departure instructions must specify the actual heading to be flown after takeoff. Example: “Climb heading 350.10...” Some existing procedures specify “Climb runway heading.” Over time, these procedures will be updated, changing the terminology to specify the actual heading being flown.

Note: For database coding, heading/track/course values must be in hundredths of a degree. For charting purposes, these heading/track/course values will be rounded to the nearest whole degree. Additionally, hundredths of a degree must not be used in ATC communications.

(2) If departure instructions require a heading to be assigned by ATC, use: “Climb on assigned heading for radar vectors to (name of fix/airway, etc.).”

(3) If departure instructions require a specific altitude to climb to after takeoff, do not use the terminology “Climb to (altitude) ...” without including a heading to fly. Example: “Climb heading 310.25 to 1500 ...”

(4) Do not use the terminology “Climb straight ahead...” or “Maintain runway track...” as there is no guidance or reference definition of this phraseology for the pilot to apply.

(5) Ensure initial departure instructions that require altitude restrictions are written clearly and in order to be flown so as to lessen the possibility of pilot deviations. For example, “Climb heading 240.15 to 1500, cross TEB 4.5 DME at 1500, then climb and maintain 2000, thence...” or, “Climb heading 195.47 to 900, then climbing right turn heading 280 to maintain 2000, thence...”

(6) A departure procedure requiring a turn does not require an initial climb heading to be specified. For example, “Climbing right turn direct XYZ VOR...” Direction of turn must be specified when turn exceeds 15 degrees.

(7) Do not use the word “immediate/immediately” in any type of departure instructions; e.g., turning instruction or speed restrictions. Old “early turn” departure procedures may contain instructions to “Turn left (right) as soon as practicable.” This terminology is only to be used on non-standard departure procedures approved by Flight Standards or the appropriate military authority.

h. Diverse Vector Area (DVA). An ATC facility may request a DVA be developed to permit vectoring of aircraft on departure, below the Minimum Vectoring Altitude (MVA) or Minimum IFR Altitude (MIA) under the provisions in Order JO 7210.3, paragraph 3-9-5, Establishing Diverse Vector Areas. Order 8260.56, Diverse Vector Area (DVA) Evaluation, until incorporated into Order 8260.3, contains the criteria to be used for development. See appendix G of this order for documenting the development of a DVA.

2-2. Responsibilities.

a. General. The following guidance outlines procedures for DP requests, processing, and cancellation.

(1) Procedure Requests. SIDs are normally requested by the ATC facility responsible for departure control at the airport where the procedure is proposed, or by another proponent. All requests for new or amended SIDs must be processed through the Service Area Operations Support Group, Flight Procedures Team (OSG-FPT) and will forward to the appropriate Regional Airspace and Procedures Team (RAPT) in accordance with Order 8260.43, Flight Procedures Management Program.

(2) Requirements. ATC must provide the OSG-FPT, detailed operational requirements and restrictions for inclusion in the SID design. AeroNav Products must make every effort to meet ATC identified operational requirements and constraints using current criteria and policy. When current criteria and policy will not support a design to meet ATC

requirements, AeroNav Products, Flight Procedure Standards Branch (AFS-420), and other ATO organizations/involved parties must work together to find an acceptable solution.

(3) Cancellation. All proposed SID cancellations must be approved by the RAPT. AeroNav Products has sole responsibility for canceling ODPs. AeroNav Products cancels a DVA by notifying the ATC Facility Manager and Support Specialist by phone/E-mail, followed by a memorandum to indicate the previously approved Form 8260-15D, Diverse Vector Area, is no longer valid.

b. Proponent. A proponent's request to develop a DP must include the information in appendices B and C. This information must be completed and forwarded to the ATC facility providing departure control service to the airport for acceptance, prior to development. The DP request package must include the following:

- (1) An outline of the type of procedure and expected benefits.
- (2) A proposed ground track, including associated fixes and any proposed altitude or speed restrictions.
- (3) A request (if required) for development assistance from the servicing ATC facility.

c. ATC. When assisting a proponent or requesting a SID, the ATC facility providing departure control service must:

- (1) Evaluate the proponent's request to ascertain preliminary operational feasibility and to determine/verify that significant benefits (see appendix B) will be derived.
- (2) Assist in designing the procedure by providing the proponent with information pertaining to traffic flow and operational constraints; e.g., routes, minimum IFR altitudes, facility/sector lateral and vertical airspace boundaries, special use airspace, etc.

Note: When an ATC facility proposes SID development from an airport served primarily by air carriers, it may attempt to solicit the assistance of a "lead carrier" in the design and flyability of the proposed procedure.

- (3) Coordinate with other ATC facilities affected by the procedure.
- (4) Act as the focal point for all ATC coordination and provide appropriate assistance in resolving any problems identified during the development process.
- (5) Ensure that a DME/DME screening model has been run on RNAV SIDs to determine if the procedure is useable by suitably equipped aircraft, prior to submission.

Note: The DME/DME assessment process is contained in Order 7470.1, DME/DME Infrastructure Evaluation for Area Navigation (RNAV) Routes and Procedures.

(6) Coordinate with the servicing ARTCC to obtain a 5-letter pronounceable name for all fixes in the graphic DP. Complete Form 8260-2 data worksheet for each fix being established, modified, or canceled (see appendix C). Include the worksheet(s) as part of the graphic DP request package. Existing fixes/NAVAIDs should be used where conveniently located.

(7) Coordinate with the servicing ARTCC to obtain a name and computer code for the SID as specified in appendix A.

(8) Complete the DP requirements data worksheet (see appendix B), when applicable.

(9) Forward the requested package to the applicable Service Area Operations Support Group. The package must contain worksheets for all fixes, the DP requirements data worksheet, and a sketch of procedures requiring graphic publication (see appendix D or E).

(10) Review SIDs at least biennially for continued need. Coordinate requested changes through the applicable Service Area Operations Support Group, Flight Procedures Team.

(11) Collaborate with Performance Based Flight Systems Branch (AFS-470) when the development of an Attention All Users Page (AAUP) is necessary for RNAV departure procedures. See appendix E, section 3, for instructions on filling out Form 8260-15E.

d. The Service Area Operations Support Group, Flight Procedures Team must:

(1) Review the DP package for completeness.

(2) Review DPs for impact based on Facilities and Equipment changes, National Change Proposal (NCP), or other applicable projects.

Note: The point-of-contact (POC) and telephone number for the ATC facility is listed on the Graphic DP requirements worksheet. The FPT must contact the POC to resolve any problems in developing the requested procedure and provide appropriate alternatives. The POC must be responsible for additional coordination of changes required for development. The FPT should coordinate with the Regional NextGen Branch (RNGB) for assistance where necessary.

(3) Facilitate discussion of the procedure at the RAPT.

(4) Forward the DP package to AeroNav Products.

(5) Provide one copy of each 8260-2 and 8260-15 series form(s) to all affected ATC facilities.

(6) The OSG-FPT will notify the requesting ATC facility of the anticipated publication date and any delay in the publication and cause.

e. AeroNav Products must:

(1) Develop and process textual ODPs on Form 8260-15A, Takeoff Minimums and Obstacle Departure Procedures, under applicable directives.

(2) Develop and process graphic ODPs and SIDs on Form 8260-15B, Graphic Departure Procedure.

(3) Develop and process a Form 8260-15C, Departure Data Record, for all RNAV DPs.

(4) Develop and process a Form 8260-15D, Diverse Vector Area, for all DVAs.

(5) Ensure that a DME/DME screening model has been run on RNAV “obstacle” departures (the Service Area OSG is responsible for DME/DME screening of SIDs) to determine if the procedure is useable by suitably equipped aircraft, prior to submission for flight inspection.

Note: The DME/DME assessment process is contained in separate guidance.

(6) Submit DPs to Flight Inspection Operations Division, AJW-391, for necessary action.

(7) Ensure that textual ODPs submitted “concurrent” with a “proposed” SIAP are flight inspected prior to assigning an effective date for the SIAP via .26 messages.

(8) After satisfactory flight inspection, forward the original Form(s) 8260-2, Radio Fix and Holding Data Record, and original 8260-15 series forms to NFDC. Copies will be provided to Service Area Flight Procedures Team for distribution to all affected ATC facilities [see paragraph 2-2d(5)].

(9) Develop, review, track, and cancel NOTAMs relating to ODPs and SIDs.

(10) Review ODPs periodically for continued need, obstacle clearance, and compliance with current criteria and policy; and coordinate proposed changes with the appropriate ATC facility. When application of new criteria or a new obstacle affects an ODP/SID that requires adjustment to an obstacle-driven CG, all DPs must be evaluated to determine if other CGs require adjustment. If CG adjustments are required, they must be updated simultaneously in the same charting cycle.

(11) When a location currently has standard takeoff minimums and circumstances now require non-standard takeoff minimums and/or an ODP development, amend the current Form 8260-15A for the airport accordingly.

(12) When it is necessary to cancel a DP, process the appropriate Form 8260-15 as directed in paragraph 2-5d.

(13) Add the “T” symbol to the instrument approach procedure (IAP) and SID charts whenever the Form 8260-15A indicates any data entries other than Standard Takeoff Minimums.

Note: The “T” symbol will not be placed on graphic ODPs.

(14) Delete the “T” symbol from the IAP charts based on receipt of a Form 8260-15A that has “Standard” in the “Takeoff Minimums” and it applies to all runways. This symbol deletion applies when a Textual ODP is not published or when removal of textual ODP information is necessary based on a revised Form 8260-15A.

Note: The basic rule is that if an ODP is published (Text or Graphic), the “T” symbol is required on all approach charts to that airport. If an ODP is not published, a “T” symbol will not appear on approach charts.

(15) Issue P-NOTAMs to correct United States Government charting discrepancies and compilation errors required (see Order 8260.19, chapter 2, section 6).

f. Flight Inspection Services must:

(1) Coordinate and execute Flight Validation and Flight Inspection for FAA developed procedures and under a reimbursable agreement with other instrument flight procedure (IFP) providers,

(2) Provide flight inspection results and archived reports upon request, and

(3) Verify DME/DME coverage when applicable.

g. The NFDC must:

(1) Conduct a pre-publication review of submitted forms to ensure compatibility with the National Airspace System Resources, National Database, and compliance with applicable directives relative to form entries.

(2) Assign an effective date and publish textual and graphic ODPs in the transmittal letter (TL) authorizing charting agencies to publish the procedure.

(3) Assign an effective date and publish graphic DPs, and associated fixes, in the daily National Flight Data Digest (NFDD) authorizing charting agencies to publish the procedure.

(4) Coordinate to ensure the Form 8260-15B supporting graphic ODPs is published in the NFDD to be effective and charted concurrently with the associated Form 8260-15A.

(5) Monitor and track the status of concurrent instrument approach procedure (IAP) packages to ensure that the entire package is published with the same effective date.

(6) Notify AeroNav Products of delays in publication if the associated proposed procedures have not been flight checked or the associated docket has not received a final date by the applicable cutoff.

(7) Resolve data conflicts, form discrepancies, etc., with AeroNav Products.

(8) Review and track FDC NOTAMs relating to textual ODPs.

(9) File and maintain the original signed copy of the forms.

(10) Assign an effective date and publish Form 8260-15E (AAUP) pages supporting RNAV Departures in the NFDD (see paragraph 2-2c(11) and appendix E, section 3).

2-3. Accuracy Verification and Responsibilities. Any ATC facility, DoD, proponent, charting agency, procedure user, concerned individual, organization, or office must:

a. Notify AeroNav Products of published errors (including omissions) that affect safety of flight by the fastest means available. AeroNav Products must take appropriate NOTAM action under Order 8260.19.

b. Notify the NFDC whenever pre-publication errors are discovered in the TL or NFDD. The NFDC will coordinate corrective actions with AeroNav Products and promulgate corrected data/forms.

c. Notify AeroNav Products whenever charting discrepancies/compilation errors are detected in United States government published aeronautical products. AeroNav Products will coordinate corrective actions with AeroNav Products and NFDC.

2-4. Military Departure Procedures.

a. Military DPs are not handled or published in the same manner as civil DPs. Approval authority for DPs at military airports rests with the military. The FAA develops United States Army DPs under Order 8260.15, United States Army Terminal Instrument Procedures Service. The FAA develops United States Air Force DPs at domestic civil airports under Order 8260.32, United States Air Force Terminal Instrument Procedures Service. The National Geospatial-Intelligence Agency (NGA) publishes all military DPs.

Note: Military DPs must be named and numbered in accordance with the criteria outlined in this order.

b. The FAA requires that all military DPs be coordinated with FAA ATC facilities or regions when such DPs affect the NAS. The Air Traffic Facility providing the departure service must assist the military in coordinating the procedures and in obtaining computer codes to ensure that the procedures are properly interfaced with the NAS. United States Air Force and Navy procedures are NOT sent to NFDC.

c. When military DPs affect airspace under the jurisdiction of FAA facilities, those affected ATC facilities/ARTCCs must maintain copies of the applicable military or FAA procedure approval forms.

d. When a military DP has a climb gradient established to clear obstruction(s) that uses the “DoD Option” provision (see Order 8260.3, Volume 4, paragraph 1-4), the procedure must be annotated “NOT FOR CIVIL USE.”

2-5. FAA 8260-15 Series Forms (see appendices D through G).

a. The 8260-15 series forms document standard takeoff minimums and facilitate transmittal of nonstandard takeoff minimums and/or departure procedures. These forms will be the basis for charting agencies to publish non-standard takeoff minimums, departure procedures, and/or to add/delete charting icons used to denote that other than standard takeoff minimums and/or specific obstacle departure procedures are published.

(1) Use Form 8260-15A.

(a) To document standard takeoff minimums.

(b) To document nonstandard takeoff minimums and/or higher than standard climb gradients for a runway.

(c) To document textual ODPs.

(d) To document that the ODP for a runway is published graphically.

(e) To document other pertinent textual data for publication; e.g., obstacle data notes, VCOA data, etc.

(2) Use Form 8260-15B.

(a) To document graphically depicted complex ODPs and all SIDs.

(b) To document other pertinent procedural data; e.g., fixes, NAVAIDs, routes, vectoring areas, altitudes, etc. required for charting database development on RNAV DPs.

(3) Use Form 8260-15C to document RNAV DPs in a manner consistent with and which aids in charting and database coding. Specifically use 8260-15C to document:

(a) The RNAV route of flight in terms of a series of segments defined by fix name, positions, waypoint type, leg types, course, and distance.

(b) Altitude and airspeed restrictions associated with fixes.

(4) Use Form 8260-15D to document a Diverse Vector Area (DVA).

(5) Use Form 8260-15E to document RNAV Departure Procedure Attention All Users Page (AAUP) for locations where it has been determined that detailed departure information is necessary.

b. Use Form 8260-15A/B to deny lower than standard takeoff minimums. When touchdown and rollout runway visual range (RVR) are available on runways with centerline lights and either RVR is installed on a baseline GREATER than 250 ft, deny takeoff minimums lower than RVR 1200 by adding the following example standard NOTE on Form 8260-15:

“RWY 27R, Air Carrier reduction below RVR 1200 NA.”

c. Administratively process the 8260-15 series forms as specified in Order 8260.19, chapter 8. Additionally, when submitting procedures for waiver and/or Flight Standard approvals, include supporting documentation; e.g., for excessive climb gradient approval, submit documentation showing calculations.

d. Cancellation of Form 8260-15(s). Cancel specific takeoff minimums for an airport or cancel any textual or graphical DP(s) no longer required, as follows:

(1) Enter the current information from the top line of page 1 of Form 8260-15A/B and into the corresponding blocks on blank Forms 8260-15A and/or B. Additionally, on Form 8260-15B; complete the “Airports Served” section.

(2) Enter/Overprint “Canceled effective ____” in the “Takeoff Minimums” section on Form 8260-15A and/or “DP Route Description” section of Form 8260-15B (a stamp may be used for this purpose). This effective date will “normally” be entered by NFDC. The only time the “canceled effective” date must be entered by AeroNav Products is when a specific effective date is required.

2-6. Procedure Amendments. All departure procedures may be amended using either the full amendment or an abbreviated amendment process as specified below. A full amendment must ensure that periodic review requirements have been met for the procedures documented on the specific form being completed. A full amendment requires a complete procedure package (i.e., all necessary forms, maps, and supporting documentation) be developed and submitted for processing. An abbreviated amendment only requires submission of the Forms 8260-15A/B (and 8260-15C, if required) for processing (see Note 2, below). All departure procedures, regardless of the amendment process used, are to be submitted to Flight Inspection for a determination of what action they must take, based on what is being amended. Departure procedures not developed and/or not Flight Inspected by the FAA are to be submitted to AFS-460 to determine Flight Validation requirements.

Note 1: Flight Inspection (AFS-460 for procedures not developed and/or Flight Inspected by the FAA) may establish unique/specific policy guidelines with individual procedure development authorities, addressing specific situations that do not require submission for Flight Inspection/

Validation. This exception (or exceptions) must be specified in either an FAA Directive or Policy Memorandum controlled by the Flight Inspection/Validation authority. AFS-460 must be provided a copy of all policy memorandums between Flight Inspection and procedure developers.

Note 2: When the abbreviated amendment process is used, steps must be taken to insure all supporting documentation, e.g., maps, waiver/approval letters, etc, remain on file in the abbreviated amendment procedure package.

a. Textual ODPs.

(1) When completing a full amendment, advance the amendment number in the “AMDT No.” item of Form 8260-15A; e.g., “AMDT 1,” “AMDT 4.” When the “abbreviated amendment” process is used, an alphabetical suffix is added/advanced whenever the procedure is revised; for example: “ORIG-A,” “AMDT 5C.” The circumstances dictating the need for revision determine whether an amendment or abbreviated amendment may be made or whether the existing procedure must be canceled and an original established.

(2) P-NOTAMs may be used and act as an “abbreviated amendment” for Textual ODPs to effect changes immediately and will generate a publication change, creating a letter suffix as noted in the above paragraph (also see Order 8260.19, chapter 2, section 6).

b. Graphic ODPs and SIDs.

(1) Whenever the “DP Name” is changed in the Title line of the Form 8260-15B, or the procedure “Type” is changed, the procedure must be canceled and a new procedure developed.

(2) Both the full and the abbreviated amendment processes require the number in the procedure title to be increased; e.g., “SHEMP 2” increases to “SHEMP 3.” (See appendix A, paragraph 2f.)

(3) A full amendment is required whenever a change is made to the items listed below as specified on Form 8260-15B:

(a) DP Route Description (pertains to entire route charted to include leg lengths when applicable).

(b) Transition Routes (adding/revising).

(c) Airports Served (Only when airports are added).

(4) An abbreviated amendment may be used whenever a change is made to the items listed below as specified on Form 8260-15B. A P-NOTAM must not be used to effect an abbreviated amendment for graphic ODPs and SIDs.

- (a) Transition Routes (only when removing)
- (b) Procedural Data Notes/Takeoff Minimums.
- (c) Takeoff Obstacle Notes.
- (d) Lost Comm Procedures.
- (e) Additional Flight Data.
- (f) Airports Served (only when airports are deleted).
- (g) Communications.

(h) Fixes and/or NAVAIDs (only those requested for charting purposes, but are not included in the textual description of the departure or entered in the transition route data).

- (i) Remarks (that will require a change to what will be charted on the procedure).

(j) Altitude changes (RNAV procedures require RNAV-PRO assessment when altitude changes are made).

(5) No amendment is required for changes made to the items listed below as specified on Form 8260-15B.

(a) Controlling Obstacle (that does not require a change to what will be charted on the procedure; change must noted in the procedure package historical information and must be retained until a future amendment/abbreviated amendment Form reflects this new controlling obstacle).

(b) Remarks (that do not require a change to what will be charted on the procedure).

Appendix A. Guidelines for the Design of Graphic Instrument Departure Procedures (DPs)

1. General.

a. Safety is a primary concern and DPs must be designed so that they provide obstacle clearance, least onerous routing (where possible), and can be confidently and consistently flown by all aircraft expected to use the procedure.

b. A DP must be relatively simple and easily understood. To avoid chart complexity and human factors concerns, limit the number of airports and/or runways from which a particular DP may be used to only those necessary to support operations.

c. A DP should use only the minimum number of fixes, turns, or altitude changes necessary to depict the route.

d. A DP should be developed to accommodate as many different types of aircraft as possible.

e. A DP should avoid the use of distance measuring equipment (DME) arcs.

f. Graphic ODPs must be designed to terminate at a fix/NAVAID located within the IFR en route structure or at an altitude that will allow random IFR flight.

g. A SID must provide for a significant user/system benefit.

h. A SID must reduce pilot/controller communications and workload.

i. A SID must be designed to terminate at a fix/NAVAID depicted on an IFR en route chart, at an altitude that will allow random IFR flight, or at a position where ATC radar service is provided.

j. Avoid Speed Restrictions Whenever Possible (see paragraphs 2-1d(3) and 2-1e(3) for specific guidance).

k. Altitude.

(1) Limit the number of altitude requirements to the minimum necessary. ATC operational restrictions are not permitted on ODPs.

(2) Minimum and maximum “block” altitudes for the same fix/waypoint are permitted. See paragraph 2-1e(1) for specific guidance and charting constraints.

(3) Avoid using multiple altitude restrictions at the same fix for different aircraft types or departure runways; e.g., “Turbo-props cross GRAVY at-or-below 5000, Turbo-jets cross

GRAVY at-or-above 6000” or “RWY 9: Cross XRRAY at 9000; RWY 27: Cross XRRAY at 11000.”

(4) Define crossing altitude restrictions as “At,” “At or Above,” “At or Below,” or “Expect.” Avoid “At” and “At-or-Below” altitudes whenever possible.

Note: “Expect” altitude restrictions will not be coded.

(5) Procedure designers must use good judgment and common sense, coupled with operational input where available, to restrict procedural altitudes due to precipitous terrain.

1. Climb Gradient (CG). DPs are designed assuming a minimum standard CG of 200 ft/NM (400 ft/NM for helicopters) to ensure required obstacle clearance is achieved. Higher CGs must be published when required for obstruction clearance and crossing altitude requirements (see paragraphs 2-1d(2) and 2-1e(2) for specific guidance).

2. Naming of DPs (see pages A-6 through A-9 for examples).

a. Textual ODPs are not named, while all graphic ODPs and SIDs must be named as described in this section.

b. SIDs, designed using radar vectors as the only navigation source to the en route environment, are normally named to correspond with the terminal control facility name. For example, the SID from Tampa International Airport is named the TAMPA THREE; the SID from Greater Cincinnati Airport is named the CINCINNATI EIGHT. If the terminal control facility name is already in use, use a fix, city, airport, or geographical area name in that order.

c. SIDs designed using a diverse vector area and radar vectors to a common specified route must be named to correspond to the fix/NAVAID/waypoint where the specified route ends. For example, the SID uses a diverse vector area and radar vectors to a fix/NAVAID/waypoint that begins a specified route to COTEE; the SID is named the COTEE ONE.

d. DPs designed using conventional, RNAV, or RNP guidance must be named to correspond with the en route fix/NAVAID name where the DP ends. For example, a conventional DP from Altoona-Blair County Airport that ends at the TATES fix is named the TATES TWO DEPARTURE.

(1) “RNAV 1” is the default designation for RNAV DPs and it must be included adjacent to the procedure title enclosed in parenthesis. If the DP is an RNAV procedure, the “(RNAV 1)” must be included in the name; for example, TATES TWO DEPARTURE (RNAV 1).

(2) If the DP is an RNP procedure, (RNP 1) must be included adjacent to the procedure title enclosed in parenthesis; for example, TATES TWO DEPARTURE (RNP 1).

e. If two or more DPs end at the same fix/NAVAID, the second and subsequent procedures must be named for the city, airport, or geographical area in that order. For example, a

SID from Greater Cincinnati Airport that ends at the REDSS fix is named the REDSS FOUR DEPARTURE. A SID from Cincinnati-Lunken Airport that also ends at the REDSS fix is called the LUNKEN SEVEN DEPARTURE.

f. Number Each Original Graphic DP “ONE.” Number subsequent amendments in numerical sequence through NINE and then start over with ONE (See paragraph 2-6b for the amendment process).

3. Transition Naming. DP transition names must always correspond with the fix/NAVAID where the transition ends. For example, the FORT LAUDERDALE SEVEN DEPARTURE termination fix is the Fort Lauderdale VORTAC (FLL) and it has a transition to the ZAPPA intersection; the transition name is ZAPPA. The REDSS FOUR DEPARTURE terminates at the REDSS fix and it has a transition to the Johnstown VORTAC (JST); the transition name is JOHNSTOWN.

4. Computer Identification Codes (see pages B-6 through B-9 for examples).

a. Textual ODPs will not receive a computer identification code.

b. Graphic ODPs and SIDs. Computer identification codes are assigned to graphic DPs by using the abbreviated name of the DP; e.g., a NAVAID or airport **3-letter** NAVAID or airport identifier, a 4-letter geographical abbreviation, or a **5-letter** fix/waypoint name, or other **5-letter** code, followed by the current DP number, then a dot, followed by the fix/NAVAID identifier where the DP ends. For example, the CINCINNATI EIGHT DEPARTURE in appendix A, paragraph 2b is coded “CVG8.CVG;” the FORT LAUDERDALE SEVEN DEPARTURE in appendix A, paragraph 3 is coded “FLL7.FLL;” and the “TATES TWO DEPARTURE in appendix A, paragraph 2d is coded “TATES2.TATES.” A computer identification code is not required for radar vector SIDs that do not contain a specified or common route published as part of the SID; i.e., a SID based solely on radar vectors to the en route structure.

c. SID Transition. SID transition computer codes are assigned by using the SID identifier and number as noted in appendix A, paragraph 4b, followed by a dot, followed by the identifier of the en route fix where the transition ends. Using the Fort Lauderdale example in appendix A, paragraph 3, the ZAPPA transition is coded “FLL7.ZAPPA.” Using the REDSS example in appendix A, paragraph 3, the Johnstown transition is coded “REDSS4.JST.”

5. RNAV DPs. The following general criteria and guidelines apply only to DPs designed for exclusive use by certain RNAV equipped aircraft. See the latest edition of Order 8260.58 for specific guidance and criteria.

a. Waypoints. Specify all waypoints as either fly-by or fly-over.

(1) Use fly-by waypoints whenever possible.

(2) Use fly-over waypoints only when operationally necessary or for obstacle clearance.

(3) Design procedures using the fewest number of waypoints.

b. Leg Types. Table A-1 shows permissible leg types for use with RNAV DPs. See Order 8260.58 for leg type definitions and examples.

Table A-1. Permissible Leg Types.		
FROM	VIA (leg type)	TO
AER	VI ¹	See ¹
AER	VA ²	ALT
AER	VM ⁸	HDG
ALT	CF ³ , DF ⁴	FB/FO
AER	CF ³ , DF ⁴	FB/FO
FB	TF ⁵	FB/FO
FO	DF ⁴ , TF ⁵	FB/FO
IF ⁷	DF ⁴ , TF ⁵	FB/FO
FO	VM ⁸	HDG
FB	RF ⁶	FB

¹ VI (Heading-to-intercept) may only be used as the first leg of a departure and must be followed by a CF leg.

² VA (Heading-to-an-altitude) may only be used as the first leg of a departure and must be followed by a DF leg. The altitude must be an at-or-above altitude; a mandatory (i.e., “at”) altitude must not be used at the first fix.

³ CF (Course-to-fix) may only be used as the first leg of a departure or as the leg following a departure VI leg.

⁴ DF (Direct-to-fix) may be used as the first leg of a departure, the leg following a departure VA leg, and for any leg thereafter preceded by a FO WP only.

⁵ TF (Track-to-fix) is not used as the first leg of a departure. TF is the preferred leg after the first leg of a departure.

⁶ RF (Constant radius arc) may only be used when necessary because some users do not have RF capability. An RF leg may only be used after a TF, CF, or another RF leg.

⁷ IF (Initial fix) is used to designate the first fix of a departure transition, i.e., the IF is coincident with the DP termination fix. IF is also used to designate the point at which RNAV begins when used in conjunction with radar vectors.

⁸ VM (Vector-to-manual termination) legs are only to be used in conjunction with ATC radar vectoring.

Note: AER – approach end of runway, ALT – altitude, FB/FO – fly-by fix/fly-over fix.

c. Leg Length.

(1) Use the Longest Legs possible. The designer must consider speed and course changes when determining minimum leg length. See Order 8260.58 for specific minima.

(2) There is no maximum leg length for straight-line paths. Exception: Do not develop leg lengths in the en route environment exceeding 260 miles to ensure the geodesic path does not exceed the protected airspace for a great circle path.

d. Chart Annotation.

(1) All (RNAV 1) and “(RNP 1)” DPs will contain a note that describes the equipment sensor limitations. Notes, as appropriate, are as follows:

Note 1: DME/DME/IRU or GPS Required.

Note 2: GPS Required.

(2) A note may be required to address the need for specific DME facilities to be operational. These are referred to as “critical DME facilities.”

Example:

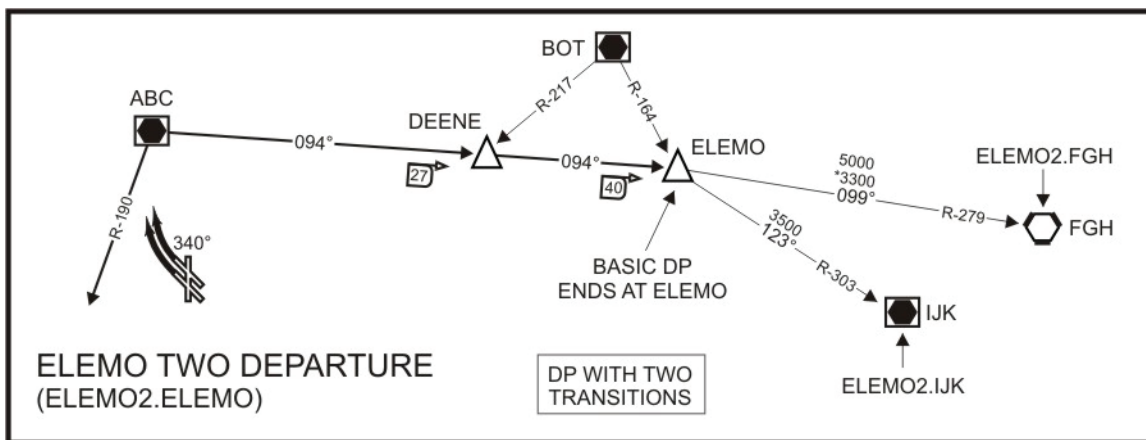
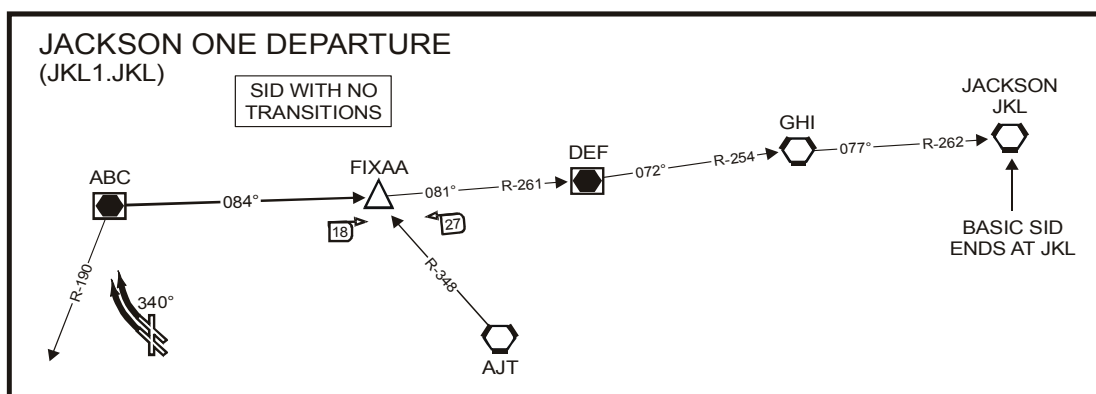
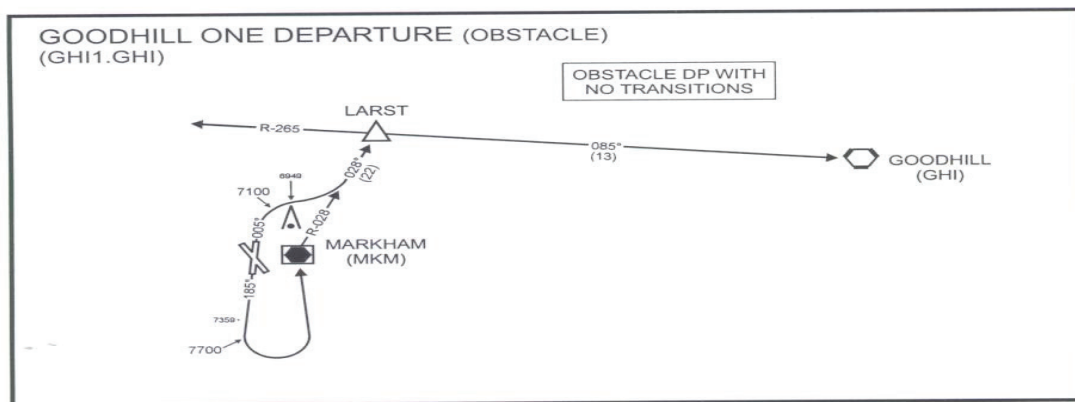
Note: For Non-GPS Equipped aircraft, ABC, JKL, and XYZ DMEs Must Be Operational.

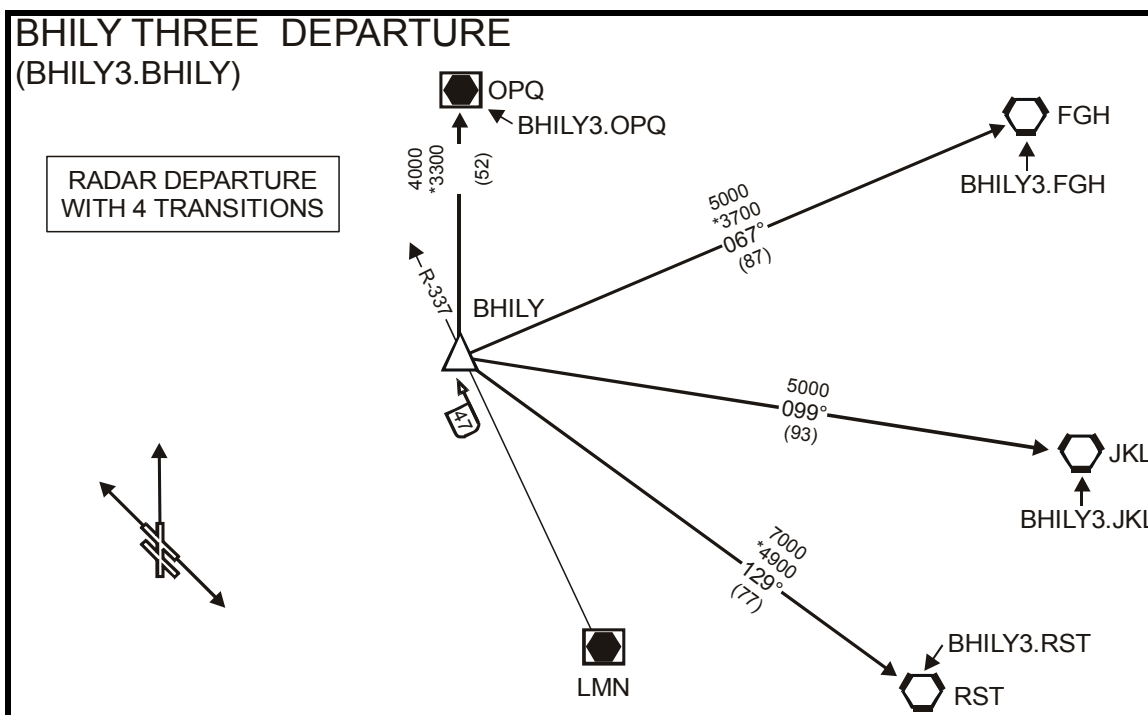
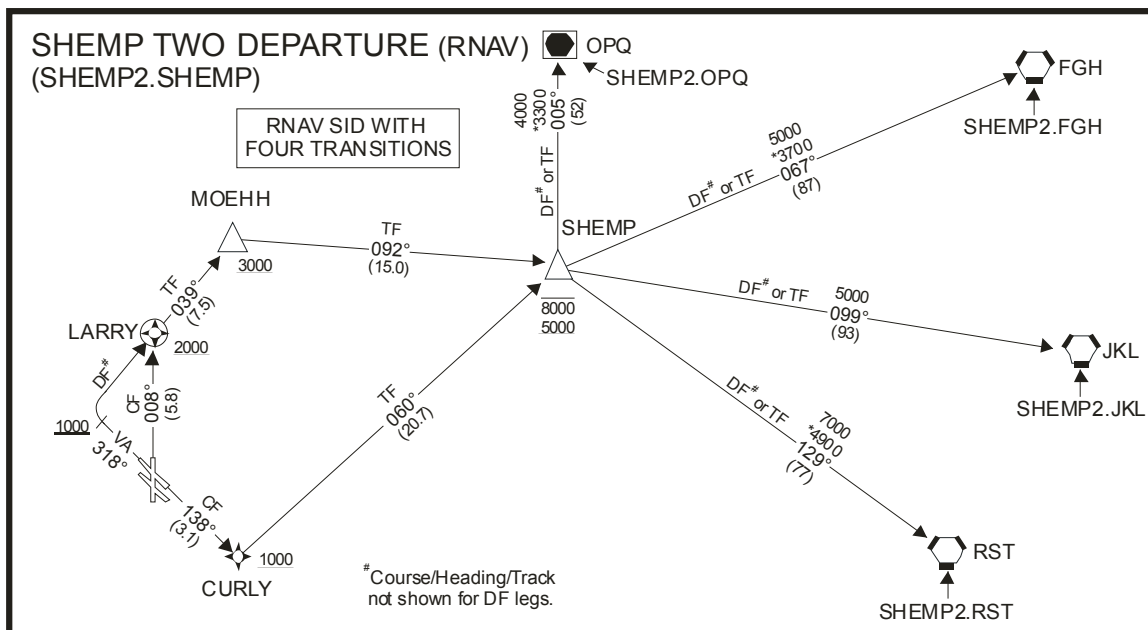
(3) Except as required by paragraph 2-1f(3), all “(RNAV 1)” DPs that are annotated “DME/DME/IRU or GPS REQUIRED” must be annotated with the note: “RADAR REQUIRED FOR NON-GPS EQUIPPED AIRCRAFT.”

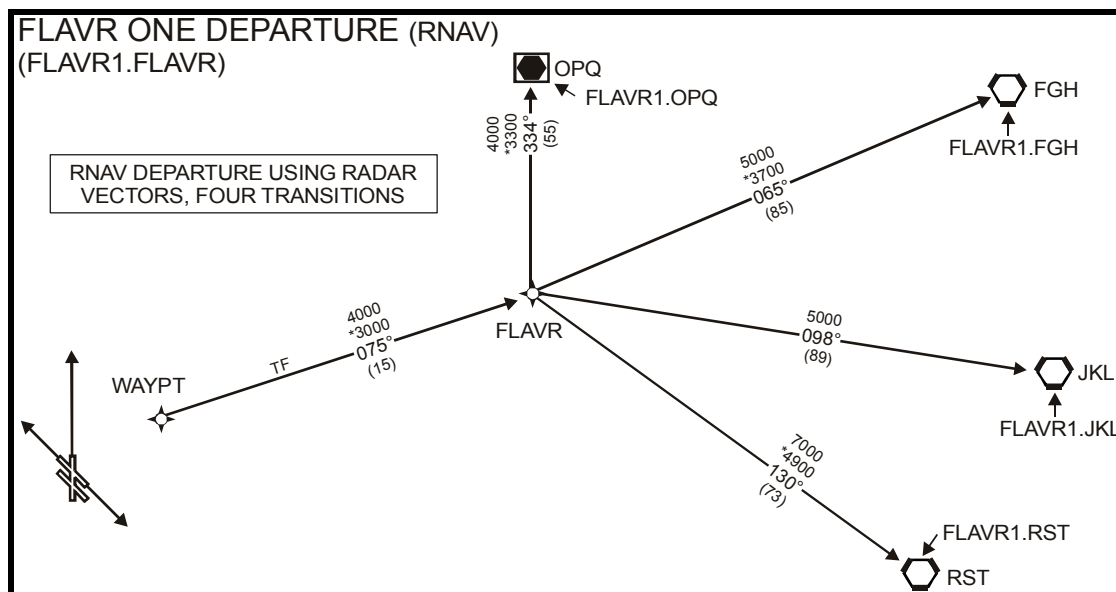
(4) When an “(RNP 1)” DP contains a radius-to-fix (RF) leg or all transitions require an RF leg, annotate the procedure with the standard note “RF REQUIRED” (see Note 1, below). If the RNP DP does not require an RF leg, but at least one transition requires an RF leg, define affected transitions as “RF REQUIRED” (see Note 2, below).

Note 1: RF Required.

Note 2: (Name) Transition, RF Required.

EXAMPLES:

EXAMPLES (Continued):

EXAMPLES (Continued):

THIS PAGE IS INTENTIONALLY LEFT BLANK

Appendix B. Instructions for Completing Graphic Departure Procedure (DP) Requirements Worksheet

Instructions for completing the graphic departure procedure requirements worksheet by **other** than AeroNav Products personnel.

Note: Proponents with the capability may use electronically generated 8260-15 series forms (with graphic depiction included) instead of the Graphic DP Requirements Worksheet.

This worksheet may be used to process changes to existing DPs. In such cases, only complete those **Lines** needed to convey the request/recommendation.

1. **Line 1. Airport(s).** Enter the name(s) of the airport(s) and the ICAO identifier(s) of each.
2. **Line 2. City and State.** Self-explanatory.
3. **Line 3. DP Name and Computer Codes.** Enter the proposed name of the DP and computer code. Use the naming and computer code conventions as outlined in appendix A. Coordinate the proposed name(s) and code(s) with the servicing ARTCC to ensure there are no duplications.
4. **Line 4. Action Required.** Indicate whether a new procedure is being established or modifying an existing DP.
5. **Line 5. Communications.** Indicate the communications functions to be charted; e.g., ATIS, AWOS/ASOS, CTAF, CLNC DEL, DEP CON, etc. List specific frequency(ies) only when multiple frequencies are available at a facility and there may be confusion as to which should be assigned to the procedure, or if the frequency(ies) are unique to the procedure. Coordinate with ATC as necessary.
6. **Line 6. Route.**
 - a. **Line 6.1. Runway(s)/Helipads/Vertiports.** Indicate the runway number(s) or helipads/vertiports the DP will serve.
 - b. **Line 6.2. Initial Route From Runway.** Indicate the desired initial route(s) that is required. If known, specify the single heading/course, or range of headings (e.g., DVA headings) for each runway authorized for the SID.
 - c. **Line 6.3. ATC Requested Routing/Operational Parameters.** Enter any information that would assist the procedure developer by providing flexibility in ground tracks. For example, if ATC needs the departure track to go generally south and join a route at a specified point and the exact ground track is not important, so state. Conversely, if there is flexibility to the east but there is an operational constraint to the west, that information must be provided. In extraordinary cases, when exact ground track is the primary concern in RNAV DPs, specify desired routing. ATC should specify the routing based on ATC needs.

d. Line 6.4. Fix(es). Enter each fix in the order flown. For the Departure IF, indicate either a specific point or at least describe the factors constraining the placement of the fix. Enter coordinates to the nearest 0.01 arc second when known. The TARGETS distribution package will satisfy this requirement. If used, enter the statement “See attached (DP name) TARGETS distribution package dated (date).”

Note: If an existing fix/NAVAID is used, enter only the fix name/facility type and ID, and any altitude restriction at the fix.

e. Line 6.5. ATC Required Altitudes. Enter any altitude restrictions associated with each fix.

7. Line 7. Transitions. [NA for Obstacle Departure Procedures (ODPs)]

a. Line 7.1. Identification. Enter the proposed name and computer code of each transition (see Block 3).

b. Line 7.2. Transition Fix(es). See Block 6.4.

c. Line 7.3. ATC Required Altitudes. See Block 6.5.

d. Line 7.4. ATC Operational Parameters. See Block 6.3.

8. Line 8. Lost Communications. List specific lost communications instructions if other than 14 CFR Part 91.185 (standard).

9. Line 9. Graphic Depiction. Provide a basic sketch of the procedure. The sketch may be hand drawn, computer generated, or overlaid on the appropriate portion of a controller chart. It is not necessary for the sketch to be to an exact scale. The intent here is to provide the procedure developer with a visual correlation of the textual route description.

10. Line 10. Requested Publication Date or Airspace Docket Number. Enter the desired effective date that coincides with the charting cycle. If the DP effective date is to be concurrent with an airspace action, enter the docket number, which may be obtained from the applicable ATO Service Area. See Order 8260.26, appendix A for chart dates and lead-time for submission.

11. Line 11. Remarks.

a. Indicate that the environmental review under Order 1050.1 (latest edition) and the noise screening have been accomplished.

Note: Notice 7210.360, Noise Screening Criteria for Certain Air Traffic Actions Above 3000 Feet, has expired; however, the noise screening is still required. The requirement will be re-established in a proposed Air Traffic environment order.

Graphic Departure Procedure (DP) Requirements Worksheet

1. **Airport(s)** _____
2. **City and State** _____
3. **DP Name** _____ **Computer Code** _____
4. **Action Required:** Establish _____ Amend _____
5. **Communications:** Enter an X in the space provided next to the communications function listed. Enter specific frequency(ies) only when multiple frequencies are available at a facility and there may be confusion as to which should be assigned to the procedure, or if the frequency is unique to the procedure.

ATIS _____ AWOS/ASOS _____ CLEARANCE DELIVERY _____ GROUND _____

TOWER _____ CTAF _____ DEPARTURE CONTROL _____ ARTCC _____
6. **Route:**
 - 6.1. **Runway(s)** _____ **Helipads/Vertiports** _____
 - 6.2. **Initial Route From Runway** _____
 - 6.3. **ATC Requested Routing/Operational Parameters** _____
 - 6.4. **Fix(es):**

NAME _____	NAVAID _____	LAT/LONG _____	ALT _____
NAME _____	NAVAID _____	LAT/LONG _____	ALT _____
NAME _____	NAVAID _____	LAT/LONG _____	ALT _____
NAME _____	NAVAID _____	LAT/LONG _____	ALT _____
NAME _____	NAVAID _____	LAT/LONG _____	ALT _____
NAME _____	NAVAID _____	LAT/LONG _____	ALT _____
NAME _____	NAVAID _____	LAT/LONG _____	ALT _____
 - 6.5. **ATC Required Altitudes:** _____

**Graphic Departure Procedure (DP)
Requirements Worksheet (Continued)**

7. Transitions: [Not Allowed for graphic Obstacle Departure Procedures (ODPs)]

7.1 Identification:

NAME _____ COMPUTER CODE _____

NAME _____ COMPUTER CODE _____

NAME _____ COMPUTER CODE _____

NAME _____ COMPUTER CODE _____

NAME _____ COMPUTER CODE _____

7.2 Transition Fix(es):

Note: If fix/NAVAID is currently published on an en route chart, enter only the fix name and/or facility ID, and required altitude.

NAME _____ NAVAID _____ LAT/LONG _____ ALT _____

NAME _____ NAVAID _____ LAT/LONG _____ ALT _____

NAME _____ NAVAID _____ LAT/LONG _____ ALT _____

NAME _____ NAVAID _____ LAT/LONG _____ ALT _____

NAME _____ NAVAID _____ LAT/LONG _____ ALT _____

NAME _____ NAVAID _____ LAT/LONG _____ ALT _____

NAME _____ NAVAID _____ LAT/LONG _____ ALT _____

7.3. ATC Required Altitudes: _____

7.4. ATC Operational Parameters: _____

8. Lost Communications: _____

**Appendix D. Section 1. Instructions for Completing
FAA Form 8260-15A, Takeoff Minimums and
Obstacle Departure Procedures (ODP) and Sample Forms**

1. Develop a separate Form 8260-15A for each airport with approved instrument procedures. If all runways are standard (e.g., no ODP required), then state “Standard.” The form must encompass all runways for that airport. Use table A-1 as a guide to initiate the required “Action” to support the “Situation” for a specific airport.

2. City and State. Complete this section with the same location data as on the associated approach procedure(s).

3. Airport. Complete this section with the same airport name data as on the associated approach procedure(s).

4. Effective Date. Leave blank. The National Flight Data Center (NFDC) will normally add the effective date. Enter an effective date only when a specific effective date is required; e.g., Magnetic Variation (Mag Var) rotation. If the procedure is a “Special,” the effective date will be entered by the Regional Flight Standards Division, NextGen Branch (RNGB).

5. AMDT No. Enter standard entry as on Standard Instrument Approach Procedures (SIAP).

6. Takeoff Minimums. Enter takeoff minimums as directed below; however, do not list Takeoff Minimums for the runway(s) served by a graphic ODP - see appendix D, paragraph 7a(6).

a. List the runway(s) that are not authorized for IFR departures. If none of the actions listed in table A-1 are feasible, or if another reason(s) precludes ODP development (noise abatement, environmental, etc.), an IFR departure must not be authorized.

Examples:

RWY 27, NA - OBSTACLES.

RWY 35, NA - ENVIRONMENTAL.

RWY 17, NA - OBSTACLES AND NOISE ABATEMENT.

Followed by:

b. List the runway(s) authorized standard takeoff minimums.

Example:

RWY 09, 31 STANDARD.

Followed by:

c. **List the runway(s)** that have any *deviations* from standard minimums and/or restrictions;

Example:

TAKEOFF MINIMUMS: RWY 13, 400-2 OR STANDARD WITH MINIMUM CLIMB OF 310 FT/NM TO 900, OR ALTERNATIVELY, WITH STANDARD TAKEOFF MINIMUMS AND A NORMAL 200 FT/NM CLIMB GRADIENT, TAKEOFF MUST OCCUR NO LATER THAN 1800 FT PRIOR TO DER.

(1) When obstacles in the initial climb area (ICA) cause a climb gradient to an altitude 200 ft or less above DER, before rounding, do not publish takeoff minimums or a climb gradient. Instead, identify the obstacle data by note for publication in the “Takeoff Obstacle Notes” section.

(2) When obstacles 3 SM or less from DER preclude standard takeoff minimums:

Note: The obstacle may be within the ICA or ICA extended to 3 SM.

(a) Provide a Note identifying the obstacle(s) in the “Takeoff Obstacle Notes” section.

(b) Provide higher than standard takeoff minimums followed by the alternative of standard minimums with a specified climb gradient.

(c) Identify the obstacle(s) on which the published ceiling and visibility is based in the Controlling Obstacles section.

(3) When obstacles beyond 3 SM of DER preclude standard takeoff minimums:

(a) Provide standard takeoff minimums with minimum climb gradient requirements.

(b) Provide higher than standard takeoff minimums to allow a visual climb over the airport (VCOA). Use standard Note in the following format: RWY XX, (CIG/VSBY) for VCOA.

Example:

TAKEOFF MINIMUMS: RWY 9, STANDARD WITH MINIMUM CLIMB OF 310 FT/NM TO 1400 OR ALTERNATIVELY, WITH STANDARD TAKEOFF MINIMUMS AND A NORMAL 200 FT/NM CLIMB GRADIENT, TAKEOFF MUST OCCUR NO LATER THAN 1800 FT PRIOR TO DER OR 1100-2½ FOR VCOA.

7. TEXTUAL Departure Procedure.

a. When a specific departure route is necessary, provide the complete text, by runway, for required DPs.

(1) When a climb to an altitude is necessary before turning, define the limitation as clear and simple as possible when limiting the initiation of a turn; e.g., **“RWY 36 – CLIMB HEADING 350.11 TO 2800 BEFORE TURNING LEFT.”**

Note: Procedure designers must consider the impact on local ATC operations when using such phrases as “before turning” or “before proceeding on course;” therefore, coordinate these actions with ATC to ensure compatibility with the local operating environment.

(2) When a DP routing is required and VOR or TACAN is used to define the route, use the format: **RWY 9 - CLIMBING LEFT TURN TO INTERCEPT ABC VORTAC R-310 TO 6000 BEFORE PROCEEDING ON COURSE.**

(3) When a DP routing is required and NDB is used to define the route, use course to or bearing from the NDB; e.g., **RWY 35 - CLIMB HEADING 350..., THEN CLIMBING RIGHT TURN TO INTERCEPT BEARING 020 FROM ABC NDB TO 6000 BEFORE PROCEEDING ON COURSE;** or **RWY 35 - CLIMB HEADING 030..., THEN ON COURSE 015 TO ABC NDB TO 4000 BEFORE PROCEEDING ON COURSE.**

(4) When a ODP routing permits a climb within a sector, define the courses to remain within in a clockwise fashion; e.g., **“RWY 12 – CLIMB ON A HEADING BETWEEN 061 CW TO 228 FROM DEPARTURE END OF RUNWAY, OR MINIMUM CLIMB OF 260 FT PER NM TO 8700 FOR HEADINGS 229 THROUGH 300.”**

(5) When a DP routing is required and a localizer course is used to define the route, use magnetic direction of localizer course to be flown; e.g., **“RWY 5 - CLIMB ON I-XXX LOCALIZER NE COURSE TO 3000 BEFORE TURNING.”**

(6) When the departure instructions must be graphically depicted, inform the pilot of the name of the default Obstacle DP, and submit an accompanying Form 8260-15B; e.g., Use standard Note: **“USE JONES DEPARTURE”** when the graphic obstacle DP serves all runways or use **“RWY 27 – USE SMITH DEPARTURE”** when the graphic obstacle DP serves only a specific runway.

b. It is not appropriate to use the wording “Comply with ODP or....” This could be confusing and cause the pilot to use a different routing than was expected by ATC.

c. Do not use the phrase “...or comply with ATC instructions.” The pilot is aware that ATC instructions are to be complied with, when possible, and safety of flight is not compromised.

d. Specify a single obstacle DP. Do not provide an option to use a SID as the default ODP. For example, **do not use** “Climb runway heading to 1200 before turning or use Manchester Departure.”

8. Visual Climb Over Airport.

a. When a VCOA has been established, include instructions to climb in visual conditions to cross a specified airport, NAVAID or fix at or above a specified altitude before proceeding on course.

b. The statement “Obtain ATC approval for VCOA when requesting IFR clearance” must be included at the beginning of the VCOA instructions.

Examples:

RWY 19 – OBTAIN ATC APPROVAL FOR VCOA WHEN REQUESTING IFR CLEARANCE. CLIMB IN VISUAL CONDITIONS TO CROSS HICKORY REGIONAL AIRPORT AT OR ABOVE 1200 BEFORE PROCEEDING ON COURSE.

ALL RUNWAYS – OBTAIN ATC APPROVAL FOR VCOA WHEN REQUESTING IFR CLEARANCE. CLIMB IN VISUAL CONDITIONS TO CROSS XYZ VOR SOUTHEAST BOUND AT OR ABOVE 4200 THEN PROCEED ON XYZ R-150 TO HAMET.

9. Takeoff Obstacle Notes.

a. Enter a Note regarding obstacles found as a result of applying table A-1, Situation 2 action and Situation 3, action “A.” See appendix D, paragraph 6c(2). Do not list Takeoff Obstacle Notes for the runway(s) served by a graphic default Obstacle DP as described in appendix D, paragraph 7a(5).

Note: An adverse assumption obstacle (AAO) will not be identified/published as a “takeoff obstacle” because pilots are not familiar with the AAO concept. However, publishing a ceiling and visibility will allow for those situations where the CG cannot be achieved and still afford the pilot the opportunity to visually acquire and avoid any obstruction that could have been built without notice to the FAA.

b. The note must include the runway affected and inform the pilot of the obstacle(s) type and location relative to the DER and height (AGL/elevation (MSL)). When there are obstacles on both sides of the runway centerline extended, note the most significant obstacles left and right of the runway centerline. Phrases such as “multiple antennas, numerous trees, etc.” are acceptable. Specify distances 1 NM or greater to the nearest whole and tenth of a NM (e.g., 2.1 NM FROM DER). Specify distances less than 1 NM in feet (e.g., 1280 FT FROM DER).

Examples:

NOTE: RWY 35, TREES 1280 FT FROM DER, 120 FT LEFT OF CENTERLINE, 50 FT AGL/1527 FT MSL.

NOTE: RWY 35, BUILDING 2.1 NM FROM DER, 160 FT LEFT OF CENTERLINE, 350 FT AGL/1927 FT MSL.

NOTE: RWY 17, MULTIPLE BUILDINGS 500 FT FROM DER, 350 FT RIGHT OF CENTERLINE, 50 FT AGL/1107 FT MSL. ANTENNA 6000 FT FROM DER, 1235 FT LEFT OF CENTERLINE, 200 FT AGL/1257 FT MSL.

NOTE: RWY 27, MULTIPLE TREES AND ANTENNAS BEGINNING 500 FT FROM DER, 350 FT RIGHT OF CENTERLINE, UP TO 110 FT AGL/1307 FT MSL.

c. These obstacle Notes must be published by charting agents.

10. Controlling Obstacles.

a. Document the controlling obstacle(s) found as a result of applying table 2-1, Situation 3 and/or Situation 4. See appendix D, paragraph 6c(2). When there is more than one controlling obstacle to be documented, following the coordinates, include what entity it applies too; i.e., “(Ceiling),” “(Visibility),” “(Climb Gradient),” or “(Climb-To Altitude).” Do not list Controlling Obstacles for the runway(s) served by a graphic default ODP as described in appendix D, paragraph 7a(5).

Note: For all DPs, the controlling obstacle is that obstacle which, having penetrated the 40:1 Obstacle Clearance Surface (OCS) causes the most adverse climb gradient, climb-to altitude, and/or ceiling and visibility to be published.

b. Use the following format to list the runway affected, elevation, and type of obstacle, the coordinates to the nearest 0.01 second; e.g., “**RWY 32: 2049 FT MSL ANTENNA 341548.01N/ 0862101.05W**” or “**RWY 32: 2049 FT MSL ANTENNA 341548.01N/ 0862101.05W.**”

c. Document the obstacle(s) that mandated development of a specific textual ODP route. These obstacles are not considered the “controlling obstacles” because they are not a factor to the specified route being flown. This information will not be charted on the procedure. Document these obstacles as follows:

“OBSTACLES MANDATING ODP ROUTE DEVELOPMENT: RWY 36 - 2049 FT MSL ANTENNA 341658.01N/ 0863108.05W.”

11. Remarks. List information/data that is not normally charted; e.g., administrative data or notes for controller information (requested by ATC). However, if something does need to be charted, precede the text with the “Chart Note:” annotation. See Order 8260.19, paragraph 8-72g,

for a chart note that is required if the ODP is a Special. General chart notes (not Takeoff Minimums or Departure Instructions Notes) need to include instructions to the chart organization to place the note at the bottom of the entry. Use the following format: “**Chart Note at bottom of entry:...**”

12. Flight Inspected By. Enter the name of the pilot who conducted the flight inspection/validation, and the date.

13. Developed By. Enter the name of the FAA procedure specialist and organizational routing code. If developed under an Other Transactional Authority, enter the procedure developer's name and organization.

14. Approved By. Enter the name of AeroNav Products Manager, or his/her delegated representative. For procedures developed under an Other Transactional Authority, enter the name of the organization's manager or his/her delegated representative. This individual must sign in the “approved by” space, and enter the date signed. If the procedure is a “Special,” this line will contain the name of and be signed by the manager, AFS-400.

15. Coordinated With. Specify the offices/organizations the procedure was coordinated with. DP coordination must be identical with the approach procedure coordination as outlined in Order 8260.19, Flight Procedures and Airspace, (latest edition), chapter 8.

16. Changes. List changes relating to data entries on page one.

17. Reasons. List reasons for changes relating to data entries on page one. Additionally, when a VCOA cannot be established, an explanation must be provided; e.g., “VCOA NOT ESTABLISHED AT ATC REQUEST DUE TO (REASON).”

18. Required Effective Date.

a. Enter the effective date as noted in Order 8260.19 (latest edition), chapter 8, except that “Proposed” dates may not be used for ODPs. Optimally, submit as routine.

Note: En route submission cutoff dates apply to graphic DPs.

b. If the Form 8260-15A represents a concurrent action, enter “CONCURRENT” followed by the necessary information; e.g., Airport ID, IAP name and amendment number; airspace action, or other event.

c. When documenting Standard Takeoff Minimums where all runways have a clear 40:1 Obstacle Clearance Surface (i.e., No ODP or obstacle notes required), enter “N/A.”

Figure D-1.

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

TAKEOFF MINIMUMS AND OBSTACLE DEPARTURE PROCEDURES (ODP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
 Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

City, State	Airport	Effective Date	Amdt No.
MILES CITY, MT	MILES CITY/FRANK WILEY FIELD		ORIG

TAKEOFF MINIMUMS:

STANDARD

TEXTUAL DEPARTURE PROCEDURE:**VISUAL CLIMB OVER AIRPORT:****TAKEOFF OBSTACLE NOTES:****CONTROLLING OBSTACLES:****REMARKS:****FLIGHT INSPECTED BY:**

JON P. DOE

FIOG

03/13/2013

REQUIRED EFFECTIVE DATE:

N/A

DEVELOPED BY:

JOE DEVELOPER

AJV-352

02/18/2013

APPROVED BY:

JOE MANAGER

AJV-352

03/14/2013

COORDINATED WITH:

APA, ALPA, AOPA, NBAA, ARPT MGR, ZNY, ZDC

CHANGES:**REASONS:**

THIS PAGE IS INTENTIONALLY LEFT BLANK

Figure D-2.

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

TAKEOFF MINIMUMS AND OBSTACLE DEPARTURE PROCEDURES (ODP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

City, State	Airport	Effective Date	Amdt No.
DANVILLE, TX	HICKORY REGIONAL		ORIG

TAKEOFF MINIMUMS:

RWY 1: NA - OBSTACLES

RWY 32: STANDARD

RWY 14: 500 - 2 1/2 OR STANDARD WITH MINIMUM CLIMB OF 330 FT PER NM TO 1200.

RWY 19: STANDARD WITH MINIMUM CLIMB OF 214 FT PER NM TO 1100, OR ALTERNATIVELY, WITH STANDARD TAKEOFF MINIMUMS AND A NORMAL 200 FT PER NM CLIMB GRADIENT, TAKEOFF MUST OCCUR NO LATER THAN 2000 FT PRIOR TO DER OR 1000 - 2 FOR VCOA.

TEXTUAL DEPARTURE PROCEDURE:

RWY 32: CLIMB HEADING 317.66 TO 2200 BEFORE TURNING LEFT.

VISUAL CLIMB OVER AIRPORT:

RWY 19: OBTAIN ATC APPROVAL FOR VCOA WHEN REQUESTING IFR CLEARANCE. CLIMB IN VISUAL CONDITIONS TO CROSS HICKORY REGIONAL AIRPORT AT OR ABOVE 1300 BEFORE PROCEEDING ON COURSE.

TAKEOFF OBSTACLE NOTES:

NOTE: RWY 14, BUILDING 1.96 NM FROM DER, ON RWY CENTERLINE, 478 FT AGL/974 FT MSL.

NOTE: RWY 32, TREES 143 FT LEFT OF DER, 21 FT AGL/498 FT MSL.

CONTROLLING OBSTACLES:

RWY 14: 974 FT MSL BUILDING, 324911.09N-0964838.62W

RWY 19: 922 FT MSL TOWER, 324748.00N-0965137.00W

RWY 32: 1049 FT MSL TOWER, 325216.19N-0965523.02W

RWY 19 (VCOA): 974 FT MSL BUILDING, 324911.09N-0964838.62W

OBSTACLES MANDATING ROUTE DEVELOPMENT: RWY 32 – 1538 FT MSL TOWER, 325249.09N-0965639.66W

REMARKS:**FLIGHT INSPECTED BY:**

JON P. DOE

FIOG

02/12/2013

REQUIRED EFFECTIVE DATE:

CONCURRENT WITH KHCK RNAV (GPS) RWY 14, ORIG

DEVELOPED BY:

JOE SPECIALIST

AJV-352

01/30/2013

APPROVED BY:

JOE MANAGER

AJV-352

02/15/2013

COORDINATED WITH:

APA, ALPA, AOPA, NBAA, ARPT MGR, FCR ATCT, ZFW

CHANGES:**REASONS:**

THIS PAGE IS INTENTIONALLY LEFT BLANK

Figure D-3.

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

TAKEOFF MINIMUMS AND OBSTACLE DEPARTURE PROCEDURES (ODP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

City, State	Airport	Effective Date	Amdt No.
LASKY, WY	LASKY REGIONAL		ORIG

TAKEOFF MINIMUMS:

RWY 16, 34: NA - OBSTACLES

TEXTUAL DEPARTURE PROCEDURE:

RWY 18, 36: USE GOODHILL DEPARTURE.

VISUAL CLIMB OVER AIRPORT:**TAKEOFF OBSTACLE NOTES:****CONTROLLING OBSTACLES:****REMARKS:****FLIGHT INSPECTED BY:**

JON P. DOE

FIOG

03/12/2013

REQUIRED EFFECTIVE DATE:

Routine

DEVELOPED BY:JOE DEVELOPER
(JOHN TRAINEE)

AJV-352

02/20/2013

APPROVED BY:

JOE MANAGER

AJV-352

03/20/2013

COORDINATED WITH:

APA, ALPA, AOPA, NBAA, ARPT MGR, LSK ATCT, LSK APP CON, ZLC, ZOB

CHANGES:**REASONS:**

THIS PAGE IS INTENTIONALLY LEFT BLANK

Figure D-4.

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

TAKEOFF MINIMUMS AND OBSTACLE DEPARTURE PROCEDURES (ODP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

City, State	Airport	Effective Date	Amdt No.
LASKY, WY	LASKY REGIONAL	04/18/2002	4

TAKEOFF MINIMUMS:

PROCEDURE CANCELLED EFFECTIVE _____.

TEXTUAL DEPARTURE PROCEDURE:**VISUAL CLIMB OVER AIRPORT:****TAKEOFF OBSTACLE NOTES:****CONTROLLING OBSTACLES:****REMARKS:****FLIGHT INSPECTED BY:**

FIOG

REQUIRED EFFECTIVE DATE:

Routine

DEVELOPED BY:

JOE DEVELOPER

AJV-352

02/20/2013

APPROVED BY:

JOE MANAGER

AJV-352

02/27/2013

COORDINATED WITH:

APA, ALPA, AOPA, NBAA, ARPT MGR, LSK ATCT, LSK APP CON, ZLC, ZOB

CHANGES:**REASONS:**

OBSTACLE DATA REVIEW - ODP NO LONGER REQUIRED

THIS PAGE IS INTENTIONALLY LEFT BLANK

Figure D-5.

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

TAKEOFF MINIMUMS AND OBSTACLE DEPARTURE PROCEDURES (ODP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

City, State	Airport	Effective Date	Amdt No.
PITTSBURGH, PA	PITTSBURGH INTERNATIONAL		4

TAKEOFF MINIMUMS:

RWY 10L, 10C, 10R, 28L, 28C, 28R, 14: STANDARD.
RWY 32: 200 - 1 1/2 OR STANDARD WITH MINIMUM CLIMB OF 240 FT PER NM TO 1500, OR ALTERNATIVELY, WITH STANDARD TAKEOFF MINIMUMS AND A NORMAL 200 FT PER NM CLIMB GRADIENT, TAKEOFF MUST OCCUR NO LATER THAN 2100 FT PRIOR TO DER.

TEXTUAL DEPARTURE PROCEDURE:**VISUAL CLIMB OVER AIRPORT:****TAKEOFF OBSTACLE NOTES:**

NOTE: RWY 10L: TREE 1387 FT FROM DER, 733 FT LEFT OF CENTERLINE, 59 FT AGL/1233 FT MSL. ROD ON OL TOWER, 4168 FT FROM DER, 910 FT LEFT OF CENTERLINE, 112 FT AGL/1282 FT MSL. TOWER 4175 FT FROM DER, 864 FT LEFT OF CENTERLINE, 112 FT AGL/1282 FT MSL. TREE 1463 FT FROM DER, 672 FT LEFT OF CENTERLINE, 38 FT AGL/1212 FT MSL.
NOTE: RWY 10C: MULTIPLE TREES BEGINNING 3207 FT FROM DER, 461 FT LEFT OF CENTERLINE, UP TO 29 FT AGL/1263 FT MSL.
NOTE: RWY 10R: MULTIPLE TREES BEGINNING 1082 FT FROM DER, 102 FT RIGHT OF CENTERLINE, UP TO 66 FT AGL/1265 FT MSL. OL ON MONITOR POLE 4590 FT FROM DER, 1124 FT LEFT OF CENTERLINE, 55 FT AGL/1241 FT MSL. POLE 4610 FT FROM DER, 1138 FT LEFT OF CENTERLINE, 55 FT AGL/1241 FT MSL.
NOTE: RWY 28L: TREE 2272 FT FROM DER, 1109 FT LEFT OF CENTERLINE, 64 FT AGL/1223 FT MSL. TREE 39 FT FROM DER, 498 FT LEFT OF CENTERLINE, 55 FT AGL/1144 FT MSL.
NOTE: RWY 28R: TREE 1810 FT FROM DER, 912 FT RIGHT OF CENTERLINE, 34 FT AGL/1273 FT MSL. BUSH 73 FT FROM DER, 477 FT LEFT OF CENTERLINE, 12 FT AGL/1215 FT MSL. POLE 645 FT FROM DER, 663 FT LEFT OF CENTERLINE, 20 FT AGL/1223 FT MSL.
NOTE: RWY 14: TREE 968 FT FROM DER, 516 FT RIGHT OF CENTERLINE, 44 FT AGL/1158 FT MSL.
NOTE: RWY 32: ANT ON OL TOWER, 1.1 NM FROM DER, 435 FT LEFT OF CENTERLINE, 105 FT AGL/1354 FT MSL. TOWER 6812 FT FROM DER, 497 FT LEFT OF CENTERLINE, 96 FT AGL/1342 FT MSL. LT ON POLE 454 FT FROM DER, 515 FT RIGHT OF CENTERLINE, 25 FT AGL/1173 FT MSL. MULTIPLE TREES BEGINNING 1717 FT FROM DER, 1108 FT RIGHT OF CENTERLINE, UP TO 61 FT AGL/1321 FT MSL. TREE 6074 FT FROM DER, 1272 FT RIGHT OF CENTERLINE, 61 FT AGL/1321 FT MSL. TREE 2577 FT FROM DER, 1108 FT RIGHT OF CENTERLINE, 74 FT AGL/1233 FT MSL. TREE 2480 FT FROM DER, 1118 FT RIGHT OF CENTERLINE, 33 FT AGL/1212 FT MSL.

CONTROLLING OBSTACLES:

RWY 32: 1354 FT MSL TOWER 403032.06N-0801435.23W

REMARKS:**FLIGHT INSPECTED BY:**

JOHN P. DOE FIOG 08/08/2013

REQUIRED EFFECTIVE DATE:

09/23/2010

DEVELOPED BY:

JOE DEVELOPER
(JIM TRAINEE) AJV-352 05/02/2013

APPROVED BY:

JOE MANAGER AJV-352 09/25/2013

COORDINATED WITH:

APA ALPA, AOPA, NBAA, ARPT MGR, PIT APP CON, ZOB

CHANGES:

1. RWY 32 ADDED CLIMB GRADIENT AND CEILING/VISIBILITY.
2. DELETED DEPARTURE PROCEDURES.

REASONS:

1. NEW CONTROLLING OBSTACLE REQUIRED A CLIMB GRADIENT.
2. DIVERSE DEPARTURE AUTHORIZED.

THIS PAGE IS INTENTIONALLY LEFT BLANK

**Section 2. Instructions for Completing
FAA Form 8260-15B, Graphic Departure Procedure (DP)
[Non-RNAV Departure Procedures] and Sample Forms**

1. Title Line: The Title Line consists of the six following elements and will be filled in as noted.

a. DP Name. Enter name of departure procedure. For example, the CATHEDRAL SEVEN DEPARTURE is entered as CATHEDRAL.

b. Number. Enter departure procedure number (spelled out); e.g., EIGHT.

c. DP Computer Code. Enter computer identification code as coordinated with by ATC (see appendix A).

d. Superseded Number. Departure procedure number (spelled out) superseded by this procedure. Enter “None” for a new procedure.

e. Dated. Date of superseded procedure. Format: DD MMM YY.

f. Effective Date. Leave blank. The effective date will normally be added by NFDC. Enter an effective date only when a specific effective date is required; e.g., Mag Var rotation. If the procedure is a “Special,” the effective date will be entered by the Regional Flight Standards Division, NextGen Branch (RNGB).

2. Type: Specify whether the procedure is a default obstacle departure procedure (see paragraph 2-1b) by placing “Obstacle” on this line **or** specify that the procedure is a “SID” when the procedure is initiated by ATC (see paragraph 2-1c).

Note: Attach an up-to-date, clear graphic depiction of the procedure. DO NOT include a textual description of transitions or departure route text.

3. DP Route Description. Provide the initial climb out instructions for each runway and a textual description of the departure route(s) to the DP termination fix. Include only information pertinent to the departure procedure. Where the initial climb out instructions from multiple runways join and share a common route/instructions prior to the DP termination fix, end each instruction with “..., thence...” followed by a paragraph containing the common information (see figure D-6). If the DP route can be clearly understood from a graphic depiction, a complete textual description is not necessary. Simply state, “...then on depicted route.” Define crossing altitudes at fixes as follows:

a. Document crossing altitude restrictions in plain text; e.g., “**CROSS GRM VORTAC AT OR ABOVE (altitude)**”; “**CROSS BRADY AT OR BELOW (altitude)**”; “**CROSS SHEMP AT OR ABOVE (altitude)**”; “**AT OR BELOW (altitude)**”; “**CROSS EDDIE AT (altitude)**.”

b. Altitude Restrictions Requested by ATC (not authorized for ODPs).

(1) See Order 8260.3, Volume 4, and/or other 8260-series directives, as applicable, for the criteria to use when establishing fix crossing altitude restrictions requested by ATC.

(2) See paragraph 2-1e(1) for altitude charting constraints.

4. Transition Routes. (Not Authorized for ODPs)

a. Transition Name. Name each transition according to the name of the fix at the transition termination point entered in appendix D, paragraph 4d. Do not include the word “Transition.”

b. Transition Computer Codes. Enter computer code as coordinated with ATC (see appendix A).

c. From FIX/NAVAID. Fix/NAVAID where the basic DP ends; e.g., **DANNY INT, BICKR.**

d. To FIX/NAVAID. En route fix/NAVAID where each transition ends; e.g., **DANNY, BICKR.** If a transition has multiple segments, enter one line for each segment.

e. Course. Specify the course for each transition segment. Enter the actual magnetic course to the hundredth of a degree (see Order 8260.19, chapter 8). When documenting the course between facilities, provide this information for both facilities.

Example:

076.56 & 080.47 (TWN R-077 & WSN R-260)

Note: AeroNav Products will round for publication.

f. Distance. Specify the distance for each transition segment. Enter the distance to the hundredth of a mile (see Order 8260.19, chapter 8). When documenting the course/distance between facilities, provide this information for both facilities.

Example:

41.61

Note: AeroNav Products will round for publication.

g. MEA. Enter MEA along transition route. By definition, the MEA also encompasses the MRA. If transitions share a common segment, make sure the MEA for that segment is the same for each transition.

h. MOCA. Enter MOCA along transition route. To reduce chart clutter, MOCAs less than 500 ft below MEAs should not be published.

i. Crossing Altitudes/Fixes. When a **SID Transition(s)** must accommodate an ATC required altitude at a specified fix, only document the ATC altitude; e.g., “**BECKY at/above 9000.**” No secondary altitude is required on transition routes since an MEA is specified that will provide obstacle clearance and ensure design constraints are met. The ATC altitude must not be lower than the MEA.

5. Procedural Data Notes/Takeoff Minimums.

a. List any procedural data information that is to appear in note form on the graphic depiction; e.g., DME required, minimum climb rate information, etc. Also, depict all restrictions and performance requirements to fly the procedure. See Order 8260.19, paragraph 8-72g, for a chart note that is required if the SID/Graphic ODP is a Special.

Followed by:

b. List the runway(s) that are not authorized for IFR departures. If none of the actions listed in table A-1 are feasible, or if another reason(s) precludes DP development (noise abatement, environmental, etc.), an IFR departure must not be authorized.

Examples:

RWY 27, NA - Obstacles.

RWY 35, NA - Environmental.

RWY 17, NA - Obstacles and noise abatement.

Followed by:

c. List the runway(s) authorized standard takeoff minimums.

Example:

RWY 09, 31 Standard.

Followed by:

d. List the runway(s) that have any *deviations* from standard minimums and/or restrictions.

Examples:

(1) TAKEOFF MINIMUMS: RWY 13, 400-2 OR STANDARD WITH MINIMUM CLIMB OF 310 FT PER NM TO 900, OR ALTERNATIVELY, WITH STANDARD TAKEOFF MINIMUMS AND NORMAL 200 FT PER NM CLIMB GRADIENT, TAKEOFF MUST OCCUR NO LATER THAN 1800 FT PRIOR TO DER.

(2) TAKEOFF MINIMUMS: RWY 27, STANDARD WITH MINIMUM CLIMB OF 280 FT/NM TO 2500, OR ALTERNATIVELY, WITH STANDARD TAKEOFF MINIMUMS AND NORMAL 200 FT/NM CLIMB GRADIENT, TAKEOFF MUST OCCUR NO LATER THAN 1800 FT PRIOR TO DER.

6. Takeoff Obstacle Notes.

a. Enter a Note regarding obstacles found as a result of applying table A-1, Situation 2 action and Situation 3, action “A” (see Form 8260-15A, Takeoff Obstacle Notes).

Note: An adverse assumption obstacle (AAO) must not be identified/published as a “takeoff obstacle” because pilots are not familiar with the AAO concept. However, publishing a ceiling and visibility will allow for those situations where the CG cannot be achieved and still afford the pilot the opportunity to visually acquire and avoid any obstruction that could have been built without notice to the FAA.

b. The note must include the runway affected and inform the pilot of the obstacle(s) type and location relative to the DER, and height [AGL/elevation (MSL)]. When there are obstacles on both sides of the runway centerline extended, note the most significant obstacles left and right of the runway centerline. Phrases such as “multiple antennas, numerous trees, etc.” are acceptable. Specify distances 1 NM or greater to the nearest whole and tenth of a NM (e.g., 2.1 NM FROM DER). Specify distances less than 1 NM in feet (e.g., 1,280 FT FROM DER).

Examples:

NOTE: RWY 35, TREES 1280 FT FROM DER, 120 FT LEFT OF CENTERLINE, 50 FT AGL/1527 FT MSL.

NOTE: RWY 35, BUILDING 2.1 NM FROM DER, 160 FT LEFT OF CENTERLINE, 350 FT AGL/ 1927 FT MSL.

NOTE: RWY 17, MULTIPLE BUILDINGS 500 FT FROM DER 350 FT RIGHT OF CENTERLINE, 50 FT AGL/1107 FT MSL. ANTENNA 6000 FT FROM DER, 1235 FT LEFT OF CENTERLINE, 200 FT AGL/ 1257 FT MSL.

NOTE: RWY 27, MULTIPLE TREES AND ANTENNAS BEGINNING 500 FT FROM DER, 350 FT RIGHT OF CENTERLINE, UP TO 110 FT AGL/1307 FT MSL.

c. These obstacle Notes must be published by charting agents.

7. Controlling Obstacles.

a. Document the controlling obstacle(s) found as a result of applying table A-1, Situation 3 and/or Situation 4. When there is more than one controlling obstacle to be documented, following the coordinates, include what entity it applies too; i.e., “(Ceiling),” “(Visibility),” “(Climb Gradient),” or “(Climb-To Altitude).”

Note: For all DPs, the controlling obstacle is that obstacle which, having penetrated the 40:1 Obstacle Clearance Surface (OCS), causes the most adverse climb gradient, climb-to altitude, and/or ceiling and visibility to be published.

b. Use the following format to list the runway affected, elevation and type of obstacle, the coordinates to the nearest 0.01-second; e.g., “**RWY 32: 2049 FT MSL ANTENNA 341548.01N/ 0862101.05W.**”

c. Document the obstacle(s) that mandated development of a specific graphic ODP route. These obstacles are not considered the “controlling obstacles” because they are not a factor to the specified route being flown. This information will not be charted on the procedure. Document these obstacles as follows:

“OBSTACLES MANDATING ODP ROUTE DEVELOPMENT: RWY 36 - 2049 FT MSL Antenna 341658.01N/ 0863108.05W.”

8. Lost Communications Procedures. Air Traffic Control (ATC) is responsible for determining the need and content of lost communications instructions. Leave blank when procedures are the same as in 14 CFR Part 91.185 (standard).

9. Additional Flight Data. List any additional charting instructions, items essential to clarify charting or information a specialist has determined needs charting as other than a Note. Examples of data may include: terrain features, airports, Special Use Airspace (SUA), holding patterns, or takeoff and departure obstacles; e.g., **CHART _____ MOA; CHART HOLDING AT ICT VORTAC, HOLD NE, RT, 222.03 INBOUND (Include Leg Length for RNAV or DME Holding, when applicable and speed, if other than standard).** Ensure that the accompanying Form 8260-2 contains the appropriate documentation for holding patterns supporting the departure procedure.

10. Airports Served. List the official airport name(s), city, and 2-letter state code served by the departure procedure.

Note: An obstacle DP may only serve one airport.

11. Communications. Enter name of radio communications to be charted; e.g., ATIS, AWOS/ASOS, CTAF, CLNC DEL, DEP CON, etc. Specify frequency(ies) only when multiple frequencies are available at a facility (such as the multiple DEP CON freqs at MIA) and there may be confusion as to which should be assigned to the procedure, or if the frequency(ies) are unique to the procedure.

12. Fixes and/or NAVAIDs. Enter only the fixes and/or NAVAIDs for which charting is requested but are not included in the textual description of the departure or entered in the transition route data.

13. Remarks. List information/data that is NOT to be charted; e.g., administrative data or notes for controller information (requested by ATC). However, if something does need to be charted, precede the text with the “Chart Note:” annotation. See Order 8260.19, paragraph 8-72g, for a chart note that is required if the SID/Graphic ODP is a Special. General chart notes (not Takeoff Minimums or Departure Instructions Notes) need to include instructions to the chart organization to place the note at the bottom of the entry. Use the following format: “**Chart Note at bottom of entry:...**”

14. Flight Inspected By. Enter the name of the pilot who conducted the flight inspection/validation, and the date.

15. Developed By. Enter the name of the FAA procedure specialist and organizational routing code. If developed under an Other Transactional Authority, enter the procedure developer's name and organization.

16. Approved By. Enter the name of AeroNav Products Manager, or his/her delegated representative. For procedures developed under an Other Transactional Authority, enter the name of the organization's manager or his/her delegated representative. This individual must sign in the “approved by” space and enter the date signed. If the procedure is a “Special,” this line will contain the name of and be signed by the manager, AFS-400.

17. Coordinated With. Specify the offices/organizations the procedure was coordinated with. Departure procedure coordination must be identical with the approach procedure coordination as outlined in Order 8260.19 (latest edition), chapter 8.

18. Changes. List changes relating to data entries.

19. Reasons. List reasons for changes relating to data entries.

20. Required Effective Date.

a. Enter the effective date as noted in Order 8260.19 (latest edition), chapter 8, except that “Proposed” dates may not be used for graphic DPs. Optimally, submit as “routine.”

Note: En route data submission cutoff dates must apply for graphic DPs.

b. If the Form 8260-15B represents a concurrent action, enter “CONCURRENT” followed by the necessary information; e.g., Airport ID, IAP name and amendment number; airspace action, or other event.

Figure D-6.

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name	Number	DP Computer Code	Superseded Number	Dated	Effective Date
GOODHILL	ONE	GHI1.GHI	NONE		

Type: Obstacle

DP ROUTE DESCRIPTION:
TAKEOFF RWY 18: CLIMB HEADING 185.22 TO 7700, THEN CLIMBING LEFT TURN DIRECT MKM VOR/DME, THEN ON MKM R-028 TO LARST, THENCE...
TAKEOFF RWY 36: CLIMB HEADING 005.22 TO 7100, THEN CLIMBING RIGHT TURN TO INTERCEPT MKM R-028 TO LARST, THENCE...
... RIGHT TURN TO INTERCEPT GHI R-265 TO GHI VORTAC. CROSS GHI VORTAC AT OR ABOVE MEA/MCA FOR ASSIGNED ROUTE OF FLIGHT.
VCOA ALL RUNWAYS: OBTAIN ATC APPROVAL FOR VCOA WHEN REQUESTING IFR CLEARANCE. CLIMB IN VISUAL CONDITIONS TO CROSS MKM VOR/DME NORTHEASTBOUND AT OR ABOVE 8100, THEN ON MKM R-028 TO LARST, THENCE...
... RIGHT TURN TO INTERCEPT GHI R-265 TO GHI VORTAC. CROSS GHI VORTAC AT OR ABOVE MEA/MCA FOR ASSIGNED ROUTE OF FLIGHT.

TRANSITION ROUTES (GRAPHIC DEPICTION ONLY):

Transition Name	Computer Codes	Transition From	FIX/NAVAID	To FIX/NAVAID	Course	Distance	MEA	MOCA	Crossing Altitudes/Fixes
-----------------	----------------	-----------------	------------	---------------	--------	----------	-----	------	--------------------------

PROCEDURAL DATA NOTES/TAKEOFF MINIMUMS:
TAKEOFF MINIMUMS: RWY 16.34 NA - OBSTACLES: RWY 36 STANDARD. RWY 18 STANDARD WITH MINIMUM CLIMB OF 380 FT PER NM TO 7700 OR 1800-3 FOR VCOA.

TAKEOFF OBSTACLE NOTES:

CONTROLLING OBSTACLES:
RWY 18: 7359 FT MSL TREES, 433303.44N/1104648.03W.
RWY 18 (VCOA): 7751 FT MSL TREES, 433807.67N/1104133.89W.
RWY 36: 6949 FT MSL TOWER, 433801.40N/1104220.06W.

LOST COMMUNICATIONS PROCEDURES:

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION
GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name	Number	DP Computer Code	Superseded Number	Dated	Effective Date
GOODHILL	ONE	GH11.GHI	NONE		

ADDITIONAL FLIGHT DATA:

AIRPORTS SERVED:
LASKY REGIONAL, LASKY, WY

COMMUNICATIONS:
ATIS, GND CON, TWR, ZLC

FIXES AND/OR NAVAID'S:

REMARKS:

<u>FLIGHT INSPECTED BY:</u>				<u>REQUIRED EFFECTIVE DATE:</u>
Johnathan P. Doe	FIOG	4/15/2011		Routine

<u>DEVELOPED BY:</u>			
Timothy S. Wisenheimer (John Q. Public)	AJV-352	2/13/2011	

<u>APPROVED BY:</u>			
David P. Specialist	AJV-352	6/12/2011	

COORDINATED WITH:
A4A, ALPA, APA, AOPA, NBAA, ARPT MGR, LSK ATCT, ZLC

CHANGES:

REASONS:

Figure D-7.

U.S. DEPARTMENT OF TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name	Number	DP Computer Code	Superseded Number	Dated	Effective Date
MICKY	FOUR	MICKY4.MICKY	THREE		

Type: SID

DP ROUTE DESCRIPTION:

TAKEOFF RWY 31L/R: CLIMB ON HEADING 309.71 AND GRM R-190 TO CROSS GRM VORTAC AT OR ABOVE 2000, THEN RIGHT TURN TO INTERCEPT GRM R-076 TO CROSS MICKY AT OR ABOVE 6000. MAINTAIN 9000. EXPECT CLEARANCE TO FILED ALTITUDE AT MICKY.

TRANSITION ROUTES (GRAPHIC DEPICTION ONLY):

Transition		From							
Transition Name	Computer Codes	FIX/NAVAID	To FIX/NAVAID	Course	Distance	MEA	MOCA	Crossing Altitudes/Fixes	
HOMINY	MICKY4.HMS	MICKY	TWN VORTAC	71.64 (TWN R-072)	10.89	3700		TWN AT/ABOVE 7000	
			HMS VORTAC	097.22 & 098.54	68.47	8100	6900		
LIMMPET	MICKY4.LPT	MICKY	LPT VORTAC	351.19 (LPT R-171)	70.98	6000	3200		
	MICKY4.WSN	MICKY	TWN VORTAC	071.64 (TWN R-072)	10.89	3700		TWN AT/ABOVE 7000	
			WSN VORTAC	076.56 & 080.47	41.61	4200			

PROCEDURAL DATA NOTES/TAKEOFF MINIMUMS:

NOTE: THIS SID TO BE USED ONLY UPON ASSIGNMENT BY METRO TOWER, NORMALLY BETWEEN THE HOURS OF 2100-0600 LOCAL TIME.

TAKEOFF MINIMUMS: RWY 13L, 13R, 18, 36 NA FOR THIS SID - NOISE ABATEMENT. RWY 31L: MINIMUM CLIMB OF 310 FT PER NM TO 2000.

RWY 31R: 300-1 3/4 OR STANDARD WITH MINIMUM CLIMB OF 310 FT PER NM TO 2000 OR ALTERNATIVELY, WITH STANDARD TAKEOFF MINIMUMS AND A NORMAL 200 FT PER NM CLIMB GRADIENT. TAKEOFF MUST OCCUR NO LATER THAN 2100 FT PRIOR TO DER.

TAKEOFF OBSTACLE NOTES:

CONTROLLING OBSTACLES:

RWY 31L: 1049 FT MSL TOWER, 325304.00N/0965428.00W.

RWY 31R: 739 FT MSL BUILDING, 325245.67N/0965221.00W.

LOST COMMUNICATIONS PROCEDURES:

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name	Number	DP Computer Code	Superseded Number	Dated	Effective Date
MICKY	FOUR	MICKY4.MICKY	THREE		

ADDITIONAL FLIGHT DATA:AIRPORTS SERVED:

METRO JETPORT, DALLAS, TX

COMMUNICATIONS:

ATIS, CLNC DEL, GND CON, TWR, DEP CON

FIXES AND/OR NAVAID'S:

SCY VOR/DME

REMARKS:FLIGHT INSPECTED BY:

Johnathan P. Doe

DEVELOPED BY:Timothy S. Wisenheimer
(John Q. Public)APPROVED BY:

David P. Specialist

COORDINATED WITH:

AAA, ALPA, APA, AOPA, NBAA, ARPT MGR, MET ATCT, REG ATCT, ZFW

CHANGES:

ADDED HMS TRANSITION

REASONS:

RAPT REQUEST

REQUIRED EFFECTIVE DATE:
CONCURRENT WITH AIRSPACE DOCKET 10-ASW-28

4/15/2011

FIOG

2/13/2011

AJV-352

6/12/2011

AJV-352

Figure D-8.

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation.. Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name	DP Computer Code	Superseded Number	Dated	Effective Date
GOODHILL	GH11.GHI	NONE		

Type:

DP ROUTE DESCRIPTION:

PROCEDURE CANCELLED

TRANSITION ROUTES (GRAPHIC DEPICTION ONLY):

Transition Name	Computer Codes	From	FIX/NAVAID	To FIX/NAVAID	Course	Distance	MEA	MOCA	Crossing Altitudes/Fixes

PROCEDURAL DATA NOTES/TAKEOFF MINIMUMS:

TAKEOFF OBSTACLE NOTES:

CONTROLLING OBSTACLES:

LOST COMMUNICATIONS PROCEDURES:

ADDITIONAL FLIGHT DATA:

AIRPORTS SERVED:

COMMUNICATIONS:

FIXES AND/OR NAVAIDS:

U.S. DEPARTMENT OF TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name	Number	DP Computer Code	Superseded Number	Dated	Effective Date
GOODHILL	ONE	GHI1.GHI	NONE		

REMARKS:FLIGHT INSPECTED BY:REQUIRED EFFECTIVE DATE:

Routine

DEVELOPED BY:

Timothy S. Wisenheimer
(John Q. Public)

AJV-352

2/13/2011

APPROVED BY:

David P. Specialist

AJV-352

6/12/2011

COORDINATED WITH:CHANGES:

PROCEDURE CANCELED.

REASONS:

OBSTACLE DATA REVIEW - ODP NO LONGER REQUIRED.

*CONCURRENT WITH CANCELATION OF KLSK. TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES. ORIG.

**Appendix E. Section 1. Instructions for Completing
FAA Form 8260-15B, Graphic Departure Procedures (DP)
[RNAV Departure Procedures] and Sample Forms**

1. Title Line. The title line consists of the following six elements and will be filled in as noted.

a. DP Name. Enter name of departure procedure. For example, the CATHEDRAL SEVEN DEPARTURE is entered as CATHEDRAL.

b. Number. Enter departure procedure number (spelled out); e.g., EIGHT.

c. DP Computer Code. Enter computer identification code coordinated with ATC (see appendix A).

d. Superseded Number. Departure procedure number (spelled out) superseded by this procedure. Enter “None” for a new procedure.

e. Dated. Date of superseded procedure. Format: DD MMM YY.

f. Effective Date. Leave blank. The effective date will normally be added by NFDC. Enter an effective date only when a specific effective date is required; e.g., Mag Var rotation. If the procedure is a “Special,” the effective date will be entered by the Regional Flight Standards Division, NextGen Branch (RNGB).

2. Type. Specify “RNAV” on this line to indicate that this is an RNAV departure. Additionally, specify “OBSTACLE” when the procedure is the default obstacle departure procedure (see paragraph 2-1b), **or** specify “SID” when the procedure is initiated by ATC (see paragraph 2-1c).

Note: Attach an up-to-date, clear graphic depiction of the procedure. DO NOT include a textual description of transitions or departure route text.

3. DP Route Description. Provide the initial climb out instructions for each runway and a textual description of the departure route(s) to the DP termination fix. Include only information pertinent to the departure procedure. Where the initial climb out instructions from multiple runways join and share a common route/instructions prior to the DP termination fix, end each instruction with “..., thence...” followed by a paragraph containing the common information (see figure E-2). If the DP route can be clearly understood from a graphic depiction, a complete textual description is not necessary. Simply state, “...then on depicted route.” Define crossing altitudes at fixes as follows:

a. Document crossing altitude restrictions in plain text; e.g., “**CROSS GRM VORTAC AT OR ABOVE (altitude)**”; “**CROSS BRADY AT OR BELOW (altitude)**”; “**CROSS SHEMP AT OR ABOVE (altitude), AT OR BELOW (altitude)**”; “**CROSS EDDIE AT (altitude).**”

b. Altitude Restrictions Requested by ATC (not authorized for ODPs).

(1) See Order 8260.3, Volume 4, and/or other 8260-series directives, as applicable, for the criteria to use when establishing fix crossing altitude restrictions requested by ATC.

(2) See paragraph 2-1e(1) for altitude charting constraints.

Note: Information in this section must match the corresponding information in the Altitude column of the Form 8260-15C.

d. See table E-1 for specific wording and required information. Specify the turn direction as either “Left/Right” as follows:

(1) DF legs. For all course changes exceeding 15 degrees.

(2) CF and TF legs. For all course changes exceeding 90 degrees.

Note: If the DP route becomes a series of consecutive TF legs with turns less than or equal to 90 degrees, a complete textual description from that point is not necessary. Simply state, “...then on depicted route.” (See example, “TAKEOFF RWY 1”)

e. Document all courses, headings, tracks, and distances to the nearest hundredth unit of measurement.

Note: Fix/NAVAID column entries will be published verbatim on the AeroNav Products chart, with the exception of courses, headings, and tracks, which will be rounded by AeroNav Products to the nearest whole degree.

f. When using a VA, VI, or VM leg, specify the actual heading to be flown (e.g., do not use “climb on runway heading”). Ensure courses, tracks, headings, and distances entered on Form 8260-15B match the equivalent true values and distances entered on Form 8260-15C as appropriate.

Table E-1. Leg Type Wording and Required Information.		
8260-15C Leg Type	8260.15B Wording	8260.15B Required Information
VI	"heading"	heading
VA	"heading"	heading/altitude
DF	"direct"	turn direction*/distance**
CF	"course"	course/distance/turn direction***
TF	"track"	course/distance/turn direction***
VM	"heading"	Heading/altitude

* Do not specify turn direction when a DF leg is used as the first leg of a DP.

** Do not specify distance when part of a VA-DF leg combination.

*** Only specify turn direction for CF or TF legs when amount of turn exceeds 90°.

RWY 27, NA - OBSTACLES.

RWY 35, NA - ENVIRONMENTAL.

RWY 17, NA - OBSTACLES AND NOISE ABATEMENT.

Followed by:

- c. List the runway(s) authorized standard takeoff minimums.**

Example:

RWY 09, 31 STANDARD.

Followed by:

- d. List the runway(s) that have any deviations from standard minimums and/or restrictions;**

Examples:

TAKEOFF MINIMUMS: RWY 13, 400-2 OR STANDARD WITH MINIMUM CLIMB OF 310 FT PER NM TO 900, OR ALTERNATIVELY, WITH STANDARD TAKEOFF MINIMUMS AND A NORMAL 200 FT PER NM CLIMB GRADIENT, TAKEOFF MUST OCCUR NO LATER THAN 1800 FT PRIOR TO DER.

TAKEOFF MINIMUMS: RWY 27, STANDARD WITH MINIMUM CLIMB OF 280 FT PER NM TO 2500, OR ALTERNATIVELY, WITH STANDARD TAKEOFF MINIMUMS AND A NORMAL 200 FT PER NM CLIMB GRADIENT, TAKEOFF MUST OCCUR NO LATER THAN 1800 FT PRIOR TO DER.

6. Takeoff Obstacle Notes.

- a. Enter a NOTE regarding obstacles** found as a result of applying table E-1, Situation 2 action, and Situation 3, action “A.”

Note: An adverse assumption obstacle (AAO) must not be identified/published as a “takeoff obstacle” because pilots are not familiar with the AAO concept. However, publishing a ceiling and visibility will allow for those situations where the CG cannot be achieved and still afford the pilot the opportunity to visually acquire and avoid any obstruction that could have been built without notice to the FAA.

- b. The note must include the runway affected** and inform the pilot of the obstacle(s) type and location relative to the DER, and height (AGL/elevation [MSL]). When there are obstacles on both sides of the runway centerline extended, note the most significant obstacles left and right of the runway centerline. Phrases such as “multiple antennas, numerous trees, etc.” are acceptable. Specify distances 1 NM or greater to the nearest whole and tenth of a NM (e.g., 2.1 NM FROM DER). Specify distances less than 1 NM in feet (e.g., 1280 FT FROM DER).

Examples:

NOTE: RWY 35, TREES 1280 FT FROM DER, 120 FT LEFT OF CENTERLINE, 50 FT AGL/1527 FT MSL.

NOTE: RWY 35, BUILDING 2.1 NM FROM DER, 160 FT LEFT OF CENTERLINE, 350 FT AGL/1927 FT MSL.

NOTE: RWY 17, MULTIPLE BUILDINGS 500 FT FROM DER, 350 FT RIGHT OF CENTERLINE, 50 FT AGL/1,107 FT MSL. ANTENNA 6000 FT FROM DER, 1235 FT LEFT OF CENTERLINE, 200 FT AGL/1257 FT MSL.

NOTE: RWY 27, MULTIPLE TREES AND ANTENNAS BEGINNING 500 FT FROM DER, 350 FT RIGHT OF CENTERLINE, UP TO 110 FT AGL/1307 FT MSL.

c. These obstacle NOTES must be published by charting agents.

7. Controlling Obstacles.

a. Document the controlling obstacle(s) found as a result of applying table E-1, Situation 3 and/or Situation 4. When there is more than one controlling obstacle to be documented, following the coordinates, include what entity it applies too; i.e., “(Ceiling),” “(Visibility),” “(Climb Gradient),” or “(Climb-To Altitude).”

Note: For all DPs, the controlling obstacle is that obstacle which, having penetrated the 40:1 Obstacle Clearance Surface (OCS) causes the most adverse climb gradient, climb-to altitude, and/or ceiling and/or visibility to be published.

b. Use the following format to list the runway affected, elevation and type of obstacle, the coordinates to the nearest 0.01 second, and if applicable, OCS height above DER elevation; e.g., “RWY 32: 2049 FT MSL ANTENNA 341548.01N/0862101.05W.”

c. Document the obstacle(s) that mandated development of a specific RNAV ODP route. These obstacles are not considered the “controlling obstacles” because they are not a factor to the specified route being flown. This information will not be charted on the procedure. Document these obstacles as follows:

“OBSTACLES MANDATING ODP ROUTE DEVELOPMENT: RWY 36 - 2049 FT MSL ANTENNA 341658.01N/ 0863108.05W.”

8. Lost Communications Procedures. ATC is responsible for determining the need and content of lost communications instructions. Leave blank when procedures are the same as in 14 CFR Part 91.185 (standard).

9. Additional Flight Data. List any additional charting instructions, items essential to clarify charting or information a specialist has determined needs charting as other than a NOTE. Examples of data may include:

a. Terrain features, airports, military operating areas (MOA), holding patterns, or takeoff and departure obstacles; e.g., **CHART: _____ MOA; CHART: HOLDING PATTERN AT ICT VORTAC, HOLD NE, RT, 222.03 INBOUND** (Include Leg Length for RNAV or DME Holding, when applicable and speed, if other than standard). Ensure that the accompanying Form 8260-2 contains the appropriate documentation for holding patterns supporting the departure procedure.

b. Document the MEA/MOCA for the segment between the IF and Basic DP fix on RNAV Radar departure procedures as follows: **CHART: MEA/MOCA FROM (RNAV IF) TO (BASIC DP FIX), (Altitude).**

c. Place the reference (departure airport) magnetic variation of record used to develop the procedure in this section. Include the point of reference and the epoch year. Example: “REFERENCE MAG VAR: KFCR 2W EPOCH YR: 2000”

d. DME Assessment (Enter one of the following):

(1) “DME/DME ASSESSMENT: SAT (RNP 1.0 OR 2.0 AS APPROPRIATE).”
Indicates a successful assessment to the RNP value specified.

(2) “DME/DME ASSESSMENT: UNSAT (RNP 1.0), SAT (RNP 2.0).” Indicates an unsuccessful assessment to RNP 1.0, but returned a successful assessment to RNP 2.0.

(3) “DME/DME ASSESSMENT: UNSAT.” Indicates an unsuccessful assessment to RNP 2.0.

(4) “DME/DME Assessment: NOT CONDUCTED.”

Note 1: If the DME/DME assessment indicates “UNSAT” or “NOT CONDUCTED,” the note “GPS Required” must be entered in the Procedural Data Notes/Takeoff Minimums section.

Note 2: The DME/DME assessment process is covered in separate guidance.

e. Use this section to describe the Pilot Navigation Area (PNA) for RNAV Radar departures. The description will be in the following manner:

PILOT NAVIGATION AREA:

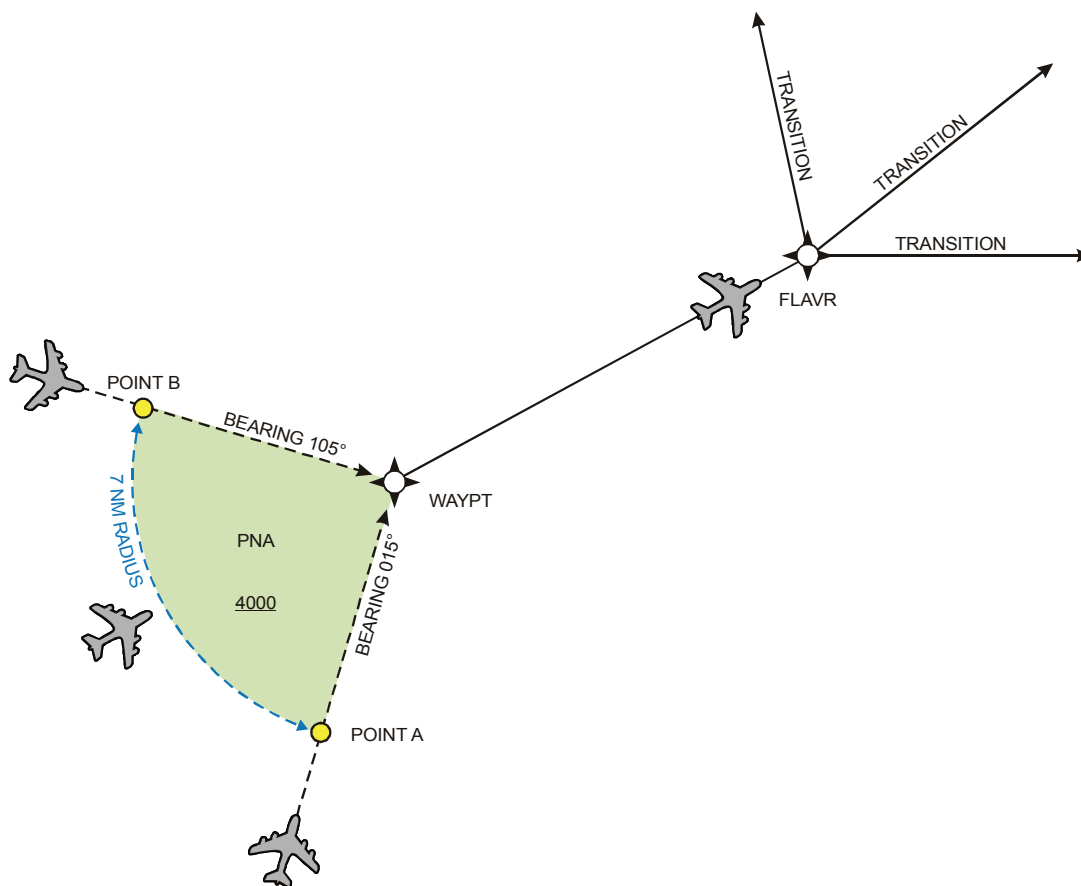
7 NM ARC CENTERED ON WAYPT (IF), CW

FROM: POINT A (BEARING 015 DEGREES TO WAYPT)

TO: POINT B (BEARING 105 DEGREES TO WAYPT)

MINIMUM ALTITUDE - 4000

Note: The illustration in figure E-1 is provided as an example of what this text is describing. An illustration may be provided but is not required on the form.

Figure E-1.

10. Airports Served. Except for departures that use Radar vectors to join RNAV routes, RNAV DPs must only serve one airport. List the airport, city, and 2-letter state code served by the departure procedure.

11. Communications. Enter name of radio communications to be charted; e.g., ATIS, AWOS/ASOS, CTAF, CLNC DEL, DEP CON, etc. Specify frequency(ies) only when multiple frequencies are available at a facility (such as the multiple DEP CON freqs at MIA) and there may be confusion as to which should be assigned to the procedure, or if the frequency(ies) are unique to the procedure.

12. Fixes and/or NAVAIDs. Enter only those fixes and/or NAVAIDs for which charting is requested but are not included in the textual description of the departure or entered in the transition route data.

13. Remarks. List information/data which is NOT to be charted; e.g., administrative data or notes for controller information (requested by ATC). However, if something does need to be charted, precede the text with the “Chart Note:” annotation. See Order 8260.19, paragraph 8-72g, for a chart note that is required if the SID/Graphic ODP is a Special. General chart notes (not Takeoff Minimums or Departure Instructions Notes) need to include instructions to the chart organization to place the note at the bottom of the entry. Use the following format: “**Chart Note at bottom of entry:...**” Document when a climb gradient has been established to support RNAV or RNP operational requirements (e.g., RNAV-Pro DME/DME/IRU limitations), etc.

14. Flight Inspected By. Enter the name of the pilot who conducted the flight inspection/validation, and the date.

15. Developed By. Enter the name of the FAA procedure specialist and organizational routing code. If developed under an Other Transactional Authority, enter the procedure developer's name and organization.

16. Approved By. Enter the name of the AeroNav Services' Manager, or his/her delegated representative. For procedures developed under an Other Transactional Authority, enter the name of the organization's manager or his/her delegated representative. This individual must sign in the “approved by” space and enter the date signed. If the procedure is a “Special,” this line will contain the name of and be signed by the manager, AFS-400.

17. Coordinated With. Specify the offices/organizations the procedure was coordinated with. Departure procedure coordination must be identical with the approach procedure coordination as outlined in Order 8260.19 (latest edition), chapter 8.

18. Changes. List changes relating to data entries.

19. Reasons. List reasons for changes relating to data entries.

20. Required Effective Date.

a. Enter the effective date as noted in Order 8260.19 (latest edition), chapter 8, except that “Proposed” dates may not be used for graphic DPs. Optimally, submit as “routine.” En route data submission cutoff dates must apply for graphic DPs.

b. If the Form 8260-15B represents a concurrent action, enter “CONCURRENT” followed by the necessary information; e.g., Airport ID, IAP name and amendment number, airspace action, or other event.

THIS PAGE IS INTENTIONALLY LEFT BLANK

Figure E-2.

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name	Number	DP Computer Code	Superseded Number	Dated	Effective Date
SHEMP	ONE	SHEMP1,SHEMP	NONE		

Type: RNAV SID

DP ROUTE DESCRIPTION:

TAKEOFF RWY 1: CLIMB ON COURSE 007.52 TO LARRY, THEN ON DEPICTED ROUTE TO SHEMP, THENCE...

TAKEOFF RWY 14L: CLIMB ON COURSE 137.64 TO CROSS CURLY AT OR ABOVE 1000, THEN CLIMBING LEFT TURN DIRECT SHEMP, THENCE...

TAKEOFF RWY 32R: CLIMB ON 317.66 HEADING TO AT OR ABOVE 1000, THEN TURN RIGHT DIRECT TO LARRY, THEN ON DEPICTED ROUTE TO SHEMP, THENCE...

... (TRANSITION), MAINTAIN 5000, EXPECT FILED ALTITUDE 10 MINUTES AFTER DEPARTURE.

TRANSITION ROUTES (GRAPHIC DEPICTION ONLY):

Transition Name	Computer Codes	Transition From	To FIX/NAVAID	Course	Distance	MEA	MOCA	Crossing Altitudes/Fixes
FOGART	SHEMP1,FGH	SHEMP	FGH VORTAC	TRACK 087.11	87.24	5000	3700	
JENKO	SHEMP1,JKL	SHEMP	JKL VORTAC	TRACK 098.77	92.51	5000		
LAYMAN	SHEMP1,LMN	SHEMP	LMN VOR/DME	RIGHT TURN TRACK 154.94	47.23	5000	4100	
ROOSTER	SHEMP1,RST	SHEMP	LMN VOR/DME	RIGHT TURN TRACK 154.94	47.23	5000	4100	
			RST VORTAC	TRACK 098.38	39.79	7000	4400	

PROCEDURAL DATA NOTES/TAKEOFF MINIMUMS:

TAKEOFF MINIMUMS: RWY 14R, 19, 32L NA - AIR TRAFFIC. RWY 1, 32R STANDARD. RWY 14L 500-2 1/2 OR STANDARD WITH MINIMUM CLIMB OF 330 FT PER NM TO 1200.

NOTE: DME/DME/IRU OR GPS REQUIRED

NOTE: RNAV-1

NOTE: RADAR REQUIRED FOR NON-GPS EQUIPPED AIRCRAFT

TAKEOFF OBSTACLE NOTES:

NOTE: RWY 1, OBSTRUCTION LIGHT 1022 FT FROM DER, 672 FT RIGHT OF CENTERLINE, 73 FT AGL/643 FT MSL.

NOTE: RWY 14L, BUILDING 1.96 NM FROM DER, 575 FT RIGHT OF CENTERLINE, 478 FT AGL/974 FT MSL.

NOTE: RWY 32R, TREES 143 FT LEFT OF DER, 21 FT AGL/498 FT MSL.

CONTROLLING OBSTACLES:

RWY 1: 543 FT MSL OBSTRUCTION LIGHT, 325141.44N/0965102.87W.

RWY 14L: 974 FT MSL BUILDING, 324911.09N/0964838.62W.

RWY 32R: 1049 FT MSL TOWER, 325216.19N/0965523.02W, 498 FT MSL TREES, 325125.20N/0965125.68W.

LOST COMMUNICATIONS PROCEDURES:

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION
GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name	Number	DP Computer Code	Superseded Number	Dated	Effective Date
SHEMP	ONE	SHEMP1.SHEMP	NONE		

ADDITIONAL FLIGHT DATA:
REFERENCE MAG VAR: KFOR 2W EPOCH YR: 00
DME/DME ASSESSMENT: UNSAT

AIRPORTS SERVED:
FOUR CLOWNS REGIONAL, VICTORVILLE, TX

COMMUNICATIONS:
ATIS, CLNC DEL, GND CON, FCR ATCT, ARCON DEP CON

FIXES AND/OR NAVAID'S:

REMARKS:

FLIGHT INSPECTED BY:
Johnathan P. Doe
FIOG
4/15/2011
REQUIRED EFFECTIVE DATE:
ROUTINE

DEVELOPED BY:
Timothy S. Wisenheimer
(John Q. Public)
AJV-352
2/13/2011

APPROVED BY:
David P. Specialist
AJV-352
6/12/2011

COORDINATED WITH:
A4A, ALPA, APA, AOPA, NBAA, ARPT MGR, FCR ATCT, ZFW

CHANGES:

REASONS:

Figure E-3.

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name	Number	DP Computer Code	Superseded Number	Dated	Effective Date
SHEMP	TWO	SHEMP2.SHEMP	ONE	18-Apr-02	

Type: RNAV SID

DP ROUTE DESCRIPTION:

TAKEOFF RWY 1: CLIMB ON COURSE 007.52 TO CROSS LARRY AT OR ABOVE 2000, THEN ON TRACK 038.92 TO CROSS MOEHH AT OR ABOVE 3000, THEN ON TRACK 091.64 TO CROSS SHEMP AT OR ABOVE 5000, AT OR BELOW 8000, THENCE....

TAKEOFF RWY 14L: CLIMB ON COURSE 137.64 TO CROSS CURLY AT OR ABOVE 1000, THEN TURN LEFT ON TRACK 059.62 TO CROSS SHEMP AT OR ABOVE 5000, AT OR BELOW 8000, THENCE....

TAKEOFF RWY 32R: CLIMB ON HEADING 317.66 TO AT OR ABOVE 1000, THEN TURN RIGHT DIRECT TO CROSS LARRY AT OR ABOVE 2000, THEN ON TRACK 038.92 TO CROSS MOEHH AT OR ABOVE 3000, THEN ON TRACK 091.64 TO CROSS SHEMP AT OR ABOVE 5000, AT OR BELOW 8000, THENCE....

... (TRANSITION). MAINTAIN 5000, EXPECT FILED ALTITUDE 10 MINUTES AFTER DEPARTURE.

TRANSITION ROUTES (GRAPHIC DEPICTION ONLY):

Transition		From		To		Course		Distance		MEA		MOCA		Crossing Altitudes/Fixes	
Transition Name	Computer Codes	FIX/NAVAID													
FOGART	SHEMP2.FGH	SHEMP	FGH VORTAC	TRACK 065.11				87.24		5000		3700			
JENKO	SHEMP2.JKL	SHEMP	JKL VORTAC	TRACK 096.77				92.51		5000					
OPAKE	SHEMP2.OPQ	SHEMP	OPQ	LEFT TURN				52.21		4000		3300			
			VOR/DME	TRACK 003.19											
ROOSTER	SHEMP2.RST	SHEMP	RST VORTAC	TRACK 098.38				39.79		7000		4900			

PROCEDURAL DATA NOTES/TAKEOFF MINIMUMS:

TAKEOFF MINIMUMS: RWY 14R, 19, 32L NA - AIR TRAFFIC. RWY 1, 32R STANDARD. RWY 14L 500-2 1/2 OR STANDARD WITH MINIMUM CLIMB OF 330 FT PER NM TO 1200.

NOTE: GPS REQUIRED.

NOTE: RNAV-1

NOTE: RWY 1/32 DO NOT EXCEED 230 KIAS UNTIL MOEHH.

TAKEOFF OBSTACLE NOTES:

NOTE: RWY 1, OBSTRUCTION LIGHT 1022 FT FROM DER, 672 FT RIGHT OF CENTERLINE, 73 FT AGL/543 FT

NOTE: RWY 14L, BUILDING 1.96 NM FROM DER, 575 FT RIGHT OF CENTERLINE, 478 FT AGL/974 FT MSL.

NOTE: RWY 32R, TREES 143 FT LEFT OF DER, 21 FT AGL/498 FT MSL.

CONTROLLING OBSTACLES:

RWY 1: 543 FT MSL OBSTRUCTION LIGHT, 325141.44N/0965102.87W.

RWY 14L: 974 FT MSL BUILDING, 324911.09N/0964838.62W.

RWY 32R: 1049 FT MSL TOWER, 325216.19N/0965523.02W. 498 FT MSL TREES, 325125.20N/0965125.68W.

LOST COMMUNICATIONS PROCEDURES:

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION
GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name	Number	DP Computer Code	Superseded Number	Dated	Effective Date
SHEMP	TWO	SHEMP2:SHEMP	ONE	18-Apr-02	

ADDITIONAL FLIGHT DATA:

REFERENCE MAG VAR: KFCR 2W EPOCH YR: 00
DME/DME ASSESSMENT: UNSAT

AIRPORTS SERVED:

FOUR CLOWNS REGIONAL, VICTORVILLE, TX

COMMUNICATIONS:

ATIS, CLNC DEL, GND CON, FCR ATCT, ARCON DEP CON

FIXES AND/OR NAVAID'S:

REMARKS:

FLIGHT INSPECTED BY:

Jonathan P. Doe

FIOG 4/15/2011

REQUIRED EFFECTIVE DATE:

ROUTINE

DEVELOPED BY:

Timothy S. Wisenheimer
(John Q. Public)

AJV-352 2/13/2011

APPROVED BY:

David P. Specialist

AJV-352 6/12/2011

COORDINATED WITH:

A4A, ALPA, APA, AOPA, NBAA, ARPT MGR, FCR ATCT, ZFW

CHANGES:

1. ADDED OPO TRANSITION.
2. REMOVED LMN VOR/DME FROM RST TRANSITION
3. RELOCATED MOEHH
4. DELETED AUTHORIZATION TO USE DME/DME/IRU
5. DELETED NOTE: RADAR REQUIRED FOR NON-GPS EQUIPPED AIRCRAFT

REASONS:

- 1-3. RAPT REQUEST.
- 4-5. ABILITY TO USE DME/DME/IRU NO LONGER AVAILABLE

U.S. DEPARTMENT OF TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION
GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name	Number	DP Computer Code	Superseded Number	Dated	Effective Date
ARKES	ONE	ARKES1-ARKES	NONE		

COORDINATED WITH:
AAA, ALPA, APA, AOPA, NBAA, ZMA, MIA APP CON

CHANGES:

REASONS:

THIS PAGE IS INTENTIONALLY LEFT BLANK

Figure E-5

U.S. DEPARTMENT OF TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name
FLAVR

Number
ONE

DP Computer Code
FLAVR1.FLAVR

Superseded Number
ONE

Dated

Effective Date

Type: RNAV SID

DP ROUTE DESCRIPTION:
TAKEOFF RWY 1, 14L, 32R: CLIMB ON ASSIGNED HEADING FOR RADAR VECTORS TO WAYPT, THEN ON TRACK 075.33 TO FLAVR, THENCE...

... (TRANSITION), MAINTAIN 5000, EXPECT FILED ALTITUDE 10 MINUTES AFTER DEPARTURE.

TRANSITION ROUTES (GRAPHIC DEPICTION ONLY):

Transition Name	Computer Codes	FIX/NAVAID	To FIX/NAVAID	Course	Distance	MEA	MOCA	Crossing Altitudes/Fixes
FOGART	FLAVR1.FGH	FLAVR	FGH VORTAC	TRACK 065.11	84.74	5000	3700	
JENKO	FLAVR1.JKL	FLAVR	JKL VORTAC	TRACK 095.06	88.8	5000		
OPAKE	FLAVR1.OPQ	FLAVR	OPQ VOR/DME	LEFT TURN	55.23	4000	3300	
ROOSTER	FLAVR1.RST	FLAVR	RST VORTAC	TRACK 333.87	72.85	7000	4900	

PROCEDURAL DATA NOTES/TAKEOFF MINIMUMS:
TAKEOFF MINIMUMS: RWY 14R, 19, 32L NA - AIR TRAFFIC. RWY 1, 32R STANDARD. RWY 14L 500-2 1/2 OR STANDARD WITH MINIMUM CLIMB OF 330 FT PER NM TO 1200.
NOTE: DME/DME/IRU OR GPS REQUIRED.
NOTE: RNAV-1
NOTE: RADAR REQUIRED

TAKEOFF OBSTACLE NOTES:
NOTE: RWY 1, OBSTRUCTION LIGHT 1022 FT FROM DER, 672 FT RIGHT OF CENTERLINE, 73 FT AGL/543 FT MSL.
NOTE: RWY 14L, BUILDING 1.96 NM FROM DER, 575 FT RIGHT OF CENTERLINE, 478 FT AGL/974 FT MSL.
NOTE: RWY 32R, TREES 143 FT LEFT OF DER, 21 FT AGL/498 FT MSL.

CONTROLLING OBSTACLES:
RWY 1: 543 FT MSL OBSTRUCTION LIGHT, 325141.44N/0965102.87W.
RWY 14L: 974 FT MSL BUILDING, 324911.09N/0964838.62W.
RWY 32R: 1049 FT MSL TOWER, 325216.19N/0965523.02W. 498 FT MSL TREES, 325125.20N/0965125.68W.

LOST COMMUNICATIONS PROCEDURES:

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION
GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation.

Distances are in nautical miles (NM). Visibilities are in statute miles (SM) or feet RVR unless otherwise indicated. Graphic depiction attached.

DP Name	DP Computer Code	Superseded Number	Dated	Effective Date
FLAVR	ONE	FLAVR1.FLAVR		

ADDITIONAL FLIGHT DATA:

REFERENCE MAG VAR: KFCR 2W EPOCH YR: 00

DME/DME ASSESSMENT: SAT

CHART: MEAMOCA FROM WAYPT TO FLAVR, 4000/3000

AIRPORTS SERVED:

FOUR CLOWNS REGIONAL, VICTORVECTORVILLE, TX

COMMUNICATIONS:

ATIS: CLNC DEL, GND CON, FCR ATCT, ARCON DEP CON

FIXES AND/OR NAVAID'S:

REMARKS:

FLIGHT INSPECTED BY:

Johnathan P. Doe

FIOG 4/15/2011

REQUIRED EFFECTIVE DATE:

09/23/2011

DEVELOPED BY:

Timothy S. Wisenheimer
(John Q. Public)

AJV-352 2/13/2011

APPROVED BY:

David P. Specialist

AJV-352 6/12/2011

COORDINATED WITH:

A4A, ALPA, APA, AOPA, NBAA, ARPT MGR, FCR ATCT, ZFW

CHANGES:

REASONS:

Figure E-7.

DEPARTURE (DATA RECORD)

DP Name SHEMP	Number TWO	DP Computer Code SHEMP2.SHEMP	Superseded Number ONE	Dated 18 Apr 02	Effective Date			
FIX/NAVAID	LAT/LONG	C	FO/IB	LEG	DIST (NM)	ALTITUDE	SPEED	REMARKS
RW01 (AER)	325030.65N/0965118.52W	N	-	-	-	-	-	-
LARRY	325615.86N/0965038.96W	Y	FO	DF	-	AT/ABOVE 2000	-	-
MOEHH	330205.91N/0964502.64W	Y	FO	TF	038.97	7.49	AT/ABOVE 3000	AT/BELOW 220K
SHEMP	325932.61N/0962728.24W	Y	FO	TF	099.71	15.00	5000B8000	-
RWY14L (AER)*	325117.19N/0965114.05W	N	-	-	-	-	-	*DISPL THLD (1273 FT)
CURLY	324905.36N/0964841.41W	Y	FB	DF	-	3.07	AT/ABOVE 1000	CG 330 FT PER NM TO 1200
SHEMP	325932.61N/0962728.24W	Y	FO	TF	059.62	20.69	5000B8000	-
RW32R (AER)	325031.35N/0965020.95W	N	-	-	-	-	-	-
1000 MSL	-	-	-	VA	315.66	-	AT/ABOVE 1000	-
LARRY	325615.86N/0965038.96W	Y	FO	DF	-	AT/ABOVE 2000	-	RIGHT TURN
MOEHH	330205.91N/0964502.64W	Y	FO	TF	038.97	7.49	AT/ABOVE 3000	AT/BELOW 220K
SHEMP	325932.61N/0962728.24W	Y	FO	TF	099.71	15.00	5000B8000	-
SHEMP	325932.61N/0962728.24W	Y	-	IF	-	-	-	SHEMP2.FGH
FGH VORTAC	333543.94N/0945243.79W	Y	FB	TF	065.11	87.24	-	RIGHT TURN
SHEMP	325932.61N/0962728.24W	Y	-	IF	-	-	-	SHEMP2.JKL
JKL VORTAC	324749.41N/0943828.97W	Y	FB	TF	096.77	92.51	-	RIGHT TURN
SHEMP	325932.61N/0962728.24W	Y	-	IF	-	-	-	SHEMP2.OPQ
OPQ VOR/DME	334641.06N/0965429.57W	Y	FB	TF	003.19	52.21	-	LEFT TURN
SHEMP	325932.61N/0962728.24W	Y	-	IF	-	-	-	SHEMP2.RST
RST VORTAC	321246.96N/0951530.88W	Y	FB	TF	127.19	76.63	-	RIGHT TURN

THIS PAGE INTENTIONALLY LEFT BLANK

**Appendix E. Section 3. Instructions for Completing
FAA Form 8260-15E, RNAV Departure Procedure
Attention All users Page (AAUP)
[RNAV Departure Procedure] and Sample Forms**

1. Title Line. The title line consists of the following four elements and will be filled in as noted (All capital letters). See figure E-10.

a. City, State. Enter name of city and state abbreviation; e.g., ATLANTA, GA.

b. Airport Name/ Airport ID. Enter airport name and airport ID, e.g., ATLANTA/HARTSFIELD-JACKSON ATLANTA INTL/KATL.

c. Effective Date. Leave blank. The effective date will normally be added by NFDC. Enter an effective date only when a specific effective date is required.

2. General Information. This section consists of the following four elements and will be filled out as noted. See figure E-10.

a. PREFLIGHT: Upon assignment of an RNAV SID, crosscheck the charted RNAV SID with the aircraft navigation system. Consider the following crosscheck items:

- Departure Runway if known
- Waypoint sequencing on the RNAV SID
- En Route Transition
- Do not modify or manually construct waypoints on the SID
- Any specific aircraft navigation operating procedures

b. BEFORE TAKEOFF: Any modification, including runway changes should be verified in the navigation system with the RNAV SID. If unable to verify correct loading or if unable comply with the RNAV SID, advise ATC. If required, ensure runway position update is accomplished prior to takeoff.

c. LINE UP/TAKEOFF: Expect a takeoff clearance that will include either an assigned heading or the RNAV track to the first waypoint. Take in to consideration the following:

- If assigned a heading do not delete the RNAV SID from the navigation system.
- **Verify that the correct runway and first waypoint** are loaded, and that the correct lateral navigation mode is available for use after takeoff. If the takeoff clearance does not match the planned/loaded procedure, either request an initial heading from tower or refuse the takeoff clearance until the discrepancy is resolved.
- A typical takeoff clearance may state, for example, “(Callsign) 123 RNAV to MPASS, Runway 26L, Cleared for Takeoff.” The expected pilot response is, “(Callsign) 123, RNAV to MPASS, Runway 26L, Cleared for Takeoff.”
- If no additional instructions are received with the takeoff clearance pilots are still expected to fly the published procedure issued in the IFR clearance.

d. AFTER TAKEOFF: Unless instructed to fly a heading by the Tower, engage lateral navigation flight guidance as soon as practical and fly the departure precisely. Strict compliance with the lateral track and charted altitude and speed restrictions is imperative. Parallel RNAV departures must not encroach on the airspace between extended parallel runway centerlines without specific ATC clearance. Manually intervene if necessary to stay on track to avoid deviating in the direction of a parallel runway, track or aircraft. If unable to comply with the SID profile, either laterally or vertically, immediately notify ATC.

3. Additional Airport Information. This section will contain information specific to the airport and may contain both textual instructions and graphical depictions; i.e., **(Airport Name) SPECIFIC INFORMATION:** (Airport ID) e.g., KATL, followed by instructions. See figure E-11.

4. Developed By. Enter the name of the person responsible for producing the AAUP. This individual must sign in the “developed by” space, and enter the date signed.

5. Coordinated With. Specify the offices/organizations the AAUP was coordinated with.

6. Changes. List changes relating to AAUP entries.

7. Reasons. List reasons for changes relating to AAUP entries.

Figure E-10.

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

RNAV DEPARTURE PROCEDURE ATTENTION ALL USERS PAGE (AAUP)

City, State	Airport	Effective Date
ATLANTA, GA	ATLANTA/HARTSFIELD-JACKSON ATLANTA INTL	

1. **PREFLIGHT:** Upon assignment of an RNAV SID, crosscheck the charted RNAV SID with the aircraft navigation system. Consider the following crosscheck items:
 - Departure Runway if known
 - Waypoint sequencing on the RNAV SID
 - En Route Transition
 - Do not modify or manually construct waypoints on the SID
 - Any specific aircraft navigation operating procedures
2. **BEFORE TAKEOFF:** Any modification, including runway changes should be verified in the navigation system with the RNAV SID. If unable to verify correct loading or if unable comply with the RNAV SID, advise ATC. If required, ensure runway position update is accomplished prior to takeoff.
3. **LINE UP/TAKEOFF:** Expect a takeoff clearance that will include either an assigned heading or the RNAV track to the first waypoint. Take in to consideration the following:
 - If assigned a heading do not delete the RNAV SID from the navigation system.
 - **Verify that the correct runway and first waypoint** are loaded, and that the correct lateral navigation mode is available for use after takeoff. If the takeoff clearance does not match the planned/loaded procedure, either request an initial heading from tower or refuse the takeoff clearance until the discrepancy is resolved.
 - A typical takeoff clearance may state, for example, "(Callsign) 123 RNAV to MPASS, Runway 26L, Cleared for Takeoff." The expected pilot response is, "(Callsign) 123, RNAV to MPASS, Runway 26L, Cleared for Takeoff."
 - If no additional instructions are received with the takeoff clearance pilots are still expected to fly the published procedure issued in the IFR clearance.
4. **AFTER TAKEOFF:** Unless instructed to fly a heading by the Tower, engage lateral navigation flight guidance as soon as practical and fly the departure precisely. Strict compliance with the lateral track and charted altitude and speed restrictions is imperative. Parallel RNAV departures must not encroach on the airspace between extended parallel runway centerlines without specific ATC clearance. Manually intervene if necessary to stay on track to avoid deviating in the direction of a parallel runway, track or aircraft. If unable to comply with the SID profile, either laterally or vertically, immediately notify ATC.

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION

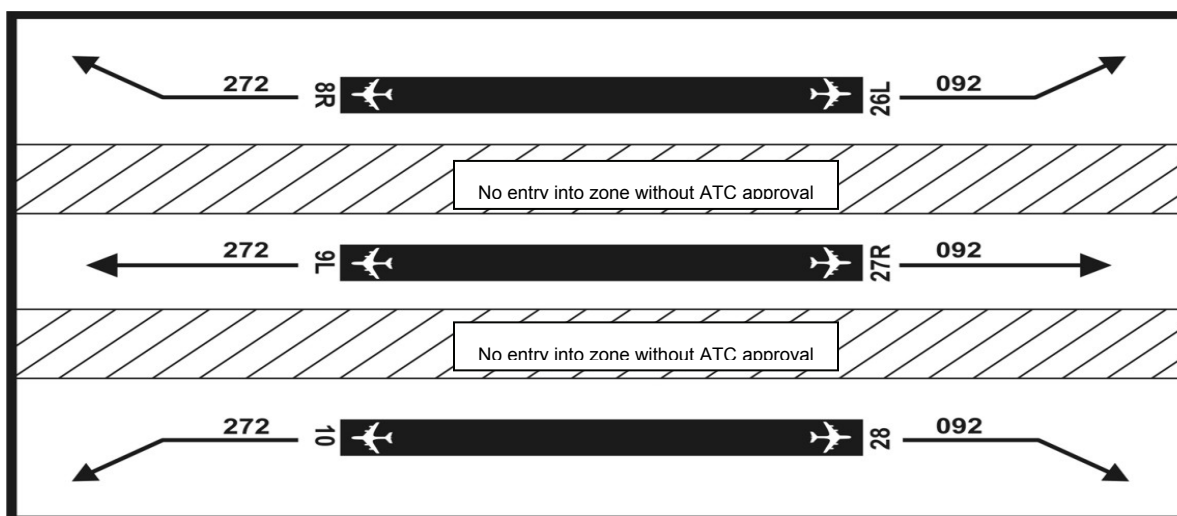
RNAV DEPARTURE PROCEDURE ATTENTION ALL USERS PAGE (AAUP)

City, State	Airport	Effective Date
ATLANTA, GA	ATLANTA/HARTSFIELD-JACKSON ATLANTA INTL	

5. **ATLANTA SPECIFIC INFORMATION:** Runway assignment will be issued on initial contact with Atlanta Ground Control at the Ramp exit spot. During dual runway simultaneous departure operations, expect an RNAV departure clearance. During triple simultaneous departure operations, expect a radar vector departure clearance after takeoff and expect vectors to join the filed RNAV/SID route.

Atlanta Departure RNAV SIDs and Associated Departure Directions

North	East	South	West
CADIT	DAWGS	BRAVS	JOGOR(WEST 1)
COKEM	DOOLY	PNUTT	JCKTS(WEST 1)
SUMMT	MUNSN	THRSR	GEETK(WEST 2)
NUGGT	UGAAA	NOVSS	RMBLN(WEST 2)

**DEVELOPED BY:****COORDINATED WITH:****CHANGES:****REASONS:**

Appendix F. Helicopter RNAV Departure Procedures

1. General.

a. Obstacle Departure Procedures (ODPs). Currently for heliport operations, ODPs cannot be developed to accommodate IFR diverse departures because diverse departure criteria do not exist. However, an FAA Form 8260-15A will still be required and must indicate the name of the IFR departure procedure (i.e., SID) that is to be used. Since this will be a SID, it will not contain “Obstacle” in parenthesis on the chart. See Order 8260.42, United States Standard for Helicopter Area Navigation (RNAV), for criteria used to develop helicopter departure procedures. Other criteria approved by AFS-400 may be used for development of “Special” departure procedures; i.e., SIDs and/or graphic or textual ODPs.

b. All IFR helicopter departure procedures will consist of a “visual” or “VFR” segment to the Initial Departure Fix (IDF), thence via a defined route that is published/charted in graphic form as a SID. The procedure must comply with design and documentation guidelines specified in chapter 2, appendices A, C, D, and E to the maximum extent possible with exceptions as noted throughout this directive.

c. Point-in-space departures may be established to support multiple departure locations. When this condition exists, a single Form 8260-15A must be used and all heliports that can use the departure must be identified in the “Airport” section of the form. A point-in-space graphic SID may serve more than one departure location.

d. Form 8260-15C, Departure Data Record, must accompany all Form 8260-15B submissions.

2. Departure Procedure.

a. Departure from a location with a Visual Segment will be conducted by crossing the IDF outbound at-or-above the altitude depicted. The helicopter will initially establish a hover at or above the Heliport Crossing Height (HCH). If required, a minimum hover height may be specified in the instructions on the chart to avoid obstacles. The helicopter will leave the departure location on the outbound heading/course specified, climbing at-or-above 400 ft/NM, crossing at-or-above the IDF altitude specified, prior to proceeding outbound on the procedure.

b. Departure from a location with a VFR Segment will be conducted by crossing the IDF outbound at the altitude depicted. Departure procedures that support multiple departure locations will have a VFR segment leading to the IDF. The helicopter will leave the departure location via pilot navigation in order to align with the departure route and comply with the altitude specified at the IDF.

c. Proceed out the described route as specified, crossing each consecutive fix at or above the indicated altitude(s) until reaching the end of the departure.

3. Documentation.

a. Comply with this Order except as noted below:

(1) Document all items as prescribed in Order 8260.42, Chapter 6; e.g., takeoff weather minimums, etc.

(2) Table 2-1, ODP Development Combinations, does not apply to helicopter departure procedures.

(3) Appendix D, paragraph 1. The Form 8260-15A is used for a single departure procedure that serves multiple departure locations.

(4) Appendix D, paragraph 7a(6). Place the name of the SID that will be used in the “Textual Departure Procedure” section of the Form 8260-15A.

(5) Appendix E, paragraph 3, DP Route Description. This item will consist of two independent sets of instructions. The “VISUAL SEGMENT” or “VFR SEGMENT” and the “IFR SEGMENT.”

(a) Special helicopter procedures with a “Visual Segment” will include a hover height (AGL) and contain a specified route to the IDF. Example: “Hover at 15 FT/AGL, then climb on track 275.21 to cross JONES at or above 900.

(b) Helicopter procedures with a “VFR Segment” will contain instructions to conduct a VFR climb to the IDF. Example: “VFR Climb to SOSNO, Cross SOSNO at or above 800.”

(6) Procedures will contain the following chart notes as applicable:

(a) Standard helicopter speed used in procedure design is 140 KIAS. If a speed less than 140 KIAS is used, place a chart note in the plan view that states “**NOTE: LIMIT TO (number) KIAS ON DEPARTURE TO (name of end fix).**” If a speed less than 140 KIAS is required for a specific segment of a departure, use: “**NOTE: LIMIT TO (number) KIAS FROM (name of start fix) TO (name of end fix).**”

(b) For all Special procedures: “**NOTE: PILOT MUST ENSURE CDI SENSITIVITY IS SET TO 0.3 NM.**”

Figure F-1.

U.S. DEPARTMENT OF TRANSPORTATION – FEDERAL AVIATION ADMINISTRATION
TAKEOFF MINIMUMS AND OBSTACLE DEPARTURE PROCEDURES (ODP)

Bearings, headings, courses, tracks and radials are magnetic. Elevation and altitudes are in feet MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

City, State	Airport	Effective Date	Amdt. No.
ANYTOWN, CA	ANY HOSPITAL HELIPORT		ORIG

TAKEOFF MINIMUMS:**TEXTUAL DEPARTURE PROCEDURES:**

USE GARYS DEPARTURE

VISUAL CLIMB OVER AIRPORT:**TAKEOFF OBSTACLE NOTES:****CONTROLLING OBSTACLES:****REMARKS:****FLIGHT INSPECTED BY:**

JOE INSPECTOR

AJW-XXX

12/14/2013

REQUIRED EFFECTIVE DATE:**DEVELOPED BY:**

JAMES DEVELOPER

AJV-XXX

12/09/2013

APPROVED BY:**COORDINATED WITH:****CHANGES:****REASONS:**

THIS PAGE IS INTENTIONALLY LEFT BLANK

Figure F-2.

U.S. DEPARTMENT OF TRANSPORTATION – FEDERAL AVIATION ADMINISTRATION
TAKEOFF MINIMUMS AND OBSTACLE DEPARTURE PROCEDURES (ODP)

Bearings, headings, courses, tracks and radials are magnetic. Elevation and altitudes are in feet MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

City, State	Airport	Effective Date	Amdt. No.
ANYTOWN, CA	MULTIPLE HELIPORTS: W HELIPORT; X HELIPORT; Y HELIPORT; Z HELIPORT		ORIG

TAKEOFF MINIMUMS:**TEXTUAL DEPARTURE PROCEDURES:**

USE XRRAY DEPARTURE

VISUAL CLIMB OVER AIRPORT:**TAKEOFF OBSTACLE NOTES:****CONTROLLING OBSTACLES:****REMARKS:****FLIGHT INSPECTED BY:**

JOE INSPECTOR

AJW-XXX

2/14/2013

REQUIRED EFFECTIVE DATE:**DEVELOPED BY:**

JAMES DEVELOPER

AJV-XXX

2/09/2013

APPROVED BY:**COORDINATED WITH:****CHANGES:****REASONS:**

THIS PAGE IS INTENTIONALLY LEFT BLANK

Figure F-3.

U.S. DEPARTMENT of TRANSPORTATION – FEDERAL AVIATION ADMINISTRATION

GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevation and altitudes are in feet MSL. Altitudes are minimum altitudes unless otherwise indicated. Crossings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet PVR unless otherwise indicated. Graphic depictions attached.

DP Name GARYS	Number ONE	DP Computer Code GARYS1 GARYS	Superseded Number NONE	Dated	Effective Date
------------------	---------------	----------------------------------	---------------------------	-------	----------------

TYPE: RNAV SID SPECIAL

DP ROUTE DESCRIPTION:
VISUAL SEGMENT: HOVER AT 15 FT/AGL, THEN CLIMB ON TRACK 270.31 TO CROSS FSTFX IDF AT OR ABOVE 500.
IFR SEGMENT: CLIMB ON COURSE 270.31 TO CROSS SECFX AT OR ABOVE 2000. THEN TRACK COURSE 180.21 TO CROSS THDFX AT OR ABOVE 3000. THEN TRACK 245.33 TO CROSS FORFX AT OR ABOVE 4000. THEN TRACK 180.21 TO CROSS GARYS AT 4500.

TRANSITION ROUTES (GRAPHIC DEPICTION ONLY):

Transition Name	Transition Computer Codes	From FIX/NAVAID	To FIX/NAVAID	Course	Distance	MEA	MOCA	Crossing Altitudes/Fixes
-----------------	---------------------------	--------------------	------------------	--------	----------	-----	------	--------------------------

PROCEDURAL DATA NOTES/TAKEOFF MINIMUMS:
TAKE OFF MINIMUMS: 600- 3/4 OR STANDARD WITH MINIMUM CLIMB OF 600FT PER NM TO 3500.
NOTE: GPS REQUIRED
NOTE: LIMIT TO 120 KIAS ON DEPARTURE TO GARYS
NOTE: PILOT MUST ENSURE CDI SENSITIVITY IS SET TO 0.3 NM.
NOTE: PROCEDURE NA AT NIGHT.

TAKEOFF OBSTACLES NOTES:
01-00040, HILL 1.29NM BEARING 221° 166 MSL

CONTROLLING OBSTACLES:
01-00065, HILL, 166 FT MSL TERRAIN 452646.70N / 1235252.30W

LOST COMMUNICATIONS PROCEDURES:
PROCEED TO ANYFX WAYPOINT THEN EXECUTE THE COPTER RNAV (GPS) 128 APPROACH

ADDITIONAL FLIGHT DATA:
REFERENCE MAG VAR: 17W EPOCH YR: 2015

Page 1 of 2

FAA Form 8260-15B / August 2009 (Computer Generated)

F-7

U.S. DEPARTMENT OF TRANSPORTATION – FEDERAL AVIATION ADMINISTRATION
GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevation and altitudes are in feet MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet FVR unless otherwise indicated. Graphic depictions attached.

DP Name	Number	DP Computer Code	Superseded Number	Dated	Effective Date
GARYS	ONE	GARYS1.GARYS	NONE		

AIRPORTS SERVED:

XXXX, ANY HOSPITAL HELIPORT; ANYTWN, CA

COMMUNICATIONS:

LOS ANGELES CENTER 124.2 , ANYTWN AWOS-3 120.00

FIXES AND/OR NAVAIDS:

REMARKS:

FLIGHT INSPECTED BY:

JOE INSPECTOR

12/14/2011

REQUIRED EFFECTIVE DATE:

DEVELOPED BY:

JAMES DEVELOPER

12/09/2009

APPROVED BY:

COORDINATED WITH:

CHANGES:

REASONS:

Figure F-4.

U.S. DEPARTMENT of TRANSPORTATION – FEDERAL AVIATION ADMINISTRATION

GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevation and altitudes are in feet MSL. Altitudes are minimum altitudes unless otherwise indicated. Crossings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet EPR unless otherwise indicated. Graphic depictions attached.

DP Name OHANA	Number ONE	DP Computer Code OHANA1.OHANA	Superseded Number	Dated	Effective Date
------------------	---------------	----------------------------------	-------------------	-------	----------------

TYPE: RNAV SID

DP ROUTE DESCRIPTION:

VFR SEGMENT: VFR CLIMB TO ALOHA, CROSS ALOHA AT OR ABOVE 800.

IFR SEGMENT: TRACK COURSE 040.30 TO CROSS PEARL AT OR ABOVE 1600, THEN TRACK COURSE 040.44 TO CROSS HARBOR AT OR ABOVE 3300, THEN TRACK COURSE 129.41 TO CROSS MOSES AT OR ABOVE 3500, THEN TRACK COURSE 086.11 TO CROSS OHANA AT OR ABOVE 3700.

TRANSITION ROUTES (GRAPHIC DEPICTION ONLY):

Transition Name	Transition Computer Codes	From FIX/NAVAID	To FIX/NAVAID	Course	Distance	MEA	MOCA	Crossing Altitudes/Fixes
-----------------	---------------------------	--------------------	------------------	--------	----------	-----	------	--------------------------

PROCEDURAL DATA NOTES/TAKEOFF MINIMUMS:

TAKE OFF MINIMUMS: FROM ALOHA IDF, MINIMUM CLIMB OF 580 FT PER NM TO 3300

NOTE: GPS REQUIRED

TAKEOFF OBSTACLES NOTES:

01-00100, HILL 1.42NM, BEARING 265.00° 842 MSL

01-00200, HILL 1.49NM, BEARING 286.20° 621 MSL

01-00300, HILL 5666.6 FT, BEARING 236.50° 587MSL

CONTROLLING OBSTACLES:

01-00100, HILL 1.42NM, BEARING 265.00° 842 MSL

LOST COMMUNICATIONS PROCEDURES:

PROCEED TO AKANA WAYPOINT THEN EXECUTE THE COPTER RNAV (GPS) 220 APPROACH

ADDITIONAL FLIGHT DATA:

REFERENCE MAG VAR: 9W EPOCH YR: 2015

FAA Form 8260-15B / August 2009 (Computer Generated)

Page 1 of 2

F-9

U.S. DEPARTMENT of TRANSPORTATION – FEDERAL AVIATION ADMINISTRATION
GRAPHIC DEPARTURE PROCEDURE (DP)

Bearings, headings, courses, tracks, and radials are magnetic. Elevation and altitudes are in feet MSL. Altitudes are minimum altitudes unless otherwise indicated. Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet FVR unless otherwise indicated. Graphic depictions attached.

DP Name	Number	DP Computer Code	Superseded Number	Dated	Effective Date
OHANA	ONE	OHANA1.OHANA			

AIRPORTS SERVED:

KAMEHAMEHA MEDICAL CENTER HELIPORT

COMMUNICATIONS:

HCF APP / CON 118.3, AWOOS-3 135.775

FIXES AND/OR NAVAIDS:

REMARKS:

FLIGHT INSPECTED BY:

JOE INSPECTOR

AJW-XXX

DEVELOPED BY:

JAMES DEVELOPER

AJV-3XX

APPROVED BY:

03/26/2012

COORDINATED WITH:

CHANGES:

REASONS:

REQUIRED EFFECTIVE DATE:

Appendix G. Instructions for Completing FAA Form 8260-15D.

1. Documentation. Complete a single Form 8260-15D (or applicable military form) for each airport where a Diverse Vector Area (DVA) has been developed and forward to the requesting ATC facility. The information on the form will be used by the facility to establish the DVA procedure. See figure G-1.

Note: For a complex DVA, consider providing a graphic depiction of the area to the facility in addition to the Form 8260-15D.

a. City and State. Complete this section with the same location data as on the associated Form 8260-15A.

b. Airport. Complete this section with the same airport name data as on the associated Form 8260-15A.

c. Effective Date. The effective date is the date of approval.

d. Amendment Number. Enter the amendment number as applicable. When the Form 8260-15D is an original, enter "ORIG."

e. DVA. List each runway assessed for a DVA followed by a description of the area. Do not include the buffer areas within the description since these descriptions may be used by ATC facilities to develop radar video maps of the DVA.

(1) Isolation Area. Include the latitude/longitude of the DRP and a distance from DRP determined by the diverse departure evaluation distance (25/46 NM) minus 5 NM. Describe in detail the isolation area(s) that must be avoided.

Example:

RWY 31: ALL AREA WITHIN 20 NM OF 352336.01N/0973607.80W (DEPARTURE REFERENCE POINT) EXCEPT FOR THE FOLLOWING AREAS: 1) WITHIN 3 NM RADIUS OF 352557.45N/0974109.53W AND 2) WITHIN 3 NM RADIUS OF 353405.64N/0972920.85W.

(2) Range of Authorized Headings. Describe the authorized range of headings (corresponding to the lateral sector boundaries) beginning with the extreme left heading, clockwise to the extreme right heading as would be viewed from the departure runway in the direction of the departure, as well as the distance from the DRP to which the DVA is applicable. Also provide a detailed point to point description of the area to assist in the creation of a video map.

Example:

RWY 6: AUTHORIZED HEADINGS 270 CLOCKWISE TO 150 WITHIN 20 NM OF 384457.07N/0902229.98W (DEPARTURE REFERENCE POINT).

INCLUDES ALL AREA WITHIN 384457.07N/0902229.98W TO 384454.27N/0904803.87W THEN VIA 20 MILE ARC CENTERED ON 384457.07N/0902229.98W TO 382736.10N/0900946.11W TO 384457.07N/0902229.98W.

(3) Climb to Initial MVA/MIA. Describe the authorized range of headings beginning with the extreme left heading, clockwise to the extreme right heading as would be viewed from the departure runway in the direction of the departure. The DVA description must state it is applicable only within those areas where the MVA/MIA sector altitude is equal to or less than the initial MVA/MIA.

Example:

RWY 36: AUTHORIZED HEADINGS 310 CLOCKWISE TO 050 TO 3500 WITHIN ANY MVA SECTOR WITH A MINIMUM ALTITUDE OF 3500 OR LESS.

(4) Defined Area (DoD Option). Use latitude/longitude points, lines, arcs, and arc center points (as applicable) to describe the area.

Example:

RWY 21L: WITHIN THE AREA BOUNDED BY A SERIES OF LINES FROM
381458.00N/1215805.00W TO
381014.00N/1220922.00W TO
380200.00N/1215823.00W TO
381831.00N/1213839.00W TO
382207.00N/1214546.00W TO
381458.00N/1215805.00W.

f. Obstacle Evaluation Area. This area is used to document and describe the OEA (including buffer areas where utilized) of the DVA and will primarily be used for identifying and evaluating the aeronautical effect of proposed obstacles. Enter a description of each OEA (using as necessary latitude/longitudes, bearings, arcs, radii, etc) for which a DVA has been established.

g. Developed By. Enter the name of the FAA procedure specialist and organizational routing code.

h. Approved By. Enter the name of the Aeronautical Navigation Products manager, or the delegated representative. This individual must sign in the “approved by” space and enter the date signed.

Note: A DVA does not require a flight inspection; therefore, no additional signatures are required.

- i. Authorized Facility.** Specify the ATC facility which requested the DVA and for which the DVA is applicable. Do not specify more than one facility on the same form.
- j. Form 7210-9 Date.** For a DVA based on a climb to an initial MVA/MIA, enter the date of the Form 7210-9 that was used to evaluate the DVA. Leave blank for other DVA types.
- k. Changes.** List changes from the Form 8260-15D which immediately preceded the current version. Leave blank for an original.
- l. Reasons.** List reasons for any changes annotated on the form.

THIS PAGE INTENTIONALLY LEFT BLANK

Figure G-1.

U.S. DEPARTMENT of TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION			
DIVERSE VECTOR AREA (DVA)			
Bearings, headings, courses, tracks, and radials are magnetic. Elevations and altitudes are in feet, MSL. Distances are in nautical miles.			
City, State	Airport	Effective Date	Amdt No.
SANTA MONICA, CA	SANTA MONICA MUNI	7/31/2011	ORIG
DVA:			
RWY 21: AUTHORIZED HEADINGS 165 CLOCKWISE TO 255 WITHIN 20 NM OF 340100.39N/1182700.64W (DEPARTURE REFERENCE POINT). INCLUDES ALL AREA WITHIN 340100.39N/1182700.64W TO 334058.22N/1182700.64W, THEN VIA 20 MILE CLOCKWISE ARC CENTERED ON 340100.39N/1182700.64W TO 335729.36N/1185041.37W, TO 340100.39N/1182700.64W			
OBSTACLE EVALUATION AREA (not for video mapping use):			
RWY 21: FROM 340100.39N/1182700.64W TO 334210.45N/1181848.69W, THEN VIA 20 NM CLOCKWISE ARC CENTERED ON 340100.39N/1182700.64W TO 334114.51N/1182324.59W, THEN VIA 3 NM CLOCKWISE ARC CENTERED ON 334058.22N/1182700.64W TO 333757.89N/1182700.64W, THEN VIA 23 NM CLOCKWISE ARC TO 335657.31N/1185414.31W, THEN VIA 3 NM CLOCKWISE ARC CENTERED ON 335729.36N/1185041.37W TO 340028.62N/1185105.74W, THEN VIA 20 NM CLOCKWISE ARC CENTERED ON 340100.39N/1182700.64W TO 340426.85N/1185043.31W, TO 340100.39N/1182700.64W			
AUTHORIZED FACILITY:			
SCT APP CON			
FAA FORM 7210-9 DATE:			
DEVELOPED BY:			
Joe Developer	AJV-35	07/31/2011	
APPROVED BY:			
Jolene Manager	AJV-35	07/31/2011	
CHANGES:			
REASONS:			
FAA Form 8260-15D / JULY 2011 (Computer Generated)			
Page 1 of 1			

THIS PAGE INTENTIONALLY LEFT BLANK

Appendix H. Administrative Information

1. Distribution. This order is distributed in Washington headquarters to the Group and Team level in the Air Traffic Organization (Safety, En Route and Oceanic Services, Terminal Services, System Operations Services, Technical Operations Services, and Mission Support Services); to the Branch level in the Flight Standards Service; to the National Flight Data Center (NFDC), AJV-21, to the National Aeronautical Navigation Products Office (AeroNav Products), AJV3, and to the Regulatory Standards Division, AMA-200, at the Mike Monroney Aeronautical Center; to the branch level in the regional Flight Standards Divisions; to the Team level in the ATO Service Area Operational Support Groups; special mailing list ZVN-826; and Special Military and Public Addressees.

2. Background. The original order combined into a single product textual instrument flight rule (IFR) departure procedures that were developed by the AeroNav Products under the guidance of the Flight Standards Service (AFS), and graphic standard instrument departures (SIDs) that were designed and produced under the direction of the Air Traffic Organization (ATO). This combined product introduced the new acronym, Departure Procedures (DP), to the pilot/controller community and the aforementioned terms of “IFR departure procedure,” and “SID” were eliminated. The original order also provided for the graphic publication of IFR departure procedures (DP) to facilitate pilot understanding of the procedure as well as all area navigation (RNAV) and required navigation performance (RNP) DPs, both those developed solely for obstruction clearance and those developed for system enhancement. Elimination of the term “SID” created undue confusion in both the domestic and international aviation communities. Therefore, in the interest of international harmonization, the FAA reintroduced the term “SID” in Order 8260.46B while also using the term “Obstacle Departure Procedures (ODPs)” to describe certain procedures. This order defines two separate types of DPs: SIDs and ODPs and provides policy guidance for the development and documentation of each.

3. Definitions. As used in this order shall or must mean compliance is mandatory. All references to related Orders and Publications apply to the latest edition. A glossary of additional terms, abbreviations, and acronyms used in this order:

- a. Adverse Assumption Obstacle (AAO).**
- b. Air Route Traffic Control Center (ARTCC).**
- c. Air Traffic Control (ATC).**
- d. Approach End of Runway (AER).** The first portion of the runway available for landing. If the runway threshold is displaced, use the displaced threshold Lat/Long as the AER.
- e. Area Navigation (RNAV).** A system of enhanced navigational capability that can compute aircraft position, actual track and ground speed, and then provide meaningful information relative to the route of flight selected by the pilot.

f. Climb Gradient (CG). A climb requirement expressed in ft per NM (gradient greater than 200 ft/NM).

g. Controller Chart. An aeronautical chart developed for internal air traffic controller reference in specific ATC facilities. These charts may also be used to design instrument procedures to support ATC operations.

h. Departure End of Runway (DER). The end of the runway that is opposite the landing threshold. It is sometimes referred to as the stop end of the runway.

i. Department of Defense (DoD).

j. Departure Procedure (DP). A preplanned IFR departure procedure published for pilot use, in graphic or textual format, that provides obstruction clearance from the terminal area to the en route structure. There are two types of DPs - Obstacle Departure Procedures (ODP) printed either textually or graphically, and Standard Instrument Departure (SID) which is always printed graphically.

k. Diverse Vector Area (DVA). An area in a radar environment established at the request of Air Traffic, and jointly developed with the FPO, that meets terminal instrument procedures (TERPS) criteria for diverse departures, obstacles and terrain avoidance in which random radar vectors below the MVA/MIA may be issued to departing aircraft.

l. Electronic Transmission. Transmittal via electronic mail (e-mail) or facsimile (FAX).

m. Fix. A generic term used to define a predetermined geographical position used for route definition. A fix may be a ground-based NAVAID, a waypoint, or defined by reference to one or more radio NAVAIDs.

n. Flight Procedures Team (FPT). An element of Mission Support Services, geographically located at each Air Traffic Service Center.

o. Fly-By Waypoint. A fly-by waypoint requires the use of turn anticipation to avoid overshoot of the next flight segment.

p. Fly-Over Waypoint. A fly-over waypoint precludes any turn until the waypoint is overflown and is followed either by an intercept maneuver of the next flight segment or direct flight to the next waypoint.

q. Initial Climb Area (ICA). An area beginning at the departure end of runway (DER) to provide unrestricted climb to at least 400 ft above DER elevation.

r. Initial Departure Fix (IDF). The first published fix/waypoint used for the departure. The IDF denotes the beginning of the RNAV portion of the SID.

Note: “IF” is used for coding (per ARINC 424) of the IDF. “IF” or “IDF” will not be placed on a departure chart in order to prevent confusion. The “IF” acronym is also used in conjunction with the intermediate fix of an instrument approach procedure.

s. Lead Carrier. An air carrier or operator that has agreed to serve as the focal point for the development of DPs at a specific airport. The lead carrier agrees to help develop the DP and conducts initial flyability evaluations by all RNAV-equipped aircraft expected to use the DP.

t. Least Onerous Route. The obstacle DP route established over terrain or other obstacles that result in the lowest possible climb gradient for that runway.

u. National Flight Data Center (NFDC). The FAA office responsible for the collection, validation, and dissemination of all aeronautical information relating to the NAS.

v. National Flight Data Digest (NFDD). A daily publication, prepared by the NFDC to promulgate non-regulatory changes to the NAS.

w. Navigational Aid (NAVAID). See Aeronautical Information Manual (AIM). Any visual or electronics device airborne or on the surface which provides point-to-point guidance information or position data to aircraft in flight.

x. Non-RNAV DP. A DP whose ground track is based on ground-based NAVAIDs and/or dead reckoning navigation.

y. Obstacle Clearance Surface (OCS). An inclined surface associated with a defined area for obstruction evaluation.

z. Obstacle Departure Procedure (ODP). A preplanned IFR departure procedure printed for pilot use in textual or graphic form to provide obstruction clearance via the least onerous route from the terminal area to the appropriate en route structure. ODPs provide obstruction clearance and may be flown without ATC clearance unless an alternate departure procedure (SID or radar vector) has been specifically assigned by ATC.

aa. Proponent. The originator of a DP requirement. This may include an individual user group, ATC, AeroNav Services, or other appropriate government agency.

bb. Radar SID. A SID established when ATC has a need to vector aircraft on departure to a particular ATS Route, NAVAID, or fix.

cc. Regional Airspace and Procedures Team (RAPT). A team established for the purpose of coordinating and processing requests for new or modified flight procedures and related airspace matters (see Order 8260.43).

dd. RNAV DP. A DP developed for RNAV-equipped aircraft whose ground track is based on satellite or distance measuring equipment (DME)/DME navigation systems.

ee. Required Navigation Performance (RNP). A statement of the navigational performance accuracy necessary for operation within defined airspace. See the AIM for current definition.

ff. Runway Heading. The magnetic direction that corresponds with the runway centerline extended, not the painted runway numbers on the runway. Pilots cleared to “fly or maintain runway heading” are expected to fly or maintain the published heading that corresponds with the extended centerline of the departure runway (until otherwise instructed by ATC), and are not to apply drift correction; e.g., RWY 4, actual magnetic heading of the runway centerline 044.22 degrees, fly 044 degrees.

gg. SID Transition. A published segment used to connect the SID to one or several en route airways/jet routes.

hh. Significant Benefits. Tangible or intangible advantages resulting from the implementation of a DP such as fuel savings from reduced flight tracks and time, reduced inter-/intra-facility coordination, reduced communications between ATC and pilots, increased flexibility of airspace management and sectorization due to more predictable ground tracks, or other similar benefits to users or providers.

ii. Standard Instrument Departure (SID). A preplanned IFR ATC departure procedure printed in graphic form for pilot/controller use to provide obstacle clearance and a transition from the terminal area to the appropriate en route structure. SIDs are primarily designed for system enhancement to expedite traffic flow and to reduce pilot/controller workload. ATC clearance must be received prior to flying a SID.

jj. Terminal Area Route Generation Evaluation and Traffic Simulation (TARGETS). An air traffic tool for RNAV DP design.

kk. TERPS. FAA Order 8260.3, United States Standard for Terminal Instrument Procedures.

ll. Transmittal Letter (TL). A biweekly publication, prepared by the NFDC, used as the medium to promulgate instrument approach procedures and textual ODPs and their effective dates for publication.

mm. Visual Climb Over Airport (VCOA). A departure option for an IFR aircraft, operating in visual meteorological conditions equal to or greater than the specified visibility and ceiling, to visually conduct climbing turns over the airport to the published “climb-to” altitude from which to proceed with the instrument portion of the departure. VCOA procedures are developed to avoid obstacles greater than 3 statute miles from the departure end of the runway as an alternative to complying with climb gradients greater than 200 ft/NM. These procedures are published in the ‘Takeoff Minimums and (Obstacle) Departure Procedures’ section of the Terminal Procedures Publications or as an option on a Graphic ODP.

nn. Waypoint (WP). A predetermined geographical position used for route definition and/or progress-reporting purposes defined by latitude/longitude and may include elevation.

4. Related Publications.

- a. Order 1050.1**, Policies and Procedures for Considering Environmental Impacts
- b. Order 7100.9**, Standard Terminal Arrival Program and Procedures.
- c. Order 7210.3**, Facility Operation and Administration
- d. Order 7400.2**, Procedures for Handling Airspace Matters.
- e. Order 8260.3**, United States Standard for Terminal Instrument Procedures (TERPS).
- f. Order 8260.19**, Flight Procedures and Airspace.
- g. Order 8260.26**, Establishing and Scheduling Standard Instrument Procedure Effective Dates.
- h. Order 8260.40**, Flight Management System (FMS) Instrument Procedure Development.
- i. Order 8260.42**, United States Standard for Helicopter Area Navigation (RNAV).
- j. Order 8260.43**, Flight Procedures Management Program.
- k. Order 8260.53**, Standard Instrument Departures that Use Radar Vectors to Join RNAV Routes.
- l. Order 8260.58**, United States Standard for Performance Based Navigation (PBN) Instrument Procedure Design.
- m. Advisory Circular 90-100**, United States Terminal and En route Area Navigation (RNAV) Operations.
- n. Advisory Circular 90-105**, Approval Guidance for RNP Operations and Barometric Vertical Navigation in the U.S. National Airspace System.
- o. RTCA DO-187**, Minimum Operational Performance Standards for Airborne Area Navigation Equipment Using Multi-Sensor Inputs.
- p. ARINC Specification 424**, Navigation System Data Base.
- q. IACC No. 4**, Interagency Air Cartographic Committee Chart Specification for Low Altitude Instrument Approach Procedures.

r. IACC No. 7, Interagency Air Cartographic Committee Chart Specification for Standard Instrument Departure Charts.

s. IACC No. 17, Interagency Air Cartographic Committee Chart Specification for Terminal Procedures Publications.

5. Forms and Reports. Appendices B, C, D, E, F, and G contain requirements data, applicable forms, and associated instructions.

6. Information Update. For your convenience, FAA Form 1320-19, *Directive Feedback Information*, is included at the end of this order to note any deficiencies found, clarifications needed, or suggested improvements regarding the contents of this order. When forwarding your comments to the originating office for consideration, please provide a complete explanation of why the suggested change is necessary.