



U.S. Department
of Transportation

Federal Aviation
Administration

Advisory Circular

Subject: AIRCRAFT BOARDING
EQUIPMENT

Date: DRAFT
Initiated by: AAS-100

AC No: 150/5220-21C
Change:

1. **PURPOSE.** This advisory circular (AC) contains the Federal Aviation Administration's (FAA's) performance standards, specifications, and recommendations for the design, manufacture, testing and maintenance of equipment used in the boarding of airline passengers.
2. **CANCELLATION.** This AC cancels AC 150/5220-21B, *Guide Specification for Devices Used to Board Airline Passengers with Mobility Impairments*, dated March 17, 2000.
3. **SCOPE.** This AC covers the three principal methods of aircraft boarding currently in use for persons with disabilities:
 - a. Passenger boarding bridges (PBBs) that are entered from the terminal boarding area.
 - b. Ramps that are moved into place to allow boarding from the tarmac.
 - c. Lifts from the tarmac to the aircraft passenger door.

Aircraft boarding chairs used to transfer passengers from their wheelchair or other apparatus to their seat in the aircraft cabin are also addressed.

The physical area covered in this AC is that which is bounded by the door of the passenger terminal area, on one end, to the door of the aircraft, on the other end. Although this AC refers only to aircraft boarding (enplaning), all references apply equally to disembarking (deplaning) with the described procedures occurring in reverse order.

The AC is primarily based on performance standards, specifications, and recommendations contained in the Society of Automotive Engineers (SAE) Aerospace Recommended Practice (ARP) 1247, *General Requirements for Aerospace Ground Support Equipment (Motorized and Non-motorized)*, and a U.S. Access Board Technical Paper on *Guidelines for Aircraft Boarding Chairs*. Pertinent FAA AC, U.S. Access Board, Military Standards and non-government SAE, ANSI, NFPA and ISO standards are also referenced (see Appendix C for more information) and, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence.

In addition to general design guidance, areas that may require clarification or tailoring in purchasing PBBs, ramps, lift and boarding chairs to the suite the for needs of specific airports are contained in tables at the end of each of their respective chapters.

4. **APPLICATION.** The FAA recommends the guidelines and standards in this AC for the implementation of equipment and procedures at airports for the boarding of passengers.

This AC does not constitute a regulation and, in general, is not mandatory. However, use of these guidelines is mandatory for such equipment and procedures funded under the Airport Improvement Program (AIP) or Passenger Facility Charge (PFC) Program. Mandatory terms such as “must” used herein apply only to those who undertake these projects using AIP or PFC funds.

Equipment meeting the standards provided in this AC satisfy the boarding device requirements contained in the U.S. Department of Transportation regulations 49 CFR Part 27, *Nondiscrimination on the Basis of Disability in Programs or Activities Receiving Federal Financial Assistance*, paragraph 27.72, and 14 CFR Part 382, *Nondiscrimination on the Basis of Disability in Air Travel, Subpart G—Boarding, Deplaning, and Connecting Assistance*, paragraphs 382.91 through 382.105.

Alternate means of satisfying these requirements which are in accordance with applicable laws and regulations are acceptable, provided they result in a substantially equivalent, or greater, level of accessibility and usability.

5. PRINCIPAL CHANGES. The previous version of this AC discussed only the passenger lift scenario and associated equipment. This document updates that effort while also addressing the other methods and equipment used to board an aircraft.

6. COMMENTS OR SUGGESTIONS for improvements to this AC should be sent to:

Manager, Airport Engineering Division
Federal Aviation Administration
ATTN: AAS-100
800 Independence Avenue, S.W.
Washington, DC 20591

7. COPIES OF THIS AC. The public may obtain electronic copies of this AC by visiting the FAA home page and navigating to The Office of Airport Safety and Standards, Advisory Circular database (www.faa.gov). A printed copy of this AC and other ACs can be ordered from:

U.S. Department of Transportation
Subsequent Distribution Office
Ardmore East Business Center
3341 Q 75th Avenue
Landover, MD 20785

Michael J. O'Donnell
Director of Airport Safety and Standards

TABLE OF CONTENTS

CHAPTER 1. INTRODUCTION..... 1

1.1. GENERAL..... 1

1.2. PERSONS WITH DISABILITIES..... 1

1.3. CATEGORIES OF BOARDING EQUIPMENT..... 1

CHAPTER 2. GENERAL DESIGN CRITERIA..... 3

2.1. GENERAL..... 3

2.2. FUNDAMENTAL STANDARDS..... 3

CHAPTER 3. PASSENGER BOARDING BRIDGES (PBBs)..... 11

3.1. GENERAL..... 11

3.2. SYSTEM DESCRIPTION..... 11

3.3. SYSTEM COMPONENTS..... 11

3.4. PERFORMANCE..... 12

3.5. PLANNING PHASE..... 14

3.6. DESIGN / DEVELOPMENT PHASE..... 16

3.7. CONSTRUCTION / PRODUCTION PHASE..... 26

3.8. POST-PRODUCTION PHASE..... 29

3.9. INSTALLATION AND ACCEPTANCE PHASE..... 31

3.10. POST-DELIVERY PHASE..... 32

3.11. PURCHASING SPECIFICATION CLARIFICATIONS..... 33

CHAPTER 4. RAMPS..... 35

4.1. GENERAL..... 35

4.2. SYSTEM DESCRIPTION..... 35

4.3. SYSTEM COMPONENTS..... 36

4.4. PERFORMANCE..... 37

4.5. PLANNING PHASE..... 38

4.6. DESIGN / DEVELOPMENT PHASE..... 39

4.7. CONSTRUCTION / PRODUCTION PHASE..... 43

4.8. POST-PRODUCTION PHASE..... 44

4.9. DELIVERY AND ACCEPTANCE PHASE..... 44

4.10. POST-DELIVERY PHASE..... 45

4.11. PURCHASING SPECIFICATION CLARIFICATIONS..... 46

CHAPTER 5. LIFTS 49

5.1. GENERAL..... 49

5.2. SYSTEM DESCRIPTION..... 49

5.3. SYSTEM COMPONENTS..... 49

5.4. PERFORMANCE..... 50

5.5. PLANNING PHASE..... 51

5.6. DESIGN / DEVELOPMENT PHASE..... 52

5.7. CONSTRUCTION / PRODUCTION PHASE..... 56

5.8. POST-PRODUCTION PHASE..... 57

5.9. DELIVERY AND ACCEPTANCE PHASE..... 57

5.10. POST-DELIVERY PHASE..... 58

5.11. PURCHASING SPECIFICATION CLARIFICATIONS..... 59

CHAPTER 6. AIRCRAFT BOARDING CHAIRS	61
6.1. GENERAL	61
6.2. PERFORMANCE.....	61
6.3. PLANNING PHASE.....	62
6.4. DESIGN / DEVELOPMENT PHASE.....	62
6.5. CONSTRUCTION / PRODUCTION PHASE.....	64
6.6. POST-PRODUCTION PHASE.....	64
6.7. DELIVERY AND ACCEPTANCE PHASE.....	64
6.8. POST-DELIVERY PHASE.....	65
6.9. PURCHASING SPECIFICATION CLARIFICATIONS.....	66
APPENDIX A. ABBREVIATIONS AND ACRONYMS.....	69
APPENDIX B. GLOSSARY	71
APPENDIX C. APPLICABLE DOCUMENTS	73
APPENDIX D. APPLICABLE LAWS AND REGULATIONS	77
APPENDIX E. ANNOTATED BIBLIOGRAPHY	81

LIST OF FIGURES

Figure 1. Clear Floor / Platform Space	4
Figure 2. Clear Pathway Dimensions.....	4
Figure 3. Carpet Pile Height	5
Figure 4. Vertical Change in Level (cross section).....	6
Figure 5. Slope Changes	6
Figure 6. Ramp Dimensions	7
Figure 7. Examples of Edge Protection and Handrail Extensions	9
Figure 8. Basic Passenger Boarding Bridge (PBB)	11
Figure 9. Ramps	36

LIST OF TABLES

Table 1. Passenger Boarding Bridge (PBB) Code Requirements.....	28
Table 2. PBB Purchasing Specification Clarifications	33
Table 3. Ramp Purchasing Specification Clarifications	46
Table 4. Lift Purchasing Specification Clarifications.....	60
Table 5. Aircraft Boarding Chair Purchasing Specification Clarifications.....	67

CHAPTER 1. INTRODUCTION

1.1. GENERAL.

A fundamental goal of this AC is to promote the simple, fast, and dignified boarding of all passengers regardless of their physical, sensory, or cognitive capabilities through the use performance standards, specifications, and recommendations for aircraft boarding equipment.

1.2. PERSONS WITH DISABILITIES.

a. The equipment in this advisory circular (AC) provides accommodations for a wide range of passengers, including those with mobility, sensory, and cognitive impairments. It is important to recognize that, for each of these types of disabilities, there exists a full range of characteristics. Mobility impairments range from people that have difficulty walking due to use of a prosthetic to the high level quadriplegic. Likewise, sensory impairments are on a continuous scale; most people with visual and hearing impairments are not totally blind or deaf but may have a very limited range of visual or aural stimuli that they can detect.

b. Understanding that all of the different disabilities include a wide range of severity is essential in planning equipment that is appropriate for everyone. Many manifestations of a disability must be considered so as not to leave out certain groups of individuals with mobility impairments. For example, the typical reference made for “persons with mobility impairments” is that of wheelchair users. But elderly passengers who walk with a shuffle must also be considered. As such, the importance of handrails, level surfaces at transitions, and appropriate floor surfaces play a significant role in the overall equipment design.

c. **Universal Design.** “Universal design” is a concept that aims to provide an equal level of service to persons of all ages and abilities. As applied to the field of aviation, universal design is fundamental to the safe and efficient transportation of the flying public. In keeping with the concept of universal design, the overall philosophy of this document is to specify both the performance and design requirements that enable seamless and integrated transportation options for all passengers.

1.3. CATEGORIES OF BOARDING EQUIPMENT.

There are two categories of boarding equipment considered in this document. The first, characterized as allowing “independent access,” includes equipment that allows passengers with mobility or sensory impairments to maneuver as closely as possible up to the aircraft while using their assistance device (e.g. their personal wheelchair or walker). The second, characterized as “dependant access,” requires passengers to be separated from that equipment at some point during the trip before reaching the aircraft door. For purposes of this document, the term “wheelchair” includes any wheeled mobility aid in which a person sits. Typically this includes scooters, manual chairs, and power chairs.

a. **Independent Access.** This category includes three basic types of equipment currently in use: (1) passenger boarding bridges that provide a direct path from the terminal boarding area to the door of a parked aircraft, (2) ramps used to board aircraft from the apron of an airport ramp, and (3) lifts used to board aircraft from the apron.

b. **Dependent Access.** The equipment in this category is most commonly known as a boarding (or transfer) chair. This category of equipment functions as a mobility device that can be used to move passengers from their personal chair to their assigned seat on the aircraft, the key feature being that these

devices are small enough to move down the aisle of the aircraft. Devices used for functions other than aircraft boarding, such as on-board (aisle) chairs used for in-flight mobility or wheelchairs used for mobility within the airport terminal, are not discussed in this AC. Passenger stairs, while technically falling into this category, will not be discussed in depth, as it is a non-preferred boarding method (for more discussion, see Section-by Section Analysis, 73 FR 27654, paragraph 382.101).

CHAPTER 2. GENERAL DESIGN CRITERIA.

2.1. GENERAL.

Fundamental standards for aircraft boarding equipment are described in this chapter and include human factors/human engineering, load capacity, dimensions, flooring, gaps and changes in levels, threshold protection, and handrails.

2.2. FUNDAMENTAL STANDARDS.

The standards contained in this section apply to all aircraft boarding equipment discussed in this AC. Unless otherwise noted, the values represent the minimum allowable standards required to ensure access to the majority of potential airline passengers.

a. Human Factors / Human Engineering. All boarding equipment must be easily operated by personnel possessing no special skills and given minimum training on the equipment. Operation must also be easily accomplished by personnel within the range of anthropomorphic sizes, as defined by the 5th percentile Asian female on the lower limit, to the 95th percentile Caucasian male, on the upper limit. Unless otherwise specified, and wherever applicable, the standards of Federal Aviation Administration (FAA) HF-STD-001 must be followed.

b. Load Capacity. The minimum design load that all boarding equipment must take into account for a single person with a disability or mobility impairment is 700 lbs (318 kg). This value is derived from an unoccupied personal mobility aid weighing up to 350 lbs (159 kg) and a passenger weighing up to 350 lbs (159 kg). The actual design load must be appropriate for the service. If it is a lift designed to be occupied only by the passenger in a personal mobility aid then the design load might be 700 lb; if two boarding agents are to accompany the passenger, everyone's combined weight should be included in the design load.

(1) Load Bearing Surfaces. The entire surface along the passenger pathway and platform surfaces must be capable of supporting the minimum design load (average live load of 40 psf or 195 kg/m²), including the edges of equipment that are adjacent to the aircraft door. The purchaser will specify the maximum number of personnel that a particular boarding device must safely support.

(2) Maximum Loads and Stresses. The maximum loads and stresses of Passenger Boarding Bridges must meet the design requirements recommended by the American Institute of Steel Construction (AISC) "Steel Construction Manual." The maximum loads and stresses for all other types of aircraft boarding equipment must meet the requirements of SAE ARP1247, paragraph 3.13.1.1, "Mechanical Design."

c. Dimensions.

(1) Clear Floor or Platform Space. The minimum dimensions of the clear floor or ground space needed to accommodate a single, stationary standard wheelchair or boarding device are found in Section 305 of the revised ADAAG (shown in Figure 1 below). Anecdotal evidence suggests that as personal wheelchairs increase in size, a minimum clear space of 32 inches (0.81 m) by 55 inches (1.40 m) (which includes knee and toe clearance) is recommended.

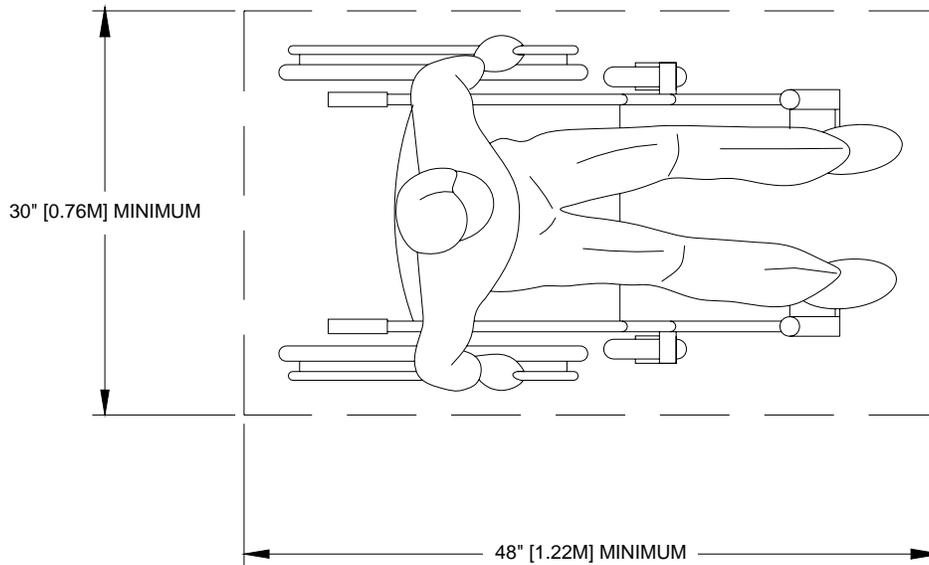


Figure 1. Clear Floor / Platform Space

(2) Clear Pathway. The minimum dimensions of the clear width of an accessible route are found in Section 403.5.1 of the revised ADAAG (shown in Figure 2 below). Note that this limit does not apply to transition ramps used to accommodate the width of aircraft doors.

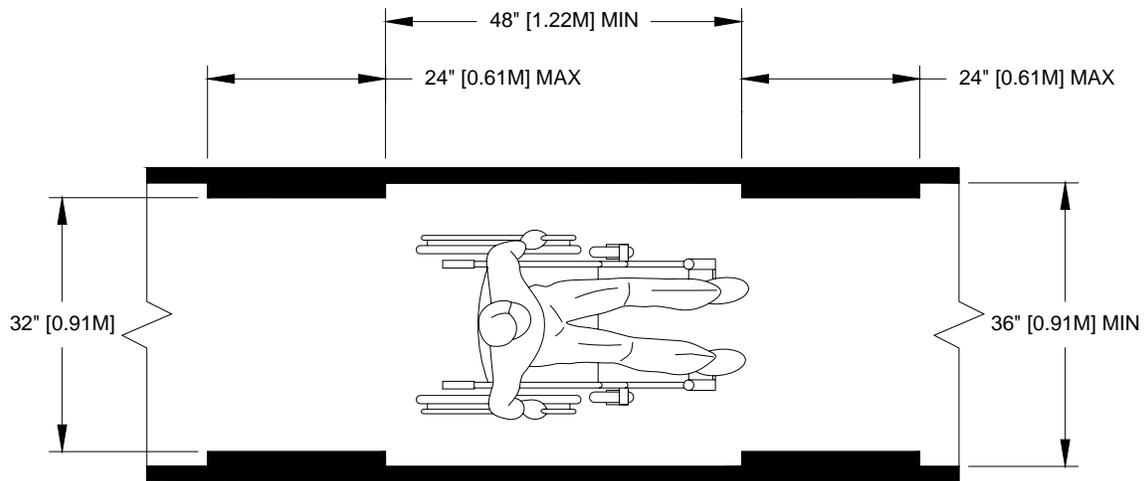


Figure 2. Clear Pathway Dimensions

(3) Other. Provisions for wheelchair passing are not required on aircraft boarding equipment. Passing will not occur on lifts, and the standard operations on ramps and PBBs are defined by airline operators. As such, enplaning and deplaning procedures do not occur at the same time, so one way traffic is to be expected. Turning radius requirements are only imposed on ramps, where the minimum area is 5 feet by 5 feet (1.5 m by 1.5 m). Safety and operational considerations on lift platforms do not allow the ability to turn. The rotundas on PBBs have the recommended minimum turning space requirements.

d. Flooring must be a firm, stable, slip-resistant, and hard surface with medium-high friction. For example, a very low pile carpet (with a maximum height of 0.5 inch (13 mm)) or a medium to high friction vinyl would be appropriate (Figure 3). Consideration must be given to possible exposure to weather in order to avoid slippery surfaces when wet. The goal is to provide a surface that works well for wheelchairs as well as persons with limited mobility. [Reference revised ADA-ABA Guidelines (2004) Section 302 and ADAAG for Transportation (1998), section 1192.23]

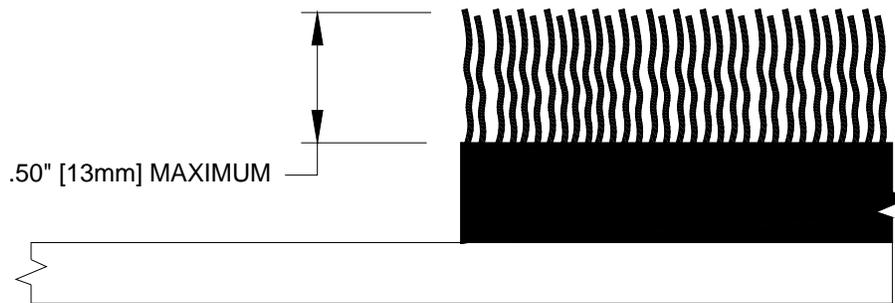


Figure 3. Carpet Pile Height

(1) Carpet. Carpet or carpet tile must be securely attached and, if not directly attached to the floor, have a firm cushion, pad. Carpet or carpet tile must have a level loop, textured loop, level cut pile, or level cut/uncut pile texture. Exposed carpet edges must be fastened to floor surfaces and have trim along the entire length of the exposed edge, except if that edge directly abuts the tunnel angles or gutters. **NOTE:** *Carpet molding is not required if rubber tile or other slip-resistant flooring is used.*

(2) Static Coefficient of Friction. There are no mandatory levels, but the recommended minimum static coefficient of friction for flooring is 0.6 for PBBs and lifts, and 0.8 for ramps.

(3) Gratings. Gratings must not be installed on accessible boarding equipment.

e. Gaps and Changes in Levels. Transitions at the entry and exit points for the boarding device and at any intermediate point where either a horizontal or vertical gap may exist should permit easy passage for all types of mobility aids ranging from canes and walkers to full size wheelchairs. Specifically they should allow easy passage for devices with wheel diameters as small as 4 inches. A typical solution is to provide a simple bridge plate, either manually or mechanically deployed in these situations.

(1) Vertical. Vertical changes in level are permitted up to 0.25 inches (6.4 mm) (Figure 4). Changes in level greater than 0.25 inches (6.4 mm) must conform to the specifications for slopes found in this section. [Reference revised ADA-ABA Guidelines (2004) Section 303]


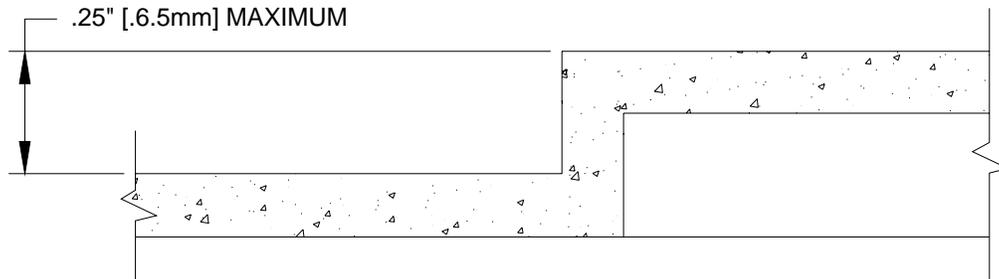


Figure 4. Vertical Change in Level (cross section)


(2) **Horizontal.** The maximum horizontal gap allowable along the path to the aircraft can be no greater than 1.5 inches (38 mm).

(3) Slopes.

(a) **For elevation changes between 0.25 inches (6.4mm) and 0.5 inches (13 mm),** the path must be beveled with a slope not steeper than 1:2. Note that for changes in level up to 0.5 inches (13 mm), either a combination of vertical and sloped changes can be provided (Figure 5a), or the entire change may be sloped (Figure 5b).

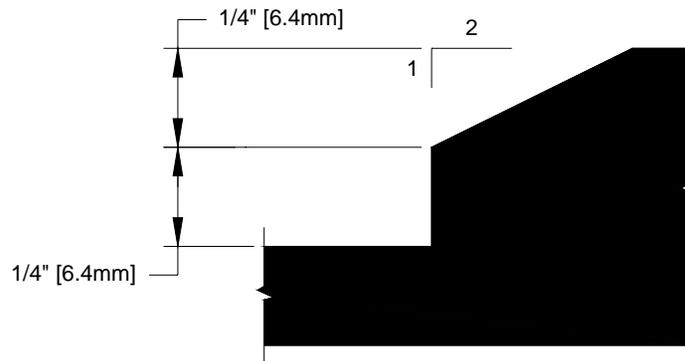


a. COMBINATION CHANGE IN ELEVATION UP TO 0.5" [13mm]

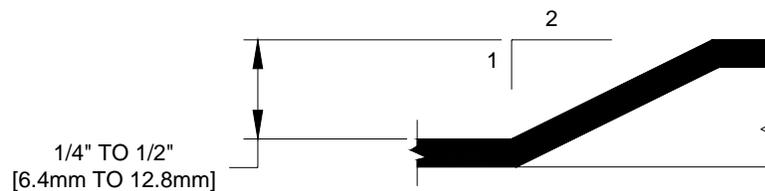

b. SLOPED CHANGE IN ELEVATION UP TO 0.5" [13mm]

Figure 5. Slope Changes

(b) Elevation changes greater than 0.5 inches (13 mm) require a surface with a recommended slope of 1:16 to 1:20, but must not exceed the following maximum slopes (Figure 6) in the direction of expected passenger traffic. **NOTE:** *The level landing requirement does not apply to the top of ramps (which may have a smaller transition ramp in place) or to PBBs.*

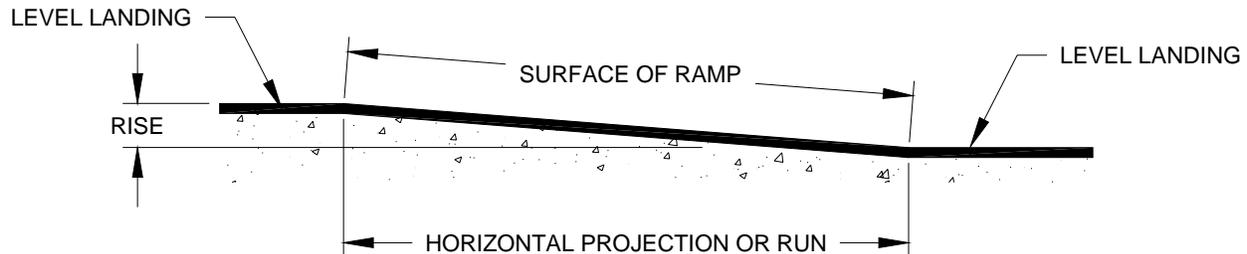

ELEVATION CHANGES GREATER THAN 0.5" [13mm] REQUIRE A SURFACE WITH A RECOMMENDED SLOPE OF 1:16 TO 1:20, BUT MUST NOT EXCEED THE FOLLOWING MAXIMUM SLOPES IN THE DIRECTION OF EXPECTED PASSENGER TRAFFIC:

UNASSISTED ACCESS - 1:12 (1' VERTICAL FOR 12' HORIZONTAL) OR 4.76°.

UNASSISTED ACCESS FOR A DISTANCE OF 5' [1.52M] OR LESS - 1:8 (1' VERTICAL FOR 8' HORIZONTAL) OR 7.13°.

ASSISTED ACCESS - 1:4 (1' VERTICAL FOR 4' HORIZONTAL) OR 14°.

Figure 6. Ramp Dimensions

(c) Maximum Rise and Run. Portable ramps used in boarding aircraft have a maximum horizontal run requirement of 33 feet (10.1 m), including the transition ramps at either end of the device, before a level platform is required. The maximum length of the portable ramp structure while being towed or moved must not exceed 27 feet (8.2 m). All other boarding equipment has no maximum rise or run requirements.

f. Threshold Protection must be provided on all boarding paths that are above 0.25 inches (6.4 mm) ground level to prevent wheelchair casters and crutch tips from slipping off the edge of the path surface. This protection should be in accordance with section of 405.9 of the revised ADAAG. In the case of a fully enclosed pathway the sides of the enclosure serve as edge protection. In the case of ramps or lifts that are not enclosed, edge protection must be provided in addition to handrails. Note, due to the required function of telescoping tunnels in passenger boarding bridges, deviations to this standard are allowed for the pathway inside that device.

(1) Markings. All thresholds and the boarding edge of ramps or lift platforms must have a band of color(s) running the full width of the edge which contrasts from the lift or ramp surface, either light-on-dark or dark-on-light. This provision applies to the walkway gutters and the edge of transition plates between segments of a passenger boarding bridge, to the transition between the boarding device floor and aircraft floor for all devices, and to the point at which the passenger moves from the tarmac to a ramp or lift. This provision does not apply if an edge or threshold already contains checkered metal plate or other provisions to increase conspicuity or friction.

(2) Edges / Curbs. Platforms, ramps, and landings with drop-offs must have curbs, walls, railings, or projecting surfaces that prevent people from slipping off the surface/path. Curbs must be a minimum of 2 in (50 mm) high. **NOTE:** *This provision does not apply to the cab's articulating floor.*

g. Handrails. Handrails on aircraft boarding equipment must meet the requirements of Section 505 of the revised ADAAG, except as noted below:

(1) For the telescoping tunnel sections within PBBs, handrails are only required on both sides of the smallest tunnel section.

(2) Handrails must not interfere with wheelchair or mobility aid maneuverability when entering or leaving the boarding device.

(3) Additional handrail requirements are specified for lift platforms in paragraph 5.6.a(1)(b) of this document.

(4) Structural Strength. The structural strength of handrails, fasteners, and mounting devices must meet the following specifications:

(a) Handrails must be capable of withstanding a force of 350 pounds (lbf) (1557 newtons (N)) concentrated at any point without permanent deformation of the rail, bar, or its supporting structure.

h. Lighting must be provided at all points along the boarding path, including the landing sill, platform, and operator compartment, at a recommended level of 20 foot-candles (215 lux), or a minimum of 15 foot-candles (161 lux) or greater, as measured from the floor-level. [Source: FAA HF-STD-001, paragraph 13.4] The lighting for emergency lighting requirements is a minimum of 5 foot-candles, as measured from the floor-level. This allows for all passengers the ability to safely negotiate a path with numerous transitions that occur within a short distance.

i. Passenger boarding stairs. Passenger boarding stairs are most commonly attached to the aircraft and are of the “adjustable fixed-riser” or “variable-riser” type. For all stair models/devices, such as portable stair stands or stairs attached to other types of boarding equipment covered in this AC, the requirements of Society of Automotive Engineers (SAE) Aerospace Recommended Practices (ARP) 836 must be met.

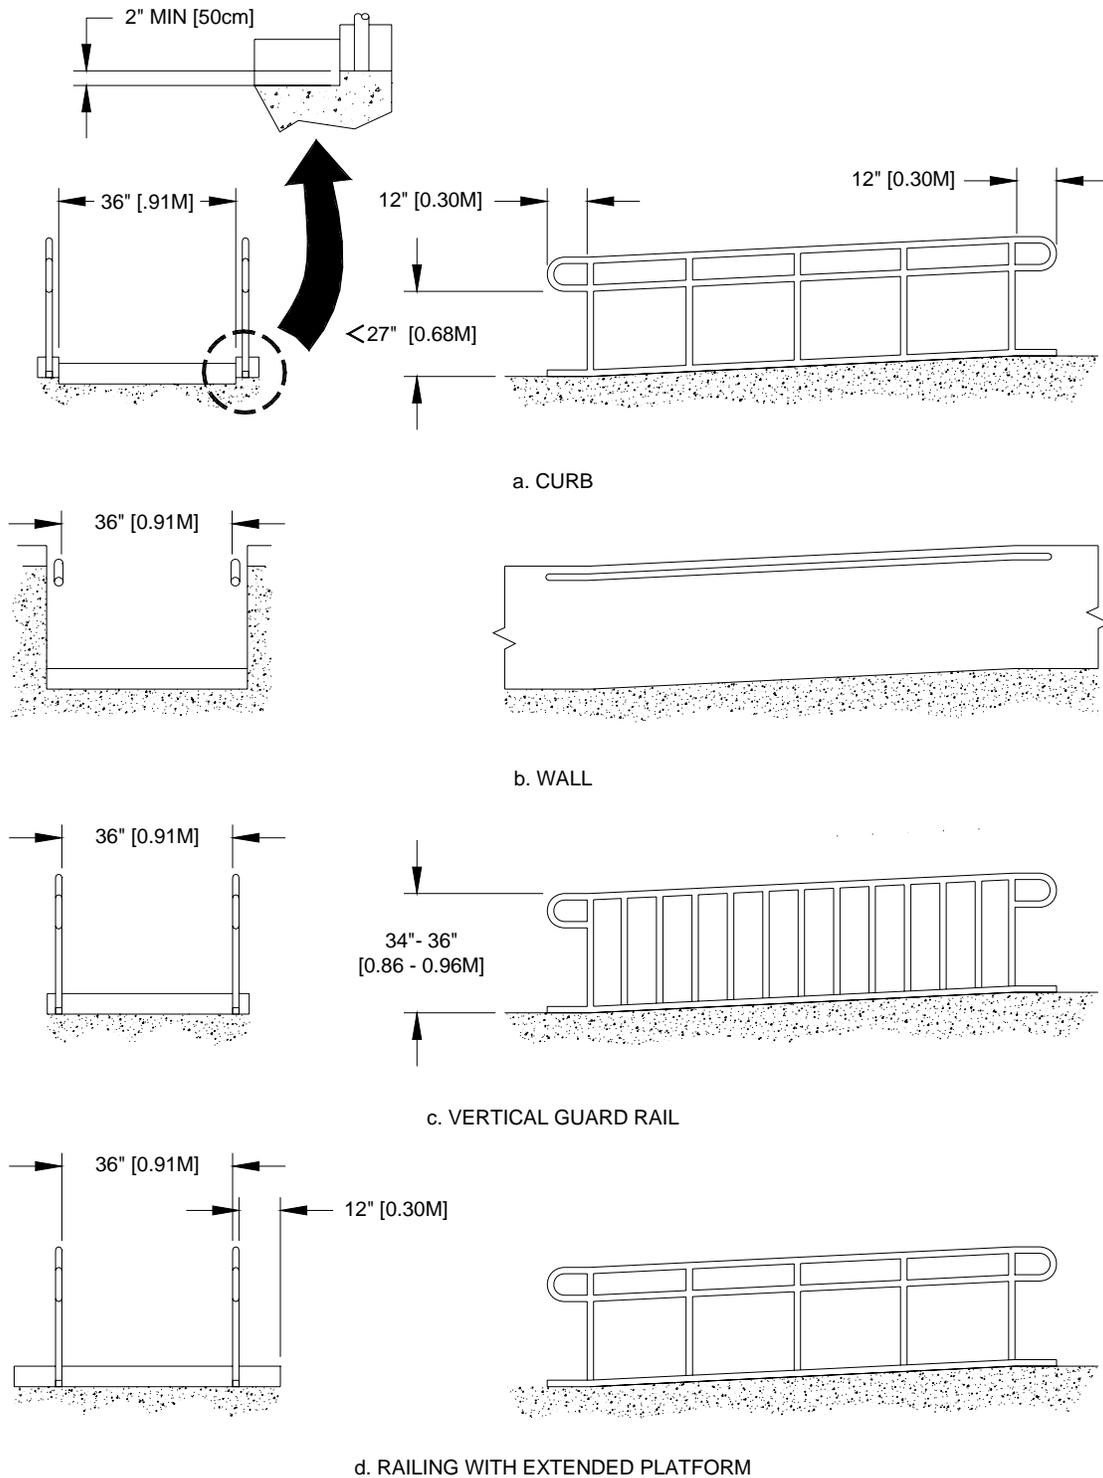


Figure 7. Examples of Edge Protection and Handrail Extensions

This page intentionally left blank.

CHAPTER 3. PASSENGER BOARDING BRIDGES (PBBs)

3.1. GENERAL.

a. Both stationary and moveable PBBs are described in this chapter. They contain rotunda assemblies, support columns, and corridors.

b. The basis for this chapter of the AC is the guidance document developed by the SAE ARP1247, and the U.S. Access Board's Technical Assistance Manual for ADA Accessibility Guidelines for Transportation Vehicles (Vehicle Guidelines). Additional requirements and clarifications have been added where necessary. The specifications outlined in this chapter represent the compilation of various source materials and industry standards, as noted.

3.2. SYSTEM DESCRIPTION.

a. **Types.** The two main types of PBBs are stationary and moveable. Stationary PBBs are permanently fixed structures while moveable PBBs have both horizontal and vertical movement about one end of the system. Except as specifically noted in this AC, the term PBB will refer to moveable type systems.

b. **Sections.** A standard PBB contains three main sections: (1) rotunda assembly, (2) support column, and (3) tunnel sections/corridor (Figure 8). For the purposes of this AC, the rotunda on the aircraft end of the PBB will also be referred to as the "bubble."

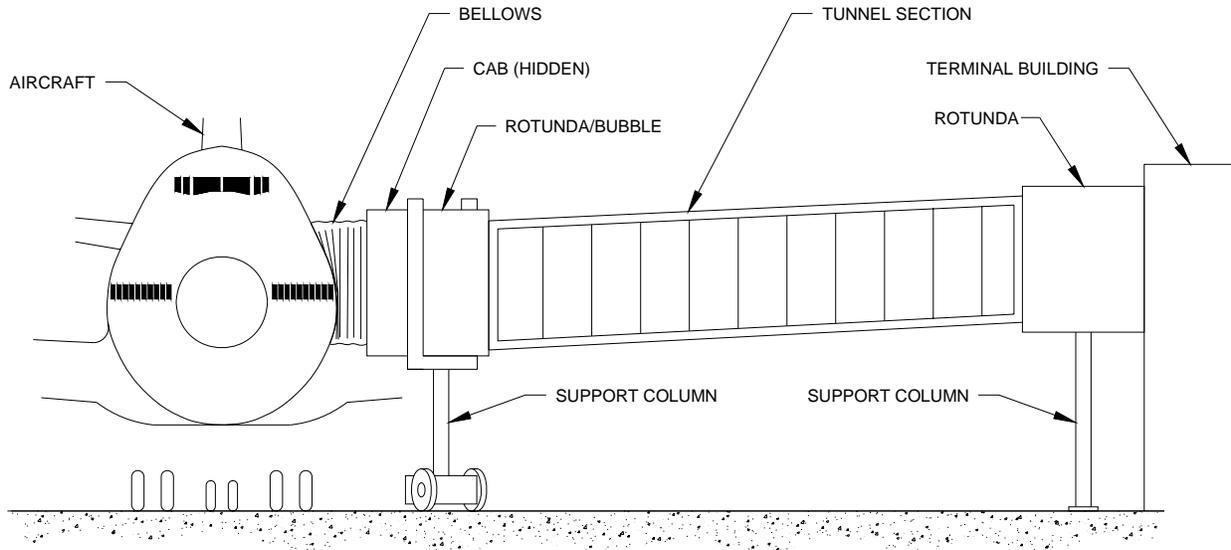


Figure 8. Basic Passenger Boarding Bridge (PBB)

3.3. SYSTEM COMPONENTS.

a. **Rotunda Assembly.** The rotunda assembly functions as the PBB's rotating element and is located at the terminal end. On the terminal end, the rotunda contains the PBB's main support column and

functions as the pivot point for the PBBs horizontal motion. On the aircraft end, the cab allows the structure to rotate and align with a variety of aircraft fuselage angles.

(1) Cab. The cab is the interface of the PBB to the aircraft. It contains the operator compartment and rotates around the bubble section of the PBB. A service access in the bubble allows the transfer of maintenance personnel, equipment, and luggage from the PBB to the airport ramp.

(a) Operator Compartment. The operator compartment is positioned on the left side of the cab (as referenced from inside the cab looking out onto the airport ramp). The primary purpose of the operator compartment is to house the PBB control station, which contains the control console, service utilities, and control interlocks required for proper operation. The operator compartment provides a location for optimum PBB maneuvering visibility without obstructing passenger traffic flow.

b. Tunnel Section / Corridor. The corridor functions as the main element in assisting passenger movement. Corridors are typically in the form of multiple telescoping tunnel sections (either two or three) in a wide variety of lengths. The telescoping tunnels are rectangular in cross section, with the largest cross section located closest to the aircraft.

c. Support Column. The support column is a vertical element that provides the structural support for the PBB. The main support column is located under the rotunda, while a secondary support column or vertical lift system is located at the aircraft end of the PBB and is supported by the wheel section or in some cases an additional foundation. The support column is custom built to meet specific site conditions, including the required height for the terminal floor and varying qualities and types of foundations in the airport ramp.

3.4. PERFORMANCE.

a. Functions. The equipment must perform the following functions:

(1) Provide a means for boarding passengers directly from the terminal boarding area to the aircraft door.

(2) Allow the aircraft end of the PBB to move vertically or horizontally in order to position the floor of the PBB to be equal to the lower lip of the aircraft doorsill, providing a level boarding surface.

(3) Provide a space in the cab for temporary placement of oversized carry-on luggage and other equipment to function as a staging area during aircraft loading/unloading operations.

(4) Provide passenger protection from external weather elements.

(5) Provide passenger protection from ramp fuel spill fires (NFPA 415).

b. Operational Standards.

(1) Movement. Unless mentioned below, there are no maximum velocity or acceleration limits for the PBB when occupied by the control station operator. When the PBB is mated to the aircraft door for passenger loading/unloading operations, the maximum amount of acceptable movement is that which allows the automatic leveling system to function properly, as described below.

(a) Maneuvering Operations.

- (i) The cab rotation angle can vary depending on customer requirements.
- (ii) The cab rotation speed can be fixed or variable between 0 and 4 degrees per second.

(b) Docking Operations. Sensors should be placed in the cab of the PBB to safely prevent dangerous contact with the aircraft. The type of sensor or spacer limit switch will be specified by the purchaser, if desired.

(2) Stability / Automatic Leveling.

(a) The PBB must be equipped with an automatic leveling system (auto-leveler) for occupant safety while the unit is mated to the aircraft door. This system allows the PBB to follow changes in the aircraft elevation that occur during aircraft loading and unloading, and places the cab floor in a level surface adjacent to the aircraft doorsill height. The auto-leveling system must function with equal reliability for all aircraft contours.

(b) The auto-leveler must be designed to level automatically while still being capable of independent, manual adjustment.

(c) To engage the automatic mode, an actuation switch or master key switch must be positioned to "AUTO". A manual override switch for manual adjustment must also be available, but protected to prevent unauthorized adjustments. All auto-leveler switches and controls must be located so that they are in full view of an operator stationed at the control console.

(d) The auto-leveler circuit must include a sustained travel timer. The timer limits auto-level operation to a time which must be adjustable from 1.6 to 16 seconds (4 seconds being recommended). If the operation exceeds the set time limit it must trigger a fault condition, upon which the system disconnects all motor power and energizes audible and visual alarms.

(3) Noise and Vibration. All mechanisms for actuating, guiding, and restraining the PBB and its associated components must be designed so that no noise or sway, other than that caused from the auto-leveling equipment (if installed), is apparent to the passengers using the PBB. No operating vibration or loads must be transmitted to the terminal building or fixed passageway from the PBB.

(4) Operability. The PBB must be capable of operating with any possible combination of passenger loading, at full load within the temperature ranges specified in this chapter. The purchaser will specify the type of communications system needed for integration into the airport's system.

(5) Operating Times.

(a) Setup/Deployment Time. The time required for a trained and proficient operator to setup and deploy the device upon arrival at the passenger loading area or aircraft must be 1 minute or less.

(b) Storage Preparation Time. The time required for a trained and proficient operator to prepare the device for standby storage must be 2 minutes or less.

(6) Emergency Operations. The system must incorporate a tow lugs to allow the PBB to be moved in case of an emergency.

(a) The cab station must be furnished with a fire alarm pull station tied to the terminal's alarm system, if specified by the purchaser.

(b) The cab area must be equipped with a fire extinguisher and smoke detectors, if specified by the purchaser.

(c) **Power or Equipment Failure.** The system must be protected against uncontrolled movement in the event of a power source failure of any type (i.e., electrical, hydraulic, or pneumatic).

(i) Hydraulic lift cylinders must have pilot-operated checks or counterbalance valves connected directly to their base fittings to prevent accidental lowering in the event of failure of any line in the system.

(ii) Electrical or pneumatic lift components must be equipped with brakes to lock the system in the event of power failure or malfunction.

(iii) The location of emergency controls must be easily identified and must be located so as not to create a potential hazard to the operator or equipment during operation.

(7) **Storage / Security.** Unless otherwise specified in this AC or by the purchaser, requirements needed to properly store and secure the device must be supplied by the manufacturer. Weather doors must be provided adjacent to the console to seal and secure the interior when the PBB is not in use. These doors must be swinging double doors that open inward and can be latched open or closed. The clear width of the weather doors when open must be no less than 36 inches (0.91 m). The use of an electric operated rollup door in lieu of the double swinging doors is an acceptable alternative.

3.5. PLANNING PHASE.

a. **Total Life:** The device must be designed to perform its intended function for its "total life" period, when maintained according to the manufacturer's instructions. The "total life" for which the equipment is designed, assuming it is used and maintained in accordance with the manufacturer's recommendations, must be a minimum of 20 years, based on a frequency of use of 5000 cycles per year.

b. Purchaser Specifications.

(1) **Options.** The manufacturer will add the following items if specified by the purchaser:

(a) A baggage slide alongside the access stairs, or bag lift or valet on the cab.

(b) Number coding on all hydraulic conductors at each coupling point such as manifolds, valves, motors, etc. The line codes would then be noted on the hydraulic schematic supplied in the maintenance manual.

c. Environment.

(1) **Weather.** The PBB and all associated outdoor mounted equipment must be designed to withstand the following extreme climatic conditions and operate without damage or failure:

(a) Ambient temperature range: -25 degrees F (-32 degrees C) to +123 degrees F (+52 degrees C) ambient outdoor air temperature. The purchaser may specify more extreme limits if required.

(b) Relative Humidity: 5% to 90%.

(c) General Environment: Dust and airborne hydrocarbons resulting from jet fuel fumes.

(d) The PBB must be capable of maneuvering in 2 inches (5 cm) of snow if specified by the purchaser.

(2) Components must be protected from mechanical, electrical, and corrosion damage causing impairment of operation due to rain, snow, ice, sand, grit, and deicing fluids.

(3) All electric motors, controls, and electrical wiring / equipment placed outdoors must be weatherproof in order to protect the equipment and connections from the elements.

(4) All non-moving structural components and materials must be individually and collectively designed and selected to serve the total life requirement under such conditions. Moving or working components, such as tires, aircraft closures, motors, brakes, etc. are exempt from this provision.

(5) The temperature ranges specified may be modified by the purchaser if the climate in which the device is to be used is extreme.

(6) **Internal Conditions.** If specified by the purchaser, the terminal end of the PBB must be designed to resist excessive temperature (100 degrees F or 38 degrees C) and exhaust fumes, such as those produced by aircraft engines and ground service equipment. Insulation and ventilation must be provided, if necessary, to limit internal temperatures to a maximum of 85 degrees F (29.4 degrees C) on a calm, fully sunlit day of 100 degrees F (37.8 degrees C).

d. Aircraft Compatibility.

(1) **Aircraft Types.** The purchaser will specify the aircraft required to be served by the PBB.

(2) **Design Considerations.** All aircraft models specified by the purchaser to be served must be surveyed by the manufacturer for compatibility. The following aircraft size/configuration factors will have a significant effect on the design of the system:

(a) Aircraft doorsill height.

(b) Aircraft door width.

(c) Aircraft door location.

(d) Aircraft components adjacent to the door constituting obstructions (wing, tail, engine nacelle, propeller, etc.)

(e) Airstairs / airdoor.

(f) Airstair handrails.

(g) Vertical movements of the aircraft (doorsill) during emplaning / deplaning.

(h) Aircraft parking arrangements.

(i) Ramp planning procedures.

(j) The resultant PBB corridor slopes from aircraft to terminal.

(k) Unless otherwise specified by the purchaser, PBBs are not required to serve aircraft that have a stairway that cannot be retracted while the door is open.

(3) **Aircraft Closure.** The aircraft end of the cab must be equipped with a folding bellows aircraft closure. The closure, when fitted to the aircraft fuselage, must surround both the open aircraft door and the doorway to protect passengers from the elements. The covering must repel water, be highly tear resistant, and remain flexible from -31 degrees F (-35 degrees C.) to +123 degrees F (52 degrees C). The aircraft closure may be any color, as specified by the purchaser.

3.6. DESIGN / DEVELOPMENT PHASE.

a. **General.** The manufacturer must field verify the dimensions required for fabrication and installation of the PBB system in the airport environment. This effort includes the responsibility for obtaining actual height measurements and anchor bolt patterns at each interface with civil/architectural construction by others.

(1) Minimum Interior Clear Dimensions.

- Corridor height – 80 inches (2.0 m).
- Corridor width – 50 inches (1.3 m), or as limited by the rotation of the PBB.
- Floor width – 58 inches (1.47 m).
- Telescoping tunnel transition ramp width – 56 inches (1.42 m).

(2) Transition Areas.

(a) A portable transition ramp, if used, that bridges the gap between the PBB and the aircraft must be designed so as not to damage the aircraft or dislodge from it when in use. It may rest on the doorsill but must not induce unsafe loads on the aircraft.

(b) A double hinge floor must be included in the system to provide a smooth transition between the level floor of the terminal and the PBB. There must be no raised surfaces along the corridor, aside from the transition ramps between telescoping tunnel sections, which may introduce a tripping hazard to the passenger.

(c) Handrails should be provided on both sides of the external portion of hinged transition ramps. The transition between telescoping sections is a particular hazard to persons with mobility impairments and must be made as easy to negotiate as possible.

(d) Flap-type flexible weather seals must be installed between the transition areas of the rotunda (between the rotunda and terminal building or fixed passageway) and along the hinged telescoping tunnel sections.

(e) An extended rotunda corridor must be provided, as required, based on the purchaser's specific airport drawings. A haunch or fixed walkway must be provided to ensure structural integrity, as required by this length.

(3) **Service and Access.** A service door, landing and stair leading to the apron area constitute the service access. The service access can be located on the right or left side of the cab end of the PBB. It

provides access between the PBB and apron for authorized personnel. At gate locations with multiple PBBs, at least one PBB must have service access. For PBBs servicing very tall aircraft, stairs are not required if the structural integrity of the system is jeopardized, or if they interfere with ramp operations, as determined by the purchaser.

(a) Service Door.

(i) The service door must open to a landing such that a wheelchair (as specified in section 2.2.b) can be moved to or from the PBB through this door. After a passenger who uses a wheelchair has been transferred to their aircraft seat, their wheelchair may need to be moved to the baggage hold of the aircraft. This procedure is expedited if the chair can be moved directly from the loading bridge to the airport ramp either using a built in baggage elevator or through the service door to an exterior lift.

(ii) The minimum dimensions of the PBB service door is a width of 30 inches (0.76 m) and a height of 80 inches (2.0 m). The service door must be made of steel, half wire-glass, be of a hollow core design, unless otherwise prohibited by security regulations or the purchaser, and must meet or exceed the 3/4 hour fire rating per ASTM E152. In addition, the door must be equipped with medium duty commercial-type hardware, an automatic door closure, and must open outward onto the landing. A security device/system for the door, the type as specified by the purchaser, must be provided. A 30 inch (0.76 m) stainless steel kick plate must be installed to cover the lower side portion of the door. A window with a minimum surface area of 658 sq. in (0.425 sq. m) must be provided in the service door.

(b) Service Stairs. The service stairs must conform to the requirements of SAE ARP836, unless as specified below.

(i) The stair landing must be parallel to the adjacent tunnel floor. It must be covered with a non-slip tread, and protected on the open sides by galvanized steel handrails, which are designed to meet the OSHA standards. At the purchaser's request, a photocell operated light with a protective cage may be installed by the manufacturer above the landing.

(c) Maintenance Ladder. The manufacturer will provide a maintenance ladder for access to the roof of the PBB. The ladder must be galvanized or painted with a safety cage at its top. This ladder will also function as the emergency ladder described above.

(4) Ground Service Connections. The arrangement of standardized locations for ground service connections on PBBs must conform to SAE ARP4084, or as otherwise specified by the purchaser.

(5) Operator Visibility. The cab must be equipped with a forward facing control console that allows the system operator to have a full view of the aircraft door during maneuvering and docking operations.

(a) Operation of the PBB must be able to be accomplished without opening the weather doors.

(b) The control console must be located behind laminated glass windows. For additional visibility, windows located in front, left, and right of the operator must be installed. The minimum size of the windows must be:

- Front – surface area of 768 sq. in (0.495 sq. m).

- Left – surface area of 330 sq. in (0.213 sq. m).
- Right – surface area of 160 sq. in (0.103 sq. m).

(c) If requested by the purchaser, double-row panels should be installed in the cab side-coiling curtains, the size of which is dependent on the width of the rotunda panels.

(d) Either a cab mirror or cameras (as chosen by the purchaser) must be mounted to allow the operators to view the apron area from their console.

b. SAFETY. It is the responsibility of the manufacturer to ensure that the equipment contains all safety features required to protect the equipment, the operator(s), the passenger load, and the aircraft serviced, in accordance with all generally accepted good design practices. All design features intended to protect the equipment operator(s) must provide similar protection to the passenger(s).

(1) Personnel Safety.

(a) Edge tracks/walkway gutters (from the telescopic function) must be designed so as to prevent persons with disabilities or mobility impairments from damaging their equipment if their equipment enters the edge track groove. Manufacturers must comply with the marking requirements listed in 2.2.f.(1).

(b) All pinch and shear points, sharp edges and protruding objects must be eliminated wherever possible and practical. If elimination is not possible, adequate guarding must be achieved to prevent injury and/or damage exposure. (reference SAE ARP1247, paragraph 3.9.12.)

(c) Push/pull forces required to move features other than control handles and access doors must be limited to 60 lb (27.2 kg), when the operator is standing upright. (reference SAE ARP1247, paragraph 3.9.13.)

(d) Stairs, ladders, scaffolds, platforms, etc. must comply with the applicable OSHA requirements. (reference SAE ARP1247, paragraph 3.9.14.)

(e) Where practical and possible, access to work areas must be provided by means of stairs rather than ladders. (reference SAE ARP1247, paragraph 3.9.16.)

(f) Stair risers, treads, and stair and ladder angles must conform to OSHA promulgated standards and documents for Industrial Operations. Critical angles must be avoided where practical and possible. (reference SAE ARP1247, paragraph 3.9.17.)

(g) Steps and ladder rungs must be of open, nonskid material. (reference SAE ARP1247, paragraph 3.9.18.)

(h) Non-slip surfaces must be provided in all areas where personnel will be required to walk or work during normal operations. (reference SAE ARP1247, paragraph 3.9.19.)

(i) The corridor must be insulated to meet industry standards.

(j) Material used in the fabrication of the sub floor must meet the requirements of NFPA 415.

(k) If requested by the purchaser, heat sensors must be located beneath the bridge.

(2) Equipment Safety.

(a) If required, the type, location, and color of reflecting devices will be specified by AC 150/5210-5.

(b) Consideration must be given for protection of lamps and reflectors against damage if dictated by normal design practice; i.e., likelihood of damage. (reference SAE ARP1247, paragraph 3.10.2)

(c) All components and systems must be fail-safe wherever practical. (reference SAE ARP1247, paragraph 3.10.4)

(d) All lifting, mobility, and/or positioning controls must be of the “deadman” type. (reference SAE ARP1247, paragraph 3.10.6)

(e) Relief valves must be provided in all hydraulic and pneumatic systems to prevent sustained pressures in excess of rated working pressure. (reference SAE ARP1247, paragraph 3.10.7)

(f) If requested by the purchaser, a 5 pound (2.27 kg) ABC-rated fire extinguisher must be mounted in the PBB at a location easily accessible to the operator.

(3) Operational Safety. Limit switches must be installed to control the PBB rotation limits.

(a) The over-travel swing limit switch must be located on the support column. The trip plate for this switch must be located on the rotunda and be adjustable in order to meet local conditions. When this switch is actuated, it must cut off all control power so that the PBB can only be moved by using the by-pass switch in the control console. The PBB should be equipped with mechanical stops to prevent collapse of the telescoping tunnel sections.

(b) Equipment must be provided at the rotunda to sense and limit the normal rotational position of the PBB swing. The actuation of this warning buzzer must be adjustable to meet local conditions. The warning buzzer must be within the over-travel limit envelope and signal the rotational operational limits.

c. Mechanical / Structural Loading.

(1) Structural members manufactured of non-ductile materials must be designed to meet the requirements of the American Institute of Steel Construction (AISC) *Steel Construction Manual*.

(2) The PBB system must be designed with sufficient structural rigidity so that deflections due to load, wind, and motions of working parts do not create interferences, cause malfunctioning of the equipment, or present safety hazards to personnel, aircraft, or the system itself. (reference SAE ARP1247, paragraph 3.13.1.1.8) The structural design must provide sufficient torsional rigidity to avoid excessive sway when the PBB is brought to a gradual stop.

(3) In the case of standard structural or component assemblies used by the end product manufacturer, certification of the application by the component manufacturer will constitute structural acceptability of such components. (reference SAE ARP1247, paragraph 3.13.1.1.9)

(4) Load Quantities. The stress levels for design must be based on the total of structural weight plus the maximum carried passenger load. Consideration must be made for anticipated dynamic loads. The design must be based on the highest stress occurring over the full range of motion with the load in the least favorable positions (s). Relief valves or other devices must be incorporated to prevent movement that exceeds the rated capacity. (reference SAE ARP1247, paragraph 3.13.1.1.1)

(a) Wind Load. The PBB structure must withstand wind loads of:

- Up to 90 mph (161 kph), for 3 second gusts, while in use and occupied; and
- Up to 70 mph (112 kph), for sustained winds.

(b) Temperature Load. Unless otherwise specified, the PBB structure must be designed for a uniform temperature increase or decrease of 70 degrees F (21 degrees C).

(c) Seismic (Earthquake) Load. All PBB structures and components must be designed in accordance with local requirements.

(5) Other.

(a) The roof, wall, and floor panels must be constructed from a minimum of 0.079 inch (2.0 mm) thick flat steel.

(b) Shoulder bolts, bearings, or bushings must be used when attaching parts having relative rotary or linear motion. (reference SAE ARP1247, paragraph 3.13.1.1.10)

(c) Caster and wheel types and applications must conform to the standards of the Caster and Floor Truck Manufacturer's Association. (reference SAE ARP1247, paragraph 3.13.1.1.11)

(d) The wheels used must be of a type and size that will not damage or cause undue wear to the surface over which they will normally operate. (reference SAE ARP1247, paragraph 3.13.1.1.12)

d. Electrical.

(1) General.

(a) The PBB must have an electrical disconnect panel, mounted on the rotunda support column. Transformers should be supplied as needed to adapt the specified terminal power to the PBB's electrical requirements.

(b) Toggle switches must be of MIL-S-3950 quality or equivalent, and rated for the loads which they control. (reference SAE ARP1247, paragraph 3.13.1.2.3)

(c) All circuits must have suitable overload protection. Fuses and circuit breakers must be grouped in convenient locations and suitably marked for size and function. Logical grouping of circuits is anticipated. (reference SAE ARP1247, paragraph 3.13.1.2.4)

(d) All wiring must be routed away from heat sources. Wiring must be adequately supported to protect it from damage, snow and ice buildup, bumping, kinking, and flexing. (reference SAE ARP1247, paragraph 3.13.1.2.5)

(e) Common wire splices must not be used. Connections must be made using terminal strips and staked lugs or by patent connectors. Terminals must meet the applicable requirements of SAE J561, J858, and J928. (reference SAE ARP1247, paragraph 3.13.1.2.6)

(f) Wiring must meet the applicable requirements of SAE J878, J1127, and J1128. (reference SAE ARP1247, paragraph 3.13.1.2.7)

(g) Each conductor must be sized to have current carrying capacity, equal to or greater than the capacity of the fuse or circuit breaker provided in its circuit, as allowed by the National Electrical Code (NEC). Optional and add-on components must be considered in sizing and in the number of conductors provided. (reference SAE ARP1247, paragraph 3.13.1.2.8)

(h) Grommets and suitable anti-chafe material must be used where the wires are required to pass through a relief or opening which exposes the wire to possible chaffing. (reference SAE ARP1247, paragraph 3.13.1.2.9)

(i) Each wiring conductor must be identified by color or number in accordance with a wiring diagram accessibly displayed in the system and/or in an accompanying document. (reference SAE ARP1247, paragraph 3.13.1.2.10)

(j) Any concealed wiring running within walls or other inaccessible areas must be contained in conduit for the length of the run and must be terminated on a terminal strip at each end of the conduit. (reference SAE ARP1247, paragraph 3.13.1.2.11)

(k) Wiring terminals must be protected by insulating boots or heat-shrinkable tubing. (reference SAE ARP1247, paragraph 3.13.1.2.12)

(l) Quick disconnect fittings, where required, must be MS (military standard) receptacles and plugs, or equivalent. (reference SAE ARP1247, paragraph 3.13.1.2.13)

(m) All electrical connections, including terminal strips and battery terminals, must be protected with suitable covers or enclosures to prevent accidental contact and short circuiting. (reference SAE ARP1247, paragraph 3.13.1.2.14)

(n) Electrical interlocks must be fail-safe design. (reference SAE ARP1247, paragraph 3.13.1.2.15)

(o) Electrical devices including lights, switches, relays, wiring, and terminals, when located in an area exposed to weather, must be of weatherproof design or protected by weatherproof enclosures. (reference SAE ARP1247, paragraph 3.13.1.2.16)

(p) Spark-producing electrical components must be located at least 18 in (0.457 m) above ground level wherever possible. (reference SAE ARP1247, paragraph 3.13.1.2.17)

(q) All electrical junction boxes used on the PBB must be made from high strength non-corrosive materials NEMA 4 rated or greater. Painted steel boxes will not be considered acceptable. The rotunda column electrical disconnect boxes are excluded from this requirement.

(r) Cabs, tunnel sections, service stairs and landings, rotundas, and all electrical items must be interconnected by a continuous grounding conductor. The main grounding conductor will be provided with the power supply feeder.

(s) A six pair (twelve conductor) wire outlet for the installation of telephone or intercom equipment must be installed on left side wall adjacent to the control console.

(t) Duplex outlets (unswitched 120 volt, single phase, 15 amp) must be located on the control console, on the lower portion of the drive column (GFI), and in the corridor.

(2) Cable Conveyance System.

(a) The telescoping tunnels must be equipped with an exterior electrical cable conveyance system. This system must be designed to be accessible to maintenance personnel for inspection or cable addition at all PBB positions and operating conditions. Access to the conveyance system must not impede passenger traffic or PBB operation. The system must be capable of supporting a combination of cables and hoses with a maximum weight of 12 pounds per foot (17.89 kg per m) and a maximum cross-sectional area of 12 square inches (77 square centimeters) consisting of two 6 square inch (39 square centimeter) areas. The largest tunnel must be equipped with an aluminum wireway to continue electrical cable routing beyond the electrical cable conveyance system.

(b) The cable conveyance system must be of heavy-duty construction such that the system is free from failure or defects for a minimum of five years from final acceptance. Shipping must be considered when designing and constructing the cable conveyance system to avoid damage to the system or suspended components during the PBB installation.

(3) Lighting. Lighting must meet the requirements of AC 150/5210-5.

(a) Exterior floodlights must be provided for nighttime operation to illuminate the apron area ahead of the PBB. A floodlight must also be provided to illuminate the drive column wheel bogey area. This light must be located under the tunnel section. All flood lights must include a protective cage.

(b) A weatherproof fluorescent fixture producing a minimum of 5 foot-candles (54 lux) must also be provided outside the weather doors to illuminate the cab-aircraft interface.

(c) A minimum of 5 foot-candles (54 lux) of illumination must be provided:

- On all controls and placards in a glare free manner.
- At all operator positions and work areas by means of flood, spot, or dome lights. (reference SAE ARP1247, paragraph 3.13.1.2.18)

(d) All external lamps must be heavy-duty type. (reference SAE ARP1247, paragraph 3.13.1.2.20)

(4) Electromagnetic Interference. The equipment must meet the current issues of radio suppression specification MIL-STD-461, Class 3D, Requirements for the Control of Electromagnetic Interference Emissions and Susceptibility. It must be capable of operating through the entire amplitude modulated aircraft radio frequency range of 75 MHz – 136 MHz.

e. Hydraulic and Electro-Mechanical. The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.3, except as specified below.

(1) Raising and lowering of the PBB must be accomplished by one person and through either two recirculating ball screws or more hydraulic cylinders, powered by an electric or engine driven pump. The

system must incorporate a fail-safe hydraulic and/or mechanical system designed to prevent lowering in the event of component failure.

(2) Hydraulic fluid must meet manufacturer's requirements for the hydraulic system components.

(3) The materials used for each hydraulic line must be consistent with its application. Fixed lines must be made of high quality steel or stainless steel. Flexible lines must be used only where necessary.

(4) The towing provisions of 3.13.1.3 do not apply to PBBs.

(5) If requested by the purchaser, a potable water system for supplying the aircraft with fresh water will be provided. The potable water system must be equipped with an interlock to prevent the PBB from retracting from the aircraft while hooked up to the system.

f. Heating, Ventilation, and Air Conditioning System. If requested by the purchaser, the manufacturer must provide suitable means for ensuring adequate ventilation, heating, or cooling through the tunnel sections of the PBB, in accordance with FAA HF-STD-001, paragraph 13.2.

g. Steering / Positioning System.

(1) **Drive Column.** The drive column provides the vertical and horizontal motion for the PBB. The drive column and control systems must be designed for smooth, quiet operation. The drive column is divided into two major components: Vertical Drive and Horizontal Drive. The vertical and horizontal movements must be able to be operated simultaneously.

(a) **Vertical Drive.** The PBB must be moved vertically by means of two recirculating ball bearing screw assemblies (for hydraulic design requirements, see section 3.6.e of this AC).

(i) Each assembly must be independent with individual motors and brakes. Each assembly must be capable of supporting the PBB under a full design load. This design must provide 100% redundancy.

(ii) The ball nut must be equipped with wiper brushes to remove grit or dirt from the screw threads.

(iii) The ball nut must be equipped with a special thread profile designed to support the PBB in the absence of the recirculating ball bearings.

(iv) The vertical drive motors must be AC induction motors which include an integral reducer and brake. The brakes must be spring applied and electrically released. The brakes must hold securely at all elevations whenever electrical power is not applied.

(v) A fault detector must sense differential motion of the ball screw assemblies. The detector must be able to disconnect electrical power from the vertical drive motors if a fault is detected.

(vi) The manufacturer must provide a disconnect switch for one vertical drive motor to accommodate column adjustments (i.e. column faults).

(b) **Horizontal Drive.** The following section assumes that a variable speed, electro-mechanical drive system is installed in the PBB to provide horizontal travel. Other power sources may be used provided they have an equivalent level of functionality and safety.

(i) Tires may be pneumatic recapped or new non-flyable. An option for solid rubber tires is also acceptable.

(ii) The horizontal drive system is composed of AC gear motors with integral brakes. The AC motors must be driven by solid state variable frequency motor controllers. The AC drive system must provide high efficiency, smooth performance, and good component availability. The controller must be able to be adjusted to provide optimum responsiveness to the horizontal controls. The controller must provide built-in diagnostics to assist with troubleshooting.

(iii) A steer angle of 180 degrees must be possible. Steering speed must be adjustable from 7 degrees per second minimum to 21 degrees per second maximum.

(iv) A regenerative braking system must be installed to allow the PBB to come to smooth controlled stops. Integral spring-applied electrically-released brakes must be provided with each drive motor. The brakes must lock the PBB in place when electrical power is disconnected, or when the joystick is placed in the neutral position.

(v) The horizontal drive motors must be equipped with manual brake releases. This allows the PBB to be towed in the event of power failure. Tow lugs must be installed as a component of the lower wheel frame.

(vi) If requested by the purchaser, the manufacturer should provide jack stands (to support the PBB during drive column maintenance) or tow bars (for positioning the PBB in the event of a drive column failure). This option may not be necessary if there are other PBBs in the vicinity with these items.

h. Instrument and Controls. The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.8.

(1) General.

(a) Unless otherwise specified by the purchaser, controls must be designed for satisfactory operation when the operator is wearing heavy winter clothing such as arctic-type gloves and overshoes.

(b) **Control Console.** The control console is located in the operator compartment and must be protected from the outside environment.

(2) **Controls.** All PBB motion controls must be of the momentary contact (deadman), positive directional control type. All of the motion controls are designed to be relative to the function of the PBB being controlled, i.e., raise and lower functions, the "raise" push button will be located above the "lower" push button. The control console must include the following controls:

(a) A three-position keyed switch used to select "OFF", "OPERATE" or "AUTO" (for automatic leveling).

(b) A four-quad joystick, which controls forward, back, right, and left steering functions.

(c) Push button switches for raising and lowering the cab end of the PBB.

(d) Push button switches for cab rotation, left or right. The Aircraft Closure Cab Rotate Interlock prevents cab rotation during deployment of the cab enclosure. Note that this will not prevent the cab from being driven in reverse.

(e) Push button(s) for independent adjustment of the left and right side of the bellows-type aircraft closure.

(f) A switch for floodlights that illuminate the apron area under the aircraft and drive column undercarriage.

(g) A switch to change the cab floor level adjustment from an automatic operation to a manual operation.

(h) A relative motion push-button switch is provided to control the cab floor level adjustment while in the manual mode.

(i) An emergency stop button which shuts down all PBB movement when pressed.

(j) A "Push to Test" button for console lights.

(k) If air conditioning is installed, PCA controls and interfaces to provide for control and status information at the PBB console (pre-cool on/off button and PCA on indicator).

(l) If specified by the purchaser, buttons and other control equipment will utilize LED (light-emitting diode) technology.

(3) Indicators. The control console must have indicators that display the current PBB operating status. The PBB must have, at a minimum, the following status indicators:

(a) A digital position indicator to vertically pre-position the PBB prior to the arrival of the aircraft. The indicator must display the vertical position of the PBB cab floor at the bumper relative to all the required aircraft sill heights. Pre-positioning the PBB horizontally may be accomplished through the use of painted guide boxes on the apron, or with any other method the purchaser chooses. The horizontal rotation position indicator is also important in aircraft "power-out" operations, as it allows the operator to accurately move the PBB to an assigned park position.

(b) A wheel position indicator to display wheel orientation with respect to the operator's position. A wheel position indicator maintains correct wheel orientation while the cab is being rotated.

(c) An amber light to indicate that the auto-leveling system is energized and functioning.

(d) A flashing red light and audible warning to indicate that the auto-leveler sustained travel timer has tripped.

(e) A flashing red warning to indicate that the PBB has reached the operational horizontal rotation limits. This light must be preceded by an audible warning.

(f) A flashing red warning to indicate that the drive wheels have reached an oversteer condition.

(g) A flashing red light to indicate that the aircraft closure is deployed. The closure must be fully retracted before the PBB can be moved forward.

(h) A flashing red light to indicate a vertical drive column fault (electro-mechanical lift only).

(i) An indicator to show when full extension or retraction of the PBB has been achieved.

(j) PCA "on" indicator, if requested by the purchaser.

(k) **Other indicators.** There are other indicators that are not located on the control console. These indicators are as follows:

- Two flashing amber beacons, with one mounted on each end of the cross-member of the wheel bogey. The beacon will alert ground personnel in the area that the PBB power is on and movement may occur at any moment.
- Two audible warning bells must ring when the PBB is moving: one bell located on the lower wheel bogey which rings at a minimum of 98 decibels at 10 ft (3.1 m); and the other bell located inside the rotunda near the terminal door, to ring at a minimum of 70 decibels at 10 ft (3.1m).

(4) Features and Interlocks.

(a) Mechanical interlocks must be installed to prevent damage to control circuits or PBB components by selecting opposite motions simultaneously. For example, depressing the up button would prevent depressing the down.

(b) When the master switch is in the "OFF" or "AUTO" position, the controls for horizontal and vertical movement, steering, aircraft closure, and cab rotation must be inoperative.

(c) Interlocks for the 400 Hz and PCA Unit must be installed to prevent the aircraft from taxiing while attached to these units.

3.7. CONSTRUCTION / PRODUCTION PHASE.

a. General Requirements.

(1) All equipment and material must be new, undamaged, and of the best grade; decisions concerning quality, fitness of materials, or workmanship must be determined by the purchaser.

(2) Where items exceed one in number, the PBB manufacturer must provide products with identical construction, model numbers, and appearance, from the same component manufacturer.

(3) Insofar as possible, products must be the standard and proven design of the manufacturer.

(4) The manufacturer must install electrical connections for power, controls, and devices in accordance with the recommendations and requirements of the NEMA and the NEC. Motors must be installed and adjusted in accordance with manufacturer's published instructions and the requirements specified herein.

b. Workmanship. The manufacturer must install all equipment, materials, specialties, etc., in accordance with the best engineering practice and standards for this type of work.

(1) Surface Finishes: All surfaces and edges of miscellaneous steel, etc., must be smooth and free of marks, burrs, roughness, and other defects. Finish welds to match parent material. Where possible, grind welds smooth; remove flux, oxide, splatter or any other residue from the weld and adjacent areas of exterior and interior surfaces. The manufacturer will only use synthetic-type filler putty as a metal filler if approved by the purchaser.

c. Materials.

(1) Moisture and Fungus Resistance. The device must meet the requirements of SAE ARP1247, paragraph 3.13.4:

(a) Equipment and controls that are exposed to the weather must be weatherproof type.

(b) Fire resistant and non-moisture absorbing materials must be used whenever possible in the fabrication of the PBB.

(2) Corrosion of Metal Parts. The device must meet the requirements of SAE ARP1247, paragraph 3.13.5.

(a) All external components must be constructed and finished in a manner to inhibit corrosion based on the purchaser's specific environment.

(b) All machined surfaces must be coated with a suitable rust preventative.

d. Parts.

(1) Standard and Commercial Parts. The device must meet the requirements of SAE ARP1247, paragraph 3.13.3.

(2) Interchangeability and Replaceability. The device must meet the requirements of SAE ARP1247, paragraph 3.13.6.

(a) Substitutions. The purchaser must approve any material or equipment designated as an "or equal" product, but these items must be clearly distinguished and noted in the PBB technical manuals as substitutions.

e. Codes, Standards, Regulations, and References. The manufacturer must recognize and comply with all codes and standards applicable to the design and construction of this type of equipment which are generally accepted and used as good practice in the industry.

(1) The following codes, standards, regulations, and references cover the design, general hardware, construction, and quality control requirements for the PBBs and associated components and systems. Unless otherwise indicated, the latest edition of the following codes and standards are applicable:

Table 1. Passenger Boarding Bridge (PBB) Code Requirements.

Sponsor	Number	Subject
AISC		American Institute of Steel Construction (AISC) Specifications for the Design Fabrication and Erection of Structural Steel for Buildings
ASTM	A 36	Structural Steel
ASTM	A 53	Steel, Steel, Black and Hot-Dipped, Zinc-Coated Welded and Seamless
ASTM	A 311	Grades 1018 & 1144 (for Hinge Pins)
ASTM	A 325	High-Strength Bolts for Structural Steel Joints (or ASTM A440)
ASTM	A 500	Cold-formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes
ASTM	A 514	High-Yield Strength, Quenched and Tempered Alloy Steel Plate Suitable for Welding
ASTM	E 152	Fire Tests for Door Assemblies
AWS	D1.1	Structural Welding Code - Steel
NEC		National Electrical Code
NEMA		National Electrical Manufacturers Association
NFPA	70	National Electrical Code
NFPA	780	Installation of Lightning Protection Systems
NFPA	90A	Installation of Air Conditioning and Ventilation Systems
NFPA	101	Code for Life Safety from Fire in Buildings and Structures
NFPA	415	Airport Terminal Buildings, Fueling Ramp Drainage and Loading Walkways
OSHA	29 CFR 1910	Occupational Safety and Health Standards
SSPC	SP-1	Solvent Cleaning
SSPC	SP-3	Power Tool Cleaning
SSPC	SP-6	Commercial Blast Cleaning
UBC	1997	Uniform Building Code

f. Certification. The PBB must be designed and constructed in accordance with NFPA 415 and local fire code regulations, as applicable. All fire system wiring and components must be compatible with the designated airport electrical system.

(1) When standard products are modified to suit these AC requirements, the manufacturer must certify operating conditions, ratings and capacity of the product based on qualification tests and must submit all appropriate compliance certificates for purchaser approval.

(2) The manufacturer must submit compliance certificates showing that electrical and mechanical work is in accordance with NFPA 415 and UL standards.

3.8. POST-PRODUCTION PHASE.

a. Identification and Marking.

(1) Any portion of the PBB structure that extends beyond the unit profile or that could create an employee injury hazard must be painted chrome yellow, in accordance with AC 150/5210-5.

(2) The device must meet the requirements of SAE ARP1247, paragraph 3.13.9. The shifting diagram placard specified in SAE ARP1247, paragraph 3.13.9.6, may be provided in a medium other than metal if designated to last for the total life of the equipment. In addition, the PBB must be provided with a permanently affixed placard identifying the maximum number of passengers and maximum weight capacity of the system. In the event that identification and marking guidance differs between SAE ARP1247 and AC 150/5210-5, AC 150/5210-5 takes precedence.

(3) The platform may be marked to indicate a preferred standing position.

(4) If specified by the purchaser, the manufacturer must provide gate signs capable of illumination for visibility at night and meeting applicable UL requirements. Additionally, the purchaser may request that a three position switch be located on the console to place the sign illumination in an "ON", "OFF" and "FLASHING" mode.

b. Interior Finishes. The interior finish of the PBB must be designed to be durable and easy to clean. The materials must withstand the environmental exposure of airport traffic. The purchaser may choose any type of interior finishing and is not limited to the recommendations below.

(1) The ceiling may be made of plank type panels or painted galvanized sheet metal.

(2) The interior tunnel light fixtures should be recessed to blend with the ceiling design and be located six feet on center.

(3) The aluminum corner molding that finishes the ends of the ceiling plank and the top edge of the wall panels must be painted black to match the interior light fixtures.

(4) Plank type ceiling insulation must be 0.5 inches (12.7 mm) thick, black, fire resistant fiberglass.

(5) The subfloor in the cab and bubble and tunnels area must be 0.75 inch (19 mm) marine grade plywood, which has a high resistance to moisture and moisture damage. Non-wood floors are optional if they meet the surface temperature requirements of NFPA 415.

(6) Ribbed rubber floor covering should be a minimum of 3/16 inch (4.76 mm) thick, applied to the floor from the aircraft end of the PBB to the terminal side of the service door. The manufacturer must provide yellow ramp nosing at the transition ramp.

(7) The purchaser will specify the PBB interior floor covering material which must meet Class 1 rating as per NFPA 415.

(8) The tunnel wall treatment may consist of floor to ceiling high pressure laminate phenolic and melamine panels or painted galvanized sheet metal with insulation backing.

(9) Wall treatments in the pivoting sections (rotunda and cab support) must be galvanized steel slats.

c. Paint. The interior and exterior paint finish must be selected and approved by the purchaser and meet the following minimum requirements unless otherwise specified. The purchaser may choose any type of paint system and is not limited to the recommendations below. Alternate systems meeting the intent of these specifications will be considered as equal.

(1) Surface Preparation.

(a) As a preliminary step for all surfaces, contaminants must be removed from the surface in accordance with SSPC SP-1 and appropriate SSPC commentaries.

(b) The surface must be mechanically cleaned in accordance with SSPC SP-3 (for surfaces exposed to passengers) or SSPC SP-1 (for surfaces not exposed to passengers) to remove loose scale and contaminants from the surface where required.

(c) The cab and exterior surface must also be dry abrasive blast cleaned in accordance with SSPC SP-6 to obtain a 25-76 μm profile (1-3 mil).

(d) For small miscellaneous assemblies, additional actions require the surface to be dry abrasive blast cleaned in accordance with SSPC SP-6 to obtain a 0.5-1.0 mil profile.

(e) Exterior surfaces protected with a galvanized mill coating do not require abrasive blast cleaning.

(2) Primer.

(a) For interior surfaces exposed to passengers, one coat of high build epoxy chromated primer or equivalent must be applied to a dry film thickness is 2-10 mils.

(b) For interior surfaces not exposed to passengers, one coat of rust-inhibitive, chromated, reducible buff primer or equivalent must be applied to a dry film thickness is 1.5-2.5 mils.

(c) For exterior surfaces, use either one coat of zinc clad IV application to a dry film thickness of 125 μm (5 mils) or one coat of high build epoxy chromated primer or equivalent to a dry film thickness of 4-17 mils.

(3) Intermediate Coat. For exterior surfaces, one coat of high build epoxy primer or equivalent must be applied to a dry film thickness of 178 μm (7 mils).

(4) Finish Coat.

(a) For all interior surfaces, a high solids polyurethane or equivalent must be applied to a dry film thickness of 2-3 mils. The total dry film thickness must be 4-10 mils.

(b) Unless otherwise specified by the purchaser, the finish color must match the wallboard color, and the manufacturer must provide interior trim samples for purchaser selection.

(c) For small miscellaneous assemblies, one coat of zinc epoxy powder or equivalent must be applied and heated to 350 degrees F for 20 minutes. The finished coating thickness must be 2-5 mils.

(d) For exterior surfaces, the PBB must meet the requirements of SAE ARP1247, paragraph 3.13.11 where applicable.

(e) An aliphatic, polyurethane, or equivalent, must be applied to a dry film thickness of 76 μm (3 mils). The total dry film thickness must be 6-20 mils. The finish color must be selected by the purchaser.

3.9. INSTALLATION AND ACCEPTANCE PHASE.

a. Installation.

(1) Prior to installation, the manufacturer must obtain all site construction, environmental, and coordination requirements for installation of the PBB at the airport.

(2) Unless otherwise specified by the purchaser, installers of mechanical and electrical work must participate in any pre-installation meetings at the project site to review conditions of other related project work.

(3) The manufacturer must provide trained personnel at the time of delivery to place the device into operation.

b. Quality Assurance. The manufacturer must test all of the equipment installed under this specification and demonstrate its proper operation to the purchaser. The manufacturer must furnish all required labor, testing, instruments and devices required for the conduct of such tests.

(1) The manufacturer must install all electrical, instrumentation, and mechanical works to the satisfaction of the purchaser, with inspecting authorities having jurisdiction.

(2) The manufacturer must notify the purchaser in writing of any instances in the specifications that are in conflict with applicable codes. The manufacturer must perform all work in accordance with applicable laws, rules, or regulations.

(3) Deviations from the specifications required for conformance with the applicable codes and/or laws must be corrected immediately, but not until such deviations have been brought to the attention of the purchaser.

(4) For applicable codes and/or laws that govern the minimum design requirements; where this AC calls for materials, vents, ductwork, sizes, design details, etc., in excess of the code requirements, the AC takes precedence.

c. Inspection. Inspections must meet the requirements of SAE ARP1247, paragraph 4.3.

d. Testing. After the equipment has been installed and the various units have been inspected, adjusted, and placed in correct operating condition, the equipment must be field tested in accordance with the purchasers testing procedures and requirements. The field tests must demonstrate that the equipment functions are in compliance with the specifications over the entire range of operation. The manufacturer must report any unusual conditions and correct deficiencies of any of the units.

(1) **Preliminary Qualification Tests.** Preliminary qualification tests may be specified by the purchaser.

(2) **Formal Qualification Tests.** Formal qualification tests may be specified by the purchaser.

(3) **Specification Conformance Tests.** The manufacturer must perform any tests referred to in SAE ARP1247, paragraph 4.6, if specified by the purchaser. The purchaser may elect to accept documentation of previously run tests.

(4) **Reliability Test and Analysis.** A reliability test and analysis may be specified by the purchaser.

e. **Data and Analyses.** If requested by the purchaser, the requirements of SAE ARP1247, paragraph 4.4, must be met by the manufacturer.

f. **Manuals and Publications.** The following operation and maintenance manuals must accompany the delivered equipment. The quantity of items is specified by the purchaser. No special format is required, but the manuals must follow the intent of the Air Transport Association (ATA) Specification 101.

- (1) Operator's handbook.
- (2) Illustrated parts breakdown and list.
- (3) Preventive maintenance schedule.

3.10. POST-DELIVERY PHASE.

a. **Training.** The manufacturer must provide trained personnel at the time of delivery to adequately train airport/airline staff in the operation and maintenance of the PBB.

(1) Training must include written operating instructions that depict the step by step operational use of the device. Written instructions must include, or be supplemented by, materials which can be used to train subsequent new operators.

(2) Training topics must include trouble shooting and problem solving, in the form of theory and hands-on training, for personnel designated by the purchaser.

(3) A total of 16 hours of training for every airport/airline personnel and technician on the purchaser's PBB maintenance staff must be provided by the manufacturer. Training selected personnel as part of a "Train the Trainer" program will also satisfy this requirement.

(4) Training time per day must not exceed 8-hour shifts, unless otherwise specified by the purchaser.

(5) Upon the completion of training, the manufacturer must issue each participant a certificate of competency.

b. **Maintenance / Reliability.** The equipment and its accessories must be designed and constructed with reliability of operation as a primary consideration. The minimum reliability design requirement is that the equipment be designed to operate between periodic preventive maintenance activities of 6 months. The above interval does not apply in cases where the component manufacturer recommends more frequent maintenance intervals.

(1) Preventive. The manufacturer must develop and provide to the purchaser written documentation on recommended preventive maintenance actions.

(2) Cleaning. The manufacturer must develop and provide to the purchaser written documentation on recommended cleaning procedures, including solvent types and tools.

(3) Inspection. The manufacturer must develop and provide to the purchaser written documentation on regularly scheduled maintenance inspection procedures. A focus on sensitive equipment and schedule timelines must be included in the documentation.

(4) Spare / Replacement of Parts. The manufacturer must develop and provide to the purchaser a parts list, including associated replacement/repair costs.

(5) Tools and Test Equipment. The device must meet the requirements of SAE ARP1247, paragraph 3.12.4.

3.11. PURCHASING SPECIFICATION CLARIFICATIONS.

A summary of the items that may require further clarification in the preparation of a purchasing specification for PBBs are listed in Table 2.

Table 2. PBB Purchasing Specification Clarifications

Paragraph	Item	Comments
3.4.b(1)(a)(i)	PBB swing radius.	
3.4.b(4)(a)	Airport telephone system for cab telephone compatibility.	
3.4.b(7)	Storage and security requirements.	
3.5.b(1)(a)	Provision of full-length passenger handrails.	
3.5.b(1)(b)	Provision of baggage slide.	
3.5.b(1)(c)	Provision of hydraulic system coding.	
3.5.c(1)(d)	Snow operations requirement.	
3.5.c(1)(a)	Temperature ranges.	
3.5.d	Aircraft compatibility.	
3.5.d(3)	Aircraft closure color.	
3.6.a(2)(b)	Provision of assisted access.	
3.6.a(3)(b)(ii)	Provision of photocell light on service stair landing.	
3.6.a(4)	Ground service connections.	
3.6.d(1)(k)	Installation of concealed/hidden wiring.	
3.6.e(5)	Potable water requirement.	
3.6.f(1)(d)	Approval of engine kill switch type.	
3.6.g(2)	Provision of HVAC system.	
3.6.i(1)(a)	Transmission selector lever – direction of operation and inclusion of “park” position.	
3.6.i(1)(b)	Requirement for use by operator wearing winter clothing.	

Paragraph	Item	Comments
3.7.a	Approval of quality, material fitness, and workmanship.	
3.7.d(2)(a)	Approval of substituted equipment.	
3.7.f(1)	Approval of compliance certificates.	
3.8.a(4)	Provision of a gate sign.	
3.8.b	Interior finishes.	
3.8.b(8)	Interior floor covering material.	
3.8.b(9)	Interior wall color.	
3.8.c	Selection and approval of interior and exterior paint.	
3.8.c(4)(b)	Approval of interior finish, wallboard color, and interior trim.	
3.8.c(4)(d)(i)	Exterior finish color.	
3.9.a(2)	Provisions for pre-installation meeting.	
3.9.b(1)	Approval of electrical, instrumentation, and mechanical work.	
3.9.d	Testing procedures and requirements.	
3.9.d(1)	Preliminary qualification tests.	
3.9.d(2)	Formal qualification tests.	
3.9.d(3)	Specification conformance tests.	
3.9.d(4)	Reliability test and analysis.	
3.9.e	Engineering data and analyses.	
3.9.f	Quantity of operations and maintenance manuals/publications.	
3.10.a(2)	Designated personnel for repair training.	
3.10.a(3)	Length of training day.	
Within the SAE ARP1247C Specification (not specifically addressed in this chapter):		
3.9.19.2	Types of approved non-slip materials.	
3.13.1.2.11	Approval of method of running concealed wiring	
3.13.1.3.5.7	Approval for coated hydraulic tanks.	
4.3	Inspection.	

CHAPTER 4. RAMPS

4.1. GENERAL.

a. The ramps covered in this chapter specifically relate to those portable devices used on an airport apron that provide a continuous sloped surface from the ground to the aircraft doorsill height.

b. In many respects, the simple ramp is a good example of using universal design principles for boarding aircraft. It can work with wheelchairs and boarding chairs, provides an easier path than stairs for persons with limited mobility, and is a method that allows all passengers to board in the same manner.


c. The basis for this chapter of the AC is the guidance document developed by the SAE ARP1247, and the U.S. Access Board's Technical Assistance Manual for ADA Accessibility Guidelines for Transportation Vehicles (Vehicle Guidelines). Additional requirements and clarifications have been added where necessary.

4.2. SYSTEM DESCRIPTION.


Types of ramps discussed in this chapter:

a. Straight Ramp. This type of ramp provides a straight-line path from the ground to the aircraft doorsill height (Figure 9a).

b. Switchback Ramp. This type of ramp provides a path in the form of switchbacks from the ground to the aircraft doorsill height (Figure 9b).

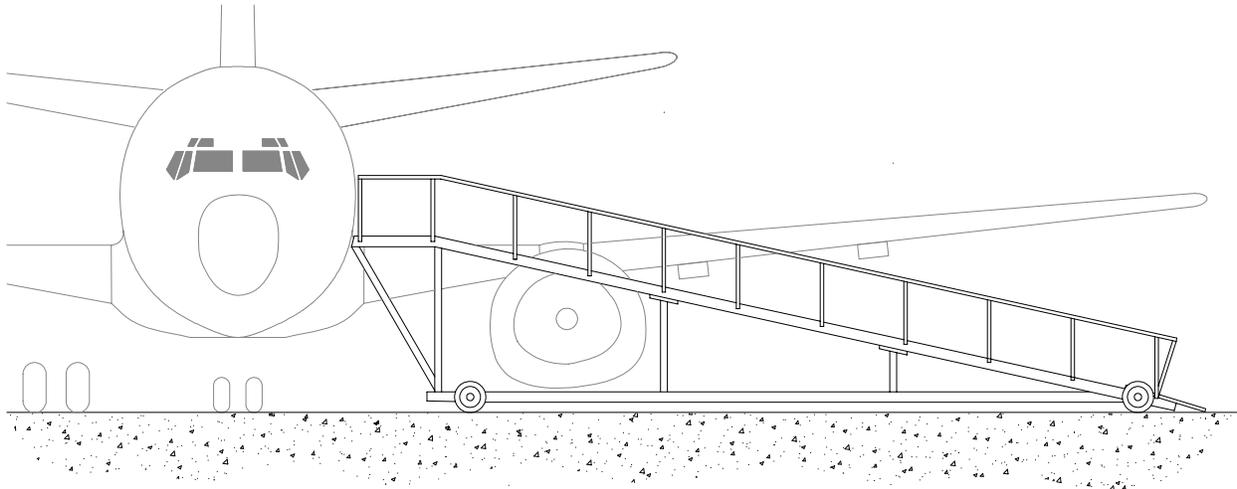

a. STRAIGHT RAMP

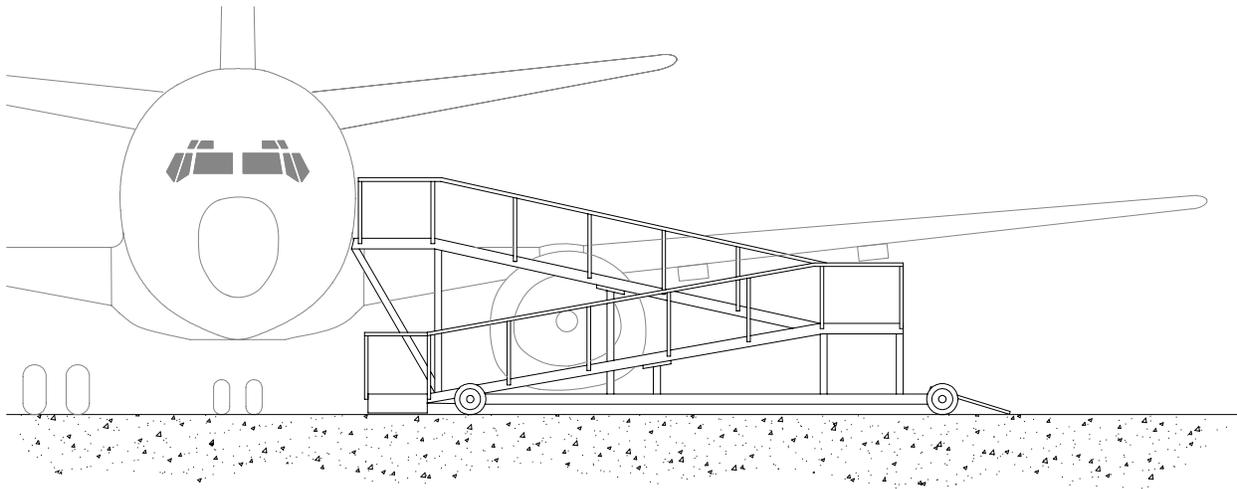

b. SWITCHBACK RAMP

Figure 9. Ramps**4.3. SYSTEM COMPONENTS.**

a. Support Structure - Base / Chassis. As specified in this chapter, the support structure of a ramp is characterized as that part of the device which provides stability and houses the sloped pathway.

b. Ramp Surface. The ramp surface is the sloped pathway upon which passengers traverse in order to board the aircraft.

c. Level Landings / Turning Platform. A level landing is located at the top and bottom of all ramps and after the maximum ramp run on switchback-type ramps, allowing adequate room for persons in wheelchairs or boarding devices enter, exit, or turn around on the ramp surface.

4.4. PERFORMANCE.

a. Functions. The equipment must perform the following functions while maintaining a safe distance from any moving part of the aircraft. If the device approaches within 12 inches (30cm) of any moving part of the aircraft, the manufacturer must demonstrate to the satisfaction of the airline operator that the device can perform all functions without undue risk of damage to the aircraft. The functions are as follows:

(1) Provide a means for boarding wheelchair users and other passengers with mobility impairments onto the ramp surface at ground level, as specified in ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192.23(c)(3), DOT regulations 49 CFR Part 38.23.

(2) Provide a path for transferring passengers from the ground to the elevated aircraft doorsill.

(3) Provide a suitable boarding chair, compatible with the device and the aircraft to be served, meeting the requirements outlined in Chapter 6 of this AC, if specified by the purchaser.

b. Operational Standards.

(1) **Movement.** When passengers are occupying the ramp, provisions must be made to restrict movement on the structure.

(2) **Stability.** The ramp must meet the requirements of SAE ARP1247, paragraph 3.13.1.9. The device must be equipped with a stabilizing system for occupant safety mated to the aircraft doorsill.

(3) **Level Landings.** Level landings must interrupt any ramp after the maximum run specified in paragraph 2.2.e(3)(c) has been met. The landing must provide a space adequate for a wheelchair as specified in paragraph 2.2.c(1) of this document. The minimum width of the landing must be equal to the width of the ramp leading to it, and the minimum area must be that as specified in paragraph 2.2.c(4) of this document.

(4) **Ramp surface.** The ramp surface must meet the requirements stated in paragraph 2.2.d of this document. The ramp surface must be continuous and slip resistant, must not have protrusions from the surface greater than 0.25 inches (6.4 mm) high and must accommodate both four-wheel and three-wheel mobility aids.

(5) **Vibration.** If applicable, the device must meet the requirements of SAE ARP1247, paragraph 3.11 and MIL-STD-1472F, paragraph 5.8.4 (Vibration). For any discrepancies between the documents, SAE ARP1247 takes precedence.

(6) Operating Times.

(a) **Setup/Deployment Time.** The time required to setup and deploy the device upon arrival at the passenger loading area or aircraft must be 1 minute or less.

(b) **Enplaning / Deplaning Time.** The time required to convey a passenger onto the device and to the doorsill level must be 2 minutes or less. The time to deplane a passenger must also be 2 minutes or less.

(c) **Storage Preparation Time.** The time required to prepare the device for standby storage must be 3 minutes or less.

(7) Emergency Operations. If the device has an electronic method of raising or lowering the ramp surface, the requirements of ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192, DOT regulations 49 CFR Part 1192, Section 1192.23(b)(3)) and SAE ARP1247, paragraph 3.9.11 must be met. Where there is a conflict with the two documents, the ADA guidelines take precedence.

(a) Power or Equipment Failure. If applicable, the device must meet the requirements of ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192, DOT regulations 49 CFR Part 1192, Section 1192.23(b)(4)).

(8) Storage / Security. All requirements needed to properly store and secure the device, including those found in ADAAG for Transportation Vehicles, DOT regulations 49 CFR Part 1192, Section 1192.23(c)(7), must be supplied by the manufacturer.

4.5. PLANNING PHASE.

a. Total Life. The device must be designed to perform its intended function for its “total life” period, when maintained according to the manufacturer’s instructions. The “total life” for which the equipment is designed, assuming it is used and maintained in accordance with the manufacturer’s recommendations, must be a minimum of 2 years, based on a frequency of use of 1000 cycles per year.

b. Purchaser Specifications.

(1) Options. The manufacturer is not be required to offer the particular options referred to in SAE ARP1247, paragraph 3.13.1.10, except as specified by the purchaser and as noted below.

(a) An emergency lowering system operable from the aerial device, platform, or aircraft door must be included.

(b) Provisions for towing for and aft must be included.

c. Environment.

(1) The device must meet the requirements of SAE ARP1247, paragraph 3.6. The temperature ranges specified may be modified by the purchaser if the climate in which the device is to be used is extreme.

(2) The device must be capable of operating on a level surface in 2 inches (5 cm) of snow if specified by the purchaser.

d. Aircraft Compatibility.

(1) Aircraft Types. The purchaser will specify the aircraft required to be served by the passenger lifting device.

(2) Design Considerations. If an aircraft to be served has a stairway that cannot be retracted while the door is open, the device must be designed to operate with the stairway deployed. All aircraft models specified by the purchaser to be served must be surveyed by the manufacturer for compatibility. The following aircraft size/configuration factors will have a significant effect on the design of the device:

(a) Aircraft doorsill height.

(b) Aircraft door width.

(c) Aircraft door location.

(d) Aircraft components adjacent to the door constituting obstructions (wing, tail, engine nacelle, propeller, etc.).

(e) Airstairs / airdoor.

(f) Airstair handrails.

(g) Vertical movements of the aircraft (doorsill) during emplaning/deplaning.

4.6. DESIGN / DEVELOPMENT PHASE.

a. General.

(1) **Attachments.** When in use for boarding or alighting, the ramp must be firmly attached to the vehicle so that it is not subject to displacement when loading or unloading a heavy power mobility aid. No gap between vehicle and ramp will exceed 5/8 inch. [Source: ADAAG for Transportation Vehicles, DOT regulations 49 CFR Part 1192, Section 1192.23(c)(6)]

(2) Handrails.

(a) The platform must be equipped with handrails on both sides. They must move in tandem with the lift, be graspable, and provide support to standees throughout the entire lift operation.

(b) Rigid protective railings or other barriers must be adjustable in length to bridge the gap between the fixed portion of the railings and the different aircraft being served by the device. The adjustable portion of the railings must have a non-marking rubber bumper to protect the aircraft. (reference SAE ARP5141)

(c) Spaces between barrier sections, and between the barriers and the aircraft, must be sufficiently small to prevent injury and provide a sense of security to occupants. (reference SAE ARP5140)

(3) Transition Areas.

(a) The secondary ramp that bridges the gap between the lift or main ramp and the aircraft must be designed so as not to damage the aircraft or dislodge when in use. It may rest on the doorsill but must not induce unsafe loads onto the aircraft.

(b) The maximum angle for transition ramps is a slope no greater than 1:8.

(4) **Service and Access.** If the device is electrically powered, the requirements of SAE ARP1247, paragraph 3.4.3 must be met.

b. Safety. The device must meet the requirements of SAE ARP1247, paragraph 3.8. All design features intended to protect the equipment operator must provide similar protection to the passenger(s).

(1) **Personnel Safety.** The device must meet the requirements of SAE ARP1247, paragraph 3.9, except as provided below.

(a) If highway transportability (defined as the capability of a self-propelled device to be licensed for operation on public highways) is not specified by the purchaser, the provisions of SAE ARP1247, paragraph 3.9.1 do not apply.

(b) If the device is not self-propelled, the provisions of SAE ARP1247, paragraphs 3.9.2 through 3.9.4 do not apply.

(2) **Equipment Safety.** The device must meet the requirements of SAE ARP1247, paragraph 3.10.

(a) Cushioning devices specified SAE ARP1247, paragraph 3.10.3 must be approved by the purchaser.

(b) For any device not completely manually operated, a 5-pound (2.3 kg) ABC rated fire extinguisher must be mounted on the device at a location easily accessible to the operator.

(c) Stabilizing devices referred to in SAE ARP1247, paragraph 3.10.9.3 must be painted chrome yellow, in accordance with AC 150/5210-5.

c. **Mechanical / Structural Loading.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.1, except as provided below.

(1) **Platform Deflection.** The ramp surface (not including the entrance ramp) must not deflect more than 3 degrees (exclusive of ramp roll or pitch) in any direction between its unloaded position and its position when loaded with 700 pounds applied through a 26 inch by 26 inch (0.660 m by 0.660 m) test pallet at any point along the center of the pathway.

(2) **Towing.** The device must meet the requirements for tow hooks/towbar and towing placards, found in SAE ARP5141, paragraph 6.

(3) **Load Quantities.** The stress levels for design must be based on the total of structural weight plus the maximum carried passenger load. Consideration must be made for anticipated dynamic loads. The design must be based on the highest stress occurring over the full range of motion with the load in the least favorable positions (s). Relief valves or other devices must be incorporated to prevent movement that exceeds the rated capacity. (reference SAE ARP1247, paragraph 3.13.1.1.1)

(a) **Wind Load.** The PBB structure must withstand wind loads of:

- Up to 90 mph (161 kph), for 3 second gusts, while in use and occupied; and
- Up to 70 mph (112 kph), for sustained winds.

(b) **Temperature Load.** Unless otherwise specified, the PBB structure must be designed for a uniform temperature increase or decrease of 70 degrees F (21 degrees C).

(c) **Seismic (Earthquake) Load.** All PBB structures and components must be designed in accordance with UBC for the following parameters:

- Seismic Zone – 2B
- Importance factor, I – 1.00

- Importance Factor, I_p – 1.00

d. Electrical. If the ramp is only manually operated, then the requirements of this section do not apply.

(1) **General.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.2.

(a) When used for cranking engines of 30 horsepower (22 kW) or less, batteries referred to in SAE ARP1247, paragraph 3.13.1.2.1 must be those recommended by the engine manufacturer.

(b) If highway transportability is specified, or otherwise specified by the purchaser, lighting equipment must meet the provisions of SAE ARP1247, paragraphs 3.13.1.2.21 and 3.13.1.2.22. Lighting must in all cases meet the requirements of AC 150/5210-5.

(c) A weatherproof lighting fixture producing a minimum of 5 foot-candles (54 lux) must be attached to the device to illuminate the interface between the lift platform and the doorway of the aircraft.

(2) **Battery Powered Devices.**

(a) Batteries must be designed to have a minimum life of 3 years when maintained according to the manufacturer's instructions. For design purposes, a frequency of use of 1000 cycles per year must be assumed.

(b) A self-contained battery charger with automatic voltage control must be provided. The charging process will require the operator to connect a readily-accessible plug to a standard 110 or 220-volt receptacle, as specified by the purchaser.

(c) The battery system must incorporate a battery condition gauge. If a low voltage condition could result in higher amperage flow and motor burnout, then the status-monitoring device must provide a time warning to the operator.

(3) **Electromagnetic Interference.** The equipment must meet the current issues of radio suppression specification MIL-STD-461, Class 3D, Requirements for the Control of Electromagnetic Interference Emissions and Susceptibility. It must be capable of operating through the entire amplitude modulated aircraft radio frequency range of 75 MHz – 136 MHz.

e. Hydraulic and Pneumatic. If the ramp is only manually operated, than the requirements of this section do not apply.

(1) The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.3. Raising and lowering of the lift must be accomplished by one person and through two or more hydraulic cylinders, powered by an electric or engine driven pump. The system must incorporate a fail-safe hydraulic and/or mechanical system designed to prevent lowering in the event of component failure.

(2) Hydraulic fluid must be as recommended by the manufacturers of the hydraulic system components.

(3) The materials used for each hydraulic line must be consistent with its application. Fixed lines must be made of high quality steel or stainless steel. Flexible lines must be used only where necessary.

(4) Hydraulic rams may be used to stabilize the device if all wheels remain firmly on the pavement surface.

f. Engines and Related Equipment. If the ramp is only manually operated, than the requirements of this section do not apply.

(1) **General.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.4.

(a) The provisions of SAE ARP1247, paragraph 3.13.1.4.4 do not apply to engines of 30 horsepower (22 kW) or less.

(b) Alternators used on engines of 30 horsepower (22 kW) or less must be as recommended by the engine manufacturer.

(c) Oil pressure switches are not be required on engines of 30 horsepower (22 kW) or less.

(d) The type of engine kill switch provided must be approved by the purchaser.

(e) Engines used to drive systems, other than the vehicle propulsion system, must be equipped with a tachometer (green-lined within the correct operating RPM range and red-lined above this range) or automatically governed to prevent over-revving.

(2) **Fuel System.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.5.

(a) The provisions of SAE ARP1247, paragraph 3.13.1.5.1 do not apply to engines of 30 horsepower (22 kW) or less.

(b) The fuel tank must have a minimum capacity to store fuel needed for eight hours of operation.

(c) Fuel tank fillers for engines of 30 horsepower (22 kW) or less must be as recommended by the engine manufacturer, and must include a flame-arresting cap.

(d) Alternative fuels, such as bio-diesel, clean diesel, gaseous fuels (natural gas and liquid petroleum gas), alcohols (methanol and ethanol), Jet A, and reformulated gasoline may be used to power self-propelled lift devices. Equipment modifications to allow the use of such fuels must conform to manufacturer specifications.

(3) **Exhaust System.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.6. Engine exhaust systems must be provided with flame and spark arrestors.

g. Self-Propelled Vehicles. If the ramp is only manually operated, than the requirements of this section do not apply. Otherwise, the device must meet the requirements of SAE ARP1247, paragraph 3.13.1.7.

(1) **Vehicle Cabs.** On vehicles equipped with an enclosed operator's cab, the cab must meet the requirements of SAE ARP1247, paragraph 3.13.1.7.3.

(2) **Passenger Van Body.** On vehicles equipped with an enclosed passenger van body, the requirements of SAE ARP5141, paragraph 4.2.6 must be met.

(3) HVAC System. If an HVAC system is specified by the purchaser, enclosed lift systems must meet the requirements of SAE J1503 and FMVSS No. 103. In sections where the two documents may conflict, FMVSS No. 103 takes precedence.

(4) Design Speed. The device must meet the requirements of SAE ARP5140, paragraph 4.1.5, or as specified by the purchaser.

(5) Braking Systems.

(a) Braking systems for vehicles with a maximum speed of 20 mph (32 km/h) or more must meet the requirements of SAE ARP1247, paragraph 3.13.1.7.2.

(b) Braking systems for vehicles with a maximum speed of less than 20 mph (32 km/h) must meet the requirements of Title 49 CFR, paragraphs 393.41 and 393.52. The maximum stopping distance in feet must be equal to the design speed in mph (in meters must be equal to the design speed in km/h).

h. Instruments and Controls. If the ramp is only manually operated, than the requirements of this section do not apply. Otherwise, the device must meet the requirements of ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192, DOT regulations 49 CFR Part 1192, Sections 1192.23(b)(2)(i) and 1192.23(b)(2)(ii), and SAE ARP1247, paragraph 3.13.1.8. Where there is a conflict with the two documents, the ADA guidelines take precedence.

(1) If approved by the purchaser, transmission selector levers may move and operate in the direction of travel of the device. Inclusion or deletion of “Park” position will be as specified by the purchaser.

(2) Unless otherwise specified by the purchaser, controls must be designed for satisfactory operation when the operator is wearing heavy arctic-type gloves and overshoes.

4.7. CONSTRUCTION / PRODUCTION PHASE.

a. Workmanship. The device must meet the requirements of SAE ARP1247, paragraph 3.13.7.

b. Materials. The device must meet the requirements of SAE ARP1247, paragraph 3.13.2.

(1) Moisture and Fungus Resistance. The device must meet the requirements of SAE ARP1247, paragraph 3.13.4.

(2) Corrosion of Metal Parts. The device must meet the requirements of SAE ARP1247, paragraph 3.13.5.

c. Parts.

(1) Standard and Commercial Parts. The device must meet the requirements of SAE ARP1247, paragraph 3.13.3.

(2) Interchangeability and Replaceability. The device must meet the requirements of SAE ARP1247, paragraph 3.13.6.

4.8. POST-PRODUCTION PHASE.

a. Identification and Marking. The device must meet the requirements of SAE ARP1247, paragraph 3.13.9. If the ramp is self-propelled, the shifting diagram placard specified in SAE ARP1247, paragraph 3.13.9.6, may be provided in a medium other than metal if designated to last for the total life of the equipment. In addition, the device must be provided with a permanently affixed placard identifying the maximum number of passengers and maximum weight capacity of the lifting platform or ramp. In the event that identification and marking guidance differs between SAE ARP1247 and AC 150/5210-5, AC 150/5210-5 takes precedence.

b. Paint.

(1) Exterior Finish. The device must meet the requirements of SAE ARP1247, paragraph 3.13.11.

(a) The device must be primed in accordance with accepted industry standards for heavy-duty industrial equipment intended for outdoor use.

(b) The device must be furnished as specified by the purchaser in accordance with AC 150/5210-5 using the standards for aircraft support vehicles.

4.9. DELIVERY AND ACCEPTANCE PHASE.

a. Transportability. If highway transportability is specified by the purchaser, the device must meet the requirements of SAE ARP1247, paragraph 3.7.

b. Quality Assurance. The manufacturer must test all of the equipment installed under this specification and demonstrate its proper operation to the purchaser. The manufacturer must furnish all required labor, testing, instruments and devices required for the conduct of such tests.

(1) The manufacturer must install all electrical, instrumentation, and mechanical works to the satisfaction of the purchaser, with inspecting authorities having jurisdiction.

(2) The manufacturer must notify the purchaser in writing of any instances in the specifications that are in conflict with applicable codes. The manufacturer must perform all work in accordance with applicable laws, rules, or regulations.

(3) Deviations from the specifications required for conformance with the applicable codes and/or laws must be corrected immediately but not until such deviations have been brought to the attention of the purchaser.

(4) For applicable codes and/or laws that govern the minimum design requirements; where this AC calls for materials, sizes, design details, etc., in excess of the code requirements, the AC takes precedence.

c. Inspection. Inspections must meet the requirements of SAE ARP1247, paragraph 4.3.

d. Testing. After the equipment has been installed and the various units have been inspected, adjusted, and placed in correct operating condition, the equipment must be field tested in accordance with the purchaser's testing procedures and requirements. The field tests must demonstrate that the equipment

functions in compliance with the specifications over the entire range of operation. The manufacturer must report any unusual conditions and correct deficiencies of any of the field-installed units.

(1) **Preliminary Qualification Tests.** Preliminary qualification tests may be specified at the purchaser's option.

(2) **Formal Qualification Tests.** Formal qualification tests may be specified at the purchaser's option.

(3) **Specification Conformance Tests.** The manufacturer must perform any tests referred to in SAE ARP1247, paragraph 4.6 as specified by the purchaser. The purchaser may elect to accept documentation of previously run tests.

(4) **Reliability Test and Analysis.** A reliability test and analysis may be specified at the purchaser's option.

e. **Data and Analyses.** If requested by the purchaser, the requirements of SAE ARP1247, paragraph 4.4 must be met by the manufacturer.

f. **Manuals and Publications.** The following manuals must accompany the delivered equipment. No special format is required.

- (1) Operator's handbook.
- (2) Illustrated parts breakdown and list.
- (3) Preventive maintenance schedule.

4.10. POST-DELIVERY PHASE.

a. **Training.** The manufacturer must, at no additional cost, provide trained personnel at the time of delivery to adequately train airport/airline staff in the operation and maintenance of the PBB.

(1) Training must include written operating instructions that depict the step by step operational use of the device, plus instruction in the proper use of a boarding chair, whether or not such a chair is provided with the boarding device. Written instructions must include, or be supplemented by, materials which can be used to train subsequent new operators.

(2) Training topics must include trouble shooting and problem solving, in the form of theory and hands on training, for personnel designated by the purchaser.

(3) A total of 40 hours of training for every airport/airline personnel and technician on the purchaser's PBB maintenance staff must be provided by the manufacturer.

(4) Training time per day must not exceed 8-hour shifts, unless otherwise specified by the purchaser.

(5) Upon the completion of training, the manufacturer must issue each participant a certificate of competency.

b. **Maintenance / Reliability.** The equipment and its accessories must be designed and constructed with reliability of operation as a primary consideration. The minimum reliability design requirement is

that the equipment be designed to operate between periodic preventive maintenance activities of 4 months, and for lifts, 100 lift cycles, whichever occurs first. The above interval does not apply to components in those cases where the component manufacturer recommends more frequent maintenance intervals. The device must incorporate a cycle counter or hour meter. The type of meter installed must be consistent with the maintenance intervals recommended by the manufacturer.

(1) Preventive. The manufacturer must develop and provide to the purchaser written documentation on recommended preventive maintenance actions. For the purpose of this specification, normal servicing of fuel, oil, tire pressure, battery, and water are not considered preventive maintenance.

(2) Cleaning. The manufacturer must develop and provide to the purchaser written documentation on recommended cleaning procedures, including solvent types and tools.

(3) Inspection. The manufacturer must develop and provide to the purchaser written documentation on regularly scheduled maintenance inspection procedures. A focus on sensitive equipment and schedule timelines must be included in the documentation.

(4) Spare / Replacement of Parts. The manufacturer must develop and provide to the purchaser a parts list, including associated replacement/repair costs.

(5) Tools and Test Equipment. The device must meet the requirements of SAE ARP1247, paragraph 3.12.4.

4.11. PURCHASING SPECIFICATION CLARIFICATIONS.

A summary of the items that may require further clarification in the preparation of a purchasing specification for ramps are listed in Table 3.

Table 3. Ramp Purchasing Specification Clarifications

Paragraph	Item	Comments
4.4.a(4)	Provision of boarding chair.	
4.4.a(5)	Provision of weather protection.	
4.5.b(1)	Specify options.	
4.5.c(1)	Temperature ranges.	
4.5.c(2)	Snow operations requirement.	
4.5.d(1)	Aircraft compatibility.	
4.6.b(1)(a)	Highway transportability.	
4.6.b(2)(a)	Aircraft interface cushioning devices.	
4.6.d(1)(b)	Lighting equipment.	
4.6.d(2)(b)	Charging voltage.	
4.6.f(1)(d)	Engine kill switch.	
4.6.g(3)	Provision of HVAC system.	
4.6.g(4)	Vehicle design speed (for self-propelled devices).	
4.6.h(1)	Transmission selector lever – direction of operation and inclusion of “Park” position.	
4.6.h(2)	Requirement for use by operator wearing winter clothing.	

Paragraph	Item	Comments
4.8.b(1)	Exterior finish / paint scheme.	
4.9.d(1)	Preliminary qualification tests.	
4.9.d(2)	Formal qualification tests.	
4.9.d(3)	Specification conformance tests.	
4.9.d(4)	Reliability test and analysis.	
4.9.e	Engineering data and analyses.	
4.10.a	Training requirements.	
Within the SAE ARP1247C Specification (not specifically addressed in this chapter):		
3.9.19.2	Types of approved non-slip materials.	
3.13.1.2.11	Approval of method of running concealed wiring.	
3.13.1.3.5.7	Approval for coated hydraulic tanks.	
3.13.5.2	Vehicle undercoating.	
4.3	Inspection.	

This page intentionally left blank.

CHAPTER 5. LIFTS

5.1. GENERAL.

a. The lift equipment covered in this chapter specifically relates to devices that provide an elevating platform allowing the transfer of a person with disability or mobility impairment from the airport ramp (tarmac) up to the aircraft door. Lift devices used anywhere else or for any other reason are not covered in this chapter. The term aircraft in this chapter refers to those with door sill heights of 60 in (152.4 cm) and above.

b. For the purposes of this specification, the two terms used to describe the operation of the lift mechanism are manually powered or motorized (via electric, hydraulic, or pneumatic means). The three terms used to describe the means by which a device transports the operator or passengers a given horizontal distance are manually powered, towed, or self-propelled (via electric motor or internal combustion engine). The purchaser will specify the type of lift mechanism and transport operation needed.

c. The basis for this chapter of the AC is the guidance document developed by the SAE ARP1247, and the U.S. Access Board's Technical Assistance Manual for ADA Accessibility Guidelines for Transportation Vehicles (Vehicle Guidelines). Additional requirements and clarifications have been added where necessary.

5.2. SYSTEM DESCRIPTION.

Types of lifts discussed in this chapter:

a. **Elevating Transport Vehicle.** A self-propelled vehicle capable of carrying many passengers and attendants in an enclosed cab, containing a chassis-mounted lift.

b. **Modified Lift.** Equipment originally used for cargo but modified for passenger transport (e.g. a converted forklift or scissor lift).

c. **Elevating Boarding Stairs.** Devices that allow a platform to slide up a boarding stair incline. This AC will not focus on this type of device.

5.3. SYSTEM COMPONENTS.

a. **Support Structure - Base / Chassis.** The support structure of a lifting device is characterized as that part of the device which houses the lifting mechanism and platform.

b. **Lifting Mechanism.** The lifting mechanism is the part of the device that functions to elevate or lower the platform. The lifting mechanism contains working and non-working parts. Working parts are characterized as those items that move and support the load, such as cables, pulleys, and shafts. Non-working parts are characterized as being in the lifting frame and attached, non-moving hardware.

c. **Platform.** The platform is a horizontal surface that is raised or lowered between ground level and the aircraft door. As used herein, the platform refers to all surfaces traversed by the passenger using a wheelchair in boarding the aircraft.

5.4. PERFORMANCE.

a. Functions. The equipment must perform the following functions while maintaining a safe distance from any moving part of the aircraft. If the device approaches within 12 inches (30cm) of any moving part of the aircraft, the manufacturer must demonstrate to the satisfaction of the airline operator that the device can perform all functions without undue risk of damage to the aircraft. The functions are as follows:

(1) Provide a means for boarding wheelchair users and other passengers with mobility impairments (persons using walkers, crutches, canes or braces or who otherwise have difficulty using steps) onto the lifting platform at ground level, as specified in ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192, DOT regulations 49 CFR Part 1192, Section 1192.23(b)(12)).

(2) Elevate the lifting platform carrying the passenger(s) and attendant(s) to the aircraft doorsill height.

(3) Provide a means for transferring passengers using wheelchairs from the elevated lift platform or ramp to and from the aircraft doorsill.

(4) Provide a suitable boarding chair, compatible with the device and the aircraft to be served, meeting the requirements outlined in Chapter 6 of this AC, if specified by the purchaser.

(5) Provide a stairway for the boarding of other passengers, if specified by the purchaser.

(6) Provide protection from wind and precipitation to passengers, if specified by the purchaser.

(7) Provide transportation between the terminal and the aircraft, if specified by the purchaser.

b. Operational Standards.

(1) Platform Movement.

(a) With Passengers. When lowering or lifting an occupant, passengers must not be subjected to the following changes in movement:

- **Velocity** in excess of 6.0 in/s (0.15 m/s) in any direction,
- **Acceleration** in excess of 10 ft/s² (3.0 m/s²) in any direction, and
- **Jerk** in excess of 8.0 ft/s³ (2.4 m/s³) in any direction.

(b) Without Passengers. Movement standards for all operations are the same as previously described, except during deployment and stowage of the device. For motorized lift mechanisms during deployment or stowage the velocity must not exceed 12 in/s (.30 m/s). Manually deployed or stowed lifts have no movement limitations during deployment or stowage.

(2) Stability. The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.9.

(a) The device must be equipped with a stabilizing system for occupant safety while the unit is mated to the aircraft doorsill.

(b) For self-propelled devices requiring stabilizers to meet the requirements of this specification, the requirements of SAE ARP5141, paragraph 4.2.5 must be met.

(3) **Noise and Vibration.** The device must meet the requirements of SAE ARP1247, paragraph 3.11 and FAA HF-STD-001, paragraph 13.5 (Noise) and MIL-STD-1472F, paragraph 5.8.4 (Vibration). For any discrepancies between the documents, SAE ARP1247 takes precedence.

(4) **Operability.** Lifts must be capable of 45 minutes of continuous operation, consisting of any possible combination of passenger loading and maneuvering cycles at full load within the temperature ranges specified in paragraph 4.5.c of this AC. For passenger loading, full load must be considered to be applied during the ascent phase only.

(5) Operating Times.

(a) **Setup/Deployment Time.** The time required to setup and deploy the device upon arrival at the passenger loading area or aircraft must be 1 minute or less.

(b) **Enplaning/Deplaning Time.** The time required to convey a passenger onto the device and to the doorsill level must be 2 minutes or less. The time to deplane a passenger must be 2 minutes or less.

(c) **Storage Preparation Time.** The time required to prepare the device for standby storage must be 3 minutes or less.

(6) **Emergency Operations.** The device must meet the requirements of ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192, DOT regulations 49 CFR Part 1192, Section 1192.23(b)(3)) and SAE ARP1247, paragraph 3.9.11. Where there is a conflict with the two documents, the ADA guidelines take precedence.

(a) **Power or Equipment Failure.** The device must meet the requirements of ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192, DOT regulations 49 CFR Part 1192, Section 1192.23(b)(4)).

(7) **Storage / Security.** All requirements needed to properly store and secure the device must be supplied by the manufacturer.

5.5. PLANNING PHASE.

a. **Total Life.** The device must be designed to perform its intended function for its “total life” period when maintained according to the manufacturer’s instructions. The total life for which the equipment is designed, assuming it is used and maintained in accordance with the manufacturer’s recommendations, must be a minimum of 10 years based on a frequency of use of 1000 cycles per year.

b. Purchaser Specifications.

(1) **Options.** The manufacturer is not be required to offer the particular options referred to in SAE ARP1247, paragraph 3.13.1.10, except as specified by the purchaser and as noted below.

(a) An emergency lowering system operable from the aerial device, platform, or aircraft door must be included.

c. Environment.

(1) The device must meet the requirements of SAE ARP1247, paragraph 3.6. The temperature ranges specified may be modified by the purchaser if the climate in which the device is to be used is extreme.

(2) The device must be capable of operating on a level surface in 2 inches (5 cm) of snow if specified by the purchaser.

d. Aircraft Compatibility.

(1) **Aircraft Types.** The purchaser will specify the aircraft to be served by the passenger lifting device.

(2) **Design Considerations.** If an aircraft to be served has a stairway that cannot be retracted while the door is open, the device must be designed to operate with the stairway deployed. All aircraft models specified by the purchaser must be surveyed by the manufacturer for compatibility. The following aircraft size/configuration factors will have a significant effect on the design of the device:

(a) Aircraft doorsill height.

(b) Aircraft door width.

(c) Aircraft door location.

(d) Aircraft components adjacent to the door constituting obstructions (wing, tail, engine nacelle, propeller, etc.).

(e) Airstairs / airdoor.

(f) Airstair handrails.

(g) Vertical movements of the aircraft (doorsill) during emplaning/deplaning.

5.6. DESIGN / DEVELOPMENT PHASE.

a. General. The device must meet the requirements of SAE ARP1247, paragraph 3.13, except as modified herein.

(1) Platform.

(a) **Edge Barriers.** Barriers must be provided to prevent the possibility of a passenger or mobility aid from traveling beyond the edge of a platform, except at the entry and exit points, and then only when the passenger is entering or exiting the lift. Platform edge barriers for lifts must meet the requirements of ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192, DOT regulations 49 CFR Part 1192, Section 1192.23(b)(5)).

(b) Handrails.

(i) The platform must be equipped with handrails on two sides. They must move in tandem with the lift, be graspable, and provide support to standees throughout the entire lift operation.

(ii) Rigid protective railings or other barriers must be adjustable in length to bridge the gap between the fixed portion of the railings and the different aircraft being served by the device. The adjustable portion of the railings must have a non-marking rubber bumper to protect the aircraft. (Reference SAE ARP5141)

(iii) Spaces between barrier members and between the barriers and the aircraft must be sufficiently small to prevent injury and provide a feeling of confidence to occupants (reference SAE ARP5140).

(c) **Surface.** The platform surface must meet the requirements of ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192, DOT regulations 49 CFR Part 1192, Section 1192.23(b)(6)).

(d) **Gaps.** Gaps in the platform surface must meet the requirements of ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192, DOT regulations 49 CFR Part 1192, Section 1192.23(b)(7)).

(e) **Entrance Ramp.** The platform entrance ramp must meet the requirements of ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192, DOT regulations 49 CFR Part 1192, Sections 1192.23(b)(8)).

(f) **Boarding Direction.** The lift must permit both inboard and outboard facing of wheelchair and mobility aid users, as specified in ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192, DOT regulations 49 CFR Part 1192, Sections 1192.23(b)(11)).

(g) The interior width of the platform must be compatible with the boarding chair to be used and aircraft to be served.

(2) Transition Areas.

(a) The secondary ramp that bridges the gap between the lift or main ramp and the aircraft must be designed so as not to damage the aircraft or dislodge when in use. It may rest on the doorsill but must not induce unsafe loads on the aircraft.

(b) The maximum angle for transition ramps is a slope no greater than 1 in 8.

(3) Passenger Restraints.

(a) If specified by the purchaser, lift platforms must include a system to immobilize each wheelchair it is designed to simultaneously transport. The system must be easily operated by the attendant or equipment operator.

(4) **Service and Access.** The device must meet the requirements of SAE ARP1247, paragraph 3.4.3.

b. **Safety.** The device must meet the requirements of SAE ARP1247, paragraph 3.8. All design features intended to protect the equipment operator must provide similar protection to the passenger(s).

(1) **Personnel Safety.** The device must meet the requirements of SAE ARP1247, paragraph 3.9, except as provided below.

(a) If highway transportability, defined as the capability (of a self-propelled device) to be licensed for operation on public highways, is not specified by the purchaser, the provisions of SAE ARP1247, paragraph 3.9.1 do not apply.

(b) If the device is not self-propelled, the provisions of SAE ARP1247, paragraphs 3.9.2 through 3.9.4 do not apply.

(2) **Equipment Safety.** The device must meet the requirements of SAE ARP1247, paragraph 3.10.

(a) Cushioning devices specified in SAE ARP1247, paragraph 3.10.3 must be approved by the purchaser.

(b) For any device not completely manually operated, a 5-pound (2.3 kg) ABC-rated fire extinguisher must be mounted on the device at a location easily accessible to the operator.

(c) Stabilizing devices referred to in SAE ARP1247, paragraph 3.10.9.3 must be painted chrome yellow in accordance with AC 150/5210-5.

c. **Mechanical / Structural Loading.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.1, except as provided below.

(1) **Factor of Safety.** Working parts on the lift mechanism, such as cables (wire rope), pulleys, and shafts, must have a minimum factor of safety of 10, based on the ultimate strength of the material.

(2) **Platform Deflection.** The lift platform (not including the entrance ramp) must not deflect more than 3 degrees (exclusive of vehicle roll or pitch) in any direction between its unloaded position and its position when loaded with 700 pounds applied through a 26 inch by 26 inch test pallet at the centroid of the platform.

(3) **Towing.** The device must meet the requirements for tow hooks/towbar and towing placards found in SAE ARP5141, paragraph 6.

d. Electrical.

(1) **General.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.2.

(a) When used for cranking engines of 30 horsepower (22 kW) or less, batteries referred to in SAE ARP1247, paragraph 3.13.1.2.1 must be those recommended by the engine manufacturer.

(b) If highway transportability is specified, or otherwise specified by the purchaser, lighting equipment must meet the provisions of SAE ARP1247, paragraphs 3.13.1.2.21 and 3.13.1.2.22. Lighting must in all cases meet the requirements of AC 150/5210-5.

(c) A weatherproof lighting fixture producing a minimum of 5 foot-candles (54 lux) must be attached to the device to illuminate the interface between the lift platform and the doorway of the aircraft.

(2) **Battery Powered Devices.**

(a) Batteries must be designed to have a minimum life of 3 years when maintained according to the manufacturer's instructions. For design purposes, a frequency of use of 1000 cycles per year must be assumed.

(b) A self-contained battery charger with automatic voltage control must be provided. The charging process will require the operator only to connect a readily-accessible plug to a standard 110 or 220-volt receptacle, as specified by the purchaser.

(c) The battery system must incorporate a battery condition gauge. If a low voltage condition could result in higher amperage flow and motor burnout, then the status-monitoring device must provide a time warning to the operator.

(3) **Electromagnetic Interference.** The equipment must meet the current issues of radio suppression specification MIL-STD-461, Class 3D, Requirements for the Control of Electromagnetic Interference Emissions and Susceptibility. It must be capable of operating through the entire amplitude modulated aircraft radio frequency range of 75 MHz – 136 MHz.

e. **Hydraulic and Pneumatic.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.3. Raising and lowering of the lift must be accomplished by one person and through two or more hydraulic cylinders powered by an electric or engine driven pump. The system must incorporate a fail-safe hydraulic and/or mechanical system designed to prevent lowering in the event of component failure.

(1) Hydraulic fluid must be as recommended by the manufacturers of the hydraulic system components.

(2) The materials used for each hydraulic line must be consistent with its application. Fixed lines must be made of high quality steel or stainless steel. Flexible lines must be used only where necessary.

(3) Hydraulic rams may be used to stabilize the device if all wheels remain firmly on the pavement surface.

f. Engines and Related Equipment.

(1) **General.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.4.

(a) The provisions of SAE ARP1247, paragraph 3.13.1.4.4 do not apply to engines of 30 horsepower (22 kW) or less.

(b) Alternators used on engines of 30 horsepower (22 kW) or less must be as recommended by the engine manufacturer.

(c) Oil pressure switches are not be required on engines of 30 horsepower (22 kW) or less.

(d) The type of engine kill switch must be approved by the purchaser.

(e) Engines used to drive systems, other than the vehicle propulsion system, must be equipped with a tachometer (green-lined within the correct operating RPM range and red-lined above this range) or automatically governed to prevent over-revving.

(2) **Fuel System.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.5.

(a) The provisions of SAE ARP1247, paragraph 3.13.1.5.1, do not apply to engines of 30 horsepower (22 kW) or less.

(b) The fuel tank must have a minimum capacity for eight hours of operation.

(c) Fuel tank fillers for engines of 30 horsepower (22 kW) or less must be as recommended by the engine manufacturer but must include a flame-arresting cap.

(d) Alternative fuels, such as bio-diesel, clean diesel, gaseous fuels (natural gas and liquid petroleum gas), alcohols (methanol and ethanol), Jet A, and reformulated gasoline may be used to power self-propelled lift devices. Equipment modifications to allow the use of such fuels must conform to manufacturer specifications.

(3) **Exhaust System.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.6. Engine exhaust systems must be provided with flame and spark arrestors.

g. **Self-Propelled Vehicles.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.1.7.

(1) **Vehicle Cabs.** On vehicles equipped with an enclosed operator's cab, the cab must meet the requirements of SAE ARP1247, paragraph 3.13.1.7.3.

(2) **Passenger Van Body.** On vehicles equipped with an enclosed passenger van body, the requirements of SAE ARP5141, paragraph 4.2.6, must be met.

(3) **HVAC System.** If an HVAC system is specified by the purchaser, enclosed lift systems must meet the requirements of SAE J1503 and FMVSS No. 103. In sections where the two documents may conflict, FMVSS No. 103 takes precedence.

(4) **Design Speed.** The device must meet the requirements of SAE ARP5140, paragraph 4.1.5, or as specified by the purchaser.

(5) Braking Systems.

(a) Braking systems for vehicles with a maximum speed of 20 mph (32 km/h) or more must meet the requirements of SAE ARP1247, paragraph 3.13.1.7.2.

(b) Braking systems for vehicles with a maximum speed of less than 20 mph (32 km/h) must meet the requirements of Title 49 CFR, paragraphs 393.41 and 393.52. The maximum stopping distance in feet must be equal to the design speed in mph (in meters must be equal to the design speed in km/h).

h. **Instruments and Controls.** The device must meet the requirements of ADAAG for Transportation Vehicles (1998) (36 CFR Part 1192, DOT regulations 49 CFR Part 1192, Sections 1192.23(b)(2)(i) and 1192.23(b)(2)(ii)), and SAE ARP1247, paragraph 3.13.1.8. Where there is a conflict with the two documents, the ADA guidelines take precedence.

(1) If approved by the purchaser, transmission selector levers may move and operate in the direction of travel of the device. Inclusion or deletion of "Park" position will be as specified by the purchaser.

(2) Unless otherwise specified by the purchaser, controls must be designed for satisfactory operation when the operator is wearing heavy arctic-type gloves and overshoes.

5.7. CONSTRUCTION / PRODUCTION PHASE.

a. **Workmanship.** The device must meet the requirements of SAE ARP1247, paragraph 3.13.7.

b. Materials. The device must meet the requirements of SAE ARP1247, paragraph 3.13.2.

(1) Moisture and Fungus Resistance. The device must meet the requirements of SAE ARP1247, paragraph 3.13.4.

(2) Corrosion of Metal Parts. The device must meet the requirements of SAE ARP1247, paragraph 3.13.5.

c. Parts.

(1) Standard and Commercial Parts. The device must meet the requirements of SAE ARP1247, paragraph 3.13.3.

(2) Interchangeability and Replaceability. The device must meet the requirements of SAE ARP1247, paragraph 3.13.6.

5.8. POST-PRODUCTION PHASE.

a. Identification and Marking. The device must meet the requirements of SAE ARP1247, paragraph 3.13.9. The shifting diagram placard specified in SAE ARP1247, paragraph 3.13.9.6 may be provided in a medium other than metal if designated to last for the total life of the equipment. In addition, the device must be provided with a permanently affixed placard identifying the maximum number of passengers and maximum weight capacity of the lifting platform or ramp. In the event that identification and marking guidance differs between SAE ARP1247 and AC 150/5210-5, AC 150/5210-5 takes precedence.

(1) The platform may be marked to indicate a preferred standing position.

b. Paint.

(1) Exterior Finish. The device must meet the requirements of SAE ARP1247, paragraph 3.13.11.

(a) The device must be primed in accordance with accepted industry standards for heavy-duty industrial equipment intended for outdoor use.

(b) The device must be furnished as specified by the purchaser, in accordance with AC 150/5210-5, using the standards for aircraft support vehicles.

5.9. DELIVERY AND ACCEPTANCE PHASE.

a. Transportability. If highway transportability is specified by the purchaser, the device must meet the requirements of SAE ARP1247, paragraph 3.7.

b. Quality Assurance. The manufacturer must test all of the equipment installed under this specification and demonstrate its proper operation to the purchaser. The manufacturer must furnish all required labor, testing, instruments and devices required for the conduct of such tests.

(1) The manufacturer must install all instrumentation and electrical and mechanical works to the satisfaction of the purchaser, with inspecting authorities having jurisdiction.

(2) The manufacturer must notify the purchaser in writing of any instances in the specifications that are in conflict with applicable codes. The manufacturer must perform all work in accordance with applicable laws, rules, or regulations.

(3) Deviations from the specifications required for conformance with the applicable codes and/or laws must be corrected immediately but not until such deviations have been brought to the attention of the purchaser.

(4) For applicable codes and/or laws that govern the minimum design requirements; where this AC calls for materials, sizes, design details, etc., in excess of the code requirements, the AC takes precedence.

c. Inspection. Inspections must meet the requirements of SAE ARP1247, paragraph 4.3.

d. Testing. After the equipment has been installed and the various units have been inspected, adjusted, and placed in correct operating condition, the equipment must be field tested in accordance with the purchasers testing procedures and requirements. The field tests must demonstrate that the equipment functions in compliance with the specifications over the entire range of operation. The manufacturer must report any unusual conditions and correct deficiencies of any of the field-installed units.

(1) **Preliminary Qualification Tests.** Preliminary qualification tests may be specified at the purchaser's option.

(2) **Formal Qualification Tests.** Formal qualification tests may be specified at the purchaser's option.

(3) **Specification Conformance Tests.** The manufacturer must perform any tests referred to in SAE ARP1247, paragraph 4.6 as specified by the purchaser. The purchaser may elect to accept documentation of previously run tests.

(4) **Reliability Test and Analysis.** A reliability test and analysis may be specified at the purchaser's option.

e. Data and Analyses. If requested by the purchaser, the requirements of SAE ARP1247, paragraph 4.4 must be met by the manufacturer.

f. Manuals and Publications. The following manuals must accompany the delivered equipment. No special format is required.

- (1) Operator's handbook.
- (2) Illustrated parts breakdown and list.
- (3) Preventive maintenance schedule.

5.10. POST-DELIVERY PHASE.

a. Training. The manufacturer must, at no additional cost, provide trained personnel at the time of delivery to adequately train airport/airline staff in the operation and maintenance of the PBB.

(1) Training must include written operating instructions that depict the step by step operational use of the device, plus instruction in the proper use of a boarding chair, regardless of whether or not such

a chair is provided with the boarding device. Written instructions must include, or be supplemented by, materials which can be used to train subsequent new operators.

(2) Training topics must include trouble shooting and problem solving in the form of theory and hands on training for personnel designated by the purchaser.

(3) A total of 40 hours of training for every airport/airline personnel and technician on the purchaser's PBB maintenance staff must be provided by the manufacturer.

(4) Training time per day must not exceed 8-hour shifts unless otherwise specified by the purchaser.

(5) Upon the completion of training, the manufacturer must issue each participant a certificate of competency.

b. Maintenance / Reliability. The equipment and its accessories must be designed and constructed with reliability of operation as a primary consideration. The minimum reliability design requirement is that the equipment be designed to operate between periodic preventive maintenance activities of 4 months and for lifts, 100 lift cycles, whichever occurs first. The above interval does not apply to components where the manufacturer recommends more frequent maintenance intervals. The device must incorporate a cycle counter or hour meter. The type of meter installed must be consistent with the maintenance intervals recommended by the manufacturer.

(1) **Preventive.** The manufacturer must develop and provide to the purchaser written documentation on recommended preventive maintenance actions. For the purpose of this specification, normal servicing of fuel, oil, tire pressure, battery, and water are not considered preventive maintenance.

(2) **Cleaning.** The manufacturer must develop and provide to the purchaser written documentation on recommended cleaning procedures, including solvent types and tools.

(3) **Inspection.** The manufacturer must develop and provide to the purchaser written documentation on regularly scheduled maintenance inspection procedures. A focus on sensitive equipment and schedule timelines must be included in the documentation.

(4) **Spare / Replacement of Parts.** The manufacturer must develop and provide to the purchaser a parts list, including associated replacement/repair costs.

(5) **Tools and Test Equipment.** The device must meet the requirements of SAE ARP1247, paragraph 3.12.4.

5.11. PURCHASING SPECIFICATION CLARIFICATIONS.

A summary of the items that may require further clarification in the preparation of a purchasing specification for lifts are listed in Table 4.

Table 4. Lift Purchasing Specification Clarifications

Paragraph	Item	Comments
5.1.	Lift mechanism and transport method.	
5.4.a(4)	Provision of boarding chair.	
5.4.a(5)	Provision of stairway.	
5.4.a(6)	Provision of weather protection.	
5.4.a(7)	Provision of transportation between terminal and aircraft.	
5.5.b(1)	Specify options.	
5.5.c(1)	Temperature ranges.	
5.5.c(2)	Snow operations requirement.	
5.5.d	Aircraft compatibility.	
5.6.a(3)(a)	Provision of wheelchair immobilization system.	
5.6.b(1)(a)	Highway transportability.	
5.6.b(2)(a)	Aircraft interface cushioning devices.	
5.6.d(1)(b)	Lighting equipment.	
5.6.d(2)(b)	Charging voltage.	
5.6.f(1)(d)	Engine kill switch.	
5.6.g(3)	Provision of HVAC system.	
5.6.g(4)	Vehicle design speed (for self-propelled devices).	
5.6.h(1)	Transmission selector lever – direction of operation and inclusion of “Park” position.	
5.6.h(2)	Requirement for use by operator wearing winter clothing.	
5.8.b(1)(b)	Exterior finish / paint scheme.	
5.9.d(1)	Preliminary qualification tests.	
5.9.d(2)	Formal qualification tests.	
5.9.d(3)	Specification conformance tests.	
5.9.d(4)	Reliability test and analysis.	
5.9.e	Engineering data and analyses	
5.10.a	Training requirements.	
Within the SAE ARP1247C Specification (not specifically addressed in this chapter):		
3.9.19.2	Types of approved non-slip materials.	
3.13.1.2.11	Approval of method of running concealed wiring.	
3.13.1.3.5.7	Approval for coated hydraulic tanks.	
3.13.5.2	Vehicle undercoating.	
4.3	Inspection.	

CHAPTER 6. AIRCRAFT BOARDING CHAIRS

6.1. GENERAL.

a. This chapter outlines the performance and technical design specifications for aircraft boarding chairs. Aircraft boarding chairs are those devices used to transfer passengers from their wheelchair or other apparatus to their seat in the aircraft cabin. This specification does not apply to other types of devices, such as on-board chairs used for in-flight mobility, stair-climbing wheelchairs, or wheelchairs used for mobility within the airport terminal.

b. The basis for this chapter is the technical paper produced by the U.S. Access Board on Guidelines for Aircraft Boarding Chairs. Additional requirements and clarifications have been added where necessary.

6.2. PERFORMANCE.

a. Functions. The chair must be able to provide a means for transferring passengers from their personal wheelchair to their seat inside the aircraft, using any of the other boarding equipment described in this AC.

b. Operational Standards.

(1) Capacity. The aircraft boarding chair must be able to support a passenger weighing 723 lbs (328 kg). [Source: U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 4.1.c.]

(2) Stability. The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 4.1.d, with the exception that the downward force must be 350 lbs (159 kg) instead of the 241 lbs (109 kg) specified.

(3) Operating Times.

(a) Setup/Deployment Time. The time required to setup and deploy the device upon arrival at the passenger loading area or aircraft must be 1 minute or less.

(b) Enplaning/Deplaning Time. The time required to convey a passenger onto the device and to the doorsill level must be 2 minutes or less. The time to deplane a passenger must be 2 minutes or less.

(c) Storage Preparation Time. The time required to prepare the device for standby storage must be 3 minutes or less.

(4) Turning. The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.1.f.

(5) Ease of Movement. The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.1.g.

(6) Ease of Transfer. The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.1.h.

(7) Vibration. The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.1.i.

(8) Alignment. The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.1.j.

(9) Independent Mobility. The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.1.k.

(10) Storage. The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), Section 3.4.

6.3. PLANNING PHASE.

a. Total Life. The device must be designed to perform its intended function for its total life period, when maintained according to the manufacturer's instructions. The total life for which the equipment is designed, assuming it is used and maintained in accordance with the manufacturer's recommendations, must be a minimum of 20 years based on a frequency of use of 1000 cycles per year.

b. Aircraft Compatibility.

(1) Aircraft Types. The purchaser will specify the aircraft required to be served by the passenger lifting device.

(2) Design Considerations. If an aircraft to be served has a stairway that cannot be retracted while the door is open, the device must be designed to operate with the stairway deployed. All aircraft models specified by the purchaser to be served must be surveyed by the manufacturer for compatibility. The following aircraft size/configuration factors will have a significant effect on the design of the device:

- Aircraft door width.
- Airstairs / airdoor.
- Airstair handrails.
- Vertical movements of the aircraft (doorsill) during emplaning/deplaning.

6.4. DESIGN / DEVELOPMENT PHASE.

a. General.

(1) Overall Dimensions. The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 4.1.a.

(2) Overall Weight. The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 4.1.b.

b. Safety.

(1) Passenger Safety features must be designed into the boarding device with the knowledge that the passenger, for example, may not have tactile sensations to provide feedback when pressure points

exist, may not have trunk control to maintain good posture when being moved in the device, and may experience muscle spasms that will cause erratic motion at any time.

(2) **Boarding Agent Safety** features must be designed into the boarding device with the knowledge that the agent will be responsible for the passenger transfers to and from the device as well as moving the device to and from the aircraft seat. The boarding device must be designed so that all lifting and positioning operations to be performed by the boarding agent can be done in a way that will minimize the risk of injury. The particular operations that should be considered are manual dependent transfers (two boarding agents lifting the passenger to or from the boarding device) and movement of the occupied device from the transfer area to a position for transfer to the aircraft seat (this includes, for example, turning the device and crossing the aircraft door threshold). [Source: Reference Guidelines for Aircraft Boarding Chairs (1987), Access Board]

(3) **Powered Boarding Equipment** should be designed with special consideration for safety of both the operator and the passenger. There should be no possibility of inadvertent operation, or of a person accidentally putting a part of their body in a place where operation of the device may cause injury.

(4) **Hinges and Locking Mechanisms.** The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraphs 3.1.1. and 3.2.d.

(5) **Posture.** The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.2.a.

(6) **Support.** The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.2.b.

(7) **Restraints.** The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.2.c.

(8) **Adjustability.** The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 4.1.f.

(9) **Protective Features.** The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 4.1.i.

c. Boarding Chair Features.

(1) **Seating.** The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), Section 4.2.

(2) **Backrests.** The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), Section 4.3.

(3) **Headrests.** The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), Section 4.4.

(4) **Armrests.** The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), Section 4.5.

(5) **Gripping Surfaces.** The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), Section 4.6.

(6) Restraints. The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), Section 4.7.

(7) Footrests. The boarding device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), Section 4.8.

d. Mechanical / Structural Loading. The device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 4.1.e.

6.5. CONSTRUCTION / PRODUCTION PHASE.

a. Workmanship. The device must meet the provisions of SAE ARP1247, paragraph 3.13.7, and the manufacturer must install all equipment, materials, specialties, etc., in accordance with the best engineering practice and standards for this type of work.

b. Materials. The device must meet the provisions of SAE ARP1247, paragraph 3.13.2, the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 4.1.h.

(1) Moisture and Fungus Resistance. The device must meet the provisions of SAE ARP1247, paragraph 3.13.4.

(2) Corrosion of Metal Parts. The device must meet the provisions of SAE ARP1247, paragraph 3.13.5.

c. Parts.

(1) Standard and Commercial Parts. The device must meet the provisions of SAE ARP1247, paragraph 3.13.3, and the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.3.g.

(2) Interchangeability and Replaceability. The device must meet the provisions of SAE ARP1247, paragraph 3.13.6, and the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.3.e. Removable parts must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 4.1.g.

6.6. POST-PRODUCTION PHASE.

a. Identification and Marking. The purchaser will specify the identification and marking standards. In addition, the device must be provided with a permanently affixed placard identifying the maximum weight capacity of the chair.

b. Paint. The exterior finish of the device must be primed in accordance with accepted industry standards.

6.7. DELIVERY AND ACCEPTANCE PHASE.

a. Quality Assurance. The manufacturer must test all of the equipment installed under this specification and demonstrate its proper operation to the purchaser. The manufacturer must furnish all required labor, testing, instruments and devices required for the conduct of such tests.

(1) The manufacturer must install all mechanical works to the satisfaction of the purchaser, with inspecting authorities having jurisdiction.

(2) The manufacturer must notify the purchaser in writing of any instances in the specifications that are in conflict with applicable codes. The manufacturer must perform all work in accordance with applicable laws, rules, or regulations.

(3) Deviations from the specifications required for conformance with the applicable codes and/or laws must be corrected immediately, but not until such deviations have been brought to the attention of the purchaser.

(4) For applicable codes and/or laws that govern the minimum design requirements; where this AC calls for materials, sizes, design details, etc., in excess of the code requirements, the AC takes precedence.

b. Inspection. Inspections must meet the provisions of SAE ARP1247, paragraph 4.3, and the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.3.c.

c. Testing. After the equipment has been installed and the various units have been inspected, adjusted, and placed in correct operating condition, the equipment must be field tested in accordance with the purchaser's testing procedures and requirements. The field tests must demonstrate that the equipment functions in compliance with the specifications over the entire range of operation. The manufacturer must report any unusual conditions and correct deficiencies of any of the field-installed units.

(1) **Preliminary Qualification Tests.** Preliminary qualification tests may be specified at the purchaser's option.

(2) **Formal Qualification Tests.** Formal qualification tests may be specified at the purchaser's option.

(3) **Specification Conformance Tests.** The manufacturer must perform any tests referred to in SAE ARP1247, paragraph 4.6 as specified by the purchaser. The purchaser may elect to accept documentation of previously run tests.

(4) **Reliability Test and Analysis.** A reliability test and analysis may be specified at the purchaser's option.

d. Data and Analyses. If requested by the purchaser, the provisions of SAE ARP1247, paragraph 4.4 must be met by the manufacturer.

e. Manuals and Publications. The following manuals must accompany the delivered equipment. No special format is required.

- (1) Operator's handbook.
- (2) Illustrated parts breakdown and list.
- (3) Preventive maintenance schedule.

6.8. POST-DELIVERY PHASE.

a. Training. The manufacturer must, at no additional cost, provide trained personnel at the time of delivery to adequately train airport/airline staff in the operation and maintenance of boarding chair.

(1) Training must include written operating instructions that depict the step by step operational use of the device, plus instruction in the proper use of a boarding chair, whether or not such a chair is provided with the boarding device. Written instructions must include, or be supplemented by, materials which can be used to train subsequent new operators.

(2) Training topics must include trouble shooting and problem solving, in the form of theory and hands on training, for personnel designated by the purchaser.

(3) A total of 40 hours of training for every airport/airline personnel and technician on the purchaser's PBB maintenance staff, must be provided by the manufacturer.

(4) Training time per day must not exceed 8-hour shifts, unless otherwise specified by the purchaser.

(5) Upon the completion of training, the manufacturer must issue each participant a certificate of competency.

b. Maintenance / Reliability. The equipment and its accessories must be designed and constructed with reliability of operation as a primary consideration. The minimum reliability design requirement is that the equipment be designed to operate between periodic preventive maintenance activities of 4 months, and for lifts, 100 lift cycles, whichever occurs first. The above interval does not apply to components in those cases where the component manufacturer recommends more frequent maintenance intervals. The device must incorporate a cycle counter or hour meter. The type of meter installed must be consistent with the maintenance intervals recommended by the manufacturer.

(1) **Preventive.** The device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.3.a. The manufacturer must also develop and provide to the purchaser written documentation on recommended preventive maintenance actions.

(2) **Cleaning.** The device must meet the provisions of the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.3.b. The manufacturer must also develop and provide to the purchaser written documentation on recommended cleaning procedures, including solvent types and tools.

(3) **Inspection.** The manufacturer must develop and provide to the purchaser written documentation on regularly scheduled maintenance inspection procedures. A focus on sensitive equipment and schedule timelines must be included in the documentation.

(4) **Spare / Replacement of Parts.** The manufacturer must develop and provide to the purchaser a parts list, including associated replacement/repair costs.

(5) **Tools and Test Equipment.** The device must meet the provisions of SAE ARP1247, paragraph 3.12.4, and the U.S. Access Board Guidelines for Aircraft Boarding Chairs (1987), paragraph 3.3.f.

6.9. PURCHASING SPECIFICATION CLARIFICATIONS.

A summary of the items that may require further clarification in the preparation of a purchasing specification for aircraft boarding chairs are listed in Table 5.

Table 5. Aircraft Boarding Chair Purchasing Specification Clarifications

Paragraph	Item	Comments
6.3.b	Aircraft compatibility.	
6.6.a	Identification / Marking / Paint scheme.	
6.7.c(1)	Preliminary qualification tests.	
6.7.c(2)	Formal qualification tests.	
6.7.c(3)	Specification conformance tests.	
6.7.c(4)	Reliability test and analysis.	
6.7.d	Engineering data and analyses	
6.8.a(2)	Designated Personnel for Training	
Within the SAE ARP1247C Specification (not specifically addressed in this chapter):		
3.9.19.2	Types of approved non-slip materials.	
3.13.1.2.11	Approval of method of running concealed wiring.	
3.13.1.3.5.7	Approval for coated hydraulic tanks.	
3.13.5.2	Vehicle undercoating.	
4.3	Inspection.	

This page intentionally left blank.

APPENDIX A. ABBREVIATIONS AND ACRONYMS

ABA	Architectural Barriers Act
AC	Advisory Circular
ACAA	Air Carrier Access Act
ADA	Americans with Disabilities Act
ADAAG	Americans with Disabilities Act Accessibility Guidelines
AIR	Aerospace Information Report
AISC	American Institute of Steel Construction
Amp	ampere
ANSI	American National Standards Institute
ARP	Aerospace Recommended Practice
ASTM	American Society for Testing and Materials
ATA	Air Transport Association
CAN/CGSB	Canadian General Standards Board
CFR	Code of Federal Regulations
DoD	Department of Defense
DOT	Department of Transportation
FAA	Federal Aviation Administration
FMVSS	Federal Motor Vehicle Safety Standard
FR	Federal Register
GFI	Ground Fault Interrupter
HVAC	Heating, Ventilation, and Air Conditioning
Hz	hertz
IN/S	Inches per Second
ISO	International Organization for Standardization
Kg	kilogram

Appendix A

KM/H	Kilometers per hour
kW	kilowatt
Lbf	pounds of force
Lb	pound
M	meter
M/S	Meters per second
MHz	megahertz
mm	millimeter
MPH	Miles per hour
N	newtons
NEC	National Electrical Code
NEMA	National Electrical Manufacturers Association
NFPA	National Fire Prevention Association
OSHA	Occupational Safety and Health Administration
PCA	preconditioned air
PBB	passenger boarding bridge
Psf	Pounds per Square Foot
RPM	Revolutions per minute
SAE	Society of Automotive Engineers
SSPC	Society for Protective Coatings
UBC	Uniform Building Code
UFAS	Uniform Federal Accessibility Standard
UL	Underwriters Laboratories
µm	micrometer

APPENDIX B. GLOSSARY

Aircraft Boarding Chair – Narrow, wheelchair-like devices used to transport disabled passengers between the airport terminal and the aircraft seat.

Boarding bridge – an enclosed, movable connector which extends from an airport terminal gate to an airplane, thereby enabling passengers to board and disembark without having to go outside.

Dead Loads – Includes the weight of the structure and all permanently attached equipment and accessories.

Deadman – Type of switch that stops or slows motion when released by the operator.

Deplane – to disembark from an aircraft.

Disability – see “person with a disability”.

Enplane – to board an aircraft.

Lift (aircraft) – a device used to elevate a passenger with a disability to the aircraft doorsill eliminating the need to use stairs.

Live Loads – Includes loads due to intended use and occupancy of an area, moveable equipment and partitions (e.g., loads associated with movement of the boarding device), and vehicle loads (e.g., motorized wheel chairs, small baggage tugs).

Manual wheelchair – Manual wheelchairs are those that require human power to move them. There are three types of manual wheelchair: self-propelled, attendant-propelled, and wheelbase. Many manual wheelchairs can be folded for storage or placement into a vehicle, although modern wheelchairs are just as likely to be rigid framed.

Person with a disability – any individual who has a physical or mental impairment that, on a permanent or temporary basis, substantially limits one or more major life activities, has a record of such an impairment, or is regarded as having such an impairment. As used in this definition:

a. The phrase physical or mental impairment means:

(1) Any physiological disorder or condition, cosmetic disfigurement, or anatomical loss affecting one or more of the following body systems: neurological, musculoskeletal, special sense organs, respiratory including speech organs, cardio-vascular, reproductive, digestive, genito-urinary, hemic and lymphatic, skin, and endocrine; or

(2) Any mental or psychological disorder, such as mental retardation, organic brain syndrome, emotional or mental illness, and specific learning disabilities.

b. The term physical or mental impairment includes, but is not limited to, such diseases and conditions as orthopedic, visual, speech, and hearing impairments; cerebral palsy, epilepsy, muscular dystrophy, multiple sclerosis, cancer, heart disease, diabetes, mental retardation, emotional illness, drug addiction, and alcoholism.

c. Major life activities means functions such as caring for one's self, performing manual tasks, walking, seeing, hearing, speaking, breathing, learning, and working.

d. Has a record of such impairment means has a history of, or has been classified, or misclassified, as having a mental or physical impairment that substantially limits one or more major life activities.

e. Is regarded as having an impairment means:

(1) Has a physical or mental impairment that does not substantially limit major life activities but that is treated by an air carrier as constituting such a limitation;

(2) Has a physical or mental impairment that substantially limits a major life activity only as a result of the attitudes of others toward such an impairment; or

(3) Has none of the impairments set forth in this definition but is treated by an air carrier as having such an impairment.

Qualified individual with a disability – an individual with a disability who purchases or possesses a valid ticket for air transportation on an air carrier and presents himself or herself at the airport for the purpose of traveling on the flight for which the ticket has been purchased or obtained and meets reasonable and nondiscriminatory contract of carriage requirements applicable to all passengers.

Ramp (aircraft) – a ramp used to board a passenger with a disability into the cabin entrance eliminating the need to use stairs. According to AC 150/5220-21B, the maximum angle for the ramp must not exceed 19 degrees and be designed for a live load of 50 psf.

Self-propelled – Motorized devices that do not transport the operator or passenger are not considered self propelled.

Sports wheelchair – athletes with disabilities use streamlined sport wheelchairs for adaptive sports that require speed and agility, such as basketball, rugby, tennis, softball, and racing. Each wheelchair sport tends to use specific types of wheelchairs. They are usually non-folding (in order to increase solidity), with a pronounced angle for the wheels (which provides stability during a sharp turn), and are made of composite, lightweight materials.

Transfer board – bridges the gap between two transfer points and is used primarily for seated transfers, for example between a wheelchair and an airline seat.

Total life – The years of use from time of delivery of the equipment to the user until its identity is destroyed by classifying it as salvage and/or subjecting it to cannibalization.

Wheelchair – a wheeled mobility device in which the user sits. The device is propelled either manually or via various automated systems. Wheelchairs are used by people for whom walking is difficult or impossible due to illness, injury, or disability.

APPENDIX C. APPLICABLE DOCUMENTS

1.1. General. A number of specifications, standards, and guides were used as a basis for developing this AC. Fundamental guidance for this AC was provided by the Americans with Disabilities Act Accessibility Guidelines (ADAAG), developed by the U.S. Access Board, and the Society of Automotive Engineers (SAE) Aerospace Recommended Practice (ARP) 1247, General Requirements for Aerospace Ground Support Equipment: Motorized and Non-motorized. Additional standards may be found within the individual aircraft boarding equipment chapters of this AC.

1.2. U.S. Government documents.

a. Department of Defense (DoD)

- | | | |
|-----|---------------|--|
| (1) | MIL-STD-461 | Class 3D, Requirements for the Control of Electromagnetic Interference Emissions and Susceptibility. |
| (2) | MIL-STD-1472F | Human Engineering Design Criteria for Military Systems, Equipment, and Facilities. |

b. Federal Aviation Administration (FAA)

- | | | |
|-----|----------------|---|
| (1) | AC 150/5210-5 | Painting, Marking, and Lighting of Vehicles Used on an Airport. |
| (2) | AC 150/5360-14 | Airport Accessibility. |
| (3) | HF-STD-001 | Human Factors Design Standards (HFDS) |

c. United States Architectural and Transportation Barriers Compliance Board (U.S. Access Board)

- | | | |
|-----|--|--|
| (1) | <u>Guidelines for Aircraft Boarding Chairs.</u> | |
| (2) | <u>ADA Accessibility Guidelines for Transportation Vehicles.</u> | |
| (3) | <u>ADA and ABA Accessibility Guidelines</u> , July 23, 2004, 36 CFR Part 1191. | |

d. National Highway Traffic Safety Administration (NHTSA)

- | | | |
|-----|-----------|---|
| (1) | FMVSS 103 | Windshield Defrosting and Defogging Systems |
|-----|-----------|---|

1.3. Non-government Documents.

a. American National Standards Institute (ANSI)

- | | | |
|-----|------------|---|
| (1) | ANSI A92.7 | Airline Ground Support Vehicle – Mounted Vertical Lift Devices. |
|-----|------------|---|

b. Society of Automotive Engineers (SAE)

- | | | |
|-----|-------------|---|
| (1) | SAE AIR1375 | Minimum Safety Requirements for Special Purpose Airline Ground Support Equipment. |
|-----|-------------|---|

- | | | |
|------|-------------|---|
| (2) | SAE AIR1558 | Interface Protective Devices – Ground Equipment to Aircraft. |
| (3) | SAE AIR4286 | Maintenance of Ground Support Equipment. |
| (4) | SAE AIR4364 | Utilization of Battery-Powered Ground Support Equipment. |
| (5) | SAE AIR4652 | Design Factors – Handicapped Passenger Boarding Devices. |
| (6) | SAE AIR5373 | Fuels in Ground Support Equipment (Other than Gasoline or Diesel). |
| (7) | SAE ARP836 | Design and Safety Criteria for Passenger Boarding Stairways. |
| (8) | SAE ARP1247 | General Requirements for Aerospace Ground Support Equipment: Motorized and Non-motorized. |
| (9) | SAE ARP1328 | Aircraft Ground Support Equipment Vehicle Stability Analysis. |
| (10) | SAE ARP1817 | Battery Industrial, Lead Acid Type, For Use in Electric Powered Ground Support Equipment. |
| (11) | SAE ARP1892 | Electrical Connectors for Use in Battery Powered Ground Support Equipment. |
| (12) | SAE ARP5140 | Design Criteria for Lifts Used to Board Passengers with Mobility Impairments onto Aircraft with Doorsill Heights of 144 inches or Less. |
| (13) | SAE ARP5141 | Chassis Mounted Lifts Used to Board Airline Passengers With Mobility Impairments. |
| (14) | SAE J1503 | Performance Test for Air-Conditioned, Heated, and Ventilated Off-Road Self-Propelled Work Machines. |

c. International Organization for Standardization (ISO)

- | | | |
|-----|---------------|--|
| (1) | ISO 6966 | Aircraft – Basic Requirements for Aircraft Loading Equipment. |
| (2) | ISO 7000 | Graphical Symbols for Use on Equipment. |
| (3) | ISO 7718 | Aircraft – Main-deck passenger doors – Interface Requirements for Connection with Passenger-Boarding Bridge or Transfer Vehicle. |
| (4) | ISO 11995 | Aircraft-Stability Requirements for Loading and Servicing Equipment. |
| (5) | ISO DIS 15845 | Ground Equipment – Boarding Equipment for Disabled Passengers – Functional Requirements. |

d. National Fire Protection Association (NFPA)

- | | | |
|-----|----------|---|
| (1) | NFPA 70 | National Electric Code (NEC) |
| (2) | NFPA 415 | Standard on Airport Terminal Buildings, Fueling Ramp Drainage, and Loading Walkways |
- e. Air Transport Association (ATA)
- | | | |
|-----|----------|---------------------------------|
| (1) | Spec 101 | Ground Equipment Technical Data |
|-----|----------|---------------------------------|

1.4. Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

1.5. Document Availability. Copies of the referenced documents may be obtained by contacting the following:

- a. ANSI – American National Standards Institute, 11 West 42nd Street, New York, NY 10036.
- b. DOD – Military specifications, standards, and handbooks are available from: Standardization Documents Order desk, Bldg 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.
- c. FAA – See paragraph 7 of this AC’s cover letter.
- d. U.S. Access Board – Architectural and Transportation Barriers Compliance Board, 1331 F Street, N.W., Suite 100, Washington, D.C. 20004-1111. www.access-board.gov
- e. SAE – Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096-0001
- f. ISO – International Organization for Standardization, 1, ch. de la Voie-Creuse CP 56, CH-1211 Geneva 20, Switzerland. www.iso.org
- g. NFPA – National Fire Protection Association, 1 Batterymarch Park, Quincy, Massachusetts, 02169-7471. www.nfpa.org
- h. ATA – Air Transport Association (ATA) Publications Department, 1301 Pennsylvania Ave., NW, Suite 1100, Washington, DC 20004. pubs@airlines.org
- i. NHTSA – NHTSA HQ, 1200 New Jersey Avenue, SE, West Building Washington, DC 20590. www.nhtsa.dot.gov

This page intentionally left blank.

APPENDIX D. APPLICABLE LAWS AND REGULATIONS

2.1. General. There are a number of overlapping federal laws and regulations that pertain to aircraft boarding accessibility. A summary of all relevant statutes are below.

a. Laws

Air Carrier Access Act (ACAA) of 1986 (49 U.S.C. § 41705) prohibits discrimination in air transportation by domestic and foreign air carriers against qualified individuals with physical or mental impairments regardless of federal funding. It applies only to air carriers that provide regularly scheduled services for hire to the public. Requirements address a wide range of issues including boarding assistance and certain accessibility features in newly built aircraft and new or altered airport facilities.

Americans with Disabilities Act (ADA) of 1990 (42 U.S.C. §§ 12101 et seq.). The ADA prohibits discrimination on the basis of disability in employment (Title I), State and local government (Title II), public accommodations and commercial facilities (Title III), transportation (Titles II and III), and telecommunications (Title IV). To be protected by the ADA, one must have a disability or have a relationship or association with an individual with a disability. An individual with a disability is defined by the ADA as a person who has a physical or mental impairment that substantially limits one or more major life activities, a person who has a history or record of such an impairment, or a person who is perceived by others as having such an impairment. Air Carriers are not governed by the ADA as they were previously addressed in the ACAA.

ADA Title II prohibits discrimination on the basis of disability by public entities including state and local government and any department or other instrumentality of a state or local government, including airport facilities. Thus, airport facilities operated by state or local government entities are subject to the new construction and alteration requirements. Subtitle B grants jurisdiction to the Department of Transportation and the Federal Aviation Administration over public airports regardless of federal funding. Thus, an airport owned by a public entity is required to comply with the provisions of 49 CFR Parts 37 and 38. For example, Section 37.33 requires designated or fixed route transportation systems in airports (i.e. shuttle service between parking lots and terminals) to be accessible to people with disabilities. ADA standards maintained by the Department of Transportation (DOT) cover public transportation facilities, including bus stops, rail stations, and airports. On October 30, 2006, DOT adopted new ADA standards based on the Board's updated guidelines. The standards took effect November 29, 2006 for new construction and alterations.

ADA Title III defines airports as commercial facilities but not as “places of public accommodation” so privately operated airports are subject to the new construction and alteration requirements found in Part D of 28 CFR Part 36. Concessionaires at the airport such as restaurants, bookstores, and gift shops, are places of public accommodation and must comply with ADA Title III requirements.

Architectural Barriers Act (ABA) of 1968 (42 U.S.C. §§ 4151 et seq.) requires that buildings and facilities that are designed, constructed, or altered with federal funds, or leased by a federal agency, comply with federal standards for physical accessibility. ABA requirements are limited to architectural standards in new and altered buildings and in newly leased facilities. They do not address the activities conducted in those buildings and facilities. Several agencies are responsible

for maintaining standards under the ABA: the Department of Defense, the Department of Housing and Urban Development, the General Services Administration, and the U.S. Postal Service. The new ABA standards will replace the **Uniform Federal Accessibility Standards (UFAS)**, which these agencies jointly adopted in 1984. Generally, each agency's standards apply to facilities it controls or funds, except the General Service Administration's which also apply to the rest of the Federal sector. GSA adopted new standards based on the Board's updated ABA guidelines on November 8, 2005. The standards apply to construction and alterations that commence after May 8, 2006, and to leases entered into after August 7, 2006.

Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794) prohibits discrimination against any qualified person with a disability in any program or activity receiving federal financial assistance or under any federally conducted program or activity.

b. Regulations

ACAA. The Department of Transportation's final rule on the ACAA, 14 CFR Part 382, Nondiscrimination on the Basis of Disability in Air Travel, Subpart G—Boarding, Deplaning, and Connecting Assistance, were published on May 13, 2008 (73 FR 27614). The following sections address the need for devices to board people with mobility impairments:

- Section 382.91 – What assistance must carriers provide to passengers with a disability in moving within the terminal?
- Section 382.93 – Must carriers offer preboarding to passengers with a disability?
- Section 382.95 – What are carriers' general obligations with respect to boarding and deplaning assistance?
- Section 382.97 – To which aircraft does the requirement to provide boarding and deplaning assistance through the use of lifts apply?
- Section 382.99 – What agreements must carriers have with the airports they serve?
- Section 382.101 – What other boarding and deplaning assistance must carriers provide?
- Section 382.103 – May a carrier leave a passenger unattended in a wheelchair or other device?
- Section 382.105 – What is the responsibility of carriers at foreign airports at which airport operators have responsibility for enplaning, deplaning, and connecting assistance?

ADA Title II (28 CFR Part 35) and **Title III** (28 CFR Part 36) regulations address the airport facility and do not pertain to the functions of the air carrier. The ADA covers access to the airport (parking, entrances, telephones, counter heights, width of corridors, etc). It does not require the airport or airline to provide mobility aids, any more than a restaurant or bank has to provide mobility aids. Portions of the airport that are governed by the ADA Title III regulations, such as restaurants and shops are governed by the Americans with Disabilities Act Accessibility Guidelines (ADAAG) published in 1994. Facilities governed by the Department of Transportation apply the Revised ADA-ABA Accessibility Guidelines published in July 2004.

ABA regulations (41 CFR 102-76) pertain to the accessibility of buildings or facilities rather than devices used to board aircraft. Initially, the 1961 ANSI A117.1 standard was referenced for the technical accessibility requirements. Later, the Access Board developed the guidelines that became the 1984 Uniform Federal Accessibility Standard (UFAS). UFAS is being replaced by the Executive Departments as they adopt the Architectural Barriers Act Accessibility Guidelines (ABAAG) published in the Federal Register in July 2004 (FR). The US Department of Transportation has adopted the ABAAG as they pertain to transportation facilities as of October 30, 2006 (FR). The Architectural Barriers Act requires access to facilities designed, built, or altered with Federal money or leased by Federal agencies. Similar to the process under the ADA, the Board sets guidelines which underpin the standards that must be followed.

Section 504 regulations pertaining to transportation facilities were published on September 6, 1991 (49 CFR Part 27). Section 27.72 Boarding Assistance for Aircraft addresses the need for devices to board people with mobility impairments. Airports in cooperation with air carriers in airports with 10,000 or more annual enplanements shall provide boarding to individuals with disabilities using mechanical lifts, ramps, or other devices that do not require employees to lift or carry passengers up stairs on aircraft with 19 or more seats. This provision does not apply to aircraft with fewer than 19 seats, float planes, and access to certain 19 seat aircraft models including the Fairchild Metro, the Jetstream 31, the Beach 1900 C and D models, and any other 19 seat aircraft determined by DOT for boarding by lift, ramp or other suitable device on the basis of significant risk of serious damage to the aircraft.

49 CFR Part 38 regulations provide minimum guidelines and requirements for accessibility standards in part 37 of this title for transportation vehicles required to be accessible by the Americans With Disabilities Act (ADA) of 1990 (42 U.S.C. 1201 et seq.).

This page intentionally left blank.

APPENDIX E. ANNOTATED BIBLIOGRAPHY

Advisory Circulars

AC 150/5210-5C, *Painting, Marking, and Lighting of Vehicles Used on an Airport*, dated August 31, 2007. FAA recommends these guidelines and standards for vehicles operating in the airport. Vehicle is defined as all conveyances, except aircraft, used on the ground to transport persons, cargo, equipment or those required to perform maintenance, construction, service, and security duties. Use of these guidelines is mandatory for vehicles funded under Federal grant assistance programs.

AC 150/5220-21B, *Guide Specifications for Devices Used to Board Airline Passengers with Mobility Impairments*, dated March 17, 2000, contains performance standards, specifications, and recommendations for the design, construction, and testing of portable devices used in the boarding of airline passengers with mobility impairments, other than passenger boarding bridges. Compliance with this Advisory circular satisfies the boarding device requirements found in DOT's Section 504 regulations, 49 CFR 27.72(b), and ACAA regulations, 14 CFR 382.39(a)(2). The specifications in this Advisory Circular are mandatory for airports using Federal grant-in-aid assistance in the purchase of such devices.

AC 150/5360-14, *Access to Airports by Individuals with Disabilities*, dated June 30, 1999. This advisory circular outlines the laws and regulations regarding individuals with disabilities as they apply to airports operated by public entities and those receiving federal financial assistance.

Guidance

CAN/CGSB-189.1-95, *Lifting Systems for Aircraft Boarding of Passengers with Mobility Impairments*. The standard specifies the requirements for design, construction, performance and testing of self-propelled, manually transported, or towed lifting equipment used to assist in the boarding of aircraft passengers with mobility impairments.

SAE ARP1247, *General Requirements for Aerospace Ground Support Equipment, Motorized and Non-Motorized*. This document is a recommended practice outlining the general design requirements for ground support equipment used in civil air transportation industry. It is intended to assist the airlines in standardizing the requirements for various ground equipment. Topics addressed include safety of person operating equipment, safety of person using equipment, safety of the equipment itself, maintenance of the equipment, repairs, and testing.

United States Architectural and Transportation Barriers Compliance Board (Access Board) Guidelines for Aircraft Boarding Chairs. This document is a technical paper intended to improve the design and use of aircraft boarding chairs as a result of safety problems and complaints regarding the use of boarding chairs. The scope of the guidelines is broad enough to apply to the various types of boarding chairs and is in no way intended to restrict design freedom. The needs of both the person with a disability using the boarding chair and the airline employees assisting the person with a disability, thus the physical characteristics of both types of users, are described in the paper. The technical design sections outline the seat size and capacity, adjustable parts, removable parts, safety belts, wheels, backrest, arms, cushioning, and footrests. Inspection of the devices and training on use of the devices is also addressed.

United States Department of Transportation's Technical Assistance Manual What Airline Employees, Airline Contractors, and Airline Travelers with Disabilities Need to Know About Access to Air Travel for Persons with Disabilities: A Guide to the Air Carrier Access Act (ACAA) and its implementing regulations, 14 CFR Part 382, provides guidance to employees/contractors of air carriers on the services,

facilities and accommodations required by the ACAA to assist passengers with disabilities. This Manual addresses assisting air travelers with disabilities plan their trip, throughout the airport, onto the aircraft, during flight, deboarding, stowage of personal equipment on the aircraft, and how to file a complaint if necessary.