


Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 01/25/2024	APWS Task ID: 4A10A925E3924171B667462389DA3237	APWS Project ID: 9594D049F0344211821AE73B0E4A7388
Procedure: RNAV (GPS) RWY 28 AMDT 3		Enroute: NO	Specialist: Swinson, Robert		Agreement Number:
Airport ID: KMLJ			Airport City: MILLEDGEVILLE		State: GA
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: PENDING DATA USED FOR KMLJ AIRPORT AND RWYS. CONTACT CASIMIR TABAKA 405-202-7857 QUALITY 26 CHECKED QUALITY 15 CHECKED					

WAAS CH 82318 W28A	APP CRS 276°	Rwy Idg TDZE Apt Elev	5424 379 385
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28
BALDWIN COUNTY RGNL (MLJ)


RNP APCH-GPS. ▼ Rwy 28 helicopter visibility reduction below ¾ SM NA. For uncompensated ▲ Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C.	MISSED APPROACH: Climb to 3000 direct IBUDY and hold.
---	---

AWOS-3 120.925	ATLANTA APP CON ★ 124.2 279.6	UNICOM 122.975 (CTAF) 0
--------------------------	---	-----------------------------------

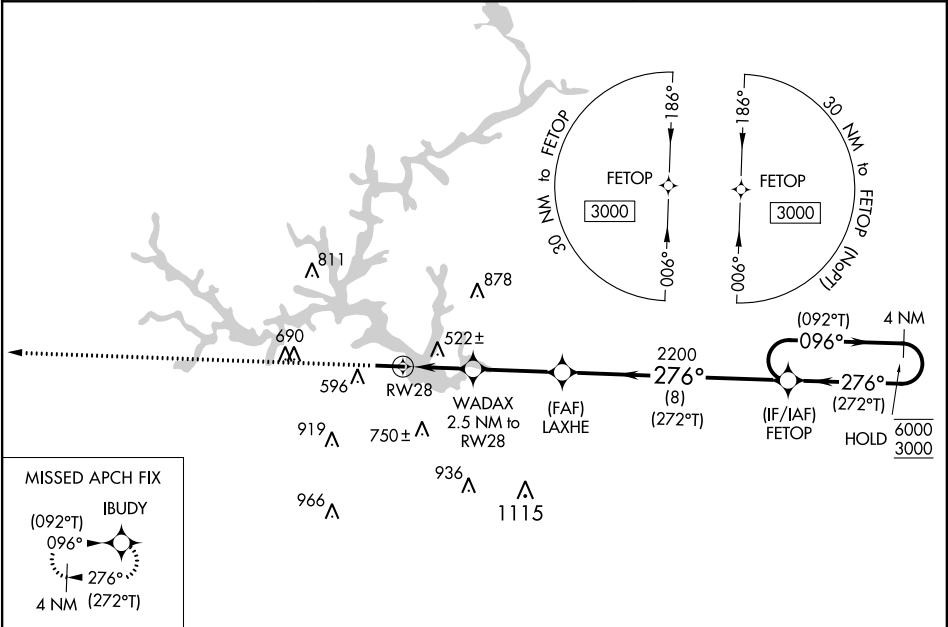

ELEV 385	TDZE 379
----------	----------

PROTOTYPE-NOT FOR NAVIGATION

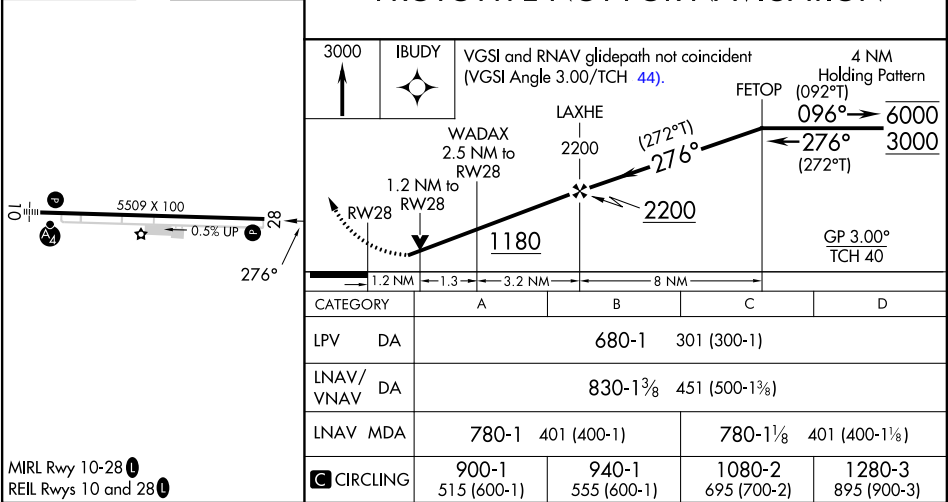

WAAS CH 82318	APP CRS 276°	Rwy Idg TDZE Apt Elev	5509 379 385
W28A			



RNAV (GPS) RWY 28

BALDWIN COUNTY RGNL (MLJ)

RNP APCH-GPS.


▼

▲

Baro-VNAV and VDP NA when using Middle Georgia Rgnl altimeter setting. Rwy 28 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Middle Georgia Rgnl altimeter setting: increase LPV DA to 754 feet and visibility ⅛ SM, LNAV/VNAV DA to 902 feet and visibility ¼ SM; increase all MDAs 100 feet and visibility LNAV Cats C/D ¼ SM and Circling Cat C ½ SM.

MISSED APPROACH:
Climb to 3000 direct
IBUDY and hold.

AWOS-3 120.925	ATLANTA APP CON ★ 124.2 279.6	UNICOM 122.975 (CTAF) 0
--------------------------	---	-----------------------------------

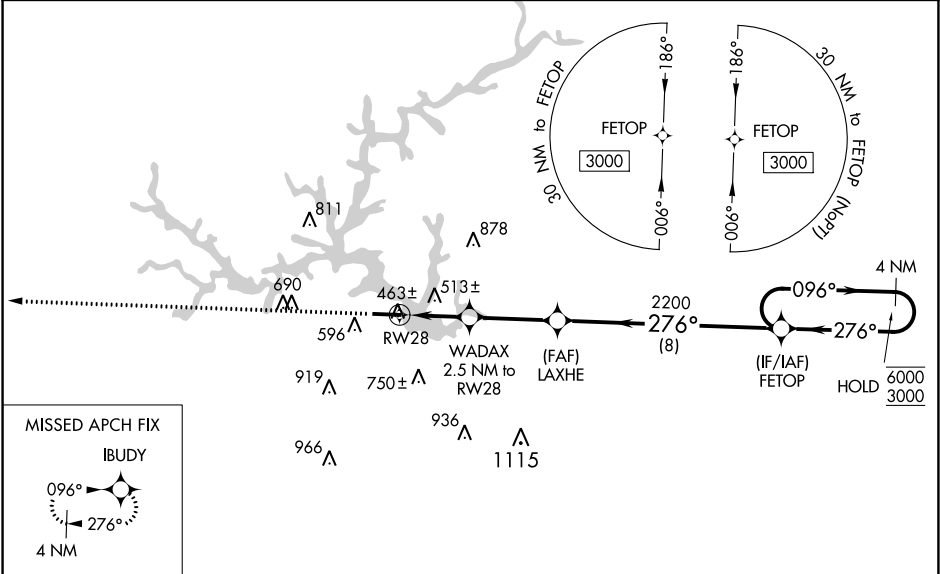

ELEV 385	TDZE 379
-----------------	-----------------

3000

IBUDY

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 41).

4 NM
Holding Pattern

WADAX
2.5 NM to
RW28

LAXHE
2200

FETOP

096°→ 6000
← 276° 3000

GP 3.00°
TCH 44

1.2 NM to
RW28

1.2 NM

1.3

3.1 NM

8 NM

276°

2200

1180

5509 X 100


0.5% UP


276°


10


28


CATEGORY	A	B	C	D
LPV DA	670-7⁄8 291 (300-7⁄8)			
LNAV/VNAV DA	818-1¼ 439 (500-1¼)			
LNAV MDA	780-1	401 (400-1)	780-1½	401 (400-1½)
CIRCLING	920-1 535 (600-1)	940-1 555 (600-1)	1100-2 715 (800-2)	1280-3 895 (900-3)

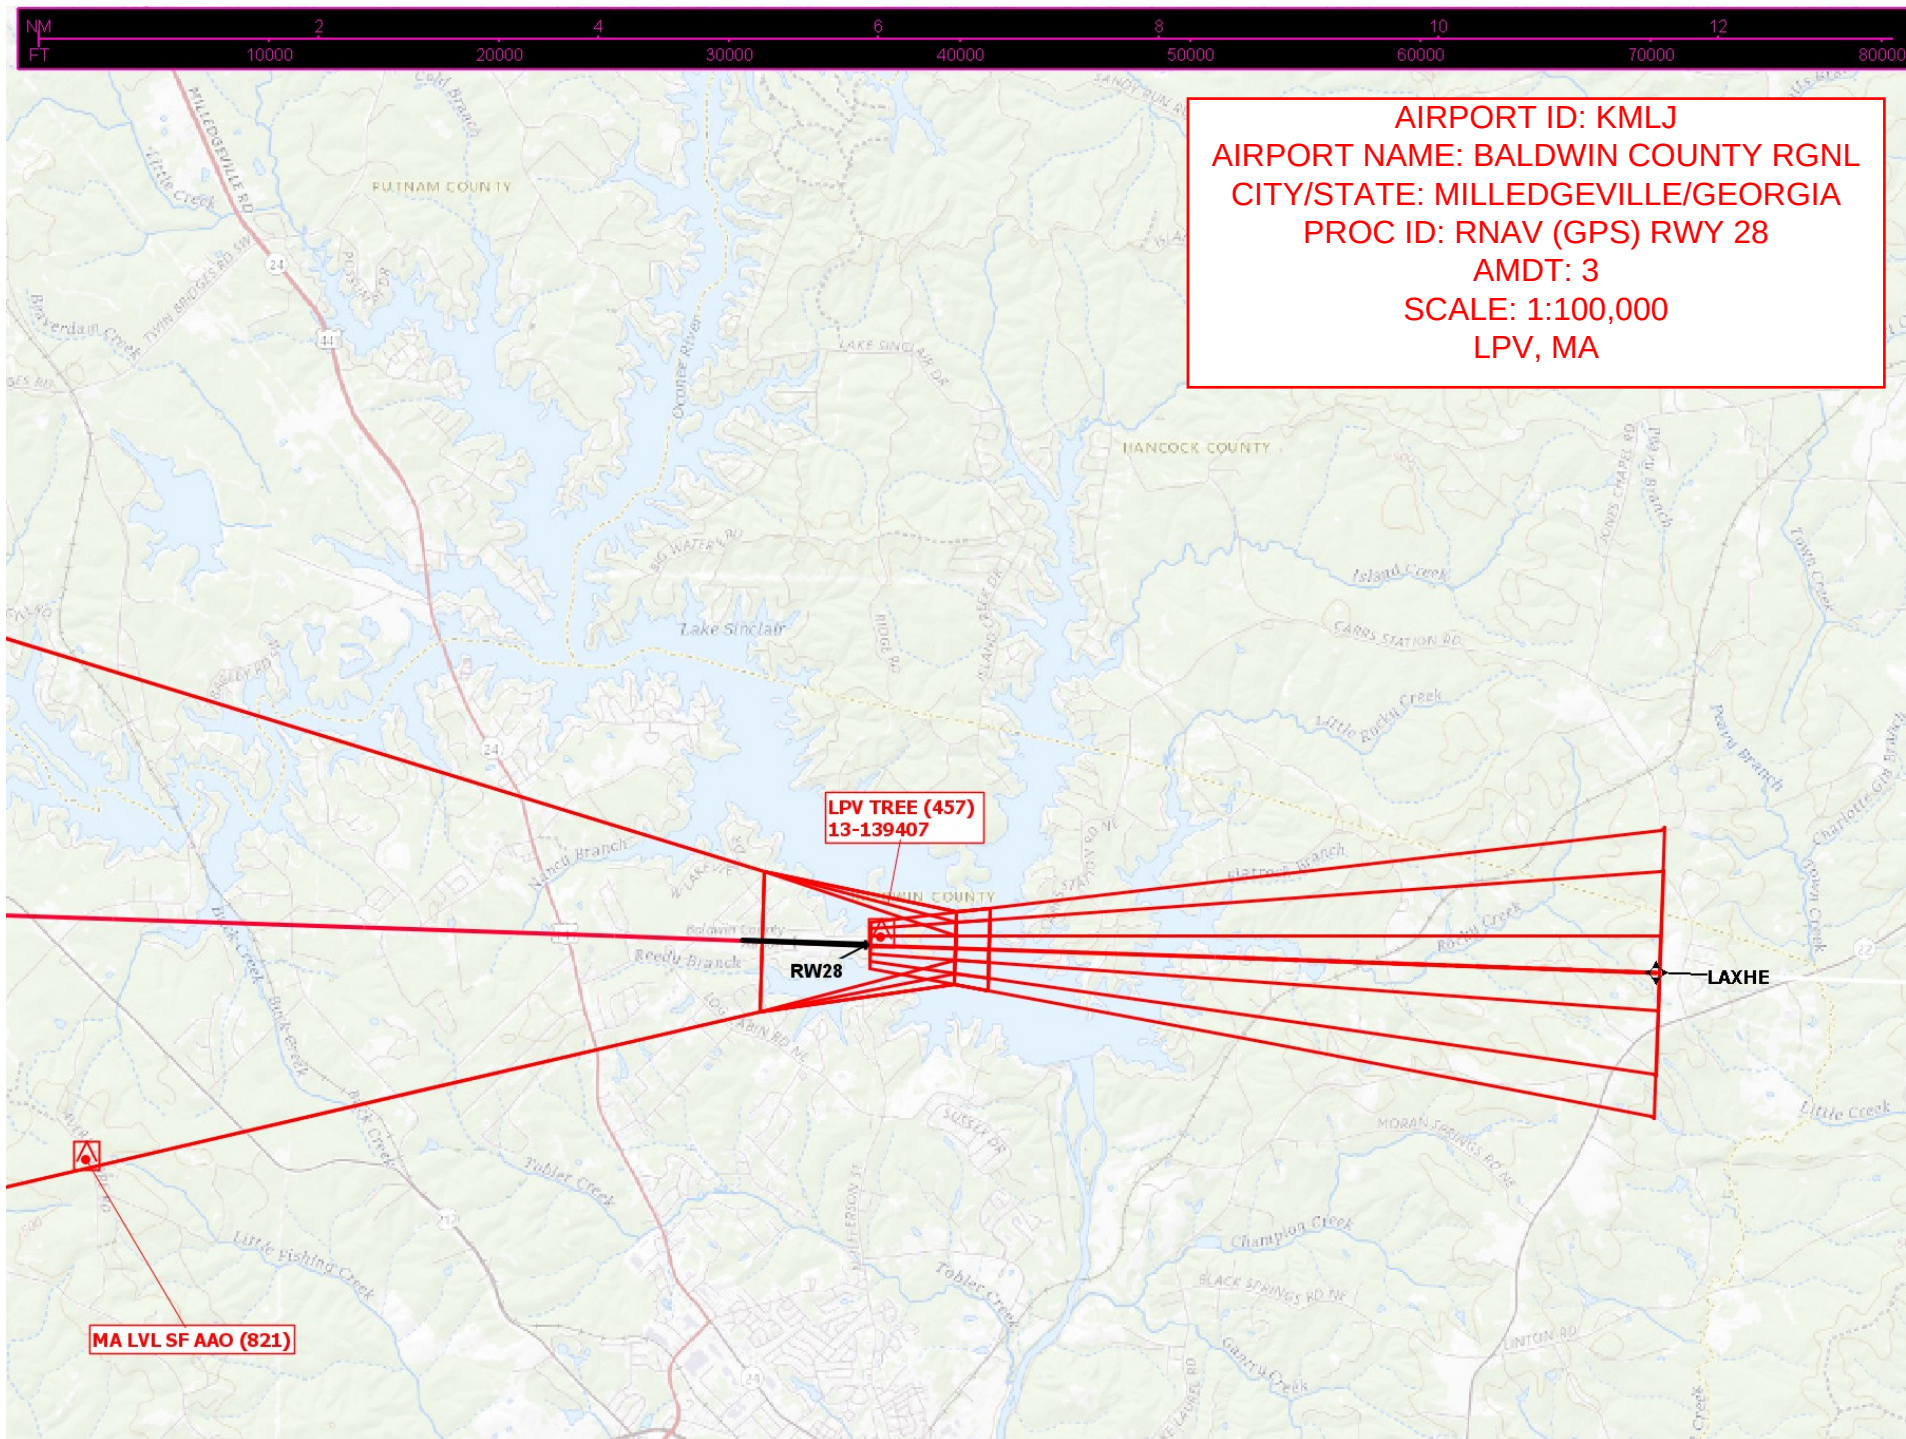

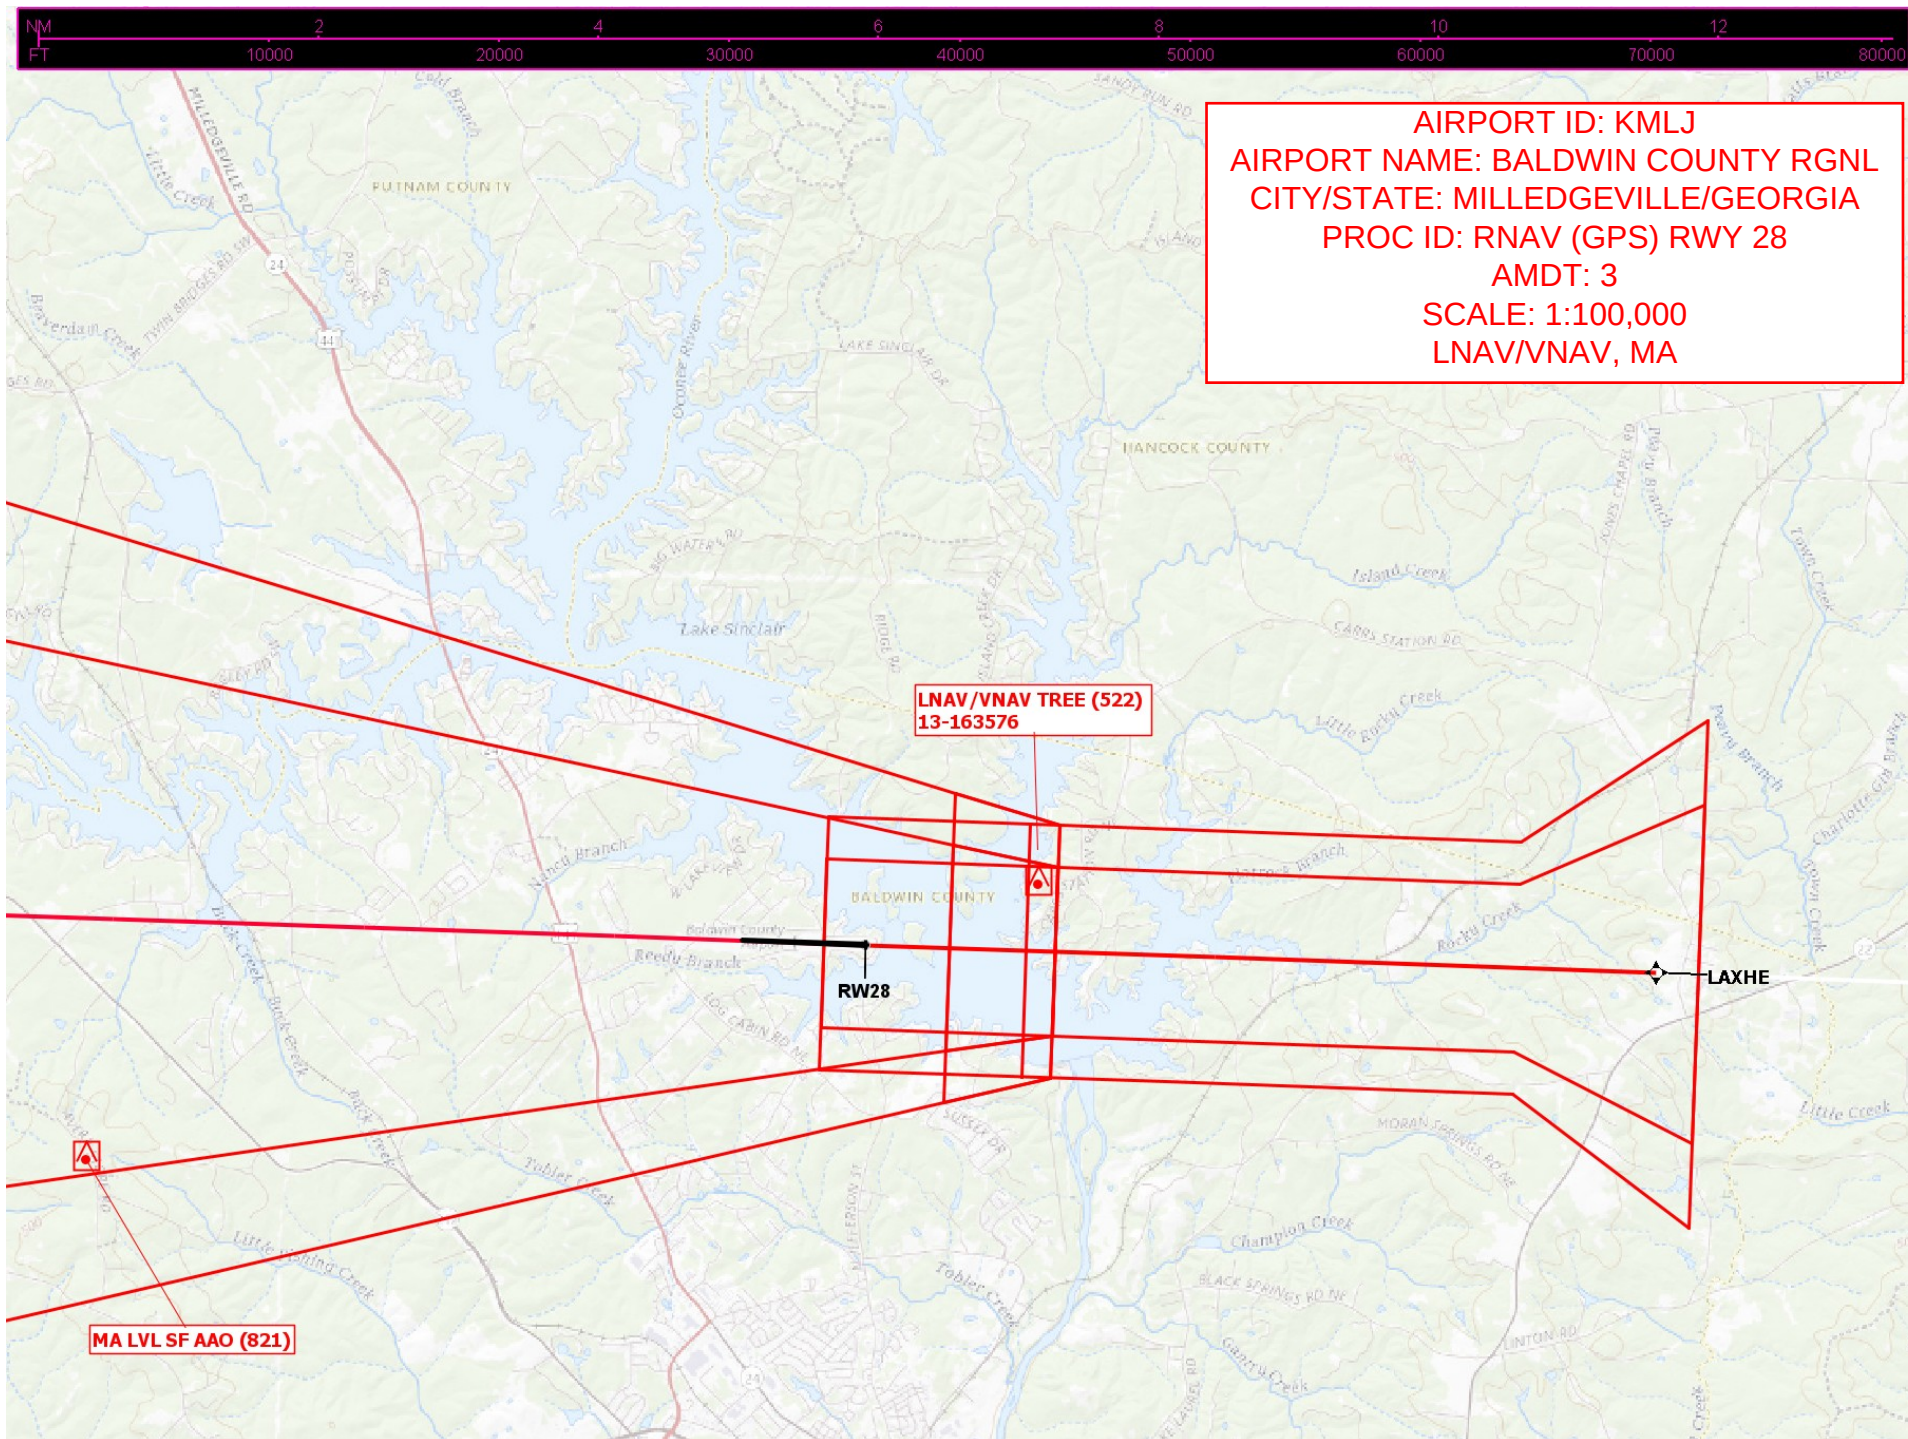

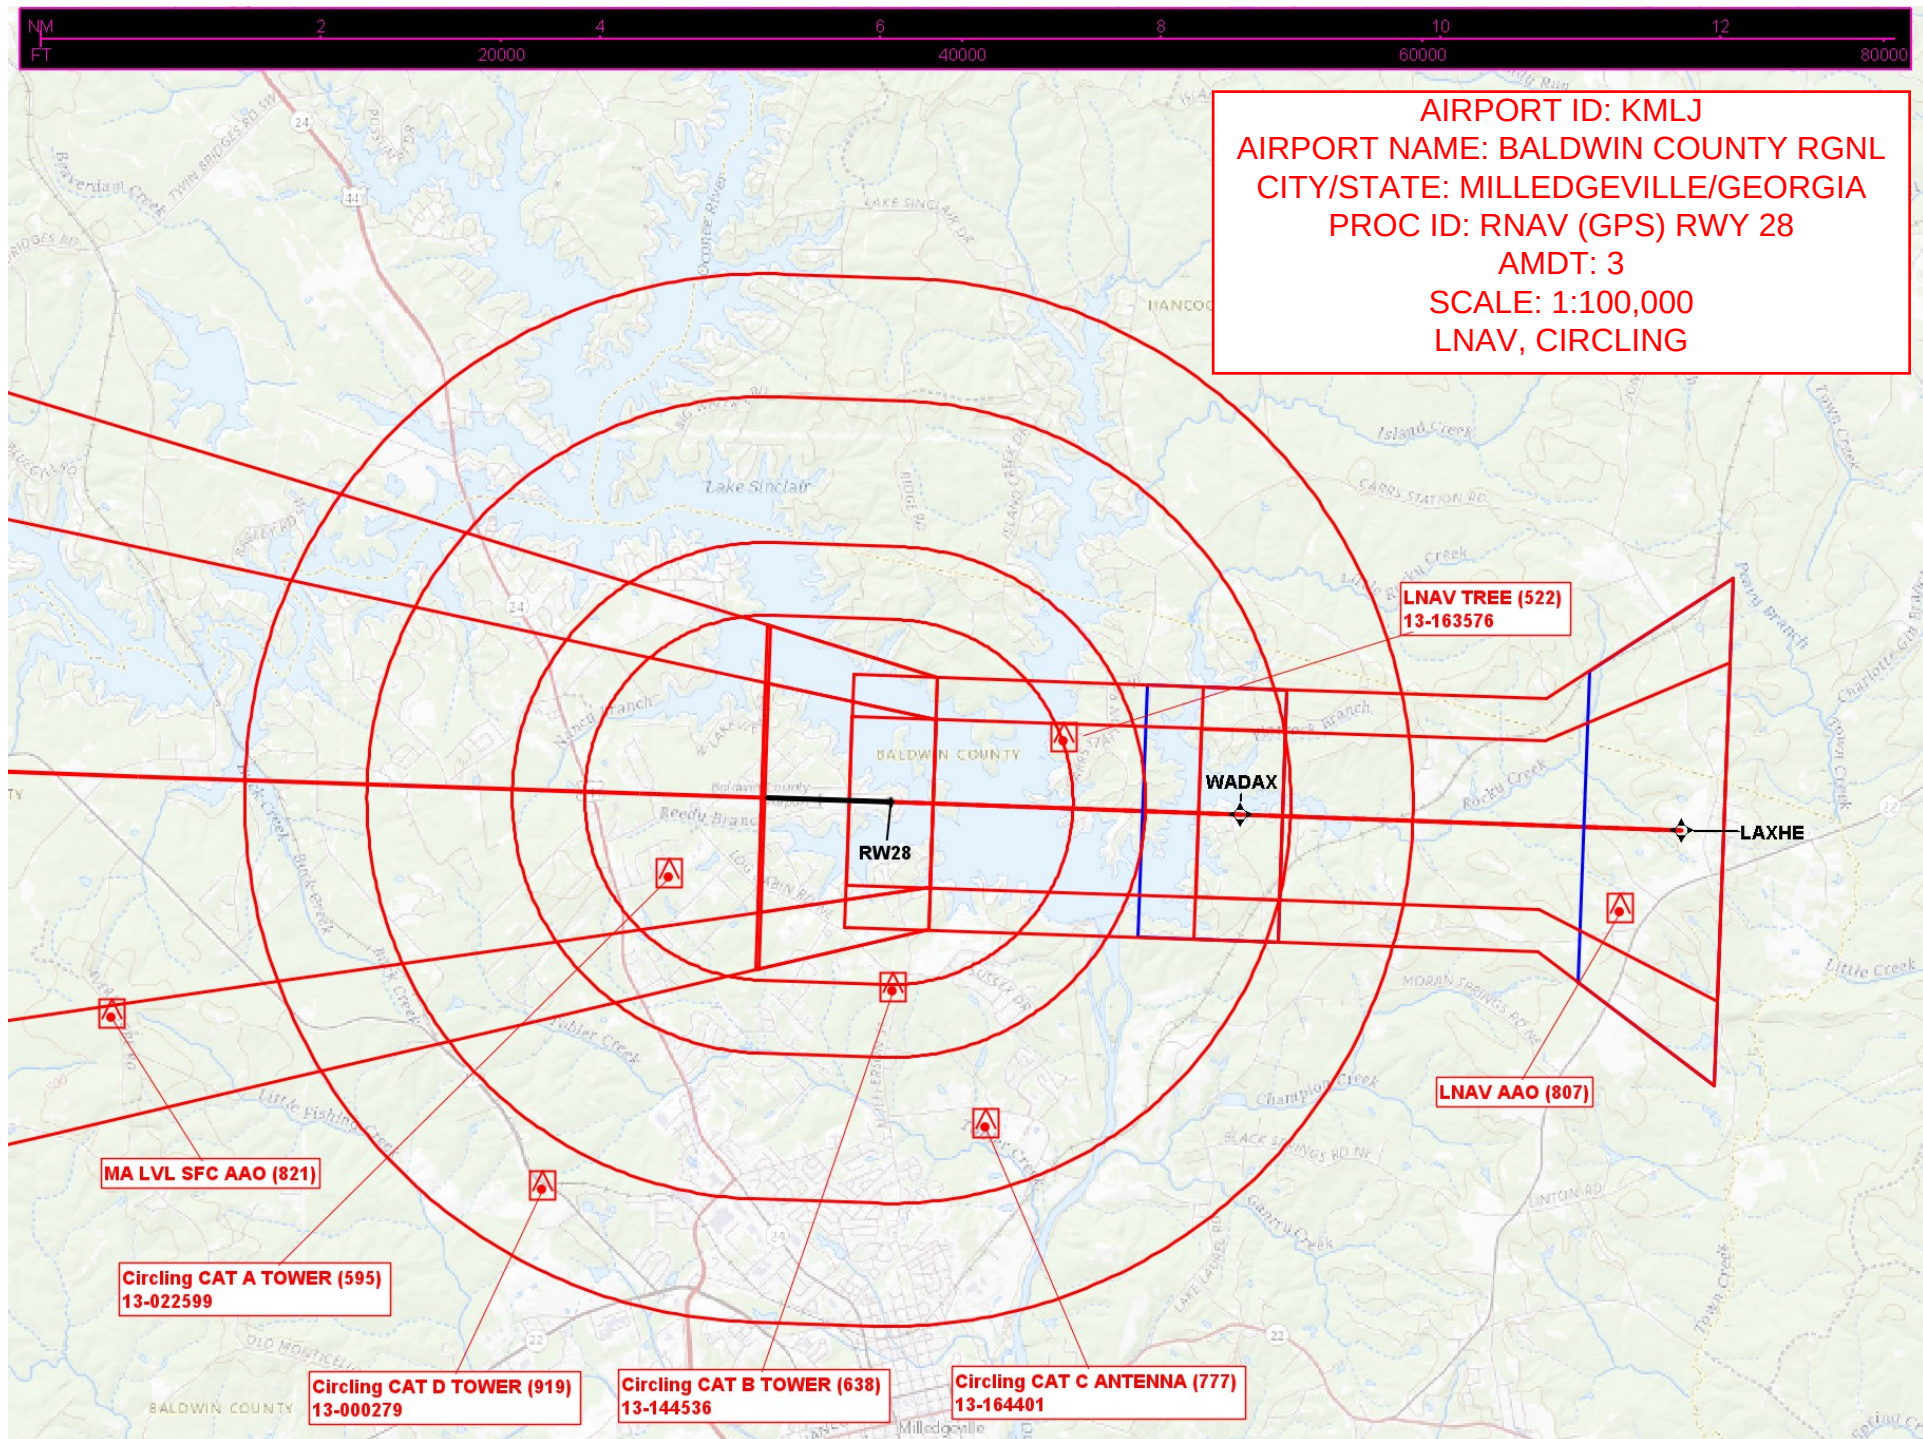

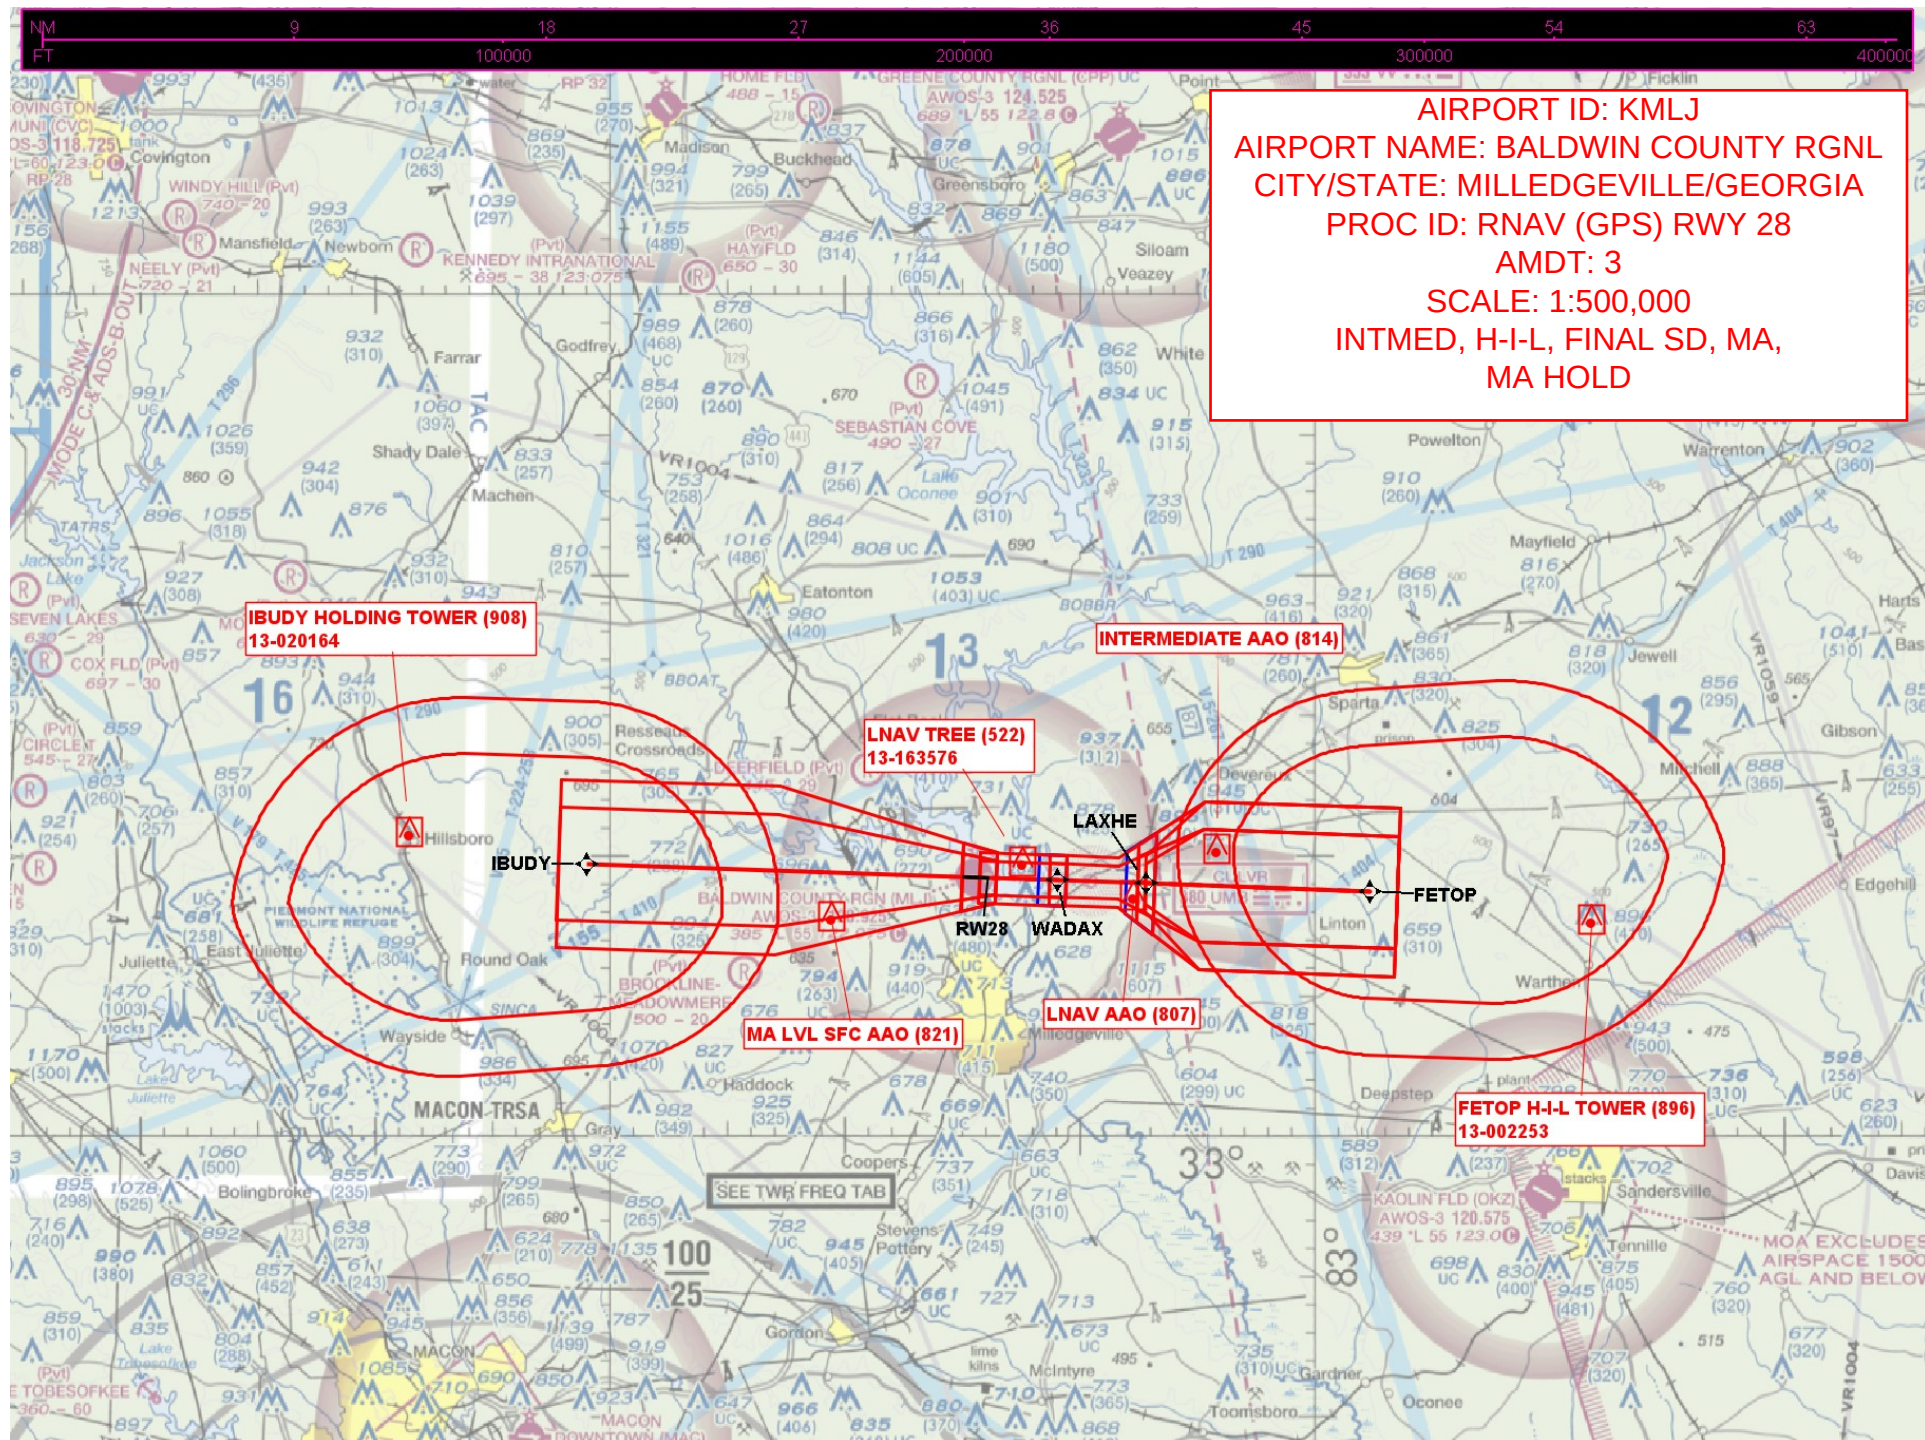

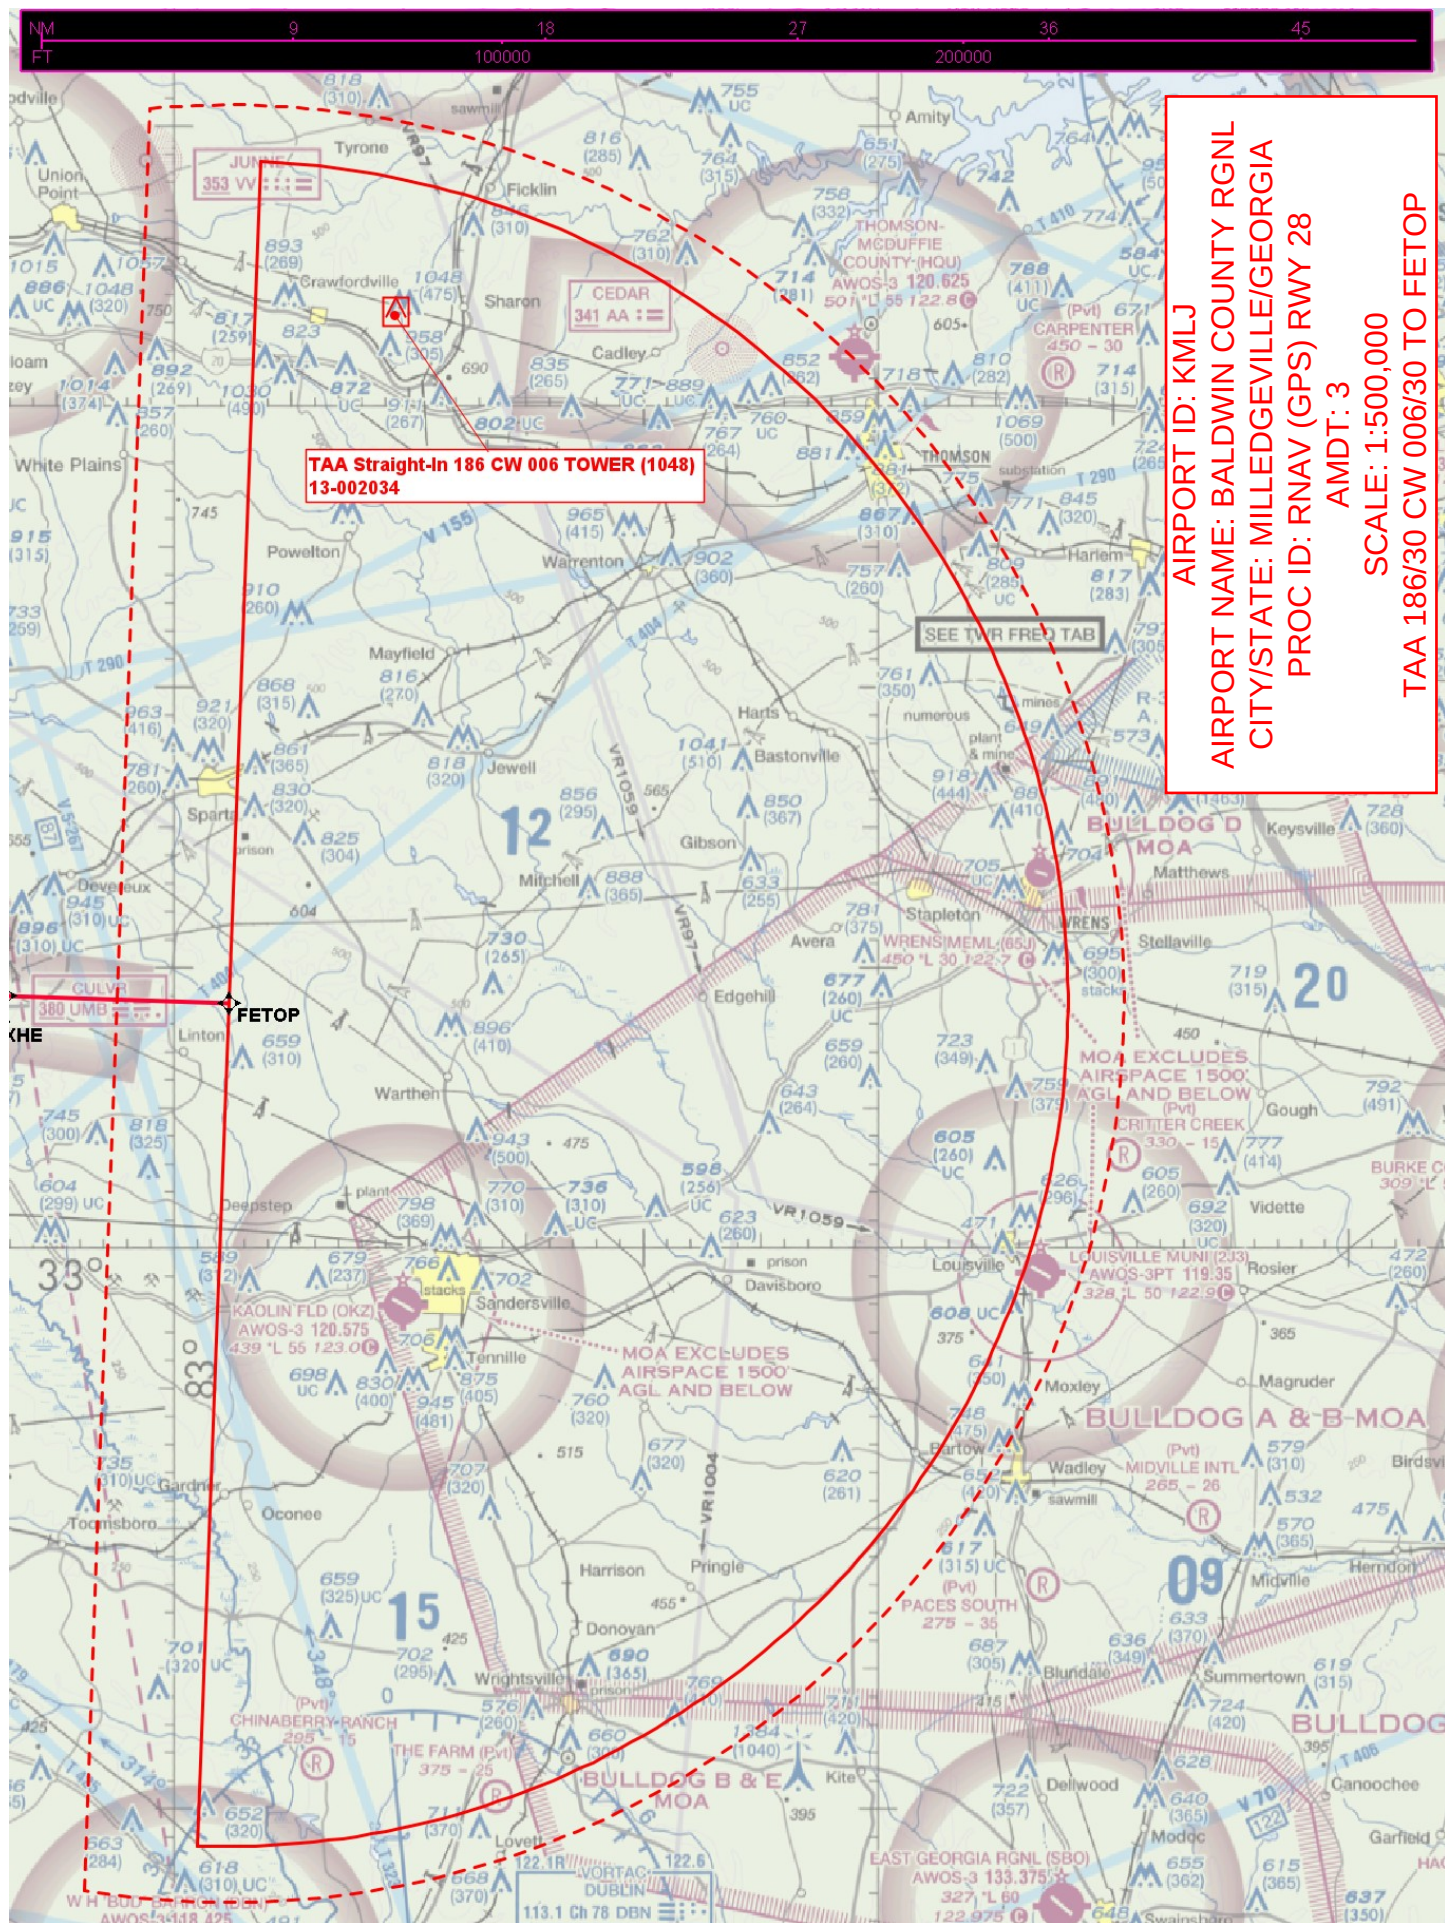

AIRPORT ID: KMLJ
AIRPORT NAME: BALDWIN COUNTY RGNL
CITY/STATE: MILLEDGEVILLE/GEORGIA
PROC ID: RNAV (GPS) RWY 28
AMDT: 3

SCALE: 1:500,000

TAA 006/30 CW 186/30 TO FETOP

