

FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
LOYD (RNAV)	ONE	PRTTY.LOYYD1	NONE		

TRANSITION ROUTES:

Transition Name	Transition Computer Codes	From FIX/NAVAID	To FIX/NAVAID	Course	Distance	MEA	MOCA	MAA	Crossing Altitudes / Fixes
ERRDA	ERRDA.LOYYD1	ERRDA	ERRDA						
			PRTTY	067.24	70.10	FL230	11900		
HYPPE	HYPPE.LOYYD1	HYPPE	HYPPE						
			SLAPE	178.63	74.36	FL230	11900		
			PRTTY	108.74	43.63	FL230	11900		
LLAXX	LLAXX.LOYYD1	LLAXX	LLAXX						
			PRTTY	350.50	31.59	FL230	12100		
PEEDY	PEEDY.LOYYD1	PEEDY	PEEDY						
			PRTTY	024.69	50.16	FL230	11900		
SLAPE	SLAPE.LOYYD1	SLAPE	SLAPE						
			PRTTY	108.74	43.63	FL230	11900		
SLIPY	SLIPY.LOYYD1	SLIPY	SLIPY						
			PEEDY	022.05	21.30	FL230	13600		
			PRTTY	024.69	50.16	FL230	11900		
TRRBO	TRRBO.LOYYD1	TRRBO	TRRBO						
			LLAXX	350.41	38.30	FL230	12100		
			PRTTY	350.50	31.59	FL230	12100		

ARRIVAL ROUTE DESCRIPTION:

FROM PRTTY ON TRACK 060.25/25.50 TO CROSS BURRD BETWEEN FL230 AND FL290, THEN ON TRACK 060.58/26.04 TO DUUMB, THEN ON TRACK 060.37/9.96 TO CROSS LOYYD AT FL200 AND AT 250 KIAS, THEN ON TRACK 081.90/24.46 TO CROSS SNMAS AT OR ABOVE 17000 AND AT 230 KIAS, THEN ON TRACK 040.69/13.83 TO CROSS BIGLP AT 15000 AND AT 220 KIAS, THEN ON TRACK 329.66/5.01 TO CROSS RUEDI AT 14000 AND AT 210 KIAS, THEN ON TRACK 300.00. EXPECT RADAR VECTORS TO FINAL APPROACH COURSE.

PBN REQUIREMENT NOTES:

RNAV 1 - DME/DME/IRU OR GPS

EQUIPMENT REQUIREMENT NOTES:

RADAR REQUIRED

PROCEDURAL DATA NOTES:

FIXES AND/OR HOLDING PATTERNS:

CHART HOLDING AT DUUMB: HOLD SW, RT, 060.00 INBOUND, 9 NM LEGS.

CHART HOLDING AT LOYYD: HOLD SW, LT, 061.00 INBOUND, 9 NM LEGS.



FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
LOYYD (RNAV)	ONE	PRTTY.LOYYD1	NONE		

CHART HOLDING AT PRTTY: HOLD SW, RT, 067.24 INBOUND, 12 NM LEGS.
CHART HOLDING AT SLIPY: HOLD SW, RT, 058.00 INBOUND, 12 NM LEGS.
CHART HOLDING AT SWMME: HOLD SE, RT, 326.00 INBOUND, 12 NM LEGS.
CHART HOLDING AT TRRBO: HOLD SE, RT, 326.00 INBOUND, 12 NM LEGS.

COMMUNICATIONS:

CHART: DENVER ARTCC, ASE TOWER

AIRPORTS SERVED:

AIRPORT ID	CITY	STATE
ASE	ASPEN	CO

LOST COMMUNICATIONS PREFERENCES:

REMARKS:

ADDITIONAL FLIGHT DATA:

DME/DME ASSESSMENT: SAT (RNP 2.0)
MAG VAR: ASE 09E/2015
CHART AT RUEDI TERMINUS: LDG ASE

FLIGHT INSPECTED BY:

JOEL P MURPHY

ORGANIZATION: DATE:

AJF 02/04/2025

Flight Inspected Signature:

Digitally signed by
ALLAN WILL

Feb 05, 2025

DEVELOPED BY:

JENIFER NORDSTROM

ZDV AIRSPACE & 05/01/2024
PROCEDURES

Developed By Signature:

Digitally signed by
ALLAN WILL

Feb 05, 2025

APPROVED BY:

ALLAN WILL

AJV-A423

Approved By Signature:

Digitally signed by
ALLAN WILL

Feb 05, 2025

CHANGES:

REASONS:





FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
LOYD (RNAV)	ONE	PRTTY.LOYD1	NONE		

Graphic Depiction 1

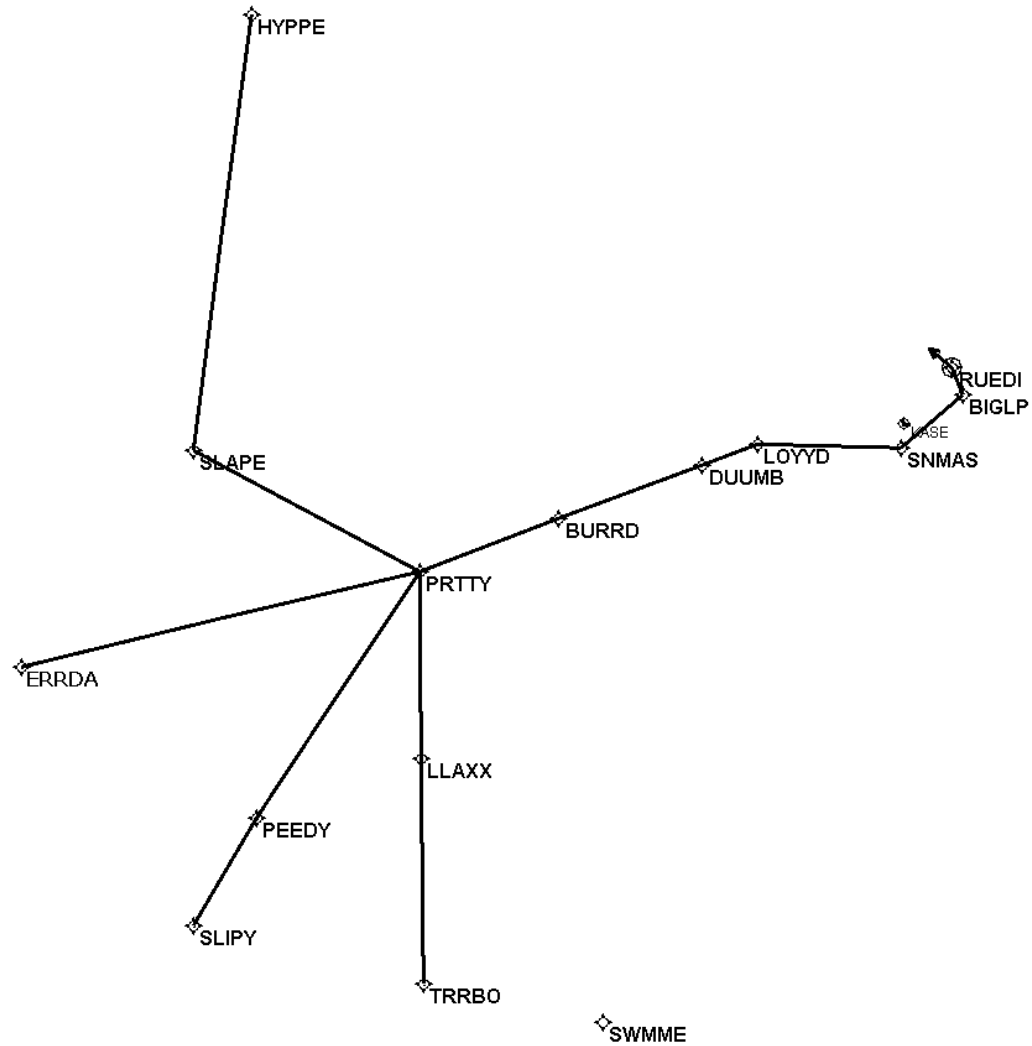

FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STAR (DATA RECORD)

Arrival Name LOYD (RNAV)		Number ONE		STAR Computer Code PRTTY.LOYYD1		Superseded Number NONE		Dated	Effective Date
<u>FIX/NAVAID</u>	<u>LAT/LONG</u>	<u>C</u>	<u>FO/FB</u>	<u>LEG TYPE</u>	<u>TC</u>	<u>DIST (NM)</u>	<u>ALTITUDE</u>	<u>SPEED</u>	<u>REMARKS</u>
En Route Transition									
ERRDA	383201.61N / 1100513.35W	Y		IF					ERRDA.LOYYD1
PRTTY	384811.03N / 1083807.40W	Y	FB	TF	076.24	70.10			
En Route Transition									
HYPPE	402227.77N / 1091449.36W	Y		IF					HYPPE.LOYYD1
SLAPE	390841.11N / 1092730.94W	Y	FB	TF	187.63	74.36			
PRTTY	384811.03N / 1083807.40W	Y	FB	TF	117.74	43.63			
En Route Transition									
LLAXX	381633.80N / 1083746.26W	Y		IF					LLAXX.LOYYD1
PRTTY	384811.03N / 1083807.40W	Y	FB	TF	359.50	31.59			
En Route Transition									
PEEDY	380629.36N / 1091342.99W	Y		IF					PEEDY.LOYYD1
PRTTY	384811.03N / 1083807.40W	Y	FB	TF	033.69	50.16			
En Route Transition									
SLAPE	390841.11N / 1092730.94W	Y		IF					SLAPE.LOYYD1
PRTTY	384811.03N / 1083807.40W	Y	FB	TF	117.74	43.63			
En Route Transition									
SLIPY	374814.09N / 1092738.08W	Y		IF					SLIPY.LOYYD1
PEEDY	380629.36N / 1091342.99W	Y	FB	TF	031.05	21.30			
PRTTY	384811.03N / 1083807.40W	Y	FB	TF	033.69	50.16			



FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STAR (DATA RECORD)

Arrival Name LOYD (RNAV)		Number ONE		STAR Computer Code PRTTY.LOYYD1		Superseded Number NONE		Dated	Effective Date
FIX/NAVAID	LAT/LONG	C	FO/FB	LEG TYPE	TC	DIST (NM)	ALTITUDE	SPEED	REMARKS
En Route Transition									
TRRBO	373813.57N / 1083716.43W	Y		IF					TRRBO.LOYYD1
LLAXX	381633.80N / 1083746.26W	Y	FB	TF	359.41	38.30			
PRTTY	384811.03N / 1083807.40W	Y	FB	TF	359.50	31.59			
Common Route									
PRTTY	384811.03N / 1083807.40W	Y		IF					PRTTY.LOYYD1
BURRD	385709.65N / 1080733.53W	Y	FB	TF	069.25	25.50	FL230BFL290		
DUUMB	390611.02N / 1073612.53W	Y	FB	TF	069.58	26.04			
LOYYD	390941.25N / 1072413.19W	Y	FB	TF	069.37	09.96	AT FL200	AT 250K	
SNMAS	390913.93N / 1065246.76W	Y	FB	TF	090.90	24.46	AT/ABOVE 17000	AT 230K	
BIGLP	391810.47N / 1063911.46W	Y	FB	TF	049.69	13.83	AT 15000	AT 220K	
RUEDI	392250.75N / 1064132.54W	Y	FO	TF	338.66	05.01	AT 14000	AT 210K	
KASE				FM	309.00				

