


WAAS CH 90529 W04A	APP CRS 045°	Rwy Idg TDZE Apt Elev	4605 2851 2872
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4
MIDLAND INTL AIR AND SPACE PORT (MAF)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). Circling Rwy 16L NA at night. Rwy 4 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA.			MISSED APPROACH: Climb to 4700 direct AYUPA and hold.		
ATIS 126.8 235.975	MIDLAND APP CON★ 124.6 290.4	MIDLAND TOWER★ 118.7 (CTAF) 0273.45	GND CON 121.9 348.6	CLNC DEL 118.05 317.65	UNICOM 122.95

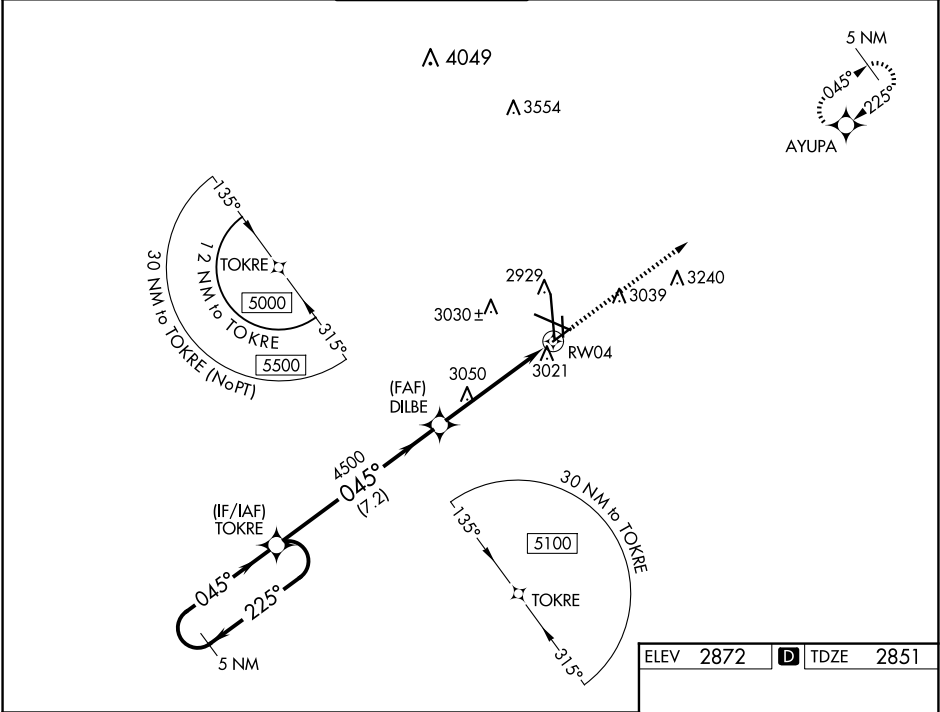

5 NM Holding Pattern		TOKRE		DILBE		RW04	
5000		225°		045°		4500	
GP 3.00°		TCH 45		7.2 NM		3.5 NM	
CATEGORY		A		B		C	
LPV DA		3051-¾		200 (200-¾)			
LNAV/VNAV DA		3283-1½		432 (500-1½)			
LNAV MDA		3360-1 509 (500-1)		3360-1¾ 509 (500-1¾)			
CIRCLING		3440-1 568 (600-1)		3440-1½ 568 (600-1½)		3520-2 648 (700-2)	

