

APP CRS
302°

Rwy Idg
TDZE
Apt Elev

5300
408
413

RNAV (GPS) RWY 30R

ST LOUIS DOWNTOWN (CPS)


▼

⚠

Circling Rwy 5 NA at night. DME/DME RNP-0.3 NA. Rwy 30R helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDA 80 feet, increase LNAV Cats C/D visibility ¾ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climbing left turn to 3000 direct GLASS and hold.

ATIS 121.45	ST LOUIS APP CON 123.7 371.875	DOWNTOWN TOWER ★ 119.925 (CTAF) 0 379.3	GND CON 121.8	CLNC DEL 118.275	CLNC DEL 121.8 (When twr closed)	UNICOM 122.95
----------------	-----------------------------------	--	------------------	---------------------	--	------------------

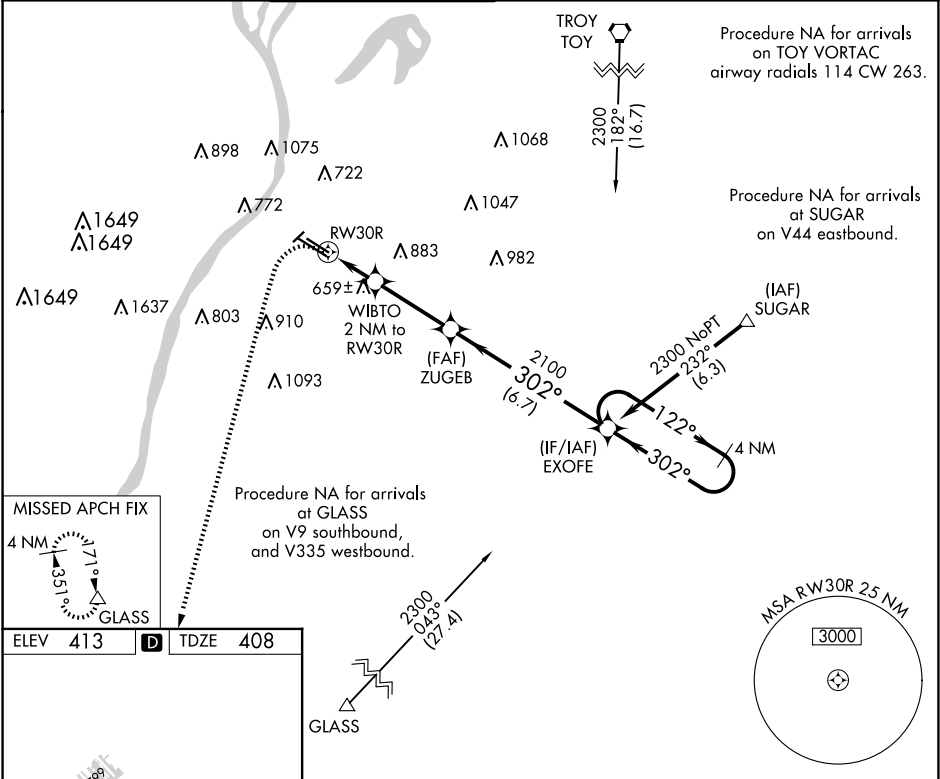

ELEV 413

D

TDZE 408

HIRL Rwy 12R-30L

REIL Rwys 12L and 12R

REIL Rwy 30R

MIRL Rwys 5-23 and 12L-30R

3000

GLASS

△

WIBTO 2 NM to RW30R

ZUGEB

EXOFE

4 NM Holding Pattern

2 NM

3.2 NM

6.7 NM

CATEGORY	A	B	C	D
LNAV MDA	920-1 512 (600-1)	920-1 512 (600-1)	920-1 512 (600-1)	920-1 512 (600-1)
CIRCLING	920-1 507 (600-1)	1120-1 707 (800-1)	1240-2 827 (900-2)	1380-3 967 (1000-3)