

WAAS
CH **63004**
W04B

APP CRS
036°

Rwy Ldg **11494**
TDZE **640**
Apt Elev **645**

RNAV (GPS) Z RWY 4R


DETROIT METRO WAYNE COUNTY (DTW)

RNP APCH:
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19° C or above 54° C.
Use of FD or AP required during simultaneous operations.

ALSF-2

MISSED APPROACH:
Climb to 4000 direct
LUPAY and hold.

D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 128.125 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	CINC DEL 120.65	CPDLC
--------------------------	--	---------------------------------------	---	---------------------------	-------

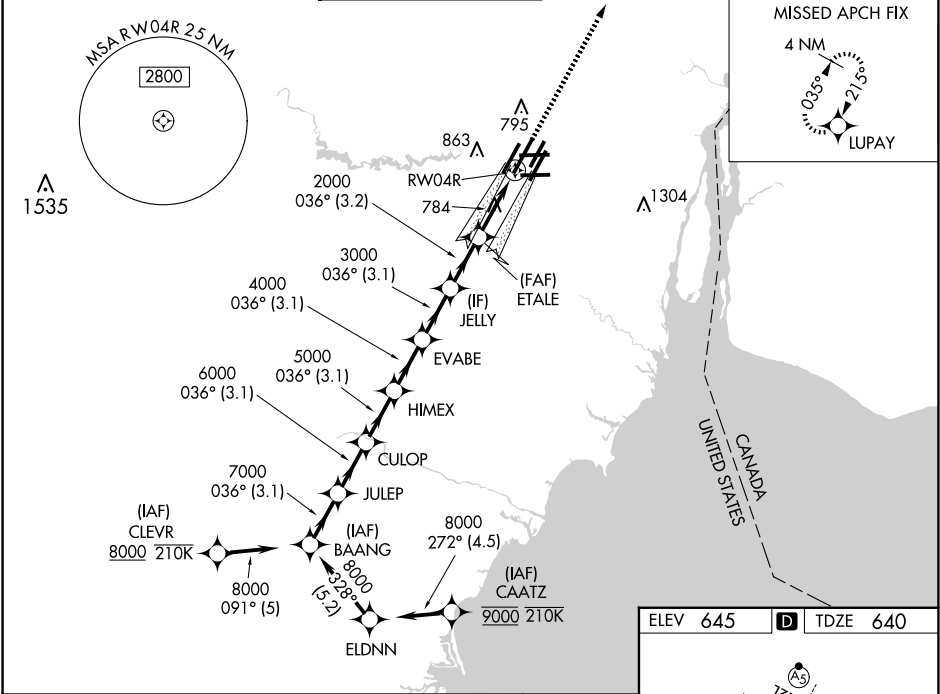

BAANG 8000 JULEP 7000 CULOP 6000 HIMEX 5000 EVABE 4000 JELLY 3000 ETALE 2000 RW04R		*LNAV only.		4000 LUPAY
GP 3.00° TCH 52		*1.1 NM to 2000 RW04R		
←3.1 NM 3.1 NM 3.1 NM 3.1 NM 3.2 NM 3 NM 1.1 NM→				
CATEGORY	A	B	C	D
LPV DA	840/18		200 (200-½)	
LNAV/VNAV DA	1021/35		381 (400-¾)	
LNAV MDA	1040/24 400 (400-½)		1040/35 400 (400-¾)	
CIRCLING	1180-1 535 (600-1)		1180-1½ 535 (600-1½) 1240-2 595 (600-2)	

ELEV 645

D

TDZE 640

TDZ/CL Rwy 3R, 4L, 4R and 22R

REIL Rwy 3L, 9L, 9R and 21R

HIRL all runways