


APP CRS	Rwy Ldg	8505
217°	TDZE	770
	Apt Elev	809

RNAV (RNP) X RWY 22
SAN ANTONIO INTL (SAT)

RNP AR APCH - GPS.	MISSED APPROACH: (Do not exceed 195K until IMIKE) Climb to 3100 direct IMIKE and on track 137° EMBOW and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.	

D-ATIS 118.9	SAN ANTONIO APP CON 125.1 307.0	SAN ANTONIO TOWER 119.8 257.8	GND CON 121.9 348.6	CLNC DEL 126.7	CPDLC
-----------------	------------------------------------	----------------------------------	------------------------	-------------------	-------

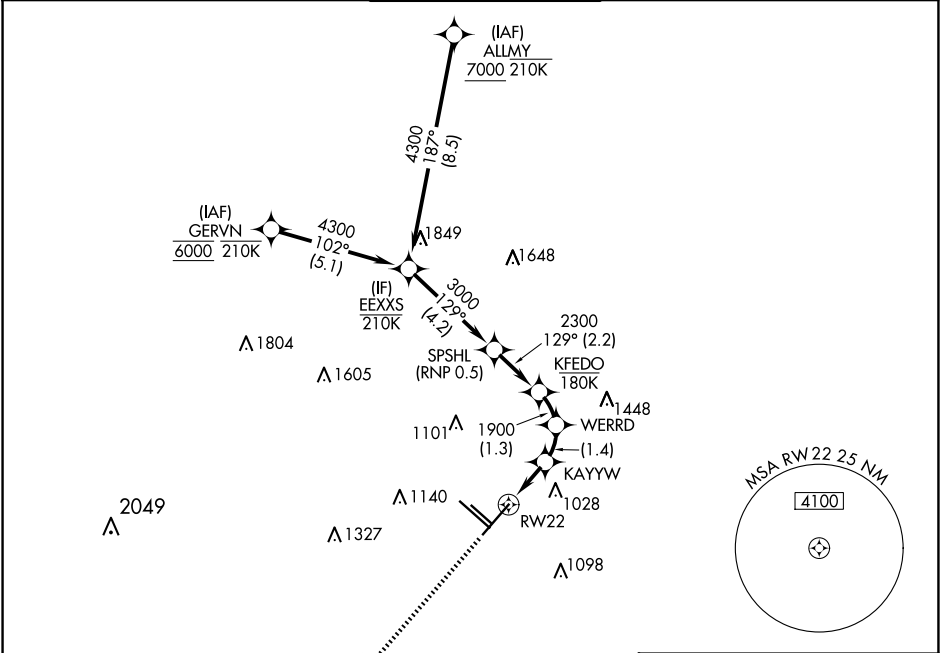

ELEV 809 **D** TDZE 770

3100 IMIKE tr 137° EMBOW

See planview for multiple IF locations.

WERRD 1900 KAYYW 1900 KFEDO 2300 SPSHL 2300 EEXXS 4300

GP 3.00° TCH 55

2 NM 1.4 1.3 NM 2.2 4.2 NM

CATEGORY	A	B	C	D
RNP 0.15 DA		1070-7/8	300 (300-7/8)	
RNP 0.30 DA		1222-13/8	452 (500-13/8)	

AUTHORIZATION REQUIRED

TDZ/CL Rwy 13R
REIL Rwys 13L, 22 and 31R
HIRL Rwys 4-22 and 13R-31L
MIRL Rwy 13L-31R