

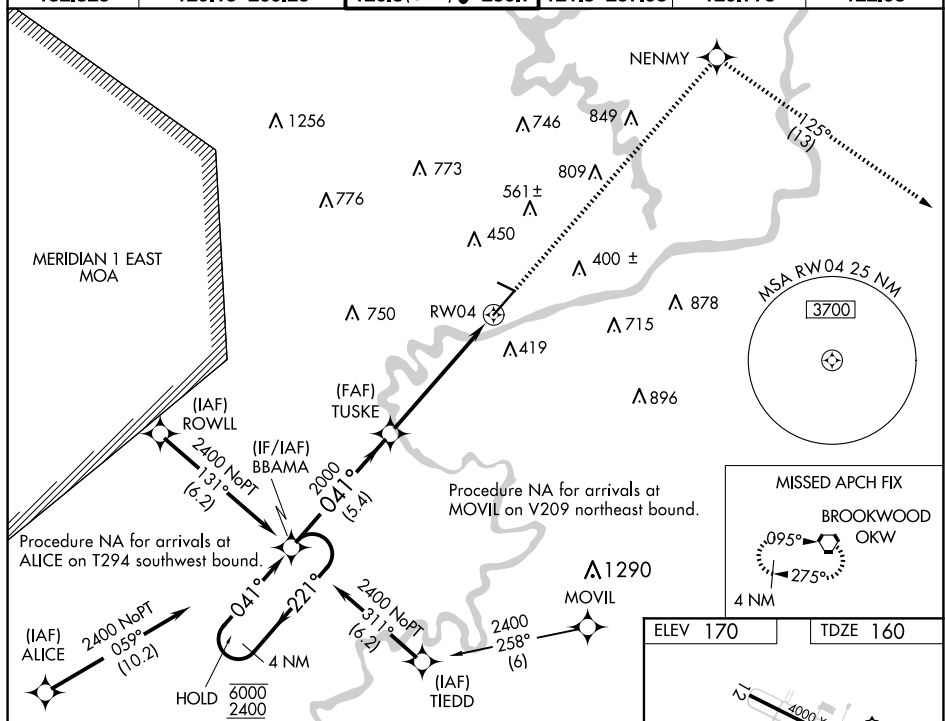
24137

RNAV (GPS) RWY 4
TUSCALOOSA NTL(TCL)

T Circling Rwy 12, 30 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, **A** increase LNAV/VNAV all Cats visibility to 1½ SM.



MISSED APPROACH: Climb to 2500 direct NENMY and on track 125° to OKW VORTAC and hold.

UNICOM
122.954 NM
Holding Pattern BBAMA

2500

NENMY

OKW

1.2 NM to
RW04

CATEGORY		A	B	C	D
LPV	DA	360- $\frac{1}{2}$		200 (200- $\frac{1}{2}$)	
RNAV	DA	575- $\frac{3}{4}$		415 (500- $\frac{3}{4}$)	
RNAV	MDA	600- $\frac{1}{2}$ 440 (500- $\frac{1}{2}$)		600- $\frac{3}{4}$ 440 (500- $\frac{3}{4}$)	
 CIRCLING		720-1 550 (600-1)	800-1 630 (700-1)	960-2 $\frac{1}{4}$ 790 (800-2 $\frac{1}{4}$)	960-2 $\frac{1}{2}$ 790 (800-2 $\frac{1}{2}$)

MIRL Rwy 12-30
HIRL Rwy 4-22 **L**

33°13'N-87°37'W

TUSCALOOSA NTL (TCL)
RNAV (GPS) RWY 4