


APP CRS	Rwy Ldg	9020
172°	TDZE	4457
	Apt Elev	4457

RNAV (GPS) RWY 17

LOGAN-CACHE (LGU)

DME/DME RNP-0.3 NA. Circling NA east of Rwy 17-35. Night Landing: Rwy 10-28 NA. Inop table does not apply to LNAV Cats C/D. *Missed approach requires minimum climb of 310 feet per NM to 7700.	MALSR	MISSED APPROACH: Climbing right turn to 10000 direct PIMIE and hold, continue climb-in-hold to 10000.
--	--	---

ASOS 135.275	SALT LAKE CENTER 127.7 354.125	UNICOM 122.8 (CTAF) 0
-----------------	-----------------------------------	--------------------------

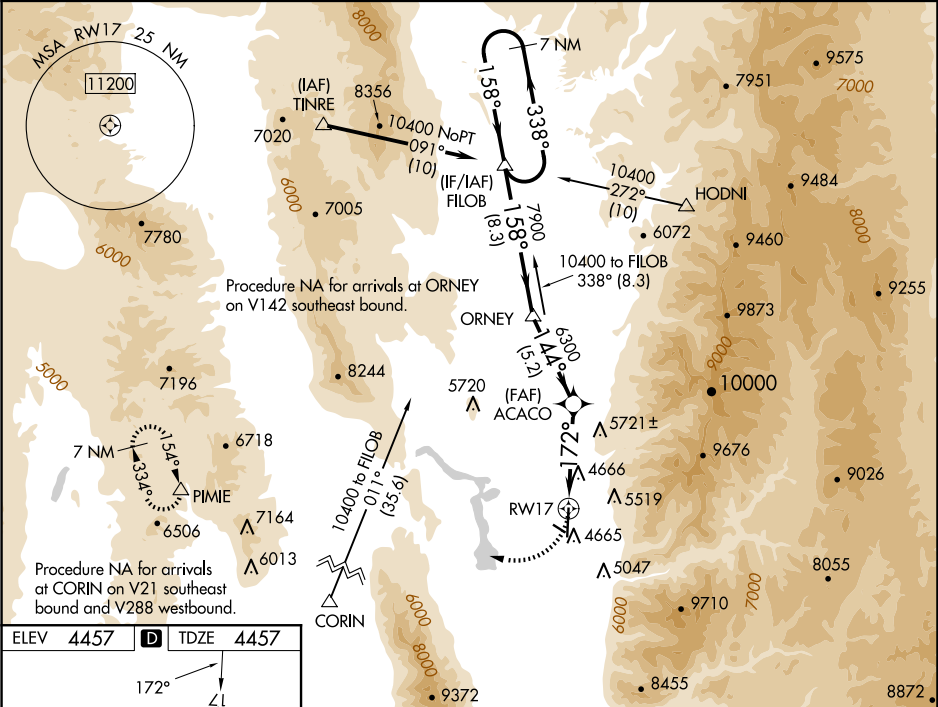

ELEV 4457	D	TDZE 4457
172° 4075 X 60 35 REIL Rwy 35 0 HIRL Rwy 17-35 0		

10000	PIMIE	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 45).		7 NM
		ACACO	ORNEY	FILOB Holding Pattern
		1.9 NM to RW17	144°	338°
		172°	158°	10400
		6300	7900	
		1.9	3.7 NM	5.2 NM
		8.3 NM		
CATEGORY	A	B	C	D
*LNAV MDA	5100-1/2	643 (700-1/2)	5100-1 3/8	643 (700-1 3/8)
LNAV MDA	5800-3/4 1343 (1400-3/4)	5800-1 1343 (1400-1)	5800-3	1343 (1400-3)
CIRCLING	5800-1 1/4 1343 (1400-1 1/4)	5800-1 1/2 1343 (1400-1 1/2)	5800-3	1343 (1400-3)