

**TOP ALTITUDE:
ASSIGNED BY ATC**



LUKE DEP CON★
118.15 363.125
PHOENIX DEP CON
120.7 239.0
ATIS
119.425
GND CON
118.0
GLENDALE TOWER★
121.0

NOTE: Turboprops and turboprops only.
NOTE: Aircraft requesting FL220 and below must file BLYTHE Transition.
NOTE: Turboprops landing LAX, file WLVRN Transition.
NOTE: Aircraft landing other than LAX and turboprops landing at LAX: Requesting FL240 and above, file HRRBR Transition.
NOTE: Aircraft departing KGEV and KGYR ATC assigned only.

TAKEOFF MINIMUMS

Rwy 19: Standard.

Rwy 1: Standard with minimum climb of 285'/NM to 5700.

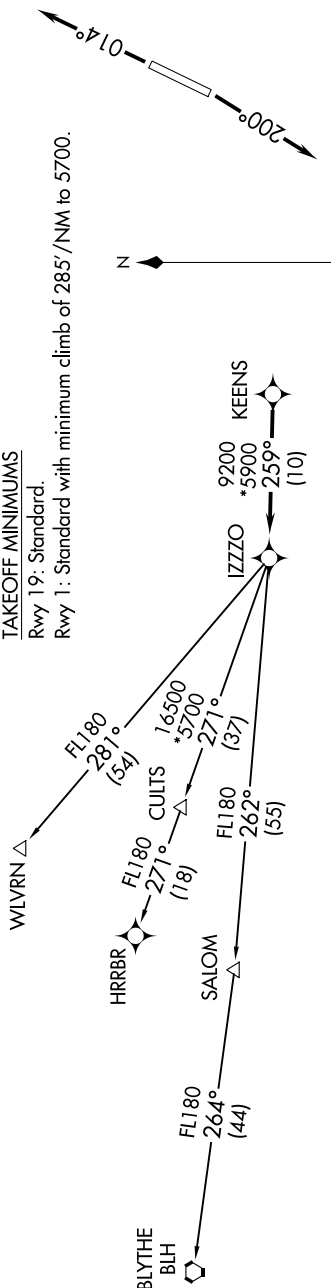

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 1: Climb on heading 014° or as assigned by ATC, then.....

TAKEOFF RUNWAY 19: Climb on heading 200° or as assigned by ATC, thence...

...for RADAR vectors to KEENS, then on track 259° to IZZO, then on (transition).
Maintain ATC assigned altitude, expect filed altitude 3 minutes after departure.

BLYTHE TRANSITION (IZZZO8.BLH)

HRRBR TRANSITION (IZZ08.HRRBR)

WLV RN TRANSITION (IZZ ZO8.WLV RN)