ILS or LOC RWY 4R
DETROIT METRO WAYNE COUNTY (DTW)

LOC/DME I-DTW	APP CRS	Rwy Ldg	11494
110.7	036°	TDZE	640
Chan 44		Apt Elev	645

RNAV 1-GPS.
CLEVR, CAATZ and ELDNN: RNAV 1-DME/DME/IRU or GPS required.
Aircraft not DME/DME/IRU or GPS equipped - RADAR required for procedure entry.
DME or RADAR required.
Simultaneous approach authorized. For inop ALS, increase S-LOC 4R Cat C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 4000 on DXO VOR/DME R-035 to LUPAY/DXO VOR/DME/15.6 DME and hold.

D-ATIS	DETROIT APP CON	METRO TOWER	GND CON	CLNC DEL	CPDLC
133.675	124.05 284.0	128.125 317.725	121.8 (NW) 132.725 (SW) 119.45 (NE) 119.25 (SE)	120.65	

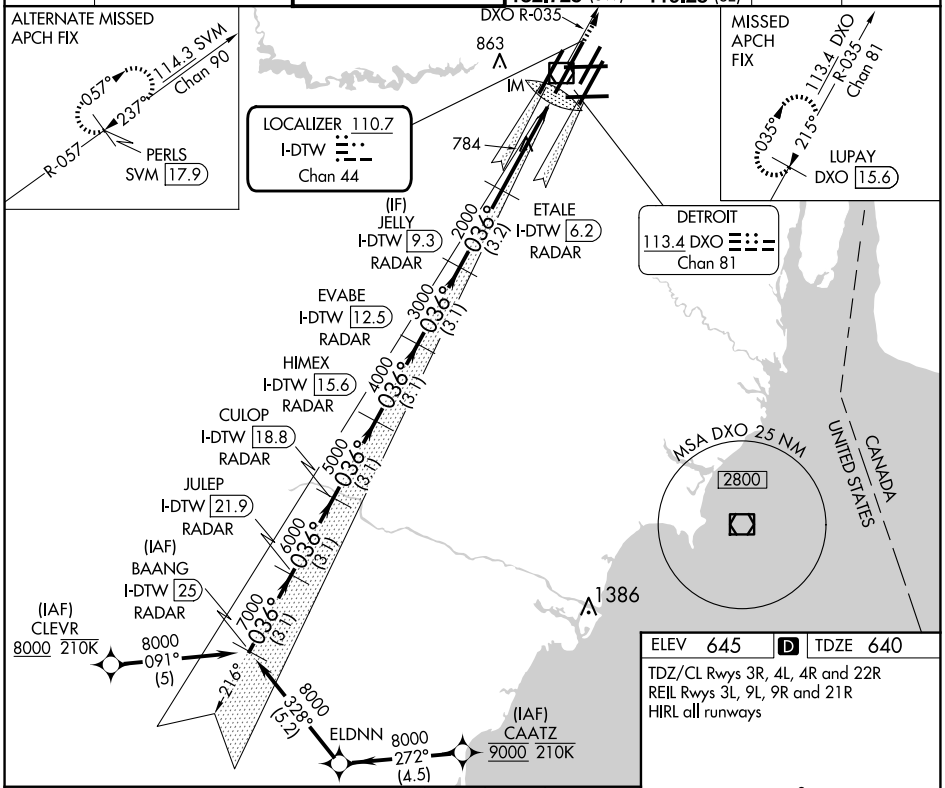

EC-1, 04 SEP 2025 to 02 OCT 2025

ELEV 645 | D | TDZE 640

TDZ/CL Rwys 3R, 4L, 4R and 22R
REIL Rwys 3L, 9L, 9R and 21R
HIRL all runways

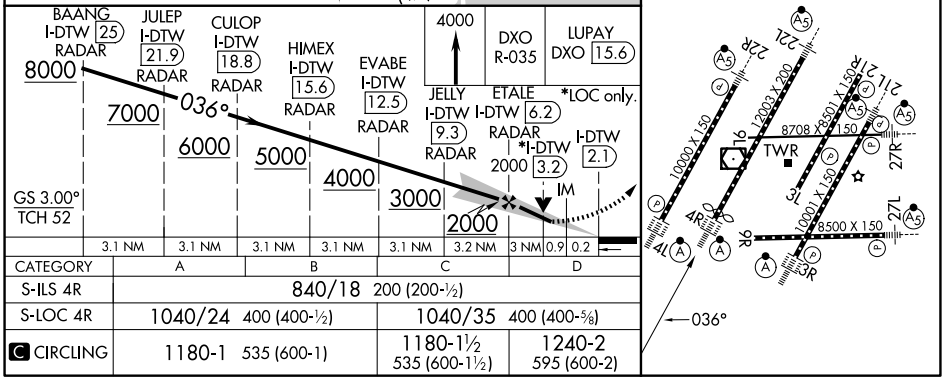

CATEGORY	A	B	C	D
S-ILS 4R	840/18 200 (200-½)			
S-LOC 4R	1040/24 400 (400-½)		1040/35 400 (400-⅝)	
C CIRCLING	1180-1 535 (600-1)		1180-1½ 535 (600-1½)	1240-2 595 (600-2)