


WAAS CH 82740 W34A	APP CRS 338°	Rwy Ldg TDZE Apt Elev 4606
--	------------------------	---

RNAV (GPS) RWY 34


SOUTH VALLEY RGNL (SVR)

RNP APCH - GPS.	MISSED APPROACH: Climb to 9000 direct DUYDE and on track 309° to KITBE and on track 268° to STACO and hold.
VDP NA when using SLC altimeter setting. Baro-VNAV NA. When local altimeter setting not received, use SLC altimeter setting and increase all LPV DA to 4956 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 5159 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat B ¼ SM.	

AWOS-3PT 134.425	SALT LAKE CITY APP CON 120.9 322.3	CLNC DEL 127.0	UNICOM 122.7 (CTAF) 0
----------------------------	--	--------------------------	---------------------------------

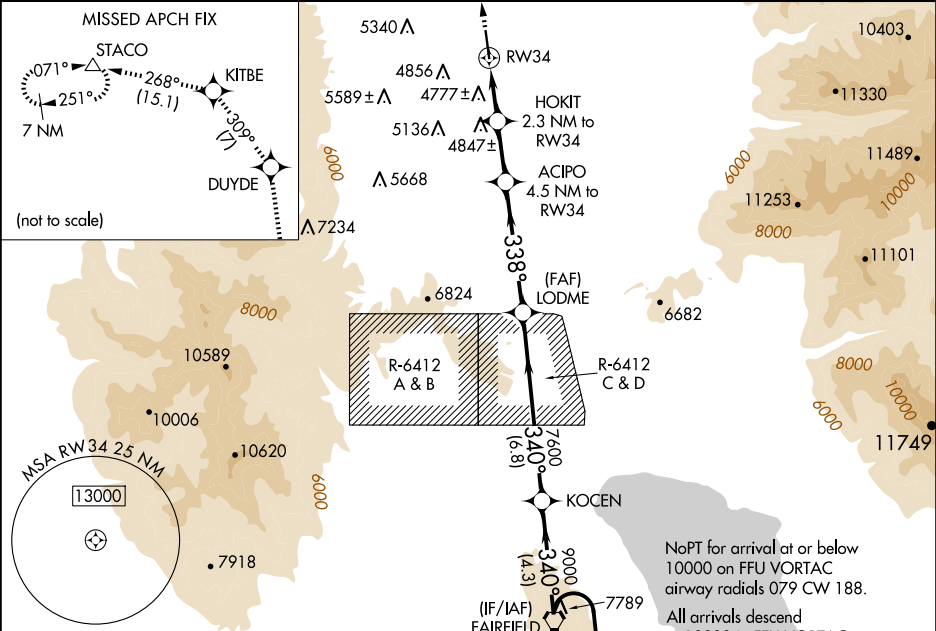

ELEV 4606	TDZE 4606
-----------	-----------

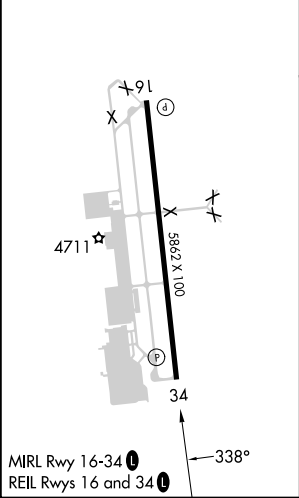

9000	DUYDE	tr 309°	KITBE	tr 268°	STACO	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 40).			
						KOCEN	FAIRFIELD	7 NM	Holding Pattern
						FFU	9000	12000	
						7600	340°	160°	
						5380	6080	9000	GP 3.00°
						1.3	1.1	2.2 NM	TCH 58
						4.7 NM	6.8 NM	4.3 NM	
CATEGORY		A		B		C		D	
LPV DA		4881-7½		275 (300-7½)					
LNAV/VNAV DA		5084-1⅓		478 (500-1⅓)					
LNAV MDA		5040-1		434 (500-1)		5040-1¼		434 (500-1¼)	
CIRCLING		5180-1		5360-1		5780-3		6040-3	
		574 (600-1)		754 (800-1)		1174 (1200-3)		1434 (1500-3)	