
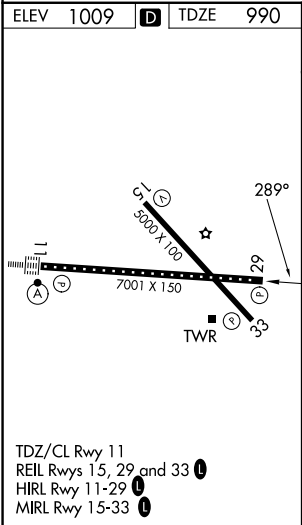


|                                        |                        |                             |                                          |
|----------------------------------------|------------------------|-----------------------------|------------------------------------------|
| WAAS<br>Ch <b>82299</b><br><b>W29A</b> | APP CRS<br><b>289°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>7001</b><br><b>990</b><br><b>1009</b> |
|----------------------------------------|------------------------|-----------------------------|------------------------------------------|

RNAV (GPS) RWY 29

WORCESTER RGNL (ORH)

|                                                                                                               |                                      |                                                                                       |                          |                           |                                               |                         |
|---------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|--------------------------|---------------------------|-----------------------------------------------|-------------------------|
| RNP APCH - GPS.                                                                                               |                                      | MISSED APPROACH: Climb to 3000 direct RILOC and hold, continue climb-in-hold to 3000. |                          |                           |                                               |                         |
| <div><div></div><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.</div></div> |                                      |                                                                                       |                          |                           |                                               |                         |
| ATIS<br><b>126.55</b>                                                                                         | YANKEE APP CON<br><b>119.0 327.1</b> | WORCESTER TOWER★<br><b>120.5 (CTAF) 263.0</b>                                         | GND CON<br><b>123.85</b> | CLNC DEL<br><b>128.65</b> | CLNC DEL<br><b>119.0</b><br>(When twr closed) | UNICOM<br><b>122.95</b> |

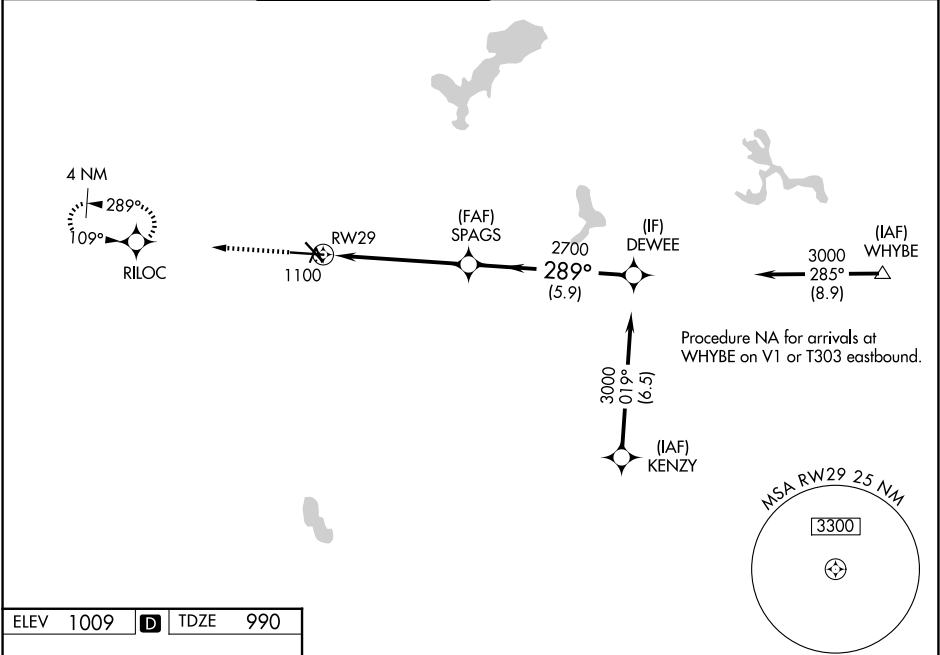

|              |                       |                       |        |              |
|--------------|-----------------------|-----------------------|--------|--------------|
| CATEGORY     | A                     | B                     | C      | D            |
| LPV DA       | 1190/50 200 (200-1)   |                       |        |              |
| LNAV/VNAV DA | 1261/50 271 (300-1)   |                       |        |              |
| LNAV MDA     | 1360/55 370 (400-1)   |                       |        |              |
| CIRCLING     | 1560-1<br>551 (600-1) | 1720-1<br>711 (800-1) | 2000-3 | 991 (1000-3) |