


WAAS CH 86738 W07A	APP CRS 075°	Rwy Ldg TDZE Apt Elev 8 8	3502
--	------------------------	---	-------------


RNAV (GPS) RWY 7
PROVINCETOWN MUNI (PVC)

RNP APCH - GPS. Baro-VNAV and VDP NA when using HYA altimeter setting. Circling Rwy 25 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Inop table does not apply to LPV. For inop ALS when using HYA altimeter setting, increase LPV and LNAV/VNAV all Cnts visibility to ½ SM. When local altimeter setting not received, use HYA altimeter setting: increase LPV DA to 271 feet, increase LNAV/VNAV DA to 331 feet; increase all MDA 80 feet.	MALSF 	MISSED APPROACH: Climb to 3000 direct WULGA and hold.
--	-----------	--

AWOS-3PT 119.275	BOSTON APP CON 118.2	CLNC DEL 120.65	UNICOM 122.8 (CTAF)	122.85
----------------------------	--------------------------------	---------------------------	-------------------------------	---------------

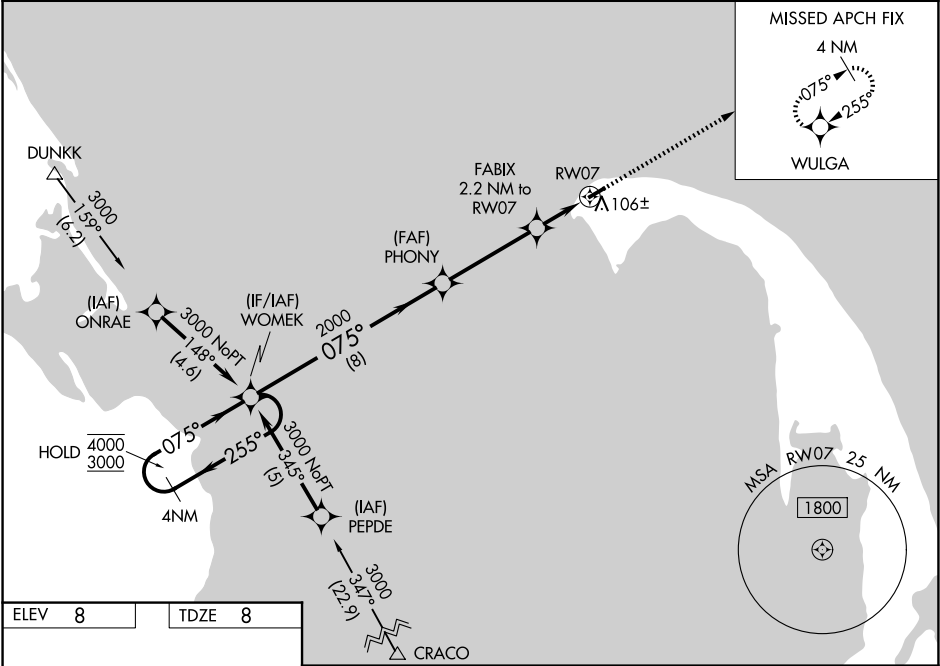

ELEV 8	TDZE 8
---------------	---------------

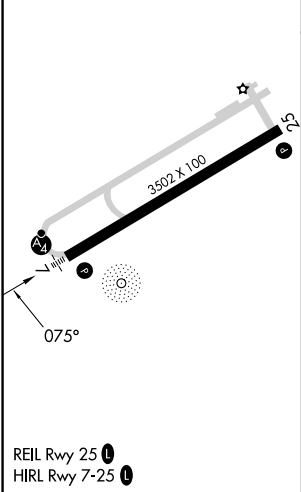

4 NM Holding Pattern		WOMEK	PHONY	FABIX	WULGA
4000	3000	255°	075°	2000	3000
GP 3.00°	TCH 40	075°	2000	740	1 NM to RWY 07
8 NM		3.9 NM	1.2 NM	1 NM	
CATEGORY	A	B	C	D	
LPV DA	208-¾	200 (200-¾)	NA	NA	
LNAV/VNAV DA	268-¾	260 (300-¾)	NA	NA	
LNAV MDA	360-¾	352 (400-¾)	NA	NA	
CIRCLING	460-1 452 (500-1)	660-1 652 (700-1)	NA	NA	

NE-1, 04 SEP 2025 to 02 OCT 2025

NE-1, 04 SEP 2025 to 02 OCT 2025