

WAAS CH 65718 W29A	APP CRS 290°	Rwy Idg TDZE Apt Elev	4402 2920 2925
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 29

THOMAS COUNTY (TIF')


Baro-VNAV NA when using North Platte altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use North Platte altimeter setting and increase all DA 137 feet and all MDA 140 feet; increase LPV and LNAV/VNAV Cats A and B visibility ½ mile. VDP NA with North Platte altimeter setting.

MISSED APPROACH: Climb to 5000 direct UFVOD and hold.

AWOS-3 120.825	DENVER CENTER 127.95 338.2	CTAF 122.9
--------------------------	--------------------------------------	----------------------

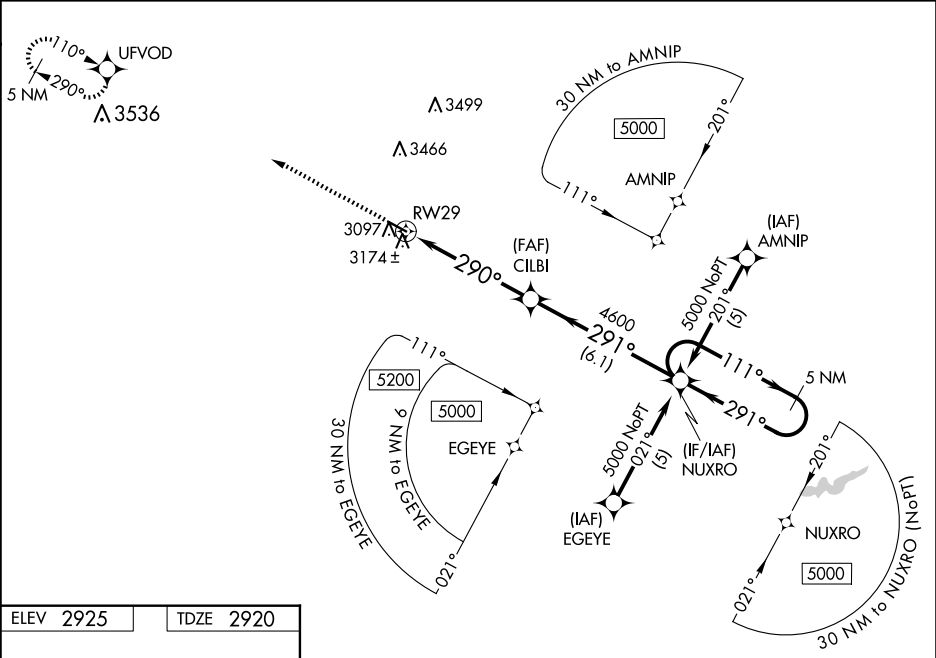

ELEV 2925	TDZE 2920
-----------	-----------

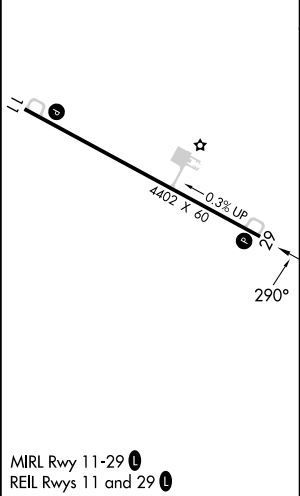

5000

UFVOD

↑

✱

* LNAV only

RW29

1.7

3.5 NM

6.1 NM

290°

291°

4600

4600

CILBI

4600

NUXRO

5 NM Holding Pattern

111°

291°

5000

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA	3170-1	250 (300-1)	NA	
LNAV/VNAV DA	3444-2	524 (600-2)	NA	
LNAV MDA	3480-1	560 (600-1)	NA	
CIRCLING	3480-1	555 (600-1)	NA	