

WAAS

CH 81807

W36A

APP CRS

356°

Rwy Ldg

7339

TDZE

1066

Apt Elev

1087

RNAV (GPS) RWY 36


NEW CENTURY AIRCENTER (IXD)

DME/DME RNP-0.3 NA. For inop MALS, increase LNAV Cat D visibility to 1¼ and LPV visibility to 1 all Cats. If local altimeter setting not received, use Johnson County Exec altimeter setting and increase all DA/MDAs 20 feet. VDP NA with Johnson County Exec altimeter setting.


MALS

MISSED APPROACH: Climb to 3100 direct ZODPU and hold.

ASOS 135.325	KANSAS CITY APP CON 118.9 251.075	NEW CENTURY TOWER ★ 133.0 (CTAF) 0	GND CON 124.3	UNICOM 122.95
-----------------	--------------------------------------	---------------------------------------	------------------	------------------

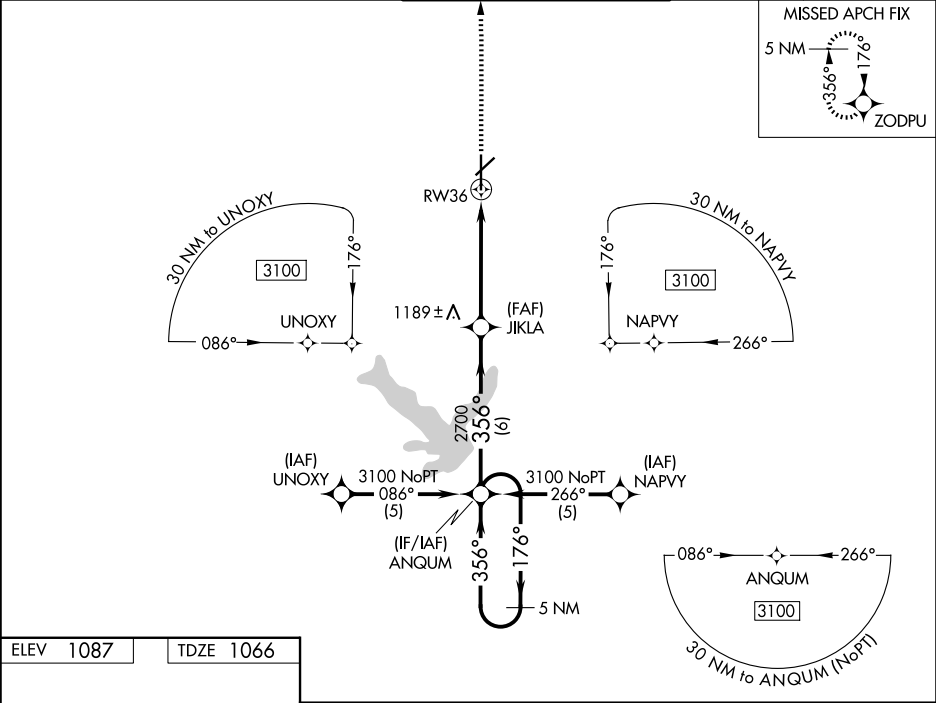

ELEV 1087	TDZE 1066
-----------	-----------

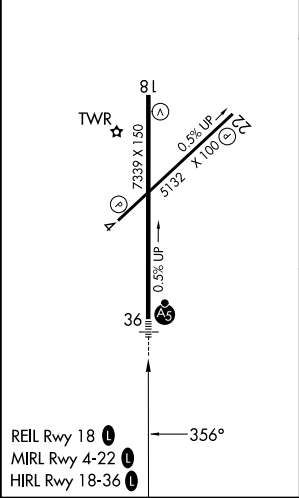

5 NM Holding Pattern				3100	ZODPU
GP 3.00° TCH 50				*LNAV only.	
ANQUM				*1.1 NM to RW36	
JIKLA				RW36	
3100 ← 176° → 356°				2700	
6 NM				3.9 NM	
1.1 NM					
CATEGORY	A	B	C	D	
LPV DA	1316-½ 250 (300-½)				
LNAV/VNAV DA	NA				
LNAV MDA	1440-½ 374 (400-½)			1440-1 374 (400-1)	
CIRCLING	1560-1 473 (500-1)		1580-1½ 493 (500-1½)		1640-2 553 (600-2)

NC-2, 27 NOV 2025 to 25 DEC 2025

NC-2, 27 NOV 2025 to 25 DEC 2025