


SALT LAKE CENTER
132.4 338.3

TAKEOFF MINIMUMS
Rwys 7, 17, 25: NA - Environmental.
Rwy 35: Standard.

NOTE: GPS required.
NOTE: RNAV 1.

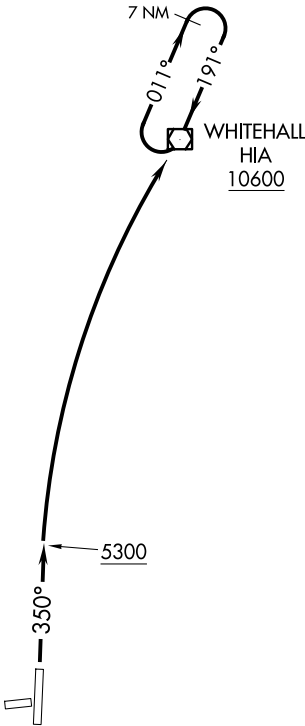

TAKEOFF OBSTACLE NOTES

- Rwy 35: Airfield light 10' from DER, 9' right of centerline, 2' AGL/4791' MSL.
- Airfield light 10' from DER, 10' left of centerline, 2' AGL/4791' MSL.
- Fence beginning 188' from DER, 296' right of centerline, up to 3' AGL/4807' MSL.
- Pole 499' from DER, 607' left of centerline, 34' AGL/4808' MSL.
- Vehicle on secondary road beginning 643' from DER, 492' right of centerline, 4817' MSL.
- Vehicle on secondary road beginning 1193' from DER, 503' right of centerline, up to 4831' MSL.
- Pole 1319' from DER, 612' right of centerline, 34' AGL/4849' MSL.
- Pole 1431' from DER, 754' right of centerline, 30' AGL/4851' MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 35: Climb on heading 350° to 5300, then climbing right turn direct HIA VOR/DME, continue climb in HIA VOR/DME holding pattern to cross HIA VOR/DME at or above 10600 before proceeding on course. Expect filed altitude five minutes after departure.