

LOC/DME I-EVV 109.9 Chan 36	APP CRS 221°	Rwy Ldg TDZE 422 Apt Elev 422
---	------------------------	---

ILS or LOC RWY 22
EVANSVILLE RGNL (EVV)

RADAR or DME required for procedure entry at AUGUS.

⚠ Circling Rwy 9 NA at night. For inop ALS, increase S-LOC 22 Cats C and D visibility to 1¾ SM. DME minimums: For inop ALS, increase S-LOC 22 Cats C and D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR
MISSED APPROACH: Climb to 1000 then climbing right turn to 2500 direct PXV VORTAC and hold.

ATIS 120.2	EVANSVILLE APP CON ★ 124.025 290.9	EVANSVILLE TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

OWENSBORO
OWB
108.65
Chan 23 (Y)



ALT MISSED
APCH FIX

130° 310° R-130



Procedure NA for arrival on PXV
VORTAC airway radials 355 CW 151.

POCKET CITY
113.3 PXV
Chan 80

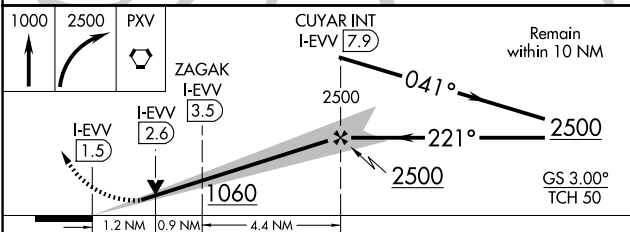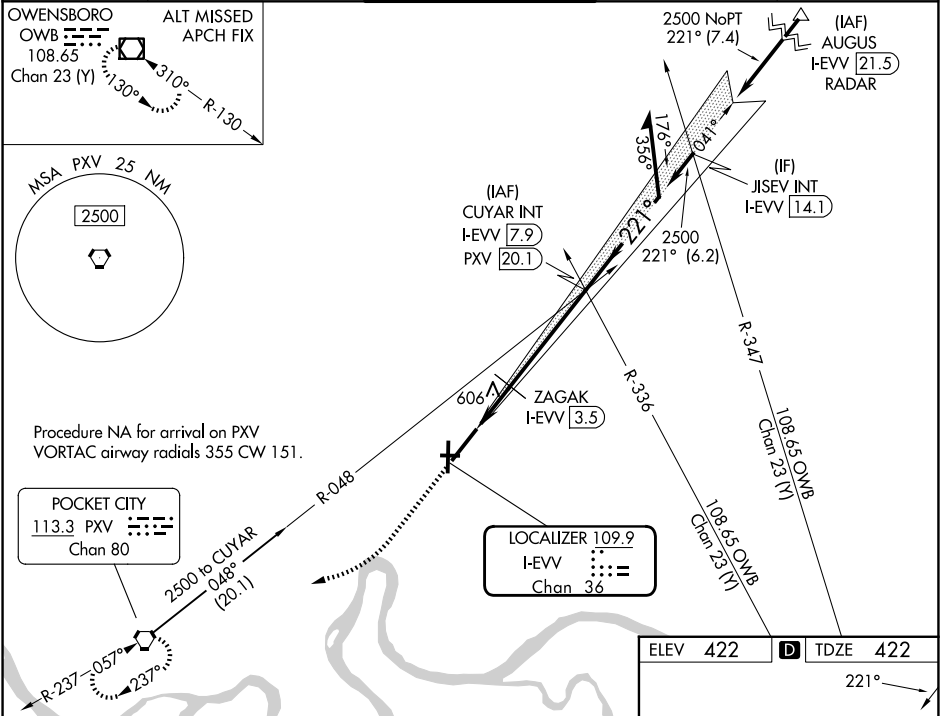

CATEGORY	A	B	C	D
S-ILS 22 *	622/24		200 (200-½)	
S-LOC 22	1060/24	638 (700-½)	1060-1¾	638 (700-1¾)
CIRCLING	1060-1	638 (700-1)	1060-1¾ 638 (700-1¾)	1060-2 638 (700-2)
ZAGAK FIX MINIMUMS (DME REQUIRED)				
S-LOC 22	840/24	418 (500-½)	840/40	418 (500-¾)
CIRCLING	920-1 498 (500-1)	1040-1 618 (700-1)	1040-1¾ 618 (700-1¾)	1040-2 618 (700-2)

ELEV 422 TDZE 422

221°

81 TWR

3497 X 75

270°-5% UP -0.6% DOWN

8021 X 150

HIRL Rwy 4-22 and 18-36
REIL Rwy 4, 18, and 36
MIRL Rwy 9-27

FAC to MAP 6.4 NM	Knots	60	90	120	150	180
	Min:Sec	6:24	4:16	3:12	2:34	2:08

EC-2, 25 DEC 2025 to 22 JAN 2026

EC-2, 25 DEC 2025 to 22 JAN 2026