

WAAS CH 50144 W02A	APP CRS 018°	Rwy Ldg 4502 TDZE 152 Apt Elev 163
--	------------------------	---



RNAV (GPS) RWY 2
WATSONVILLE MUNI (WVI)

RNP APCH - GPS.

T Rwy 2 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Circling Rwy 9, 27 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C. Circling NA west of Rwy 2-20. Baro-VNAV and VDP NA when using MRY altimeter setting. When local altimeter setting not received, use MRY altimeter setting and increase LPV DA to 464 feet, increase LNAV/VNAV DA to 742 feet, increase all MDAs 80 feet.

MISSED APPROACH: (Do not exceed 200K until IFAFY) Climb to 740 then climbing right turn to 3000 direct IFAFY and hold.

ASOS 132.275	NORCAL APP CON 127.15 307.125	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

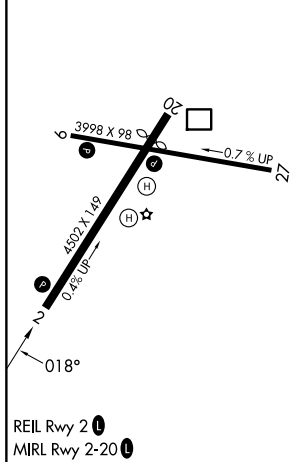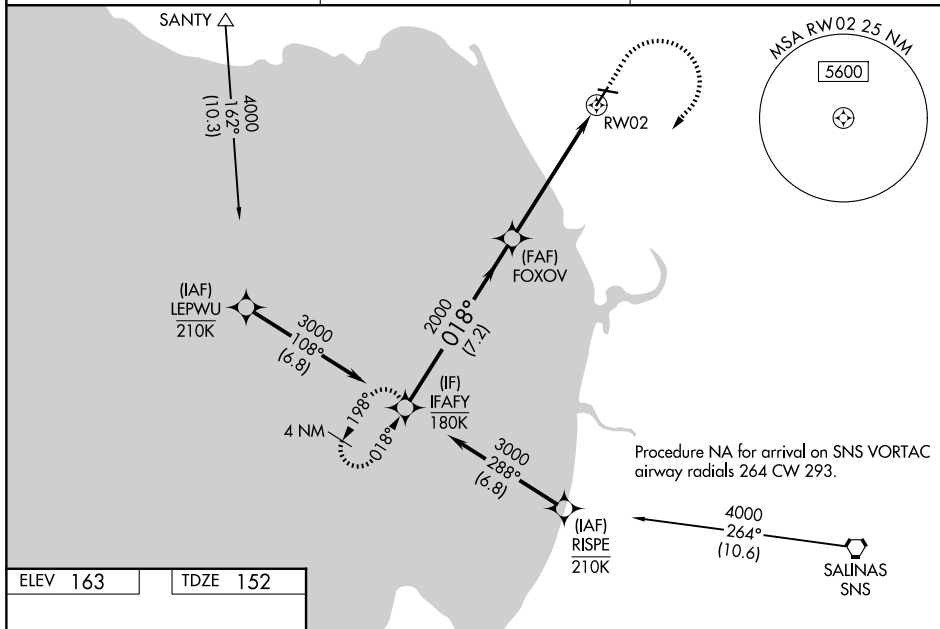

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 43).

IFAFY

3000

018°

2000

FOXOV

2000

1.6 NM to RW02

RW02

7.2 NM

4.1 NM

1.6 NM

GP 3.00°
TCH 56

CATEGORY	A	B	C	D
LPV DA	402- ³ / ₄ 250 (300- ³ / ₄)			
LNNAV/ VNAV DA	680-1 ¹ / ₂ 528 (600-1 ¹ / ₂)			
LNNAV MDA	680-1 528 (600-1)		680-1 ¹ / ₂ 528 (600-1 ¹ / ₂)	
CIRCLING	680-1 517 (600-1)		680-1 ¹ / ₂ 517 (600-1 ¹ / ₂)	1180-3 1017 (1100-3)