

WAAS CH 82633 W05A	APP CRS 054°	Rwy Ldg TDZE Apt Elev	3601 3199 3204
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 5


RAPID CITY RGNL (RAP)

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Ellsworth AFB altimeter setting and increase all DA 25 feet and all MDA 40 feet. VDP and Baro-VNAV NA with Ellsworth AFB altimeter setting.

MISSED APPROACH: Climb to 5300 direct EWEBU and hold.

ASOS 118.525	ELLSWORTH APP CON ★ 119.5 259.1	RAPID CITY TOWER ★ 125.85 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
------------------------	---	--	-------------------------	-------------------------

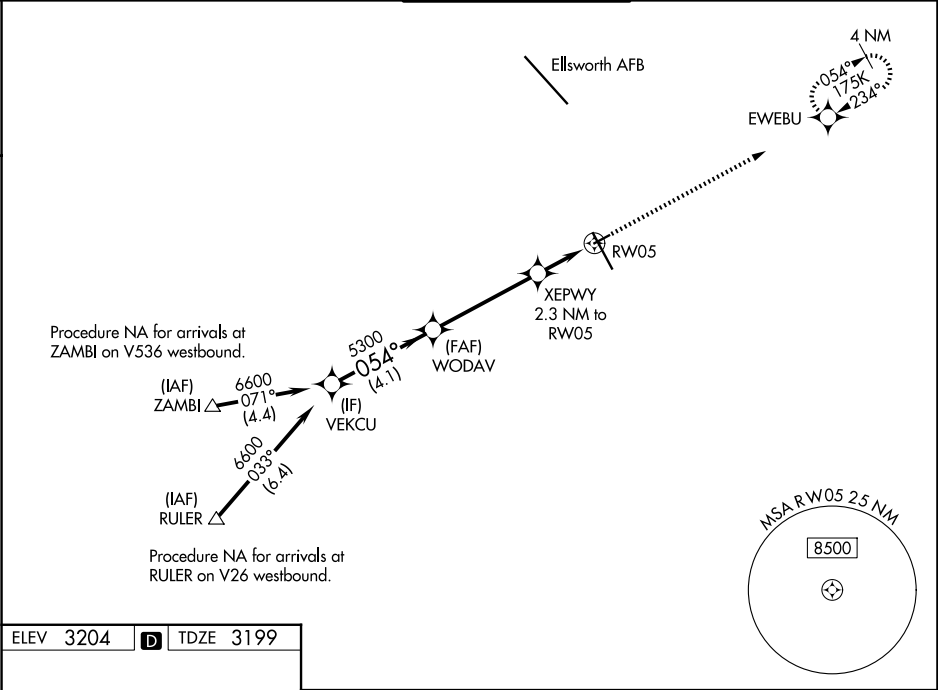

ELEV 3204	D	TDZE 3199
-----------	---	-----------

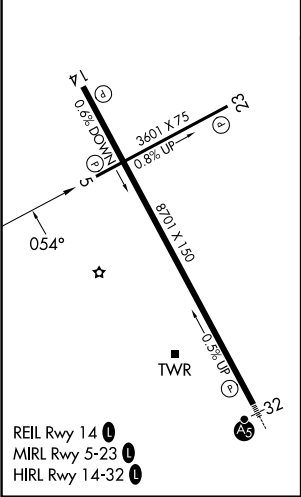

VEKCU		WODAV		5300	EWEBU
6600		5300		XEPWY 2.3 NM to RW05	*LNAV only.
5300		*3920		*0.9 NM to RW05	RW05
GP 3.00°		TCH 34		8.1 NM	
4.1 NM		4.3 NM		1.4 NM	
0.9 NM					
CATEGORY	A	B	C	D	
LPV DA	3449-1	250 (300-1)	NA		
LNAV/VNAV DA	3449-1	250 (300-1)	NA		
LNAV MDA	3500-1	301 (300-1)	NA		
CIRCLING	3660-1 456 (500-1)	3840-1 636 (700-1)	NA		