

FORT DRUM, NEW YORK

HI-ILS or LOC RWY 3

WHEELER-SACK AAF (KGTB)

LOC/DME I-AEZ 108.5 Chan 22	APCH CRS 029°	Rwy ldg TDZE Arpt Elev 8637 685 690
---	-------------------------	---

[USA]

DME or RADAR required

- * When ALS inop, increase vis to ½ mile.
- ** When ALS inop, increase CAT C vis to 2½ miles, CAT D vis to 2¾ miles, CAT E vis to 3 miles.



† MISSED APPROACH: Climb to 1200, then climbing left turn to 5000 direct ART VORTAC and hold, continue climb in hold to 5000.


ATIS 119.525	APP CON 124.875 307.125	TOWER 118.75 290.25	GND CON 123.65 229.8	CLNC DEL 123.65	ASR/PAR
------------------------	-----------------------------------	-------------------------------	--------------------------------	---------------------------	---------

*** When ALS inop, increase CAT C vis to 1½ mile, CAT D vis to 1¾ miles, CAT E vis to 1½ miles.

**** Circling NA E of Rwy 21 and 33. Circling NA for CAT CD to Rwy 8. Circling NA for CAT E to Rwy 8-26 and 15-33.


LOCALIZER 108.5
I-AEZ
Chan 22

WATERTOWN 109.8 ART
Chan 35

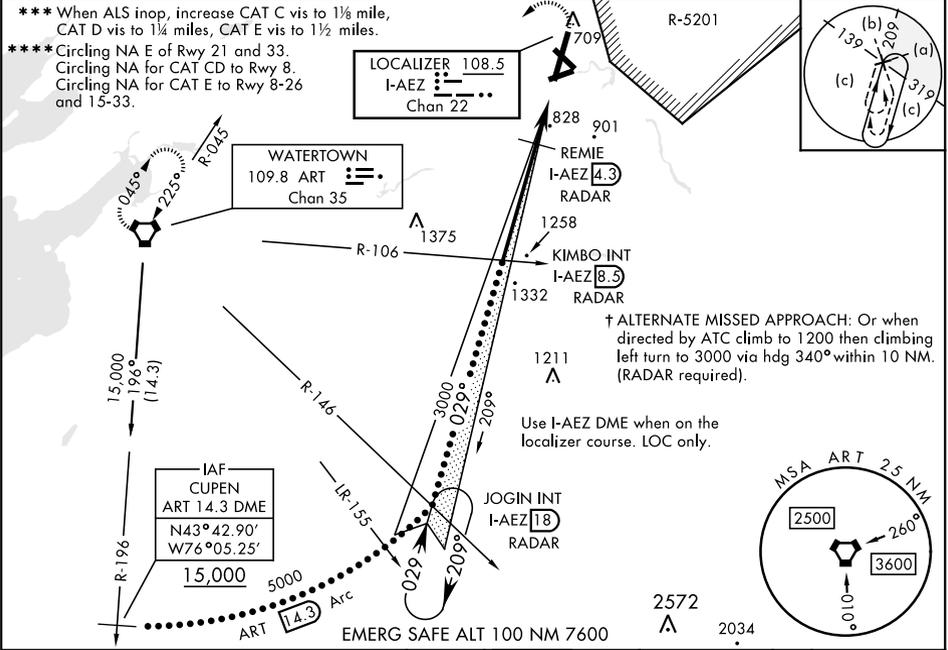



† ALTERNATE MISSED APPROACH: Or when directed by ATC climb to 1200 then climbing left turn to 3000 via hdg 340° within 10 NM. (RADAR required).

Use I-AEZ DME when on the localizer course. LOC only.



JOGIN INT ART R-146 I-AEZ 18 RADAR	KIMBO INT ART R-106 I-AEZ 8.3 RADAR	1200	5000	ART
--	---	------	------	-----

ELEV 690	TDZE 685
----------	----------

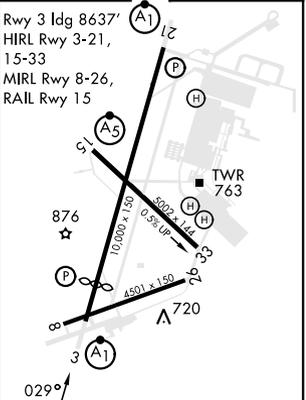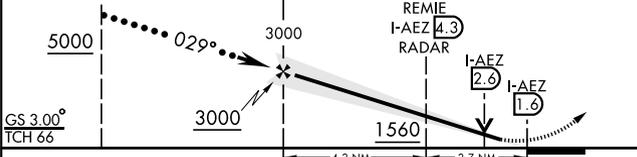

CATEGORY	C	D	E
S-ILS 3*	957-½ 272 (300-½)		
S-LOC 3**	1560-2 875 (900-2)	1560-2¼ 875 (900-2¼)	1560-2½ 875 (900-2½)
CIRCLING ****	1560-2½ 870 (900-2½)	1560-2¾ 870 (900-2¾)	1640-3 950 (1000-3)
DME MINIMUMS			
S-LOC 3***	1080-¾ 395 (400-¾)	1080-1 395 (400-1)	
CIRCLING ****	1220-1½ 530 (600-1½)	1380-2¼ 690 (700-2¼)	1640-3 950 (1000-3)

FAF to MAP 6.9 NM					
Knots	120	140	160	180	200
Min:Sec	3:27	2:57	2:35	2:18	2:04

FORT DRUM, NEW YORK
Amdt 2 20APR23

44°03'N-75°43'W

WHEELER-SACK AAF (KGTB)

HI-ILS or LOC RWY 3

NE-2, 19 MAR 2026 to 16 APR 2026

NE-2, 19 MAR 2026 to 16 APR 2026