

WAAS CH <b>90117</b> <b>W25A</b>	APP CRS <b>254°</b>	Rwy Ldg <b>7281</b> TDZE <b>1475</b> Apt Elev <b>1478</b>
-------------------------------------	---------------------	---

# RNAV (GPS) RWY 25L


PHOENIX DEER VALLEY (DVT)

RNP APCH - GPS



**⚠** When VGSI inop, Circling to Rwy 25R NA at night. Circling NA north of Rwy 7R-25L at night. When local altimeter setting not received, use Scottsdale altimeter setting; increase LPV all Cats DA to 1877 feet and LPV all Cats visibility 1/8 SM. Increase all MDA 40 feet and Circling Cats B visibility 1/4 SM. Rwy 25L helicopter visibility reduction below 3/4 SM NA. VDP NA when using Scottsdale altimeter setting.

**MISSED APPROACH:** Climb to 6000 direct BOLES and on track 314° to HEVRO and right turn on track 072° to BANYO and hold.

ATIS <b>126.5</b>	PHOENIX APP CON <b>120.7 239.0</b>	DEER VALLEY TOWER* <b>118.4</b> (070°-250°) (CTAF) <b>120.2</b> (251°-069°)	GND CON <b>121.8</b>	UNICOM <b>122.95</b>
-------------------	------------------------------------	---	----------------------	----------------------

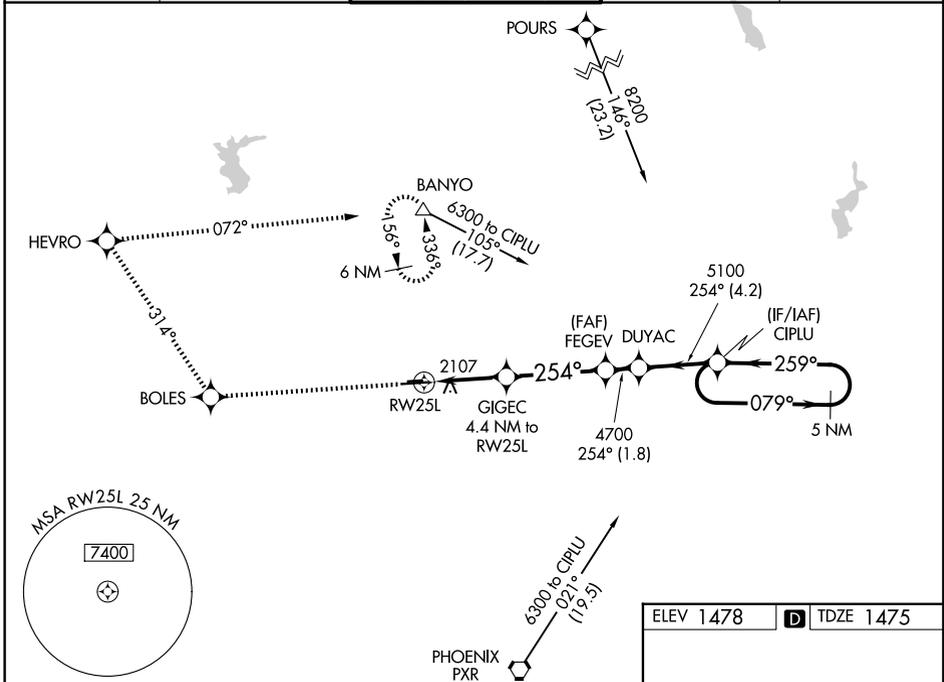

ELEV 1478	<b>D</b> TDZE 1475
-----------	--------------------

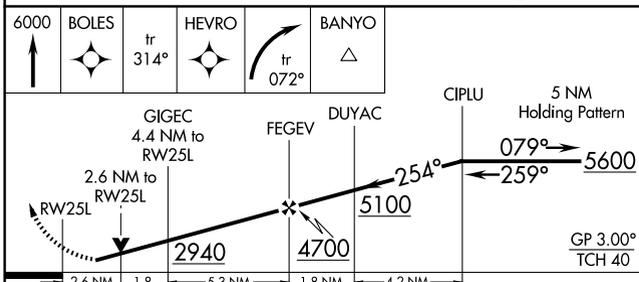

CATEGORY	A	B	C	D
LPV DA	1850-1 1/4		375 (400-1 1/4)	
RNAV MDA	2360-1 1/4	885 (900-1 1/4)	2360-2 3/4	885 (900-2 3/4)
CIRCLING	2400-1 1/4	2420-1 1/4	2580-3	2700-3
	922 (1000-1 1/4)	942 (1000-1 1/4)	1102 (1200-3)	1222 (1300-3)

MIRL Rwy 7L-25R and 7R-25L  
REIL Rwy 7L, 7R, 25L, and 25R

SW-4, 19 MAR 2026 to 16 APR 2026

SW-4, 19 MAR 2026 to 16 APR 2026