


WAAS CH 93909 W26A	APP CRS 263°	Rwy Ldg TDZE Apt Elev	8002 5489 5515
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 26

COLORADO AIR AND SPACE PORT (CFO)

RNP APCH.		SPACE PORT TOWER * 120.2 (CTAF)		GND CON 124.7	CLNC DEL 124.7	CLNC DEL 121.75 (When twr closed)	UNICOM 122.95
<p>⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 48°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM, and increase LNAV Cat C/D visibility to 1½ SM.</p>		<p>MALSRL</p>		<p>MISSED APPROACH: (Do not exceed 200K until LIMEX) Climb to 6100 then climbing left turn to 7600 direct LIMEX and hold.</p>			

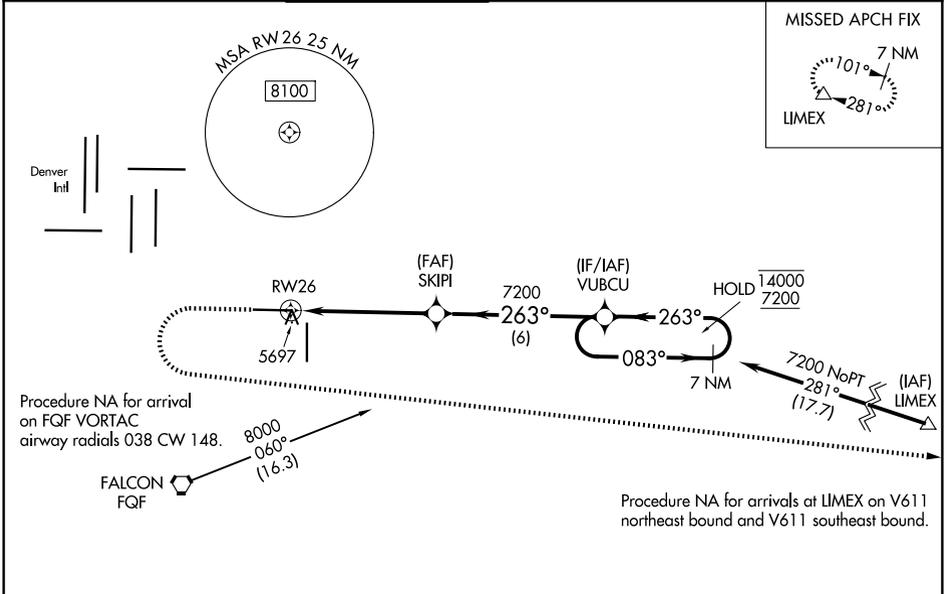

ELEV 5515		TDZE 5489		
6100	7600	LIMEX		
*LNAV only		*1.4 NM to RWY 26		
RWY 26		SKIPI		
7200		VUBCU		
7200		7 NM Holding Pattern		
1.4 NM		3.8 NM		
6 NM		7 NM		
GP 3.00°		TCH 50		
CATEGORY	A	B	C	D
LPV DA	5689-½		200 (200-½)	
LNAV/VNAV DA	5858-¾		369 (400-¾)	
LNAV MDA	5960-½ 471 (500-½)		5960-1 471 (500-1)	
CIRCLING	6000-1 485 (500-1)		6100-1½ 585 (600-1½) 6300-2½ 785 (800-2½)	

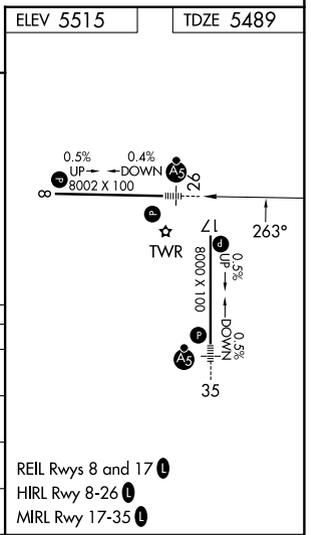

SW-1, 19 MAR 2026 to 16 APR 2026

SW-1, 19 MAR 2026 to 16 APR 2026

REIL Rwy 8 and 17
HIRL Rwy 8-26
MIRL Rwy 17-35