

WAAS CH 63237 W19A	APP CRS 192°	Rwy Ldg 3202 TDZE 236 Apt Elev 236
----------------------------------------	------------------------	---------------------------------------------------------------


RNAV (GPS) RWY 19

SHERIDAN-GRANT COUNTY RGNL (9M8)

▼ Baro-VNAV NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA. Night landing: Rwy 1 NA. Use Pine Bluff altimeter setting, when not received, use Little Rock altimeter setting and increase all DA 5 feet and all MDA 20 feet: increase Circling Cat C visibility 1/4 mile.


▲ NA MISSED APPROACH: Climb to 1900 direct NEONS and hold.

PBF ASOS 120.775	LITTLE ROCK APP CON 135.4 353.6	UNICOM 122.8 (CTAF)
----------------------------	-------------------------------------------	-------------------------------

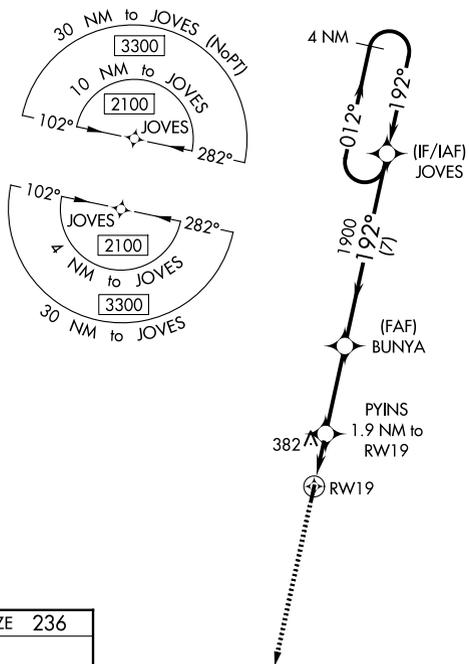

SC-1, 19 MAR 2026 to 16 APR 2026

SC-1, 19 MAR 2026 to 16 APR 2026

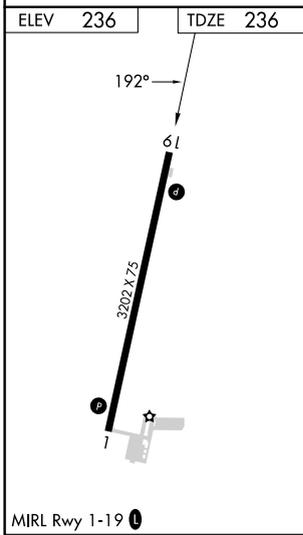

1900 NEONS VGSi and RNAV glidepath not coincident (VGSi Angle 3.25/TCH 43).

*LNAV only.

	PYNS 1.9 NM to RW19	BUNYA 1900	JOVES 4 NM Holding Pattern
	880*	1900	2100
	1.9 NM	3.2 NM	7 NM
	192°		012° / 192°
			GP 3.00° TCH 40

CATEGORY	A	B	C	D
LPV DA	590-1 1/4	354 (400-1 1/4)		NA
LNAV/VNAV DA	682-1 1/2	446 (500-1 1/2)		NA
LNAV MDA	700-1	464 (500-1)	700-1 3/8 464 (500-1 3/8)	NA
CIRCLING	740-1 504 (600-1)	840-1 604 (700-1)	960-2 724 (800-2)	NA