

WAAS CH <b>90347</b> <b>W17A</b>	APP CRS <b>166°</b>	Rwy Ldg TDZE Apt Elev	<b>3500</b> <b>1309</b> <b>1309</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 17




REDFIELD MUNI (1D8)

RNP APCH - GPS.

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using ABR altimeter setting. When local altimeter not received, use ABR altimeter setting and increase LPV DA to 1643 feet; increase LNAV/VNAV DA to 1738 feet and all visibilities ¼ SM. Increase all MDAs 100 feet.

MISSED APPROACH: Climb to 3400 direct LAVDE and hold.

AWOS-3P <b>118.525</b>	MINNEAPOLIS CENTER <b>126.25 339.8</b>	UNICOM <b>122.8 (CTAF) 0</b>
---------------------------	---	---------------------------------

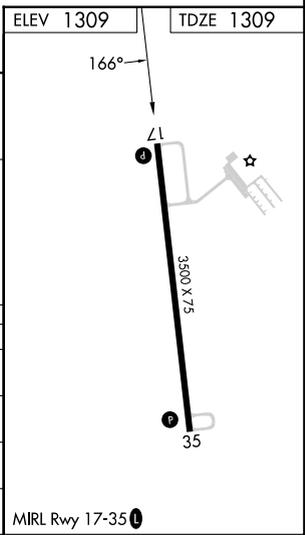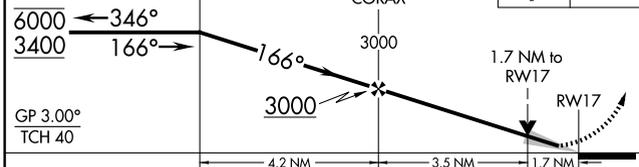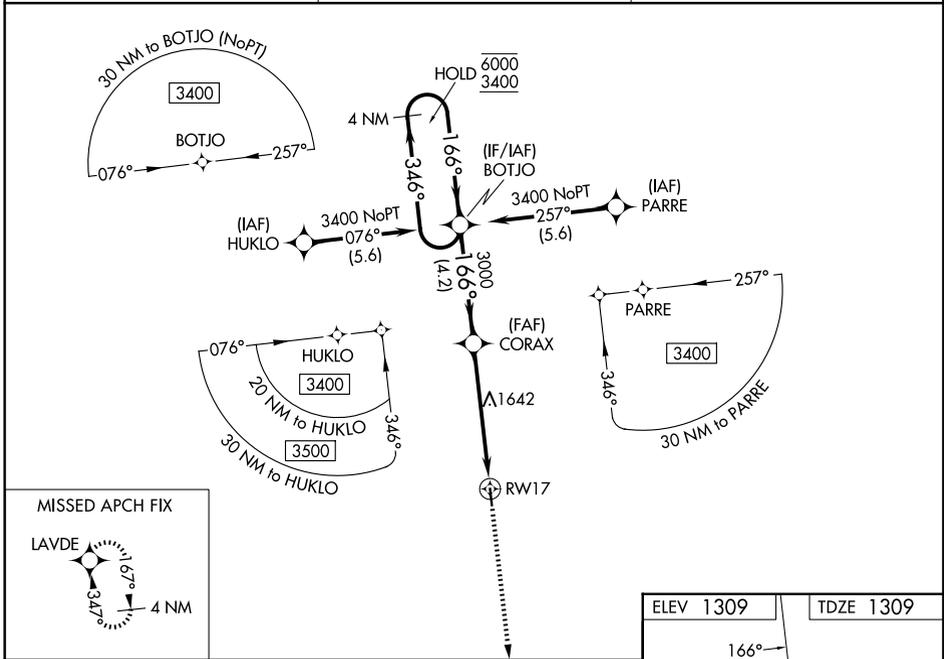

CATEGORY	A	B	C	D
LPV DA	1559-1	250 (300-1)		NA
LNAV/VNAV DA	1654-1	345 (400-1)		NA
LNAV MDA	1900-1	591 (600-1)		NA
CIRCLING	1900-1	591 (600-1)		NA

NC-1, 19 MAR 2026 to 16 APR 2026

NC-1, 19 MAR 2026 to 16 APR 2026