


WAAS CH 86538 W29A	APP CRS 289°	Rwy Ldg TDZE Apt Elev	5400 97 97
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 29

ANIAK (ANI)(PANI)

RNP APCH. ⚠ ❄ -37°C	Circling NA north of Rwy 11-29. Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.	MISSED APPROACH: Climb to 1500 then climbing left turn to 3500 direct APWIS and hold.
---------------------------	--	---

AWOS-3P 124.3	ANCHORAGE CENTER 118.15 251.05	CLNC DEL 118.15	CTAF 122.1 0
-------------------------	--	---------------------------	-------------------------------

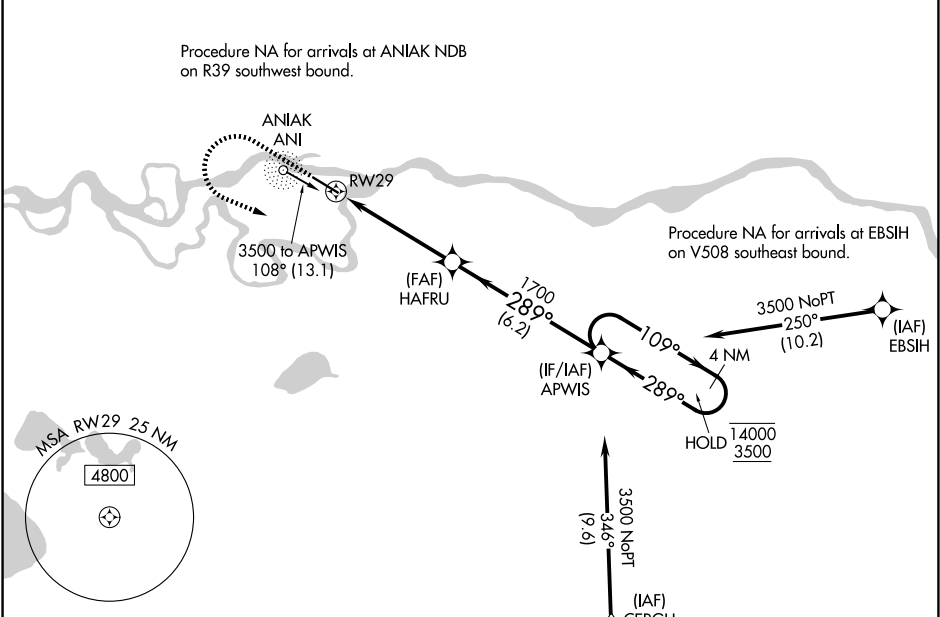

ELEV 97	D	TDZE 97
---------	----------	---------

HIRL Rwy 11-29

1500 ↑	3500 ↶	APWIS ✦	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).
-----------	-----------	------------	---

*LNAV only

*1.3 NM to RW29

RW29

1.3 NM

HAFRU

1700

289°

1700

APWIS

4 NM Holding Pattern

109° → 14000

← 289° 3500

GP 3.00°
TCH 52

CATEGORY	A	B	C	D
LPV DA	347-1 250 (300-1)			
LNAV/VNAV DA	460-1 363 (400-1)			
LNAV MDA	560-1	463 (500-1)	560-1½	463 (500-1½)
CIRCLING	560-1 463 (500-1)	620-1 523 (600-1)	860-2¼ 763 (800-2¼)	1200-3 1103 (1200-3)