


|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>77501</b><br><b>W21A</b> | APP CRS<br><b>207°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5200</b><br><b>1540</b><br><b>1540</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 21  
VENANGO RGNL (F'KL)

|                                                                                                                                                                                                                                              |                                             |                           |                                 |                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|---------------------------|---------------------------------|-------------------------------------------------------------|
| RNP APCH.<br><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (114°F). Circling Rwy 12 NA at night. For inop ALS, increase LPV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM.</div> |                                             |                           | MALSR<br>                       | MISSED APPROACH:<br>Climb to 3400 direct<br>BUVCA and hold. |
| AWOS-3PT<br><b>118.175</b>                                                                                                                                                                                                                   | YOUNGSTOWN APP CON ★<br><b>126.25 322.3</b> | CLNC DEL<br><b>126.25</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |                                                             |

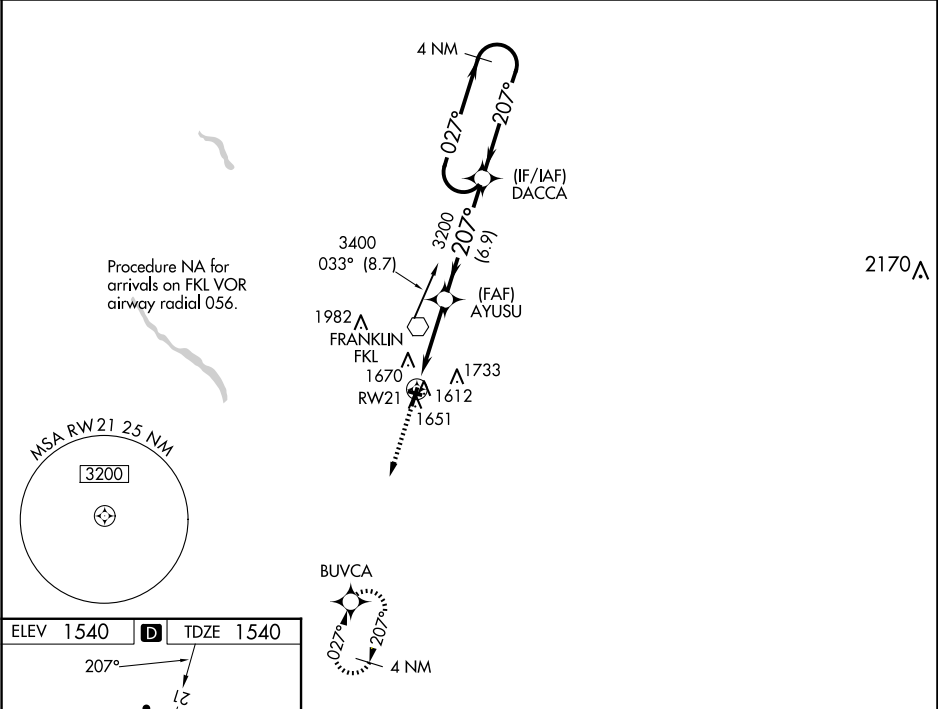

|                              |                      |                      |                      |                      |
|------------------------------|----------------------|----------------------|----------------------|----------------------|
| ELEV 1540 <b>D</b> TDZE 1540 |                      | 3400 BUVCA           |                      | 4 NM Holding Pattern |
| *LNAV only.                  |                      | *1 NM TO RW21        |                      | GP 3.00° TCH 55      |
| RW21                         |                      | AYUSU 3200           |                      | DACCA                |
| 1 NM                         |                      | 4 NM                 |                      | 6.9 NM               |
| CATEGORY                     | A                    | B                    | C                    | D                    |
| LPV DA                       | 1803-½ 263 (300-½)   |                      |                      |                      |
| LNAV/VNAV DA                 | 1901-¾ 361 (400-¾)   |                      |                      |                      |
| LNAV MDA                     | 1900-½ 360 (400-½)   |                      | 1900-⅝ 360 (400-⅝)   |                      |
| CIRCLING                     | 1960-1¼ 420 (500-1¼) | 2000-1¼ 460 (500-1¼) | 2040-1½ 500 (500-1½) | 2100-2 560 (600-2)   |

NE-4, 09 JUL 2026 to 06 AUG 2026

NE-4, 09 JUL 2026 to 06 AUG 2026