

WAAS CH 86525 W32A	APP CRS 321°	Rwy Ldg TDZE 996 Apt Elev 998
--	------------------------	---

RNAV (GPS) RWY 32

NEW RICHMOND RGNL (R.NH)

RNP APCH.


⚠

Baro-VNAV NA when using Osceola altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 37°C (98°F). Rwy 32 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Osceola altimeter setting and increase all DA/MDA 40 feet; increase LNAV visibility Cats C and D ½ SM and Circling Cats C and D ¼ SM. Circling to Rwy 4, 22 NA.


MISSED APPROACH:


Climb to 3500 direct ENEPE and hold.

AWOS-3 120.0	MINNEAPOLIS APP CON 121.2 335.65	GCO 121.725	UNICOM 122.975 (CTAF) 0
------------------------	--	-----------------------	-----------------------------------

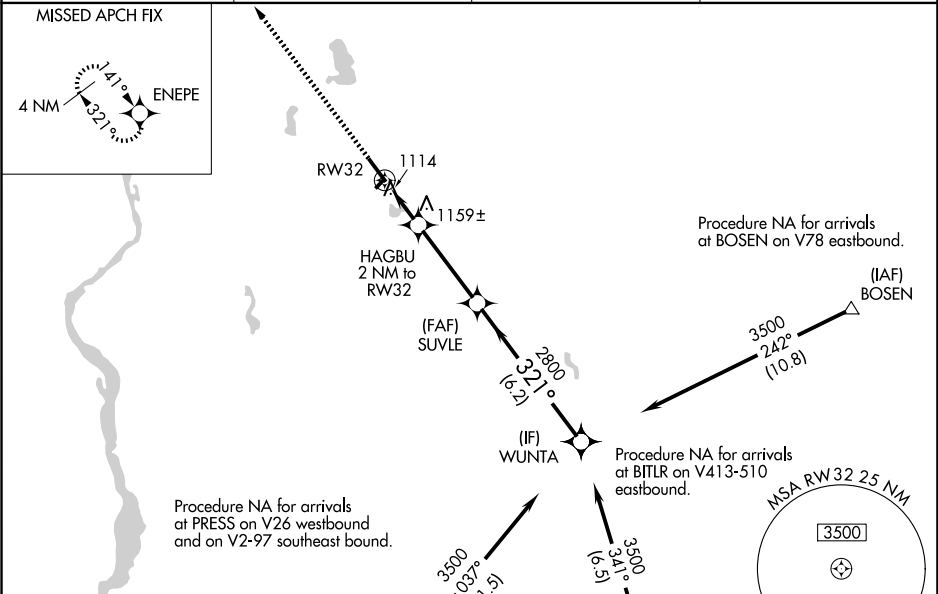

ELEV 998	TDZE 996
-----------------	-----------------

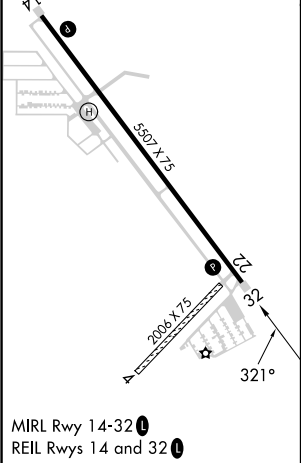

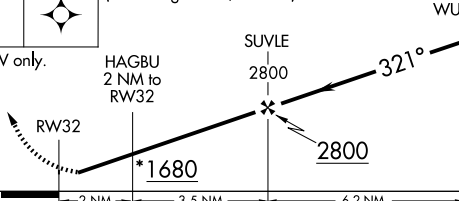3500	ENEPE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 20).			
					
*LNAV only.		HAGBU 2 NM to RW32	SUVLE 2800	WUNTA 3500	GP 3.00° TCH 50
RW32		*1680	2800		
2 NM		3.5 NM	6.2 NM		
CATEGORY	A	B	C	D	
LPV DA	1246-1		250 (300-1)		
LNAV/ VNAV DA	1295-1		299 (300-1)		
LNAV MDA	1420-1	424 (500-1)	1420-1¼		424 (500-1¼)
CIRCLING	1540-1	542 (600-1)	1660-1¾ 662 (700-1¾)	1660-2 662 (700-2)	