

ALTUS, OKLAHOMA

RNAV (GPS) Z RWY 18R

APCH CRS	Rwy Idg	13,440
175°	TDZE	1378
	Arprt Elev	1382


(USAF)

ALTUS AFB (KLTS)

RNP APCH-GPS	SALSF	MISSED APPROACH: Climb to 4000 direct OKKIE and hold.
▼ * When ALS inop increase RVR to 45, vis to 7/8 mile. ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE RVR to 60, vis to 1 1/8 miles. *** Circling NA W of Rwy 18R-36L.	A2	


ATIS★ 109.8 273.5	FORT WORTH CENTER 133.5 350.35	APP CON 125.1 353.7	TOWER★ 119.65 254.4	GND CON 121.85 275.8
----------------------	-----------------------------------	------------------------	------------------------	-------------------------

For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C (130°F).

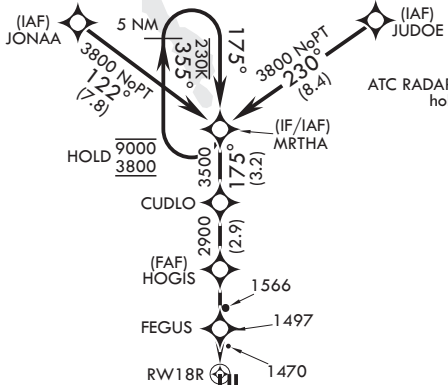

ATC RADAR required for holding.

ATC RADAR required for holding above 4000.



EMERG SAFE ALT 100 NM 4900

MRTHA					4000	OKKIE	ELEV 1382	TDZE 1378
9000 3800 175° 355° 5 NM Holding Pattern					175° 176° 0.4% UP 3500 x 90 0.3% UP 9001 x 150 356°			181 36R A1
GP 3.00° † TCH 53					BCN TWR			
CUDLO 3500 HOGIS 2900 FEGUS 2040 1 NM to RWY 18R					ASSAULT STRIP			
2.6 NM 2 NM					HIRL all rwys			
CATEGORY	A	B	C	D	E			
LNAV/VNAV DA*	1660/40		282	(300-¾)				
LNAV MDA**	1760/40 382 (400-¾)		1760/45	382	(400-¾)			
CIRCLING***	1780-1 398 (400-1)	1840-1 458 (500-1)	1880-1½ 498 (500-1½)	2080-2¼ 698 (700-2¼)	2300-3 918 (1000-3)			

ALTUS, OKLAHOMA

34°40'N - 99°16'W

ALTUS AFB (KLTS)

Amdt 3 14MAY26

RNAV (GPS) Z RWY 18R

SC-1, 03 SEP 2026 to 01 OCT 2026

SC-1, 03 SEP 2026 to 01 OCT 2026