


ILS or LOC RWY 25
CHAUTAUQUA COUNTY/JAMESTOWN (JHW)

MISSED APPROACH: Climb to 2420 then climbing right turn to 3800 on heading 125° and I-JHW localizer course NE (069°) to KRAUS INT/I-JHW 6.6 DME and hold. Continue climb-in-hold.

UNICOM
122.975 (CTAF) **L**

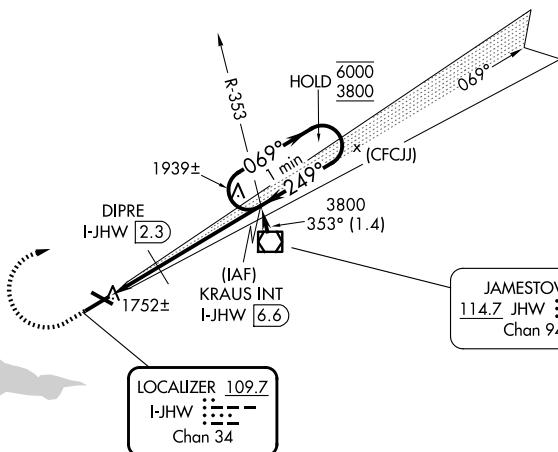

2420 3800 I-JHW LOC crs KRAUS INT KRAUS INT

hdg 125° NE (069°)


I-JHW 0.2 I-JHW 1.1 DIPRE I-JHW 2.3

3800 069° 249° 6000 3800

3800 GS 3.00° TCH 48

* 2420

* 2620 when using DKK dialmeter setting.



Knots	60	90	120	150	180
Min:Sec	6:24	4:16	3:12	2:34	2:08

CATEGORY	A	B	C	D
S-ILS 25	1971-1/2 250 (300-1/2)			
S-LOC 25	2420-1/2	699 (700-1/2)	2420-1 1/2	699 (700-1 1/2)
CIRCLING	2420-1	697 (700-1)	2420-2 697 (700-2)	2420-2 1/4 697 (700-2 1/4)
DIPRE FIX MINIMUMS (DME REQUIRED)				
S-LOC 25	2080-1/2	359 (400-1/2)	2080-5/8	359 (400-5/8)
CIRCLING	2200-1	477 (500-1)	2260-1 1/2 537 (600-1 1/2)	2340-2 617 (700-2)