# RNAV (GPS) RWY 23

MBS INTL (MBS)


| WAAS | APP CRS | Rwy Ldg | 8002 |
|---|---|---|---|
| CH 49010 | 233° | TDZE | 661 |
| W23A | | Apt Elev | 668 |


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
For inoperative ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.
# RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2300 direct WERDO and hold.

| ATIS | GREAT LAKES APP CON★ | SAGINAW TOWER★ | GND CON | UNICOM |
|---|---|---|---|---|
| 125.925 | 126.45 235.625 | 120.1 (CTAF) L 257.7 | 121.7 | 122.95 |

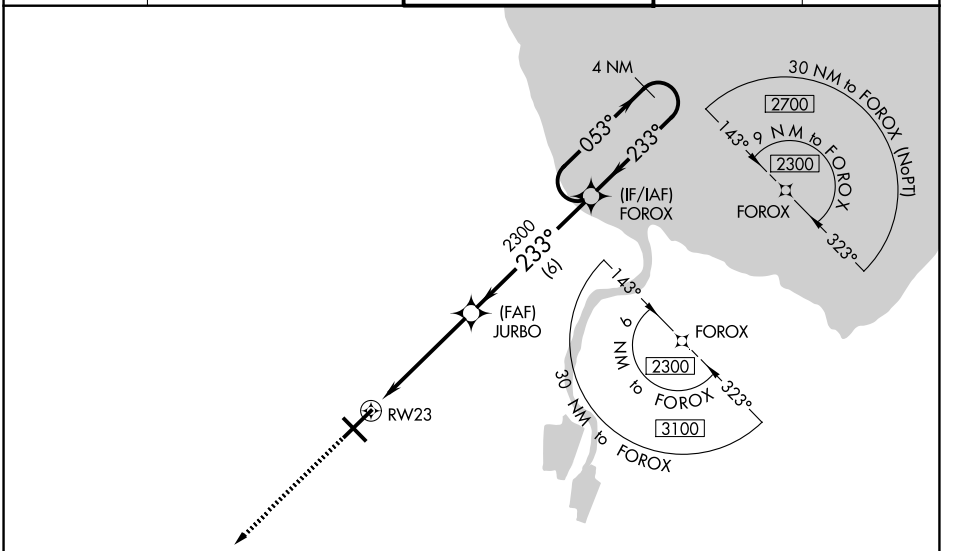

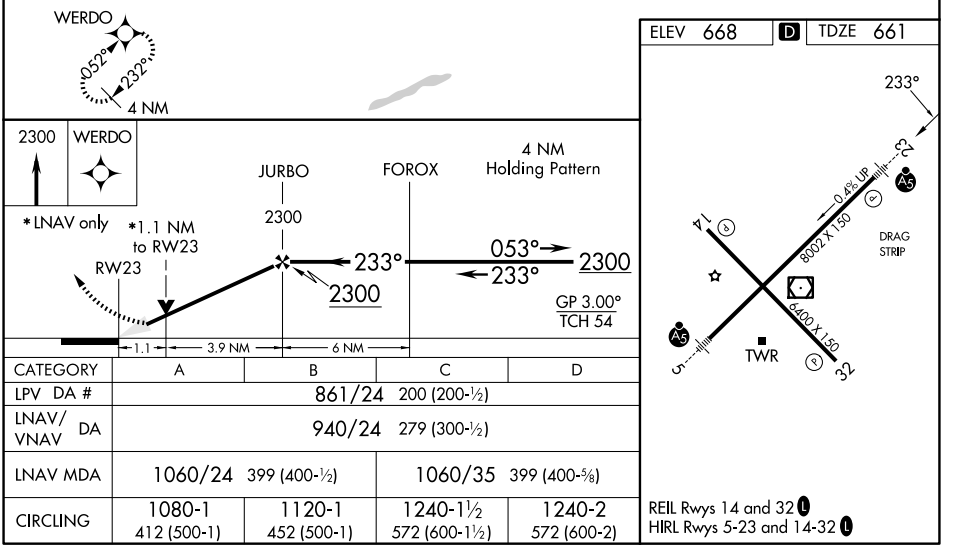
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA # | 861/24 200 (200-½) | | | |
| LNAV/VNAV DA | 940/24 279 (300-½) | | | |
| LNAV MDA | 1060/24 399 (400-½) | | 1060/35 399 (400-⅝) | |
| CIRCLING | 1080-1 412 (500-1) | 1120-1 452 (500-1) | 1240-1½ 572 (600-1½) | 1240-2 572 (600-2) |




REIL Rwys 14 and 32 L
HIRL Rwys 5-23 and 14-32 L



EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026