# RNAV (GPS) RWY 28

CAPE MAY COUNTY (WWD)


| WAAS | APP CRS | Rwy Ldg | 5000 |
|---|---|---|---|
| CH 86741 | 280° | TDZE | 19 |
| W28A | | Apt Elev | 22 |

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C or above 54° C. Circling NA for Cats C and D northeast of Rwys 19 and 28. Rwy 28 helicopter visibility reduction below ¾ SM NA. Circling Rwy 1 NA at night.

MISSED APPROACH: Climbing left turn to 2500 direct ATR VOR/DME and hold.


| AWOS-3PT | ATLANTIC CITY APP CON | CLNC DEL | UNICOM |
|---|---|---|---|
| 118.275 | 124.6 327.125 | 121.7 | 122.7 (CTAF) L |

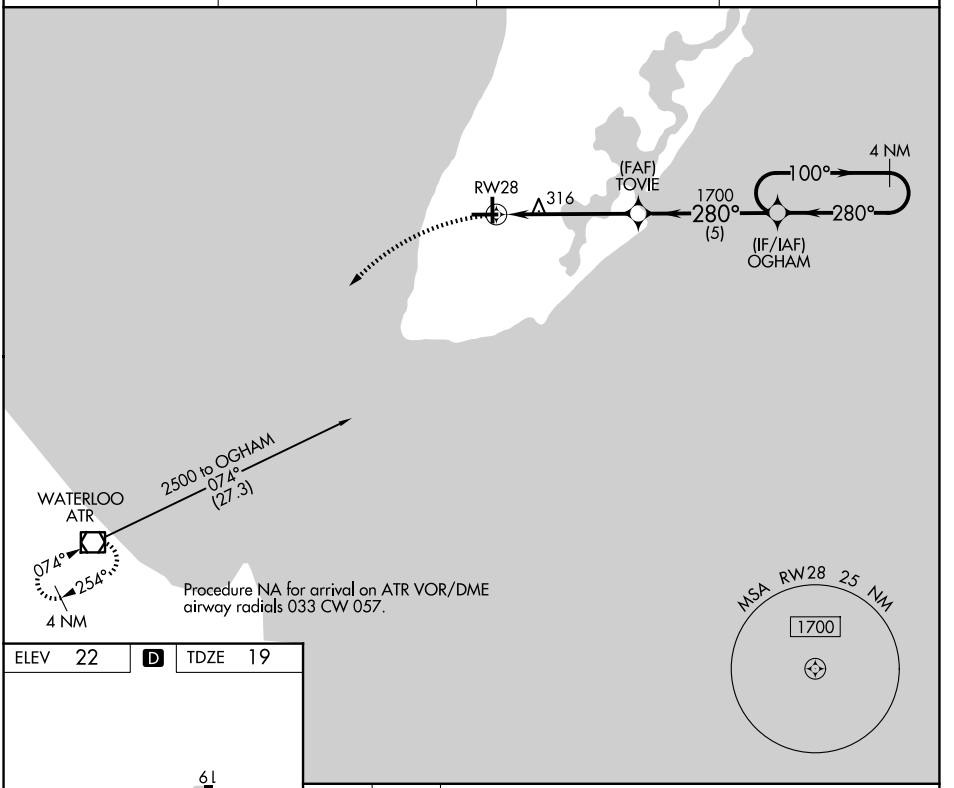


ELEV 22 D TDZE 19




MIRL Rwy 10-28 L
HIRL Rwy 1-19 L

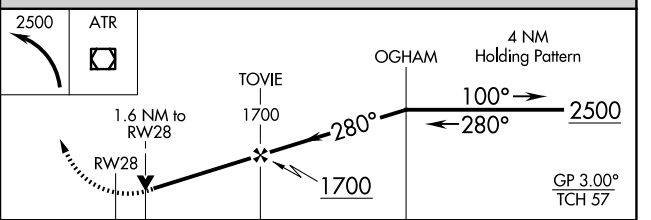


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | | 665-2½ | 646 (700-2½) | |
| LNAV/VNAV DA | | 634-2½ | 615 (700-2½) | |
| LNAV MDA | 580-1 561 (600-1) | | 580-1⅝ 561 (600-1⅝) | |
| CIRCLING | 580-1 558 (600-1) | 620-1 598 (600-1) | 620-1⅝ 598 (600-1⅝) | 980-3 958 (1000-3) |



NE-2, 26 NOV 2026 to 24 DEC 2026
NE-2, 26 NOV 2026 to 24 DEC 2026